



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

www.levelingmounts.com & www.iec-corp.com

METRIC LEVELERS

ANY THREAD . . . ANY LENGTH . . . ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

Welcome ...

We are pleased to introduce our comprehensive metric catalog with a complete line of metric levelers and glides. This catalog lists over 2,000 products for machinery, equipment and display racks. IEC's broad metric line of heavy, medium and light duty levelers and glides is in direct response to the global demand we are seeing for these products.

We've included in this catalog an overview page of the complete line of levelers and glides, new selection guides for choosing the right component and product tables with specifications for easily finding an off-the-shelf metric leveler and glide just right for your application. There is a standard quote request form available in the catalog for requesting custom designs and OEM pricing on larger quantities.

IEC's mission since 1992 has been to lead the equipment component industry in meeting the leveling needs of OEM equipment, furniture and product manufacturers with a broad range of products that match the high standards and cost requirements of our customers. We have specialized in providing solutions for leveling, aligning, stabilizing and sliding by offering products in a wide range of sizes, materials and features most often requested by our customers in metric and inch threads. We have an engineering department available who is always happy to assist you with selecting from thousands of IEC's standard off-the-shelf products the best solution for your application.

We recognize the needs in OEM manufacturing for high performance products, attractive designs and prices to make your products more competitive. We have made every effort possible to address these needs in this metric catalog. We now offer the industry's most complete range of components with metric and inch threads for leveling, aligning, stabilizing, sliding and surface protection.

It is our attention to customer service for over 20 years that has enabled IEC to become the leader in the design of equipment component leveling products. This dedicated effort has resulted in the design and development of thousands of new components, stronger customer service and the assurance that the products you specify today will be available for the duration of your product life-cycle.



CONTENTS3

PRODUCT OVERVIEW4

SELECTION GUIDE9

METRIC SLANT BASE LEVELERS

Slant Base Socket Levelers - Metric Steel & Stainless Steel12

Slant Base Stud Levelers - Metric Steel & Stainless Steel.....13-14

Slant Base Stud Levelers - Metric Delrin Base, Steel & Stainless Steel13-14

Slant Base Stud Levelers - Metric Extended Stud Lengths Steel & Stainless Steel13-14

Slant Base Stud Levelers - Metric Extended Stud Lengths Delrin Base, Steel & Stainless Steel.....13-14

METRIC LOW PROFILE LEVELERS

Low-Profile Metric Socket Levelers - Steel & Stainless Steel15

Low-Profile Metric Stud Levelers - Steel & Stainless Steel - 2",3",4",5",6" & 8" Stud Lengths16-21

METRIC TOGGLE PADS

Toggle Pads Socket - Metric Steel, Stainless Steel, Delrin Base22

Toggle Pads Stud - Metric Steel, Stainless Steel, Delrin Base.....23-26

METRIC NYLON SWIVEL LEVELERS

Nylon Swivel, Metric Socket with Rubber Pad28

Nylon Swivel, Metric Stud with Rubber Pad - 2",3",4",5",6",8" Stud Lengths30-41

METRIC SAUCER BASE® LEVELERS

Saucer Base® Metric Fixed & Swivel Stud Levelers - 1" to 8" Studs42-56

Saucer Base® Metric Fixed & Swivel Socket Levelers.....57-58

METRIC HI-PRO® & DOUBLE HIGH PROFILE POLY LEVELERS

Hi-Pro® & Double High Profile Metric Poly Fixed Stud & Socket Levelers59-62

METRIC LOW PROFILE POLY SWIVEL

Low Profile Metric Poly Swivel Socket Levelers64

Low Profile Metric Poly Swivel Stud Levelers - 2",3",4",5",6",8" Stud Lengths65-70

METRIC POLY BASED FIXED GLIDES

Poly Based Metric Fixed Socket Glides71

Poly Based Metric Fixed Stud Glides72

METRIC KNOB STYLE GLIDES

Knob Style Stud/Socket Glides74

METRIC LIGHT DUTY THREADED GLIDES

Metric Plastic Base (Non-Swivel) Glides75-80

Metric Plastic Base (Swivel) Glides75-80

Metric Steel Base Plastic Cushion Glides75-80

Metric Nylon Fixed & Swivel Base Glides.....75-80

Metric Round Molded Hex Glides.....75-80

Metric Threaded Felt Pads75-80

Metric Steel & Plastic Hex Glides75-80

Metric Slotted Swivel Glides75-80

METRIC SAUCER BASE® SWIVEL SOCKET GLIDE

Saucer Base® Metric Swivel Socket Glides81-82

RFQ FAX-BACK FORM

Request A Quote Form84


Warranty and Disclaimer.....85



HEAVY DUTY METRIC LEVELERS


SLANT BASE – SOCKET LEVELERS

The IEC Slant Base Socket Leveler is ideal for heavy-duty loads where a stud is not required. Integrated ball and swivel socket provides a low-friction support interface. Ideal for cabinets, instruments, machinery and equipment. Steel, stainless steel and white delrin® base models.

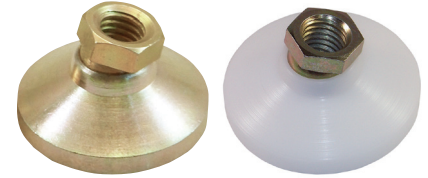

SLANT BASE – STUD LEVELERS

The IEC Slant Base Stud Leveler is ideal for heavy-duty loads. Integrated ball and swivel socket provides a low-friction support interface. Ideal for cabinets, instruments, machinery and equipment. Steel, stainless steel and white delrin® base models.

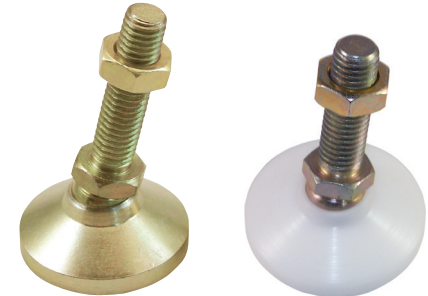

LOW PROFILE – SOCKET LEVELERS

The IEC Low-Profile Socket Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket offer a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.



LOW PROFILE – STUD LEVELERS

The IEC Low-Profile Stud Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket offer a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.



TOGGLE PADS – SOCKET

IEC Stud Toggle Pads feature an exclusive ball design that minimizes base separation. Ideal for heavy-duty loads. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provides a low-friction support interface. Steel, stainless steel and white delrin® base models.



TOGGLE PADS – STUD

IEC Stud Toggle Pads feature an exclusive ball design that minimizes base separation. Ideal for heavy-duty loads. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provides a low-friction support interface. Steel, stainless steel and Delrin® base models.





MEDIUM DUTY DUTY METRIC GLIDES


NYLON SWIVEL – SOCKET LEVELERS (with rubber pad)

The IEC Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases from 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.



NYLON SWIVEL – STUD LEVELERS (with rubber pad)

The IEC Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1-1/2" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel stud has trivalent zinc, yellow chromate finish.

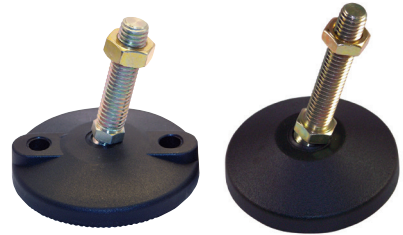

LOW-PROFILE POLY SWIVEL – SOCKET LEVELERS

The IEC Low-Profile Steel and Stainless Steel Socket Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4", 15 degree swivel from center-line. Steel Socket has trivalent zinc, yellow chromate finish.




LOW-PROFILE POLY SWIVEL – STUD LEVELERS

The IEC Low-Profile Steel and Stainless Steel Socket Stud Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4", 15 degree swivel from center-line. Steel Socket has trivalent zinc, yellow chromate finish.



POLY BASE FIXED – STUD GLIDES

The IEC Poly Base Steel and Stainless Steel Fixed Stud & Socket Glides available with and without rubber pad are ideal for medium-duty loads. The stud tilts several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Trivalent zinc plated steel stud and black polypropylene base. Many sizes available with Top-A-Just™ top-end external hex (-HX). You may also request top broached hex, allen drive (-BR). Rubber pad version provides non-skid surface protection.

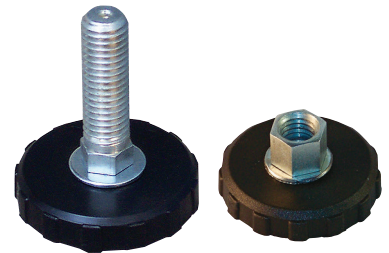

KNOB STYLE – LEVELING GLIDES

The IEC Knob Style Steel and Stainless Steel Socket and Stud Style Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene or PVC base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Trivalent, zinc-plated steel stud.





MEDIUM DUTY METRIC LEVELERS (CONT'D.)

LOW PROFILE SAUCER™ BASE FIXED & SWIVEL LEVELERS (NEW 2019)

The IEC *Saucer Base™ Medium Duty Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available in Fixed and Swivel Stud designs with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating. **For more thread sizes and lengths for this base style see our Ruggedized Light Duty Glide catalog.**



LOW-PROFILE, SAUCER BASE™ FIXED SOCKET LEVELERS (NEW 2019)

The IEC *Saucer Base™ Fixed Socket Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick **with a bottom hex drive molded into the base. Steel socket and washer have clear zinc plating. Color base options shown also available.**



LOW-PROFILE, SAUCER BASE™ SWIVEL SOCKET LEVELERS (NEW 2019)

The IEC *Saucer Base™ Swivel Levelers* have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. **Steel socket has gold zinc plating. Color base options shown also available.**



HI-PRO® POLY BASE FIXED STUD GLIDES (NEW 2019)

The IEC *High Profile Steel and Stainless Steel Poly Base Fixed Stud Glide* features IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.**



HI-PRO® POLY BASE FIXED SOCKET GLIDES (NEW 2019)

The IEC *High Profile Steel and Stainless Steel Poly Base Fixed Socket Glide* features IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. Hi-Profile Poly Base Fixed Socket Thru-Hole Threaded and Non-Threaded designs are also available.





RUGGEDIZED LIGHT DUTY GLIDES

Low Profile **SAUCER BASE**® Fixed Socket Glides

The IEC Saucer Base® Ruggedized® Light Duty (RLD) Fixed Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. The socket swivels approximately 15 degrees from centerline. **Steel socket has black trivalent zinc plating.**



OPTIONAL BASE COLORS



Low Profile **SAUCER BASE**® Swivel Socket Glides

The IEC Saucer Base® Ruggedized® Light Duty (RLD) Swivel Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. The socket swivels approximately 15 degrees from centerline. **Steel socket has black trivalent zinc plating.**



OPTIONAL BASE COLORS






LIGHT DUTY METRIC LEVELERS / GLIDES




Light Duty, (Non-Swivel)
Plastic Base Threaded Glide



Light Duty, (Non-Swivel)
Black Vinyl Base Threaded Glide




Light Duty, (Non-Swivel)
Steel Base Threaded Glide




Light Duty, (Molded Hex)
Black Plastic Base Threaded Glide



Light Duty, Plastic Swivel Base
Threaded Glide



Threaded Felt Pads



Medium Duty, Zinc-Plated
Steel Hex Threaded Glides



Light Duty, Nickel Plated
Slotted Swivel Glides



Light Duty, Nylon Base
Fixed Base Threaded Glide



Light Duty, Rubber Base
Fixed Base Threaded Glide



Light Duty, PTFE Base
Fixed Base Threaded Glide



Light Duty, Steel Base
Fixed Base Threaded Glide



Light Duty, Felt Base
Fixed Base Threaded Glide



Light Duty, Nylon Base
Swivel Threaded Glide



Light Duty, Rubber Base
Swivel Threaded Glide



Light Duty, PTFE Base
Swivel Threaded Glide



Light Duty, Steel Base
Swivel Threaded Glide



Light Duty, Felt Base
Swivel Threaded Glide



HEAVY-DUTY METRIC LEVELERS

Features by Leveler Family	Slant Base Socket	Slant Base Stud	Low Profile Socket	Low Profile Stud	Toggle Pad Socket	Toggle Pad Stud
Steel	Yes	Yes	Yes	Yes	Yes	Yes
Stainless Steel	Yes	Yes	Yes	Yes	Yes	Yes
Load Range	to 20,000 lbs.	to 20,000 lbs.	to 10,000 lbs.	to 10,000 lbs.	to 5,000 lbs.	to 5,000 lbs.
Metric Threads	M6-M24	M6-M24	M6-M24	M6-M24	M6-M24	M6-M24
Stud Lengths	N / A	2" - 8"	N / A	2"-8"	N / A	2"-8"
Top Thread Adjustment	N / A	Yes	N / A	Yes	N / A	Yes
Swivel Base	Yes	Yes	Yes	Yes	Yes	Yes
Optional Lag Holes	N / A	N / A	Yes	Yes	N / A	N / A
Base Diameters	1" to 4"	1" to 4"	3/4" to 4"	3/4" to 4"	3/4" to 1 1/4"	3/4" to 1 1/4"
Optional Delrin Base	Yes	Yes	N / A	N / A	Yes	Yes
Optional Rubber Pad	Yes	Yes	Yes	Yes	Yes	Yes
Standard Finish Gold Iridite - Zinc	Yes	Yes	Yes	Yes	Yes	Yes
Optional Finish Black Oxide	Yes	Yes	Yes	Yes	Yes	Yes
Catalog Page	8	11-12	13	14-19	20	22-24



MEDIUM-DUTY METRIC LEVELERS

Features by Leveler Family	Nylon Swivel Socket	Nylon Swivel Stud	Low Profile Poly Swivel Socket	Low Profile Poly Swivel Stud	Low Profile Poly Fixed Socket	Low Profile Poly Fixed Stud	Knob Style Socket/Stud
Steel	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Stainless Steel	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Load Range	to 3,000 lbs.	to 3,000 lbs.	to 3,000 lbs.	to 3,000 lbs.	to 3,000 lbs.	to 3,000 lbs.	to 1,000 lbs.
Metric Threads	M6-M24	M6-M24	M6-M24	M6-M24	M6-M20	M6-M16	M6-M10
Stud Lengths	N / A	2" - 8"	N / A	2" to 8"	N / A	1/2" to 8"	1/2" to 3-3/8"
Top Thread Adjust	N / A	Yes	N / A	Yes	N / A	Yes	Yes
Swivel Base 15°	Yes	Yes	Yes	Yes	N / A	N / A	N / A
Optional Lag Holes	Yes	Yes	N / A	N / A	N / A	N / A	N / A
Base Diameters	1 1/2" to 10"	1 1/2" to 10"	1" to 4"	1" to 4"	1" to 3"	1" to 4"	1" to 3"
Base Material	Nylon	Nylon	Nylon	Nylon	Nylon	Nylon	Polypropylene
Fixed Base	N / A	N / A	N / A	N / A	Yes	Yes	Yes
Jam Nut Provided	Yes	Yes	Yes	Yes	Supplied On Request	Supplied On Request	Supplied On Request
Optional Rubber Pad	Yes	Yes	N / A	N / A	Yes	Yes	Yes
Catalog Page	26-27	28-39	40	41-46	48-49	50-53	54



LIGHT-DUTY METRIC LEVELERS & GLIDES

Features by Leveler Family	Threaded Glide Non-Swivel	Threaded Glide 25 Degree Swivel	Threaded Glide 20 Degree Swivel	Glide Fixed Molded Hex Base	Glide Fixed Steel Hex Base	Threaded Glide Felt Pad
Steel Stud	Yes	Yes	Yes	Yes	Yes	Yes
Light Duty	Yes	Yes	Yes	Yes	Yes	Yes
Medium Duty	N / A	N / A	N / A	N / A	N / A	N / A
Metric Threads	M6-M10	M8-M12	M8 & M10	M8 & M100	M6-M12	M6-M10
Stud Lengths	3/8" & 1"	1"	1-1/2"	1-1/2"	1 to 2-1/2"	1"
Top Thread Adjustment	N / A	N / A	Yes	N / A	Yes	N / A
Base Diameters	7/8" to 1 3/8"	7/8" to 1-1/16"	1-1/2"	1 1/4"	3/4" to 1-1/16"	1"
Base Plastic with Nickel Plated Steel Shell-White	Yes	Yes	Yes	N / A	N / A	N / A
Base Plastic with Nickel Plated Steel Shell-Black	Yes	Yes	N / A	N / A	N / A	N / A
Base Black Vinyl	Yes	Yes	N / A	Yes	N / A	N / A
Base White Plastic	Yes	Yes	Yes	N / A	N / A	N / A
Base Gray Rubber	Yes	N / A	N / A	N / A	N / A	N / A
Optional Gray Cap for Hex Base	N / A	N / A	N / A	N / A	N / A	N / A
Free Turning Stud	Yes	N / A	N / A	N / A	N / A	N / A
Catalog Page	55-60	55-60	55-60	55-60	55-60	55-60



SLANT BASE METRIC SOCKET LEVELERS


The IEC Slant Base Metric Socket Leveler with steel, stainless steel or white delrin® plastic base is ideal for heavy-duty loads where a stud is not required. Integrated ball and swivel socket provide a low-friction support interface. Ideal for cabinets, instruments, machinery and equipment.

Features

- Solid steel/stainless steel
- Integrated ball and socket
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black chromate or clear chromate options
- Rubber pad or non-marring delrin base

Applications

- Equipment benches
- Machinery
- Instruments
- Enclosures



white base is delrin® plastic.

METRIC STEEL & STAINLESS STEEL

Steel	SS	Load	A	B	C	D	E
IL1-M6G	IL5-M6	1400	M6x1	1/2	45/64	1	5/32
IL1-M10G	IL5-M10	3000	M10x1.50	5/8	7/8	1-1/4	3/16
IL1-M12G	IL5-M12	5500	M12x1.75	3/4	1-1/8	1-7/8	1/4
IL1-M16G	IL5-M16	6000	M16x2.00	7/8	1-1/4	2-1/2	5/16
IL1-M20G	IL5-M20	8000	M20x2.50	1-1/16	1-1/2	3	1/2
IL1-M24G	IL5-M24	20000	M24x3.00	1-1/2	1-7/8	4	13/32

METRIC STEEL & STAINLESS STEEL WITH RUBBER PAD

Steel	SS	Load	A	B	C	D	E
IL1-M6G-P	IL5-M6-P	IL105-RLD0	M6x1	1/2	53/64	1	5/32
IL1-M10G-P	IL5-M10-P	2250	M10x1.50	5/8	1	1-1/4	3/16
IL1-M12G-P	IL5-M12-P	3750	M12x1.75	3/4	1-1/4	1-7/8	1/4
IL1-M16G-P	IL5-M16-P	4500	M16x2.00	7/8	1-3/8	2-1/2	5/16
IL1-M20G-P	IL5-M20-P	6000	M20x2.50	1-1/16	1-5/8	3	1/2
IL1-M24G-P	IL5-M24-P	15000	M24x3.00	1-1/2	2	4	13/32

DELTRIN BASE - METRIC STEEL & STAINLESS STEEL

Steel	SS	Load	A	B	C	D	E
IL3-M6W	IL3-M6S	200	M6x1	1/2	45/64	1	5/32
IL3-M10W	IL3-M10S	300	M10x1.50	5/8	7/8	1-1/4	3/16
IL3-M12W	IL3-M12S	700	M12x1.75	3/4	1-1/8	1-7/8	1/4
IL3-M16W	IL3-M16S	1200	M16x2.00	7/8	1-1/4	2-1/2	5/16
IL3-M20W	IL3-M20S	1800	M20x2.50	1-1/16	1-1/2	3	1/2
IL3-M24W	IL3-M24S	2400	M24x3.00	1-1/2	1-7/8	4	13/32

The delrin® base is white.



SLANT BASE METRIC STUD LEVELERS


The IEC Metric Slant Base Stud Leveler is ideal for heavy-duty loads. Integrated ball and swivel socket provide a low-friction support interface. Ideal for cabinets, instruments, machinery and equipment.

Features

- Solid steel/stainless steel
- Integrated ball and socket
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black chromate or clear chromate options
- Rubber pad or non-marring delrin base

Applications

- Equipment benches
- Machinery
- Instruments
- Enclosures

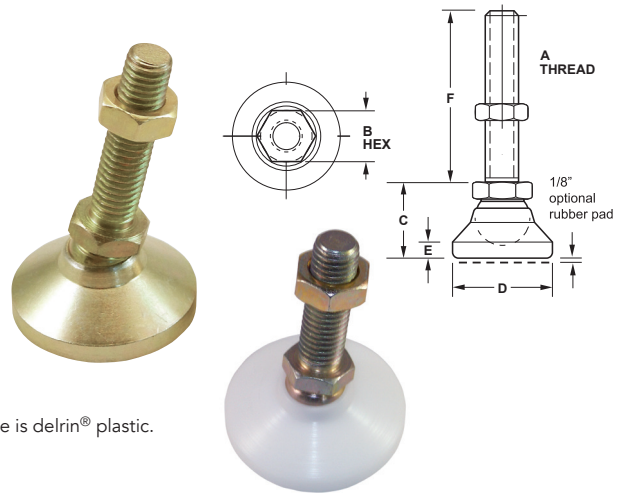

white base is delrin® plastic.

METRIC - STEEL & STAINLESS STEEL

Steel	SS	Load	A	B	C	D	E	F
IL2-M6G	IL6-M6	1400	M6x1	1/2	45/64	1	5/32	1-1/4
IL2-M10G	IL6-M10	3000	M10x1.50	5/8	7/8	1-1/4	3/16	2
IL2-M12G	IL6-M12	5500	M12x1.75	3/4	1-1/8	1-7/8	1/4	2
IL2-M16G	IL6-M16	6000	M16x2.00	7/8	1-1/4	2-1/2	5/16	2
IL2-M20G	IL6-M20	8000	M20x2.50	1-1/16	1-1/2	3	1/2	2
IL2-M24G	IL6-M24	20000	M24x3.00	1-1/2	1-7/8	4	13/32	4-1/4

METRIC - STEEL & STAINLESS STEEL WITH RUBBER PAD

Steel	SS	Load	A	B	C	D	E	F
IL2-M6G-P	IL6-M6-P	IL105-RLD0	M6x1	1/2	53/64	1	5/32	1-1/4
IL2-M10G-P	IL6-M10-P	2250	M10x1.50	5/8	1	1-1/4	3/16	2
IL2-M12G-P	IL6-M12-P	3750	M12x1.75	3/4	1-1/4	1-7/8	1/4	2
IL2-M16G-P	IL6-M16-P	4500	M16x2.00	7/8	1-3/8	2-1/2	5/16	2
IL2-M20G-P	IL6-M20-P	6000	M20x2.50	1-1/16	1-5/8	3	1/2	2
IL2-M24G-P	IL6-M24-P	15000	M24x3.00	1-1/2	2	4	13/32	4-1/4

METRIC DELRIN BASE - STEEL & STAINLESS STEEL

Steel	SS	Load	A	B	C	D	E	F
IL4-M6W	IL4-M6S	200	M6x1	1/2	45/64	1	5/32	1-1/4
IL4-M10W	IL4-M10S	300	M10x1.50	5/8	7/8	1-1/4	3/16	2
IL4-M12W	IL4-M12S	700	M12x1.75	3/4	1-1/8	1-7/8	1/4	2
IL4-M16W	IL4-M16S	1200	M16x2.00	7/8	1-1/4	2-1/2	5/16	2
IL4-M20W	IL4-M20S	1800	M20x2.50	1-1/16	1-1/2	3	1/2	2
IL4-M24W	IL4-M24S	2400	M24x3.00	1-1/2	1-7/8	4	13/32	4-1/4

The delrin® base is white.



SLANT BASE METRIC EXTENDED STUD LEVELERS


The IEC Metric Slant Base Extended Stud Leveler is ideal for heavy-duty loads. Integrated ball and swivel socket provide a low-friction support interface. Ideal for cabinets, instruments, machinery and equipment.

Features

- Solid steel/stainless steel
- Integrated ball and socket
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black chromate or clear chromate options
- Rubber pad or non-marring delrin base

Applications

- Equipment benches
- Machinery
- Instruments
- Enclosures

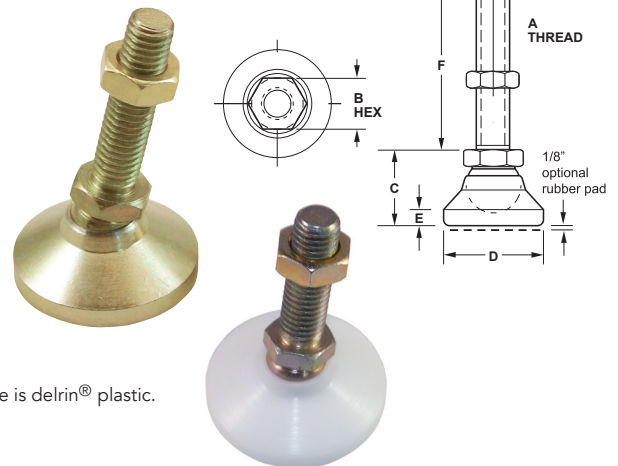

white base is delrin® plastic.

EXTENDED STUD LENGTHS - METRIC STEEL & STAINLESS STEEL

Steel	SS	Load	A	B	C	D	E	F
IL2-M6Gx2	IL6-M6x2	1400	M6x1	1/2	45/64	1	5/32	2-1/2
IL2-M10Gx4	IL6-M10x4	3000	M10x1.50	5/8	7/8	1-1/4	3/16	4
IL2-M12Gx4	IL6-M12x4	5500	M12x1.75	3/4	1-1/8	1-7/8	1/4	4
IL2-M16Gx4	IL6-M16x4	6000	M16x2.00	7/8	1-1/4	2-1/2	5/16	4
IL2-M20Gx4	IL6-M20x4	8000	M20x2.50	1-1/16	1-1/2	3	1/2	4
IL2-M24Gx8	IL6-M24x8	20000	M24x3.00	1-1/2	1-7/8	4	13/32	8

EXTENDED STUD LENGTHS - METRIC STEEL & STAINLESS STEEL WITH RUBBER PAD

Steel	SS	Load	A	B	C	D	E	F
IL2-M6Gx2-P	IL6-M6x2-P	IL105-RLD0	M6x1	1/2	53/64	1	5/32	2-1/2
IL2-M10Gx4-P	IL6-M10x4-P	2250	M10x1.50	5/8	1	1-1/4	3/16	4
IL2-M12Gx4-P	IL6-M12x4-P	3750	M12x1.75	3/4	1-1/4	1-7/8	1/4	4
IL2-M16Gx4-P	IL6-M16x4-P	4500	M16x2.00	7/8	1-3/8	2-1/2	5/16	4
IL2-M20Gx4-P	IL6-M20x4-P	6000	M20x2.50	1-1/16	1-5/8	3	1/2	4
IL2-M24Gx8-P	IL6-M24x8-P	15000	M24x3.00	1-1/2	2	4	13/32	8

DELRIN BASE - EXTENDED STUD LENGTHS - METRIC STEEL & STAINLESS STEEL

Steel	SS	Load	A	B	C	D	E	F
IL4-M6Wx2	IL4-M6Sx2	200	M6x1	1/2	45/64	1	5/32	2-1/2
IL4-M10Wx4	IL4-M10Sx4	300	M10x1.50	5/8	7/8	1-1/4	3/16	4
IL4-M12Wx4	IL4-M12Sx4	700	M12x1.75	3/4	1-1/8	1-7/8	1/4	4
IL4-M16Wx4	IL4-M16Sx4	1200	M16x2.00	7/8	1-1/4	2-1/2	5/16	4
IL4-M20Wx4	IL4-M20Sx4	1800	M20x2.50	1-1/16	1-1/2	3	1/2	4
IL4-M24Wx8	IL4-M24Sx8	2400	M24x3.00	1-1/2	1-7/8	4	13/32	8

The delrin® base is white.



LOW PROFILE METRIC SOCKET LEVELERS

The IEC Metric Low-Profile Socket Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements.


The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features


- Steel/stainless steel options
- Integrated ball and socket
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

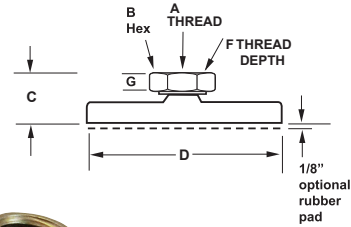

Nut Height: "G" = 1/2", 5/8", 11/16", 3/4"
for Threads: M12, M16, M20, M24



Nut Height: "G" = 3/16"
for Threads: M6, M8, M10

LOW PROFILE - METRIC STEEL & STAINLESS STEEL SOCKET

Steel	Stainless	Load	A	B	C	D	F	G
IL61-M6G	IL61-M6S	100	M6x1	1/2	5/8	3/4	3/8	3/16
IL61-M8G	IL61-M8S	500	M8x1.25	1/2	5/8	3/4	3/8	3/16
IL61-M10G	IL61-M10S	1000	M10x1.50	1/2	5/8	3/4	3/8	3/16
IL61-M12G	IL61-M12S	2000	M12x1.75	5/8	15/16	3/4	3/8	1/2
IL61-M16G	IL61-M16S	3000	M16x2.00	3/4	1-1/8	3/4	1/2	5/8
IL61-M20G	IL61-M20S	4000	M20x2.50	1	1-3/16	3/4	5/8	11/16
IL61-M24G	IL61-M24S	5000	M24x3.00	1-1/4	1-1/4	3/4	11/16	3/4
IL63-M6G	IL63-M6S	100	M6x1	1/2	5/8	1 1/4	3/8	3/16
IL63-M8G	IL63-M8S	500	M8x1.25	1/2	5/8	1 1/4	3/8	3/16
IL63-M10G	IL63-M10S	1000	M10x1.50	1/2	5/8	1 1/4	3/8	3/16
IL63-M12G	IL63-M12S	2000	M12x1.75	5/8	15/16	1 1/4	3/8	1/2
IL63-M16G	IL63-M16S	3000	M16x2.00	3/4	1-1/8	1 1/4	1/2	5/8
IL63-M20G	IL63-M20S	4000	M20x2.50	1	1-3/16	1 1/4	5/8	11/16
IL63-M24G	IL63-M24S	5000	M24x3.00	1-1/4	1-1/4	1 1/4	11/16	3/4
IL65-M6G	IL65-M6S	100	M6x1	1/2	5/8	1 7/8	3/8	3/16
IL65-M8G	IL65-M8S	500	M8x1.25	1/2	5/8	1 7/8	3/8	3/16
IL65-M10G	IL65-M10S	3000	M10x1.50	1/2	5/8	1 7/8	3/8	3/16
IL65-M12G	IL65-M12S	5000	M12x1.75	5/8	15/16	1 7/8	3/8	1/2
IL65-M16G	IL65-M16S	6000	M16x2.00	3/4	1-1/8	1 7/8	1/2	5/8
IL65-M20G	IL65-M20S	8000	M20x2.50	1	1-3/16	1 7/8	5/8	11/16
IL65-M24G	IL65-M24S	10000	M24x3.00	1-1/4	1-1/4	1 7/8	11/16	3/4
IL67-M6G	IL67-M6S	100	M6x1	1/2	5/8	2 1/2	3/8	3/16
IL67-M8G	IL67-M8S	500	M8x1.25	1/2	5/8	2 1/2	3/8	3/16
IL67-M10G	IL67-M10S	3000	M10x1.50	1/2	5/8	2 1/2	3/8	3/16
IL67-M12G	IL67-M12S	5000	M12x1.75	5/8	15/16	2 1/2	3/8	1/2
IL67-M16G	IL67-M16S	6000	M16x2.00	3/4	1-1/8	2 1/2	1/2	5/8
IL67-M20G	IL67-M20S	8000	M20x2.50	1	1-3/16	2 1/2	5/8	11/16
IL67-M24G	IL67-M24S	10000	M24x3.00	1-1/4	1-1/4	2 1/2	11/16	3/4
IL69-M6G	IL69-M6S	100	M6x1	1/2	5/8	3	3/8	3/16
IL69-M8G	IL69-M8S	500	M8x1.25	1/2	5/8	3	3/8	3/16
IL69-M10G	IL69-M10S	3000	M10x1.50	1/2	5/8	3	3/8	3/16
IL69-M12G	IL69-M12S	5000	M12x1.75	5/8	15/16	3	3/8	1/2
IL69-M16G	IL69-M16S	6000	M16x2.00	3/4	1-1/8	3	1/2	5/8
IL69-M20G	IL69-M20S	8000	M20x2.50	1	1-3/16	3	5/8	11/16
IL69-M24G	IL69-M24S	10000	M24x3.00	1-1/4	1-1/4	3	11/16	3/4
IL71-M6G	IL71-M6S	100	M6x1	1/2	5/8	4	3/8	3/16
IL71-M8G	IL71-M8S	500	M8x1.25	1/2	5/8	4	3/8	3/16
IL71-M10G	IL71-M10S	3000	M10x1.50	1/2	5/8	4	3/8	3/16
IL71-M12G	IL71-M12S	5000	M12x1.75	5/8	15/16	4	3/8	1/2
IL71-M16G	IL71-M16S	6000	M16x2.00	3/4	1-1/8	4	1/2	5/8
IL71-M20G	IL71-M20S	8000	M20x2.50	1	1-3/16	4	5/8	11/16
IL71-M24G	IL71-M24S	10000	M24x3.00	1-1/4	1-1/4	4	11/16	3/4

To order with 1/8" black rubber pad, (add "-P").

To order with two (2) 5/8" dia. lag holes centered at 2-3/4", (add "-H"). Only available on 4" base.



LOW-PROFILE METRIC STUD LEVELERS


The IEC Metric Low-Profile Stud Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

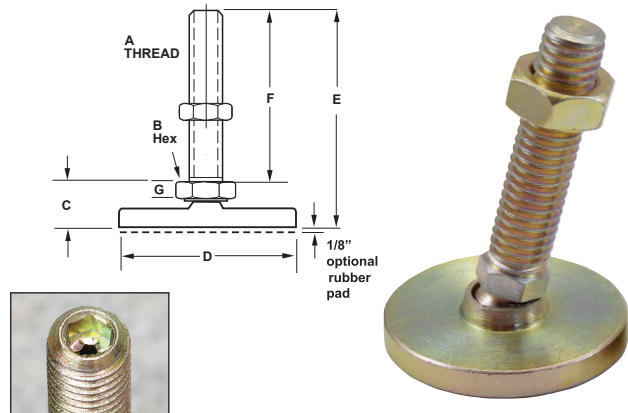

LOW PROFILE - METRIC STEEL & STAINLESS STEEL (1" & 2" STUD)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M6Gx1	IL60-M6Sx1	100	M6x1	1/2	3/4	3/4	1-3/4	1	3/16
IL60-M8Gx1	IL60-M8Sx1	500	M8x1.25	1/2	3/4	3/4	1-3/4	1	3/16
IL60-M6G	IL60-M6S	100	M6x1	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M8G	IL60-M8S	500	M8x1.25	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M10G	IL60-M10S	1000	M10x1.50	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M12G	IL60-M12S	2000	M12x1.75	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M16G	IL60-M16S	3000	M16x2.00	5/8	3/4	3/4	2-3/4	2	3/16
IL60-M20G	IL60-M20S	4000	M20x2.50	3/4	3/4	3/4	2-3/4	2	3/16
IL60-M24G	IL60-M24S	5000	M24x3.00	1	1	3/4	3	2	1/2
IL62-M6Gx1	IL62-M6Sx1	100	M6x1	1/2	3/4	1 1/4	1-3/4	1	3/16
IL62-M8Gx1	IL62-M8Sx1	500	M8x1.25	1/2	3/4	1 1/4	1-3/4	1	3/16
IL62-M6G	IL62-M6S	100	M6x1	1/2	3/4	1 1/4	2-3/4	2	3/16
IL62-M8G	IL62-M8S	500	M8x1.25	1/2	3/4	1 1/4	2-3/4	2	3/16
IL62-M10G	IL62-M10S	1000	M10x1.50	1/2	3/4	1 1/4	2-3/4	2	3/16
IL62-M12G	IL62-M12S	2000	M12x1.75	1/2	3/4	1 1/4	2-3/4	2	3/16
IL62-M16G	IL62-M16S	3000	M16x2.00	5/8	3/4	1 1/4	2-3/4	2	3/16
IL62-M20G	IL62-M20S	4000	M20x2.50	3/4	3/4	1 1/4	2-3/4	2	3/16
IL62-M24G	IL62-M24S	5000	M24x3.00	1	1	1 1/4	3	2	1/2
IL64-M6Gx1	IL64-M6Sx1	100	M6x1	1/2	3/4	1 7/8	1-3/4	1	3/16
IL64-M8Gx1	IL64-M8Sx1	500	M8x1.25	1/2	3/4	1 7/8	1-3/4	1	3/16
IL64-M6G	IL64-M6S	100	M6x1	1/2	3/4	1 7/8	2-3/4	2	3/16
IL64-M8G	IL64-M8S	500	M8x1.25	1/2	3/4	1 7/8	2-3/4	2	3/16
IL64-M10G	IL64-M10S	3000	M10x1.50	1/2	3/4	1 7/8	2-3/4	2	3/16
IL64-M12G	IL64-M12S	5000	M12x1.75	1/2	3/4	1 7/8	2-3/4	2	3/16
IL64-M16G	IL64-M16S	6000	M16x2.00	5/8	3/4	1 7/8	2-3/4	2	3/16
IL64-M20G	IL64-M20S	8000	M20x2.50	3/4	3/4	1 7/8	2-3/4	2	3/16
IL64-M24G	IL64-M24S	10000	M24x3.00	1	1	1 7/8	3	2	1/2
IL66-M6Gx1	IL66-M6Sx1	100	M6x1	1/2	3/4	2 1/2	1-3/4	1	3/16
IL66-M8Gx1	IL66-M8Sx1	500	M8x1.25	1/2	3/4	2 1/2	1-3/4	1	3/16
IL66-M6G	IL66-M6S	100	M6x1	1/2	3/4	2 1/2	2-3/4	2	3/16
IL66-M8G	IL66-M8S	500	M8x1.25	1/2	3/4	2 1/2	2-3/4	2	3/16
IL66-M10G	IL66-M10S	3000	M10x1.50	1/2	3/4	2 1/2	2-3/4	2	3/16
IL66-M12G	IL66-M12S	5000	M12x1.75	1/2	3/4	2 1/2	2-3/4	2	3/16
IL66-M16G	IL66-M16S	6000	M16x2.00	5/8	3/4	2 1/2	2-3/4	2	3/16
IL66-M20G	IL66-M20S	8000	M20x2.50	3/4	3/4	2 1/2	2-3/4	2	3/16
IL66-M24G	IL66-M24S	10000	M24x3.00	1	1	2 1/2	3	2	1/2
IL68-M6Gx1	IL68-M6Sx1	100	M6x1	1/2	3/4	3	1-3/4	1	3/16
IL68-M8Gx1	IL68-M8Sx1	500	M8x1.25	1/2	3/4	3	1-3/4	1	3/16
IL68-M6G	IL68-M6S	100	M6x1	1/2	3/4	3	2-3/4	2	3/16
IL68-M8G	IL68-M8S	500	M8x1.25	1/2	3/4	3	2-3/4	2	3/16
IL68-M10G	IL68-M10S	3000	M10x1.50	1/2	3/4	3	2-3/4	2	3/16
IL68-M12G	IL68-M12S	5000	M12x1.75	1/2	3/4	3	2-3/4	2	3/16
IL68-M16G	IL68-M16S	6000	M16x2.00	5/8	3/4	3	2-3/4	2	3/16
IL68-M20G	IL68-M20S	8000	M20x2.50	3/4	3/4	3	2-3/4	2	3/16
IL68-M24G	IL68-M24S	10000	M24x3.00	1	1	3	3	2	1/2
IL70-M6Gx1	IL70-M6Sx1	100	M6x1	1/2	3/4	4	1-3/4	1	3/16
IL70-M8Gx1	IL70-M8Sx1	500	M8x1.25	1/2	3/4	4	1-3/4	1	3/16
IL70-M6G	IL70-M6S	100	M6x1	1/2	3/4	4	2-3/4	2	3/16
IL70-M8G	IL70-M8S	500	M8x1.25	1/2	3/4	4	2-3/4	2	3/16
IL70-M10G	IL70-M10S	3000	M10x1.50	1/2	3/4	4	2-3/4	2	3/16
IL70-M12G	IL70-M12S	5000	M12x1.75	1/2	3/4	4	2-3/4	2	3/16
IL70-M16G	IL70-M16S	6000	M16x2.00	5/8	3/4	4	2-3/4	2	3/16
IL70-M20G	IL70-M20S	8000	M20x2.50	3/4	3/4	4	2-3/4	2	3/16
IL70-M24G	IL70-M24S	10000	M24x3.00	1	1	4	3	2	1/2



LOW-PROFILE METRIC STUD LEVELERS



The IEC Metric Low-Profile Stud Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE - METRIC STEEL & STAINLESS STEEL (3" STUD)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M8Gx3	IL60-M8Sx3	500	M8x1.25	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M10Gx3	IL60-M10Sx3	1000	M10x1.50	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M12Gx3	IL60-M12Sx3	2000	M12x1.75	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M16Gx3	IL60-M16Sx3	3000	M16x2.00	5/8	3/4	3/4	3-3/4	3	3/16
IL60-M20Gx3	IL60-M20Sx3	4000	M20x2.50	3/4	3/4	3/4	3-3/4	3	3/16
IL60-M24Gx3	IL60-M24Sx3	5000	M24x3.00	1	1	3/4	4	3	1/2
IL62-M8Gx3	IL62-M8Sx3	500	M8x1.25	1/2	3/4	1 1/4	3-3/4	3	3/16
IL62-M10Gx3	IL62-M10Sx3	1000	M10x1.50	1/2	3/4	1 1/4	3-3/4	3	3/16
IL62-M12Gx3	IL62-M12Sx3	2000	M12x1.75	1/2	3/4	1 1/4	3-3/4	3	3/16
IL62-M16Gx3	IL62-M16Sx3	3000	M16x2.00	5/8	3/4	1 1/4	3-3/4	3	3/16
IL62-M20Gx3	IL62-M20Sx3	4000	M20x2.50	3/4	3/4	1 1/4	3-3/4	3	3/16
IL62-M24Gx3	IL62-M24Sx3	5000	M24x3.00	1	1	1 1/4	4	3	1/2
IL64-M8Gx3	IL64-M8Sx3	500	M8x1.25	1/2	3/4	1 7/8	3-3/4	3	3/16
IL64-M10Gx3	IL64-M10Sx3	3000	M10x1.50	1/2	3/4	1 7/8	3-3/4	3	3/16
IL64-M12Gx3	IL64-M12Sx3	5000	M12x1.75	1/2	3/4	1 7/8	3-3/4	3	3/16
IL64-M16Gx3	IL64-M16Sx3	6000	M16x2.00	5/8	3/4	1 7/8	3-3/4	3	3/16
IL64-M20Gx3	IL64-M20Sx3	8000	M20x2.50	3/4	3/4	1 7/8	3-3/4	3	3/16
IL64-M24Gx3	IL64-M24Sx3	10000	M24x3.00	1	1	1 7/8	4	3	1/2
IL66-M8Gx3	IL66-M8Sx3	500	M8x1.25	1/2	3/4	2 1/2	3-3/4	3	3/16
IL66-M10Gx3	IL66-M10Sx3	3000	M10x1.50	1/2	3/4	2 1/2	3-3/4	3	3/16
IL66-M12Gx3	IL66-M12Sx3	5000	M12x1.75	1/2	3/4	2 1/2	3-3/4	3	3/16
IL66-M16Gx3	IL66-M16Sx3	6000	M16x2.00	5/8	3/4	2 1/2	3-3/4	3	3/16
IL66-M20Gx3	IL66-M20Sx3	8000	M20x2.50	3/4	3/4	2 1/2	3-3/4	3	3/16
IL66-M24Gx3	IL66-M24Sx3	10000	M24x3.00	1	1	2 1/2	4	3	1/2
IL68-M8Gx3	IL68-M8Sx3	500	M8x1.25	1/2	3/4	3	3-3/4	3	3/16
IL68-M10Gx3	IL68-M10Sx3	3000	M10x1.50	1/2	3/4	3	3-3/4	3	3/16
IL68-M12Gx3	IL68-M12Sx3	5000	M12x1.75	1/2	3/4	3	3-3/4	3	3/16
IL68-M16Gx3	IL68-M16Sx3	6000	M16x2.00	5/8	3/4	3	3-3/4	3	3/16
IL68-M20Gx3	IL68-M20Sx3	8000	M20x2.50	3/4	3/4	3	3-3/4	3	3/16
IL68-M24Gx3	IL68-M24Sx3	10000	M24x3.00	1	1	3	4	3	1/2
IL70-M8Gx3	IL70-M8Sx3	500	M8x1.25	1/2	3/4	4	3-3/4	3	3/16
IL70-M10Gx3	IL70-M10Sx3	3000	M10x1.50	1/2	3/4	4	3-3/4	3	3/16
IL70-M12Gx3	IL70-M12Sx3	5000	M12x1.75	1/2	3/4	4	3-3/4	3	3/16
IL70-M16Gx3	IL70-M16Sx3	6000	M16x2.00	5/8	3/4	4	3-3/4	3	3/16
IL70-M20Gx3	IL70-M20Sx3	8000	M20x2.50	3/4	3/4	4	3-3/4	3	3/16
IL70-M24Gx3	IL70-M24Sx3	10000	M24x3.00	1	1	4	4	3	1/2

To order with 1/8" black rubber pad, (add "-P"). To order optional top broached hex, "allen drive," add "-BR". To order with two (2) 5/8" dia. lag holes centered at 2-3/4", (add "-H"). Only available on 4" base.

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



LOW-PROFILE METRIC STUD LEVELERS



The IEC Metric Low-Profile Stud Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE - METRIC STEEL & STAINLESS STEEL (4" STUD)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M8Gx4	IL60-M8Sx4	500	M8x1.25	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M10Gx4	IL60-M10Sx4	1000	M10x1.50	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M12Gx4	IL60-M12Sx4	2000	M12x1.75	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M16Gx4	IL60-M16Sx4	3000	M16x2.00	5/8	3/4	3/4	4-3/4	4	3/16
IL60-M20Gx4	IL60-M20Sx4	4000	M20x2.50	3/4	3/4	3/4	4-3/4	4	3/16
IL60-M24Gx4	IL60-M24Sx4	5000	M24x3.00	1	1	3/4	5	4	1/2
IL62-M8Gx4	IL62-M8Sx4	500	M8x1.25	1/2	3/4	1 1/4	4-3/4	4	3/16
IL62-M10Gx4	IL62-M10Sx4	1000	M10x1.50	1/2	3/4	1 1/4	4-3/4	4	3/16
IL62-M12Gx4	IL62-M12Sx4	2000	M12x1.75	1/2	3/4	1 1/4	4-3/4	4	3/16
IL62-M16Gx4	IL62-M16Sx4	3000	M16x2.00	5/8	3/4	1 1/4	4-3/4	4	3/16
IL62-M20Gx4	IL62-M20Sx4	4000	M20x2.50	3/4	3/4	1 1/4	4-3/4	4	3/16
IL62-M24Gx4	IL62-M24Sx4	5000	M24x3.00	1	1	1 1/4	5	4	1/2
IL64-M8Gx4	IL64-M8Sx4	500	M8x1.25	1/2	3/4	1 7/8	4-3/4	4	3/16
IL64-M10Gx4	IL64-M10Sx4	3000	M10x1.50	1/2	3/4	1 7/8	4-3/4	4	3/16
IL64-M12Gx4	IL64-M12Sx4	5000	M12x1.75	1/2	3/4	1 7/8	4-3/4	4	3/16
IL64-M16Gx4	IL64-M16Sx4	6000	M16x2.00	5/8	3/4	1 7/8	4-3/4	4	3/16
IL64-M20Gx4	IL64-M20Sx4	8000	M20x2.50	3/4	3/4	1 7/8	4-3/4	4	3/16
IL64-M24Gx4	IL64-M24Sx4	10000	M24x3.00	1	1	1 7/8	5	4	1/2
IL66-M8Gx4	IL66-M8Sx4	500	M8x1.25	1/2	3/4	2 1/2	4-3/4	4	3/16
IL66-M10Gx4	IL66-M10Sx4	3000	M10x1.50	1/2	3/4	2 1/2	4-3/4	4	3/16
IL66-M12Gx4	IL66-M12Sx4	5000	M12x1.75	1/2	3/4	2 1/2	4-3/4	4	3/16
IL66-M16Gx4	IL66-M16Sx4	6000	M16x2.00	5/8	3/4	2 1/2	4-3/4	4	3/16
IL66-M20Gx4	IL66-M20Sx4	8000	M20x2.50	3/4	3/4	2 1/2	4-3/4	4	3/16
IL66-M24Gx4	IL66-M24Sx4	10000	M24x3.00	1	1	2 1/2	5	4	1/2
IL68-M8Gx4	IL68-M8Sx4	500	M8x1.25	1/2	3/4	3	4-3/4	4	3/16
IL68-M10Gx4	IL68-M10Sx4	3000	M10x1.50	1/2	3/4	3	4-3/4	4	3/16
IL68-M12Gx4	IL68-M12Sx4	5000	M12x1.75	1/2	3/4	3	4-3/4	4	3/16
IL68-M16Gx4	IL68-M16Sx4	6000	M16x2.00	5/8	3/4	3	4-3/4	4	3/16
IL68-M20Gx4	IL68-M20Sx4	8000	M20x2.50	3/4	3/4	3	4-3/4	4	3/16
IL68-M24Gx4	IL68-M24Sx4	10000	M24x3.00	1	1	3	5	4	1/2
IL70-M8Gx4	IL70-M8Sx4	500	M8x1.25	1/2	3/4	4	4-3/4	4	3/16
IL70-M10Gx4	IL70-M10Sx4	3000	M10x1.50	1/2	3/4	4	4-3/4	4	3/16
IL70-M12Gx4	IL70-M12Sx4	5000	M12x1.75	1/2	3/4	4	4-3/4	4	3/16
IL70-M16Gx4	IL70-M16Sx4	6000	M16x2.00	5/8	3/4	4	4-3/4	4	3/16
IL70-M20Gx4	IL70-M20Sx4	8000	M20x2.50	3/4	3/4	4	4-3/4	4	3/16
IL70-M24Gx4	IL70-M24Sx4	10000	M24x3.00	1	1	4	5	4	1/2

To order with 1/8" black rubber pad, (add "-P"). To order optional top broached hex, "allen drive," add "-BR". To order with two (2) 5/8" dia. lag holes centered at 2-3/4", (add "-H"). Only available on 4" base.

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



LOW-PROFILE METRIC STUD LEVELERS



The IEC Metric Low-Profile Stud Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE - METRIC STEEL & STAINLESS STEEL (5" STUD)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M10Gx5	IL60-M10Sx5	1000	M10x1.50	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M12Gx5	IL60-M12Sx5	2000	M12x1.75	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M16Gx5	IL60-M16Sx5	3000	M16x2.00	5/8	3/4	3/4	5-3/4	5	3/16
IL60-M20Gx5	IL60-M20Sx5	4000	M20x2.50	3/4	3/4	3/4	5-3/4	5	3/16
IL60-M24Gx5	IL60-M24Sx5	5000	M24x3.00	1	1	3/4	6	5	1/2
IL62-M10Gx5	IL62-M10Sx5	1000	M10x1.50	1/2	3/4	1 1/4	5-3/4	5	3/16
IL62-M12Gx5	IL62-M12Sx5	2000	M12x1.75	1/2	3/4	1 1/4	5-3/4	5	3/16
IL62-M16Gx5	IL62-M16Sx5	3000	M16x2.00	5/8	3/4	1 1/4	5-3/4	5	3/16
IL62-M20Gx5	IL62-M20Sx5	4000	M20x2.50	3/4	3/4	1 1/4	5-3/4	5	3/16
IL62-M24Gx5	IL62-M24Sx5	5000	M24x3.00	1	1	1 1/4	6	5	1/2
IL64-M10Gx5	IL64-M10Sx5	3000	M10x1.50	1/2	3/4	1 7/8	5-3/4	5	3/16
IL64-M12Gx5	IL64-M12Sx5	5000	M12x1.75	1/2	3/4	1 7/8	5-3/4	5	3/16
IL64-M16Gx5	IL64-M16Sx5	6000	M16x2.00	5/8	3/4	1 7/8	5-3/4	5	3/16
IL64-M20Gx5	IL64-M20Sx5	8000	M20x2.50	3/4	3/4	1 7/8	5-3/4	5	3/16
IL64-M24Gx5	IL64-M24Sx5	10000	M24x3.00	1	1	1 7/8	6	5	1/2
IL66-M10Gx5	IL66-M10Sx5	3000	M10x1.50	1/2	3/4	2 1/2	5-3/4	5	3/16
IL66-M12Gx5	IL66-M12Sx5	5000	M12x1.75	1/2	3/4	2 1/2	5-3/4	5	3/16
IL66-M16Gx5	IL66-M16Sx5	6000	M16x2.00	5/8	3/4	2 1/2	5-3/4	5	3/16
IL66-M20Gx5	IL66-M20Sx5	8000	M20x2.50	3/4	3/4	2 1/2	5-3/4	5	3/16
IL66-M24Gx5	IL66-M24Sx5	10000	M24x3.00	1	1	2 1/2	6	5	1/2
IL68-M10Gx5	IL68-M10Sx5	3000	M10x1.50	1/2	3/4	3	5-3/4	5	3/16
IL68-M12Gx5	IL68-M12Sx5	5000	M12x1.75	1/2	3/4	3	5-3/4	5	3/16
IL68-M16Gx5	IL68-M16Sx5	6000	M16x2.00	5/8	3/4	3	5-3/4	5	3/16
IL68-M20Gx5	IL68-M20Sx5	8000	M20x2.50	3/4	3/4	3	5-3/4	5	3/16
IL68-M24Gx5	IL68-M24Sx5	10000	M24x3.00	1	1	3	6	5	1/2
IL70-M10Gx5	IL70-M10Sx5	3000	M10x1.50	1/2	3/4	4	5-3/4	5	3/16
IL70-M12Gx5	IL70-M12Sx5	5000	M12x1.75	1/2	3/4	4	5-3/4	5	3/16
IL70-M16Gx5	IL70-M16Sx5	6000	M16x2.00	5/8	3/4	4	5-3/4	5	3/16
IL70-M20Gx5	IL70-M20Sx5	8000	M20x2.50	3/4	3/4	4	5-3/4	5	3/16
IL70-M24Gx5	IL70-M24Sx5	10000	M24x3.00	1	1	4	6	5	1/2

To order with 1/8" black rubber pad, (add "-P"). To order optional top broached hex, "allen drive," add "-BR". To order with two (2) 5/8" dia. lag holes centered at 2-3/4", (add "-H"). Only available on 4" base.

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



LOW-PROFILE METRIC STUD LEVELERS


The IEC Metric Low-Profile Stud Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyor
- Machinery
- Work tables
- Display racks

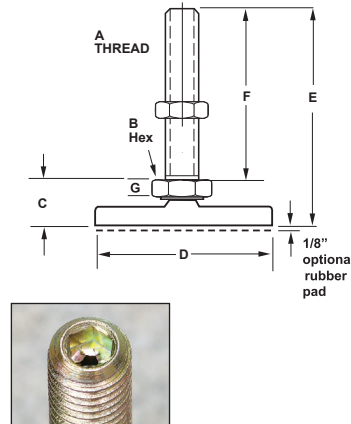

LOW PROFILE - METRIC STEEL & STAINLESS STEEL (6" STUD)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M10Gx6	IL60-M10Sx6	1000	M10x1.50	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M12Gx6	IL60-M12Sx6	2000	M12x1.75	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M16Gx6	IL60-M16Sx6	3000	M16x2.00	5/8	3/4	3/4	6-3/4	6	3/16
IL60-M20Gx6	IL60-M20Sx6	4000	M20x2.50	3/4	3/4	3/4	6-3/4	6	3/16
IL60-M24Gx6	IL60-M24Sx6	5000	M24x3.00	1	1	3/4	7	6	1/2
IL62-M10Gx6	IL62-M10Sx6	1000	M10x1.50	1/2	3/4	1 1/4	6-3/4	6	3/16
IL62-M12Gx6	IL62-M12Sx6	2000	M12x1.75	1/2	3/4	1 1/4	6-3/4	6	3/16
IL62-M16Gx6	IL62-M16Sx6	3000	M16x2.00	5/8	3/4	1 1/4	6-3/4	6	3/16
IL62-M20Gx6	IL62-M20Sx6	4000	M20x2.50	3/4	3/4	1 1/4	6-3/4	6	3/16
IL62-M24Gx6	IL62-M24Sx6	5000	M24x3.00	1	1	1 1/4	7	6	1/2
IL64-M10Gx6	IL64-M10Sx6	3000	M10x1.50	1/2	3/4	1 7/8	6-3/4	6	3/16
IL64-M12Gx6	IL64-M12Sx6	5000	M12x1.75	1/2	3/4	1 7/8	6-3/4	6	3/16
IL64-M16Gx6	IL64-M16Sx6	6000	M16x2.00	5/8	3/4	1 7/8	6-3/4	6	3/16
IL64-M20Gx6	IL64-M20Sx6	8000	M20x2.50	3/4	3/4	1 7/8	6-3/4	6	3/16
IL64-M24Gx6	IL64-M24Sx6	10000	M24x3.00	1	1	1 7/8	7	6	1/2
IL66-M10Gx6	IL66-M10Sx6	3000	M10x1.50	1/2	3/4	2 1/2	6-3/4	6	3/16
IL66-M12Gx6	IL66-M12Sx6	5000	M12x1.75	1/2	3/4	2 1/2	6-3/4	6	3/16
IL66-M16Gx6	IL66-M16Sx6	6000	M16x2.00	5/8	3/4	2 1/2	6-3/4	6	3/16
IL66-M20Gx6	IL66-M20Sx6	8000	M20x2.50	3/4	3/4	2 1/2	6-3/4	6	3/16
IL66-M24Gx6	IL66-M24Sx6	10000	M24x3.00	1	1	2 1/2	7	6	1/2
IL68-M10Gx6	IL68-M10Sx6	3000	M10x1.50	1/2	3/4	3	6-3/4	6	3/16
IL68-M12Gx6	IL68-M12Sx6	5000	M12x1.75	1/2	3/4	3	6-3/4	6	3/16
IL68-M16Gx6	IL68-M16Sx6	6000	M16x2.00	5/8	3/4	3	6-3/4	6	3/16
IL68-M20Gx6	IL68-M20Sx6	8000	M20x2.50	3/4	3/4	3	6-3/4	6	3/16
IL68-M24Gx6	IL68-M24Sx6	1000	M24x3.00	1	1	3	7	6	1/2
IL70-M10Gx6	IL70-M10Sx6	3000	M10x1.50	1/2	3/4	4	6-3/4	6	3/16
IL70-M12Gx6	IL70-M12Sx6	5000	M12x1.75	1/2	3/4	4	6-3/4	6	3/16
IL70-M16Gx6	IL70-M16Sx6	6000	M16x2.00	5/8	3/4	4	6-3/4	6	3/16
IL70-M20Gx6	IL70-M20Sx6	8000	M20x2.50	3/4	3/4	4	6-3/4	6	3/16
IL70-M24Gx6	IL70-M24Sx6	10000	M24x3.00	1	1	4	7	6	1/2

To order with 1/8" black rubber pad, (add "-P"). To order optional top broached hex, "allen drive," add "-BR". To order with two (2) 5/8" dia. lag holes centered at 2-3/4", (add "-H"). Only available on 4" base.

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



LOW-PROFILE METRIC STUD LEVELERS




The IEC Metric Low-Profile Stud Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

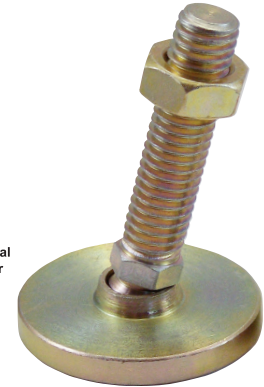

LOW PROFILE - METRIC STEEL & STAINLESS STEEL (8" STUD)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M12Gx8	IL60-M12Sx8	2000	M12x1.75	1/2	3/4	3/4	8-3/4	8	3/16
IL60-M16Gx8	IL60-M16Sx8	3000	M16x2.00	5/8	3/4	3/4	8-3/4	8	3/16
IL60-M20Gx8	IL60-M20Sx8	4000	M20x2.50	3/4	3/4	3/4	8-3/4	8	3/16
IL60-M24Gx8	IL60-M24Sx8	5000	M24x3.00	1	1	3/4	9	8	1/2
IL62-M12Gx8	IL62-M12Sx8	2000	M12x1.75	1/2	3/4	1 1/4	8-3/4	8	3/16
IL62-M16Gx8	IL62-M16Sx8	3000	M16x2.00	5/8	3/4	1 1/4	8-3/4	8	3/16
IL62-M20Gx8	IL62-M20Sx8	4000	M20x2.50	3/4	3/4	1 1/4	8-3/4	8	3/16
IL62-M24Gx8	IL62-M24Sx8	5000	M24x3.00	1	1	1 1/4	9	8	1/2
IL64-M12Gx8	IL64-M12Sx8	5000	M12x1.75	1/2	3/4	1 7/8	8-3/4	8	3/16
IL64-M16Gx8	IL64-M16Sx8	6000	M16x2.00	5/8	3/4	1 7/8	8-3/4	8	3/16
IL64-M20Gx8	IL64-M20Sx8	8000	M20x2.50	3/4	3/4	1 7/8	8-3/4	8	3/16
IL64-M24Gx8	IL64-M24Sx8	10000	M24x3.00	1	1	1 7/8	9	8	1/2
IL66-M12Gx8	IL66-M12Sx8	5000	M12x1.75	1/2	3/4	2 1/2	8-3/4	8	3/16
IL66-M16Gx8	IL66-M16Sx8	6000	M16x2.00	5/8	3/4	2 1/2	8-3/4	8	3/16
IL66-M20Gx8	IL66-M20Sx8	8000	M20x2.50	3/4	3/4	2 1/2	8-3/4	8	3/16
IL66-M24Gx8	IL66-M24Sx8	10000	M24x3.00	1	1	2 1/2	9	8	1/2
IL68-M12Gx8	IL68-M12Sx8	5000	M12x1.75	1/2	3/4	3	8-3/4	8	3/16
IL68-M16Gx8	IL68-M16Sx8	6000	M16x2.00	5/8	3/4	3	8-3/4	8	3/16
IL68-M20Gx8	IL68-M20Sx8	8000	M20x2.50	3/4	3/4	3	8-3/4	8	3/16
IL68-M24Gx8	IL68-M24Sx8	10000	M24x3.00	1	1	3	9	8	1/2
IL70-M12Gx8	IL70-M12Sx8	5000	M12x1.75	1/2	3/4	4	8-3/4	8	3/16
IL70-M16Gx8	IL70-M16Sx8	6000	M16x2.00	5/8	3/4	4	8-3/4	8	3/16
IL70-M20Gx8	IL70-M20Sx8	8000	M20x2.50	3/4	3/4	4	8-3/4	8	3/16
IL70-M24Gx8	IL70-M24Sx8	10000	M24x3.00	1	1	4	9	8	1/2


To order with 1/8" black rubber pad, (add "-P"). To order optional top broached hex, "allen drive," add "-BR". To order with two (2) 5/8" dia. lag holes centered at 2-3/4", (add "-H"). Only available on 4" base.

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



TOGGLE PADS - METRIC SOCKET

The IEC Metric Socket Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.



Features

- Steel/stainless steel options
- Integrated ball and socket
- White Delrin (nylon) base option
- Black delrin available as custom item (change to -BD)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Fixtures / Tooling

METRIC TOGGLE PADS - STEEL & STAINLESS STEEL SOCKET

Steel	Stainless	Load	A	B	C	D	F	G
IL61-M6G	IL61-M6S	100	M6x1	1/2	5/8	3/4	3/8	3/16
IL61-M8G	IL61-M8S	500	M8x1.25	1/2	5/8	3/4	3/8	3/16
IL61-M10G	IL61-M10S	1000	M10x1.50	1/2	5/8	3/4	3/8	3/16
IL61-M12G	IL61-M12S	2000	M12x1.75	1/2	15/16	3/4	3/8	1/2
IL61-M16G	IL61-M16S	3000	M16x2.00	5/8	1-1/8	3/4	1/2	5/8
IL61-M20G	IL61-M20S	4000	M20x2.50	3/4	1-3/16	3/4	5/8	11/16
IL61-M24G	IL61-M24S	5000	M24x3.00	1	1-1/4	3/4	11/16	3/4
IL63-M6G	IL63-M6S	100	M6x1	1/2	5/8	1 1/4	3/8	3/16
IL63-M8G	IL63-M8S	500	M8x1.25	1/2	5/8	1 1/4	3/8	3/16
IL63-M10G	IL63-M10S	1000	M10x1.50	1/2	5/8	1 1/4	3/8	3/16
IL63-M12G	IL63-M12S	2000	M12x1.75	1/2	15/16	1 1/4	3/8	1/2
IL63-M16G	IL63-M16S	3000	M16x2.00	5/8	1-1/8	1 1/4	1/2	5/8
IL63-M20G	IL63-M20S	4000	M20x2.50	3/4	1-3/16	1 1/4	5/8	11/16
IL63-M24G	IL63-M24S	5000	M24x3.00	1	1-1/4	1 1/4	11/16	3/4

To order with 1/8" black rubber pad, (add "-P").

METRIC TOGGLE PADS (Delrin Base) - STEEL/STAINLESS STEEL SOCKET

Steel	Stainless	Load	A	B	C	D	F	G
IL61-M6G-WD	IL61-M6S-WD	100	M6x1	1/2	5/8	3/4	3/8	3/16
IL61-M8G-WD	IL61-M8S-WD	300	M8x1.25	1/2	5/8	3/4	3/8	3/16
IL61-M10G-WD	IL61-M10S-WD	500	M10x1.50	1/2	5/8	3/4	3/8	3/16
IL61-M12G-WD	IL61-M12S-WD	750	M12x1.75	1/2	15/16	3/4	3/8	1/2
IL61-M16G-WD	IL61-M16S-WD	1000	M16x2.00	5/8	1-1/8	3/4	1/2	5/8
IL61-M20G-WD	IL61-M20S-WD	1250	M20x2.50	3/4	1-3/16	3/4	5/8	11/16
IL61-M24G-WD	IL61-M24S-WD	1500	M24x3.00	1	1-1/4	3/4	11/16	3/4
IL63-M6G-WD	IL63-M6S-WD	100	M6x1	1/2	5/8	1 1/4	3/8	3/16
IL63-M8G-WD	IL63-M8S-WD	300	M8x1.25	1/2	5/8	1 1/4	3/8	3/16
IL63-M10G-WD	IL63-M10S-WD	500	M10x1.50	1/2	5/8	1 1/4	3/8	3/16
IL63-M12G-WD	IL63-M12S-WD	750	M12x1.75	1/2	15/16	1 1/4	3/8	1/2
IL63-M16G-WD	IL63-M16S-WD	1000	M16x2.00	5/8	1-1/8	1 1/4	1/2	5/8
IL63-M20G-WD	IL63-M20S-WD	1250	M20x2.50	3/4	1-3/16	1 1/4	5/8	11/16
IL63-M24G-WD	IL63-M24S-WD	1500	M24x3.00	1	1-1/4	1 1/4	11/16	3/4

white base is delrin® plastic.





METRIC TOGGLE PADS / SWIVEL SET SCREWS



The IEC Metric Toggle Pads (Swivel Set Screws) feature an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Work tables
- Display racks
- Fixtures
- Tooling



LOW PROFILE - METRIC STEEL & STAINLESS STEEL

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M6Gx1	IL60-M6Sx1	100	M6x1	1/2	3/4	3/4	2-3/4	1	3/16
IL60-M8Gx1	IL60-M8Sx1	500	M8x1.25	1/2	3/4	3/4	2-3/4	1	3/16
IL60-M6G	IL60-M6S	100	M6x1	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M8G	IL60-M8S	500	M8x1.25	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M10G	IL60-M10S	1000	M10x1.50	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M12G	IL60-M12S	2000	M12x1.75	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M16G	IL60-M16S	3000	M16x2.00	5/8	3/4	3/4	2-3/4	2	3/16
IL60-M20G	IL60-M20S	4000	M20x2.50	3/4	3/4	3/4	2-3/4	2	3/16
IL60-M24G	IL60-M24S	5000	M24x3.00	1	1	3/4	3	2	1/2
IL60-M8Gx3	IL60-M8Sx3	500	M8x1.25	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M10Gx3	IL60-M10Sx3	1000	M10x1.50	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M12Gx3	IL60-M12Sx3	2000	M12x1.75	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M16Gx3	IL60-M16Sx3	3000	M16x2.00	5/8	3/4	3/4	3-3/4	3	3/16
IL60-M20Gx3	IL60-M20Sx3	4000	M20x2.50	3/4	3/4	3/4	3-3/4	3	3/16
IL60-M24Gx3	IL60-M24Sx3	5000	M24x3.00	1	1	3/4	4	3	1/2
IL60-M8Gx4	IL60-M8Sx4	500	M8x1.25	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M10Gx4	IL60-M10Sx4	1000	M10x1.50	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M12Gx4	IL60-M12Sx4	2000	M12x1.75	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M16Gx4	IL60-M16Sx4	3000	M16x2.00	5/8	3/4	3/4	4-3/4	4	3/16
IL60-M20Gx4	IL60-M20Sx4	4000	M20x2.50	3/4	3/4	3/4	4-3/4	4	3/16
IL60-M24Gx4	IL60-M24Sx4	5000	M24x3.00	1	1	3/4	5	4	1/2
IL60-M10Gx5	IL60-M10Sx5	1000	M10x1.50	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M12Gx5	IL60-M12Sx5	2000	M12x1.75	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M16Gx5	IL60-M16Sx5	3000	M16x2.00	5/8	3/4	3/4	5-3/4	5	3/16
IL60-M20Gx5	IL60-M20Sx5	4000	M20x2.50	3/4	3/4	3/4	5-3/4	5	3/16
IL60-M24Gx5	IL60-M24Sx5	5000	M24x3.00	1	1	3/4	6	5	1/2
IL60-M10Gx6	IL60-M10Sx6	1000	M10x1.50	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M12Gx6	IL60-M12Sx6	2000	M12x1.75	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M16Gx6	IL60-M16Sx6	3000	M16x2.00	5/8	3/4	3/4	6-3/4	6	3/16
IL60-M20Gx6	IL60-M20Sx6	4000	M20x2.50	3/4	3/4	3/4	6-3/4	6	3/16
IL60-M24Gx6	IL60-M24Sx6	5000	M24x3.00	1	1	3/4	7	6	1/2
IL60-M12Gx8	IL60-M12Sx8	2000	M12x1.75	1/2	3/4	3/4	8-3/4	8	3/16
IL60-M16Gx8	IL60-M16Sx8	3000	M16x2.00	5/8	3/4	3/4	8-3/4	8	3/16
IL60-M20Gx8	IL60-M20Sx8	4000	M20x2.50	3/4	3/4	3/4	8-3/4	8	3/16
IL60-M24Gx8	IL60-M24Sx8	5000	M24x3.00	1	1	3/4	9	8	1/2

To order with 1/8" black rubber pad, (add "-P"). To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



METRIC TOGGLE PADS / SWIVEL SET SCREWS



The IEC Metric Toggle Pads (Swivel Set Screws) feature an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Work tables
- Display racks
- Fixtures
- Tooling



LOW PROFILE - METRIC STEEL & STAINLESS STEEL

Steel	Stainless	Load	A	B	C	D	E	F	G
IL62-M6Gx1	IL62-M6Sx1	100	M6x1	1/2	3/4	1-1/4	2-3/4	1	3/16
IL62-M8Gx1	IL62-M8Sx1	500	M8x1.25	1/2	3/4	1-1/4	2-3/4	1	3/16
IL62-M6G	IL62-M6S	100	M6x1	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M8G	IL62-M8S	500	M8x1.25	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M10G	IL62-M10S	1000	M10x1.50	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M12G	IL62-M12S	2000	M12x1.75	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M16G	IL62-M16S	3000	M16x2.00	5/8	3/4	1-1/4	2-3/4	2	3/16
IL62-M20G	IL62-M20S	4000	M20x2.50	3/4	3/4	1-1/4	2-3/4	2	3/16
IL62-M24G	IL62-M24S	5000	M24x3.00	1	1	1-1/4	3	2	1/2
IL62-M8Gx3	IL62-M8Sx3	500	M8x1.25	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M10Gx3	IL62-M10Sx3	1000	M10x1.50	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M12Gx3	IL62-M12Sx3	2000	M12x1.75	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M16Gx3	IL62-M16Sx3	3000	M16x2.00	5/8	3/4	1-1/4	3-3/4	3	3/16
IL62-M20Gx3	IL62-M20Sx3	4000	M20x2.50	3/4	3/4	1-1/4	3-3/4	3	3/16
IL62-M24Gx3	IL62-M24Sx3	5000	M24x3.00	1	1	1-1/4	4	3	1/2
IL62-M8Gx4	IL62-M8Sx4	500	M8x1.25	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M10Gx4	IL62-M10Sx4	1000	M10x1.50	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M12Gx4	IL62-M12Sx4	2000	M12x1.75	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M16Gx4	IL62-M16Sx4	3000	M16x2.00	5/8	3/4	1-1/4	4-3/4	4	3/16
IL62-M20Gx4	IL62-M20Sx4	4000	M20x2.50	3/4	3/4	1-1/4	4-3/4	4	3/16
IL62-M24Gx4	IL62-M24Sx4	5000	M24x3.00	1	1	1-1/4	5	4	1/2
IL62-M10Gx5	IL62-M10Sx5	1000	M10x1.50	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-M12Gx5	IL62-M12Sx5	2000	M12x1.75	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-M16Gx5	IL62-M16Sx5	3000	M16x2.00	5/8	3/4	1-1/4	5-3/4	5	3/16
IL62-M20Gx5	IL62-M20Sx5	4000	M20x2.50	3/4	3/4	1-1/4	5-3/4	5	3/16
IL62-M24Gx5	IL62-M24Sx5	5000	M24x3.00	1	1	1-1/4	6	5	1/2
IL62-M10Gx6	IL62-M10Sx6	1000	M10x1.50	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-M12Gx6	IL62-M12Sx6	2000	M12x1.75	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-M16Gx6	IL62-M16Sx6	3000	M16x2.00	5/8	3/4	1-1/4	6-3/4	6	3/16
IL62-M20Gx6	IL62-M20Sx6	4000	M20x2.50	3/4	3/4	1-1/4	6-3/4	6	3/16
IL62-M24Gx6	IL62-M24Sx6	5000	M24x3.00	1	1	1-1/4	7	6	1/2
IL62-M12Gx8	IL62-M12Sx8	2000	M12x1.75	1/2	3/4	1-1/4	8-3/4	8	3/16
IL62-M16Gx8	IL62-M16Sx8	3000	M16x2.00	5/8	3/4	1-1/4	8-3/4	8	3/16
IL62-M20Gx8	IL62-M20Sx8	4000	M20x2.50	3/4	3/4	1-1/4	8-3/4	8	3/16
IL62-M24Gx8	IL62-M24Sx8	5000	M24x3.00	1	1	1-1/4	9	8	1/2

To order with 1/8" black rubber pad, (add "-P"). To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



TOGGLE PADS - METRIC STUD (SWIVEL SET SCREWS)



The IEC Metric Delrin® Base Stud Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Black delrin available as custom
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Fixtures
- Tooling



white base is delrin® plastic.

LOW PROFILE - METRIC (DELRIN BASE) STEEL & STAINLESS STEEL

Steel	Stainless	Load	A	B	C	D	E	F	G
IL60-M6Gx1-WD	IL60-M6Sx1-WD	100	M6x1	1/2	3/4	3/4	2-3/4	1	3/16
IL60-M8Gx1-WD	IL60-M8Sx1-WD	300	M8x1.25	1/2	3/4	3/4	2-3/4	1	3/16
IL60-M6G-WD	IL60-M6S-WD	100	M6x1	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M8G-WD	IL60-M8S-WD	300	M8x1.25	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M10G-WD	IL60-M10S-WD	500	M10x1.50	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M12G-WD	IL60-M12S-WD	750	M12x1.75	1/2	3/4	3/4	2-3/4	2	3/16
IL60-M16G-WD	IL60-M16S-WD	1000	M16x2.00	5/8	3/4	3/4	2-3/4	2	3/16
IL60-M20G-WD	IL60-M20S-WD	1250	M20x2.50	3/4	3/4	3/4	2-3/4	2	3/16
IL60-M24G-WD	IL60-M24S-WD	1500	M24x3.00	1	1	3/4	3	2	1/2
IL60-M8Gx3-WD	IL60-M8Sx3-WD	300	M8x1.25	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M10Gx3-WD	IL60-M10Sx3-WD	500	M10x1.50	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M12Gx3-WD	IL60-M12Sx3-WD	750	M12x1.75	1/2	3/4	3/4	3-3/4	3	3/16
IL60-M16Gx3-WD	IL60-M16Sx3-WD	1000	M16x2.00	5/8	3/4	3/4	3-3/4	3	3/16
IL60-M20Gx3-WD	IL60-M20Sx3-WD	1250	M20x2.50	3/4	3/4	3/4	3-3/4	3	3/16
IL60-M24Gx3-WD	IL60-M24Sx3-WD	1500	M24x3.00	1	1	3/4	4	3	1/2
IL60-M8Gx4-WD	IL60-M8Sx4-WD	300	M8x1.25	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M10Gx4-WD	IL60-M10Sx4-WD	500	M10x1.50	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M12Gx4-WD	IL60-M12Sx4-WD	750	M12x1.75	1/2	3/4	3/4	4-3/4	4	3/16
IL60-M16Gx4-WD	IL60-M16Sx4-WD	1000	M16x2.00	5/8	3/4	3/4	4-3/4	4	3/16
IL60-M20Gx4-WD	IL60-M20Sx4-WD	1250	M20x2.50	3/4	3/4	3/4	4-3/4	4	3/16
IL60-M24Gx4-WD	IL60-M24Sx4-WD	1500	M24x3.00	1	1	3/4	5	4	1/2
IL60-M10Gx5-WD	IL60-M10Sx5-WD	500	M10x1.50	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M12Gx5-WD	IL60-M12Sx5-WD	750	M12x1.75	1/2	3/4	3/4	5-3/4	5	3/16
IL60-M16Gx5-WD	IL60-M16Sx5-WD	1000	M16x2.00	5/8	3/4	3/4	5-3/4	5	3/16
IL60-M20Gx5-WD	IL60-M20Sx5-WD	1250	M20x2.50	3/4	3/4	3/4	5-3/4	5	3/16
IL60-M24Gx5-WD	IL60-M24Sx5-WD	1500	M24x3.00	1	1	3/4	6	5	1/2
IL60-M10Gx6-WD	IL60-M10Sx6-WD	500	M10x1.50	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M12Gx6-WD	IL60-M12Sx6-WD	750	M12x1.75	1/2	3/4	3/4	6-3/4	6	3/16
IL60-M16Gx6-WD	IL60-M16Sx6-WD	1000	M16x2.00	5/8	3/4	3/4	6-3/4	6	3/16
IL60-M20Gx6-WD	IL60-M20Sx6-WD	1250	M20x2.50	3/4	3/4	3/4	6-3/4	6	3/16
IL60-M24Gx6-WD	IL60-M24Sx6-WD	1500	M24x3.00	1	1	3/4	7	6	1/2
IL60-M12Gx8-WD	IL60-M12Sx8-WD	750	M12x1.75	1/2	3/4	3/4	8-3/4	8	3/16
IL60-M16Gx8-WD	IL60-M16Sx8-WD	1000	M16x2.00	5/8	3/4	3/4	8-3/4	8	3/16
IL60-M20Gx8-WD	IL60-M20Sx8-WD	1250	M20x2.50	3/4	3/4	3/4	8-3/4	8	3/16
IL60-M24Gx8-WD	IL60-M24Sx8-WD	1500	M24x3.00	1	1	3/4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



TOGGLE PADS - METRIC STUD (SWIVEL SET SCREWS)



The IEC Metric Delrin® Base Stud Toggle Pad features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Standard steel finish is corrosion resistant zinc-plated gold irridite. Other finishes available upon request.

Features

- Steel/stainless steel options
- Integrated ball and stud
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Black delrin available as custom
- Non-tilt and extended stud length designs (2" - 8")
- Optional Top-A-Just™ shown at right. (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Fixtures
- Tooling



white base is delrin® plastic.

LOW PROFILE - METRIC STEEL & STAINLESS STEEL

Steel	Stainless	Load	A	B	C	D	E	F	G
IL62-M6Gx1-WD	IL62-M6Sx1-WD	100	M6x1	1/2	3/4	1-1/4	2-3/4	1	3/16
IL62-M8Gx1-WD	IL62-M8Sx1-WD	300	M8x1.25	1/2	3/4	1-1/4	2-3/4	1	3/16
IL62-M6G-WD	IL62-M6S-WD	100	M6x1	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M8G-WD	IL62-M8S-WD	300	M8x1.25	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M10G-WD	IL62-M10S-WD	500	M10x1.50	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M12G-WD	IL62-M12S-WD	750	M12x1.75	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-M16G-WD	IL62-M16S-WD	1000	M16x2.00	5/8	3/4	1-1/4	2-3/4	2	3/16
IL62-M20G-WD	IL62-M20S-WD	1250	M20x2.50	3/4	3/4	1-1/4	2-3/4	2	3/16
IL62-M24G-WD	IL62-M24S-WD	1500	M24x3.00	1	1	1-1/4	3	2	1/2
IL62-M8Gx3-WD	IL62-M8Sx3-WD	300	M8x1.25	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M10Gx3-WD	IL62-M10Sx3-WD	500	M10x1.50	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M12Gx3-WD	IL62-M12Sx3-WD	750	M12x1.75	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-M16Gx3-WD	IL62-M16Sx3-WD	1000	M16x2.00	5/8	3/4	1-1/4	3-3/4	3	3/16
IL62-M20Gx3-WD	IL62-M20Sx3-WD	1250	M20x2.50	3/4	3/4	1-1/4	3-3/4	3	3/16
IL62-M24Gx3-WD	IL62-M24Sx3-WD	1500	M24x3.00	1	1	1-1/4	4	3	1/2
IL62-M8Gx4-WD	IL62-M8Sx4-WD	300	M8x1.25	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M10Gx4-WD	IL62-M10Sx4-WD	500	M10x1.50	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M12Gx4-WD	IL62-M12Sx4-WD	750	M12x1.75	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-M16Gx4-WD	IL62-M16Sx4-WD	1000	M16x2.00	5/8	3/4	1-1/4	4-3/4	4	3/16
IL62-M20Gx4-WD	IL62-M20Sx4-WD	1250	M20x2.50	3/4	3/4	1-1/4	4-3/4	4	3/16
IL62-M24Gx4-WD	IL62-M24Sx4-WD	1500	M24x3.00	1	1	1-1/4	5	4	1/2
IL62-M10Gx5-WD	IL62-M10Sx5-WD	500	M10x1.50	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-M12Gx5-WD	IL62-M12Sx5-WD	750	M12x1.75	1/2	3/4	1-1/4	5-3/4	5	3/16
IL62-M16Gx5-WD	IL62-M16Sx5-WD	1000	M16x2.00	5/8	3/4	1-1/4	5-3/4	5	3/16
IL62-M20Gx5-WD	IL62-M20Sx5-WD	1250	M20x2.50	3/4	3/4	1-1/4	5-3/4	5	3/16
IL62-M24Gx5-WD	IL62-M24Sx5-WD	1500	M24x3.00	1	1	1-1/4	6	5	1/2
IL62-M10Gx6-WD	IL62-M10Sx6-WD	500	M10x1.50	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-M12Gx6-WD	IL62-M12Sx6-WD	750	M12x1.75	1/2	3/4	1-1/4	6-3/4	6	3/16
IL62-M16Gx6-WD	IL62-M16Sx6-WD	1000	M16x2.00	5/8	3/4	1-1/4	6-3/4	6	3/16
IL62-M20Gx6-WD	IL62-M20Sx6-WD	1250	M20x2.50	3/4	3/4	1-1/4	6-3/4	6	3/16
IL62-M24Gx6-WD	IL62-M24Sx6-WD	1500	M24x3.00	1	1	1-1/4	7	6	1/2
IL62-M12Gx8-WD	IL62-M12Sx8-WD	750	M12x1.75	1/2	3/4	1-1/4	8-3/4	8	3/16
IL62-M16Gx8-WD	IL62-M16Sx8-WD	1000	M16x2.00	5/8	3/4	1-1/4	8-3/4	8	3/16
IL62-M20Gx8-WD	IL62-M20Sx8-WD	1250	M20x2.50	3/4	3/4	1-1/4	8-3/4	8	3/16
IL62-M24Gx8-WD	IL62-M24Sx8-WD	1500	M24x3.00	1	1	1-1/4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

HEAVY-DUTY METRIC

NOTES



NYLON SWIVEL METRIC SOCKET STYLE

LEVELERS – with Rubber Pad


The IEC Metric Nylon Base Steel and Stainless Steel Swivel Socket Leveler with Rubber Pad is ideal for medium-duty load requirements where a stud is not required. Nylon bases 1" to 10" with 15 degree swivel supporting loads to 3,000 lbs. Steel Socket has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

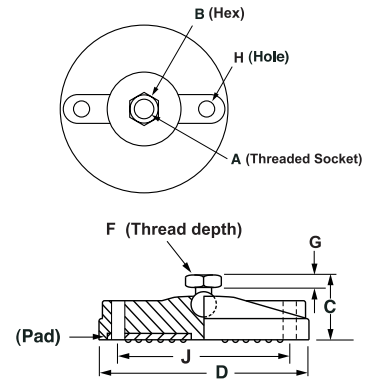

Metric Threads : 1" to 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	F	G	H	J
Nylon Swivel Socket Levelers—with Rubber Pad										
IL91-M6G-P	IL91-M6S-P	100	M6X1	1/2	1	1	3/8	3/16	-	-
IL91-M8G-P	IL91-M8S-P	500	M8X1.25	1/2	1	1	3/8	3/16	-	-
IL91-M10G-P	IL91-M10S-P	2000	M10X1.50	1/2	1	1	3/8	3/16	-	-
IL91-M12G-P	IL91-M12S-P	2000	M12X1.75	5/8	1-5/16	1	3/8	1/2	-	-
IL91-M16G-P	IL91-M16S-P	2000	M16X2.00	3/4	1-7/16	1	1/2	5/8	-	-
IL91-M20G-P	IL91-M20S-P	2000	M20X2.50	1	1-5/8	1	5/8	11/16	-	-
IL91-M24G-P	IL91-M24S-P	2000	M24X3.00	1 1/4	1-7/8	1	11/16	3/4	-	-
IL93-M6G-P	IL93-M6S-P	100	M6X1	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M8G-P	IL93-M8S-P	500	M8X1.25	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M10G-P	IL93-M10S-P	2000	M10X1.50	1/2	1	1 1/2	3/8	3/16	-	-
IL93-M12G-P	IL93-M12S-P	2000	M12X1.75	5/8	1-5/16	1 1/2	3/8	1/2	-	-
IL93-M16G-P	IL93-M16S-P	2000	M16X2.00	3/4	1-7/16	1 1/2	1/2	5/8	-	-
IL93-M20G-P	IL93-M20S-P	2000	M20X2.50	1	1-5/8	1 1/2	5/8	11/16	-	-
IL93-M24G-P	IL93-M24S-P	2000	M24X3.00	1 1/4	1-7/8	1 1/2	11/16	3/4	-	-
IL95-M6G-P	IL95-M6S-P	100	M6X1	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M8G-P	IL95-M8S-P	500	M8X1.25	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M10G-P	IL95-M10S-P	2500	M10X1.50	1/2	1	2 3/8	3/8	3/16	-	-
IL95-M12G-P	IL95-M12S-P	2500	M12X1.75	5/8	1-5/16	2 3/8	3/8	1/2	-	-
IL95-M16G-P	IL95-M16S-P	2500	M16X2.00	3/4	1-7/16	2 3/8	1/2	5/8	-	-
IL95-M20G-P	IL95-M20S-P	2500	M20X2.50	1	1-5/8	2 3/8	5/8	11/16	-	-
IL95-M24G-P	IL95-M24S-P	2500	M24X3.00	1 1/4	1-7/8	2 3/8	11/16	3/4	-	-
IL97-M6G-H-P	IL97-M6S-H-P	100	M6X1	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M8G-H-P	IL97-M8S-H-P	500	M8X1.25	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M10G-H-P	IL97-M10S-H-P	3000	M10X1.50	1/2	1	3 1/8	3/8	3/16	.39	2.2
IL97-M12G-H-P	IL97-M12S-H-P	3000	M12X1.75	5/8	1-5/16	3 1/8	3/8	1/2	.39	2.2
IL97-M16G-H-P	IL97-M16S-H-P	3000	M16X2.00	3/4	1-7/16	3 1/8	1/2	5/8	.39	2.2
IL97-M20G-H-P	IL97-M20S-H-P	3000	M20X2.50	1	1-5/8	3 1/8	5/8	11/16	.39	2.2
IL97-M24G-H-P	IL97-M24S-H-P	3000	M24X3.00	1 1/4	1-7/8	3 1/8	11/16	3/4	.39	2.2
IL99-M6G-H-P	IL99-M6S-H-P	100	M6X1	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M8G-H-P	IL99-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M10G-H-P	IL99-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3/8	3/16	.51	2.9
IL99-M12G-H-P	IL99-M12S-H-P	3000	M12X1.75	5/8	1-1/2	4	3/8	1/2	.51	2.9
IL99-M16G-H-P	IL99-M16S-H-P	3000	M16X2.00	3/4	1-5/8	4	1/2	5/8	.51	2.9
IL99-M20G-H-P	IL99-M20S-H-P	3000	M20X2.50	1	1-7/8	4	5/8	11/16	.51	2.9
IL99-M24G-H-P	IL99-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	4	11/16	3/4	.51	2.9
IL99A-M6G-H-P	IL99A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M8G-H-P	IL99A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M10G-H-P	IL99A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3/8	3/16	.51	4.9
IL99A-M12G-H-P	IL99A-M12S-H-P	3000	M12X1.75	5/8	1-1/2	6	3/8	1/2	.51	4.9
IL99A-M16G-H-P	IL99A-M16S-H-P	3000	M16X2.00	3/4	1-5/8	6	1/2	5/8	.51	4.9
IL99A-M20G-H-P	IL99A-M20S-H-P	3000	M20X2.50	1	1-7/8	6	5/8	11/16	.51	4.9
IL99A-M24G-H-P	IL99A-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	6	11/16	3/4	.51	4.9
IL99B-M6G-H-P	IL99B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M8G-H-P	IL99B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M10G-H-P	IL99B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3/8	3/16	.51	6.9
IL99B-M12G-H-P	IL99B-M12S-H-P	3000	M12X1.75	5/8	1-1/2	8	3/8	1/2	.51	6.9
IL99B-M16G-H-P	IL99B-M16S-H-P	3000	M16X2.00	3/4	1-5/8	8	1/2	5/8	.51	6.9
IL99B-M20G-H-P	IL99B-M20S-H-P	3000	M20X2.50	1	1-7/8	8	5/8	11/16	.51	6.9
IL99B-M24G-H-P	IL99B-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	8	11/16	3/4	.51	6.9
IL99C-M6G-H-P	IL99C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M8G-H-P	IL99C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M10G-H-P	IL99C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3/8	3/16	.51	8.9
IL99C-M12G-H-P	IL99C-M12S-H-P	3000	M12X1.75	5/8	1-1/2	10	3/8	1/2	.51	8.9
IL99C-M16G-H-P	IL99C-M16S-H-P	3000	M16X2.00	3/4	1-5/8	10	1/2	5/8	.51	8.9
IL99C-M20G-H-P	IL99C-M20S-H-P	3000	M20X2.50	1	1-7/8	10	5/8	11/16	.51	8.9
IL99C-M24G-H-P	IL99C-M24S-H-P	3000	M24X3.00	1 1/4	2-1/8	10	11/16	3/4	.51	8.9

"H" denotes two lag holes in base Note: "F" column values represent thread depth

To order without rubber pad, remove "-P." To order without lag holes, remove "-H."



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY METRIC
NOTES



NYLON METRIC SWIVEL STUD STYLE

LEVELERS – with Rubber Pad




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- M6 & M8 available in 1" (25mm) length
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

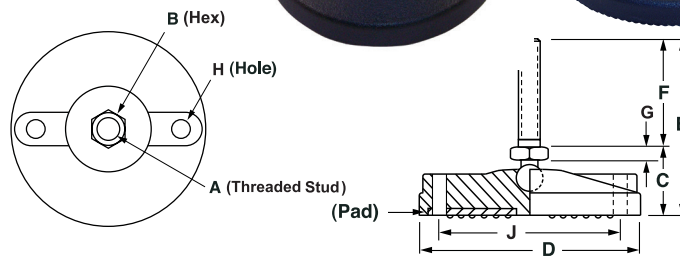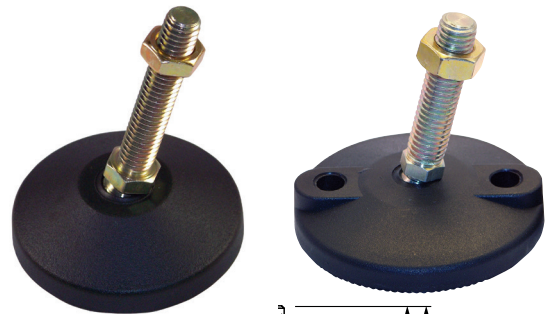

Metric Threads: 1" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-2" Stud and Rubber Pad											
IL90-M6Gx1-P	IL90-M6Sx1-P	100	M6X1	1/2	1	1	2	1	3/16	-	-
IL90-M8Gx1-P	IL90-M8Sx1-P	500	M8X1.25	1/2	1	1	2	1	3/16	-	-
IL90-M6G-P	IL90-M6S-P	100	M6X1	1/2	1	1	3	2	3/16	-	-
IL90-M8G-P	IL90-M8S-P	500	M8X1.25	1/2	1	1	2	2	3/16	-	-
IL90-M10G-P	IL90-M10S-P	2000	M10X1.50	1/2	1	1	3	2	3/16	-	-
IL90-M12G-P	IL90-M12S-P	2000	M12X1.75	1/2	1	1	3	2	3/16	-	-
IL90-M16G-P	IL90-M16S-P	2000	M16X2.00	5/8	1	1	3	2	3/16	-	-
IL90-M20G-P	IL90-M20S-P	2000	M20X2.50	3/4	1	1	3	2	3/16	-	-
IL90-M24G-P	IL90-M24S-P	2000	M24X3.00	1	1-1/4	1	3-1/4	2	7/16	-	-
IL92-M6Gx1-P	IL92-M6Sx1-P	100	M6X1	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M8Gx1-P	IL92-M8Sx1-P	500	M8X1.25	1/2	1	1-1/2	2	1	3/16	-	-
IL92-M6G-P	IL92-M6S-P	100	M6X1	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M8G-P	IL92-M8S-P	500	M8X1.25	1/2	1	1-1/2	2	2	3/16	-	-
IL92-M10G-P	IL92-M10S-P	2000	M10X1.50	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M12G-P	IL92-M12S-P	2000	M12X1.75	1/2	1	1-1/2	3	2	3/16	-	-
IL92-M16G-P	IL92-M16S-P	2000	M16X2.00	5/8	1	1-1/2	3	2	3/16	-	-
IL92-M20G-P	IL92-M20S-P	2000	M20X2.50	3/4	1	1-1/2	3	2	3/16	-	-
IL92-M24G-P	IL92-M24S-P	2000	M24X3.00	1	1-1/4	1-1/2	3-1/4	2	7/16	-	-
IL94-M6Gx1-P	IL94-M6Sx1-P	100	M6X1	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M8Gx1-P	IL94-M8Sx1-P	500	M8X1.25	1/2	1	2-3/8	2	1	3/16	-	-
IL94-M6G-P	IL94-M6S-P	100	M6X1	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M8G-P	IL94-M8S-P	500	M8X1.25	1/2	1	2-3/8	2	2	3/16	-	-
IL94-M10G-P	IL94-M10S-P	2500	M10X1.50	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M12G-P	IL94-M12S-P	2500	M12X1.75	1/2	1	2-3/8	3	2	3/16	-	-
IL94-M16G-P	IL94-M16S-P	2500	M16X2.00	5/8	1	2-3/8	3	2	3/16	-	-
IL94-M20G-P	IL94-M20S-P	2500	M20X2.50	3/4	1	2-3/8	3	2	3/16	-	-
IL94-M24G-P	IL94-M24S-P	2500	M24X3.00	1	1-1/4	2-3/8	3-1/4	2	7/16	-	-
IL96-M6Gx1-H-P	IL96-M6Sx1-H-P	100	M6X1	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M8Gx1-H-P	IL96-M8Sx1-H-P	500	M8X1.25	1/2	1	3-1/8	2	1	3/16	.39	2.2
IL96-M6G-H-P	IL96-M6S-H-P	100	M6X1	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M8G-H-P	IL96-M8S-H-P	500	M8X1.25	1/2	1	3-1/8	2	2	3/16	.39	2.2
IL96-M10G-H-P	IL96-M10S-H-P	3000	M10X1.50	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M12G-H-P	IL96-M12S-H-P	3000	M12X1.75	1/2	1	3-1/8	3	2	3/16	.39	2.2
IL96-M16G-H-P	IL96-M16S-H-P	3000	M16X2.00	5/8	1	3-1/8	3	2	3/16	.39	2.2
IL96-M20G-H-P	IL96-M20S-H-P	3000	M20X2.50	3/4	1	3-1/8	3	2	3/16	.39	2.2
IL96-M24G-H-P	IL96-M24S-H-P	3000	M24X3.00	1	1-1/4	3-1/8	3-1/4	2	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



NYLON METRIC SWIVEL STUD STYLE

LEVELERS – with Rubber Pad





The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

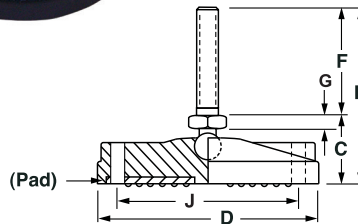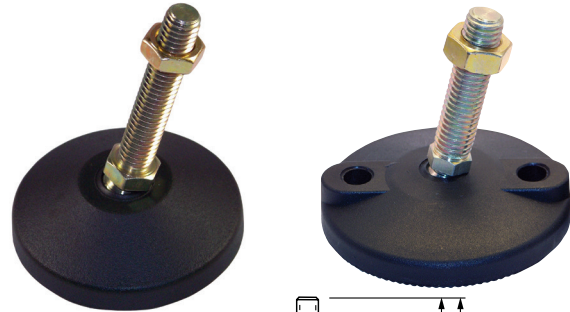

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—2" Stud and Rubber Pad											
IL98-M6Gx1-H-P	IL98-M6Sx1-H-P	100	M6X1	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M8Gx1-H-P	IL98-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	4	2-1/4	1	3/16	.51	2.9
IL98-M6G-H-P	IL98-M6S-H-P	100	M6X1	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M8G-H-P	IL98-M8S-H-P	500	M8X1.25	1/2	1-1/4	4	2-1/4	2	3/16	.51	2.9
IL98-M10G-H-P	IL98-M10S-H-P	3000	M10X1.50	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M12G-H-P	IL98-M12S-H-P	3000	M12X1.75	1/2	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M16G-H-P	IL98-M16S-H-P	3000	M16X2.00	5/8	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M20G-H-P	IL98-M20S-H-P	3000	M20X2.50	3/4	1-1/4	4	3-1/4	2	3/16	.51	2.9
IL98-M24G-H-P	IL98-M24S-H-P	3000	M24X3.00	1	1-1/2	4	3-1/2	2	7/16	.51	2.9
IL98A-M6Gx1-H-P	IL98A-M6Sx1-H-P	100	M6X1	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M8Gx1-H-P	IL98A-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	6	2-1/4	1	3/16	.51	4.9
IL98A-M6G-H-P	IL98A-M6S-H-P	100	M6X1	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M8G-H-P	IL98A-M8S-H-P	500	M8X1.25	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M10G-H-P	IL98A-M10S-H-P	3000	M10X1.50	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M12G-H-P	IL98A-M12S-H-P	3000	M12X1.75	1/2	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M16G-H-P	IL98A-M16S-H-P	3000	M16X2.00	5/8	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M20G-H-P	IL98A-M20S-H-P	3000	M20X2.50	3/4	1-1/4	6	3-1/4	2	3/16	.51	4.9
IL98A-M24G-H-P	IL98A-M24S-H-P	3000	M24X3.00	1	1-1/2	6	3-1/2	2	7/16	.51	4.9
IL98B-M6Gx1-H-P	IL98B-M6Sx1-H-P	100	M6X1	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M8Gx1-H-P	IL98B-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	8	2-1/4	1	3/16	.51	6.9
IL98B-M6G-H-P	IL98B-M6S-H-P	100	M6X1	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M8G-H-P	IL98B-M8S-H-P	500	M8X1.25	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M10G-H-P	IL98B-M10S-H-P	3000	M10X1.50	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M12G-H-P	IL98B-M12S-H-P	3000	M12X1.75	1/2	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M16G-H-P	IL98B-M16S-H-P	3000	M16X2.00	5/8	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M20G-H-P	IL98B-M20S-H-P	3000	M20X2.50	3/4	1-1/4	8	3-1/4	2	3/16	.51	6.9
IL98B-M24G-H-P	IL98B-M24S-H-P	3000	M24X3.00	1	1-1/2	8	3-1/2	2	7/16	.51	6.9
IL98C-M6Gx1-H-P	IL98C-M6Sx1-H-P	100	M6X1	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M8Gx1-H-P	IL98C-M8Sx1-H-P	500	M8X1.25	1/2	1-1/4	10	2-1/4	1	3/16	.51	8.9
IL98C-M6G-H-P	IL98C-M6S-H-P	100	M6X1	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M8G-H-P	IL98C-M8S-H-P	500	M8X1.25	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M10G-H-P	IL98C-M10S-H-P	3000	M10X1.50	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M12G-H-P	IL98C-M12S-H-P	3000	M12X1.75	1/2	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M16G-H-P	IL98C-M16S-H-P	3000	M16X2.00	5/8	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M20G-H-P	IL98C-M20S-H-P	3000	M20X2.50	3/4	1-1/4	10	3-1/4	2	3/16	.51	8.9
IL98C-M24G-H-P	IL98C-M24S-H-P	3000	M24X3.00	1	1-1/2	10	3-1/2	2	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



NYLON METRIC SWIVEL STUD STYLE

LEVELERS – with Rubber Pad




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

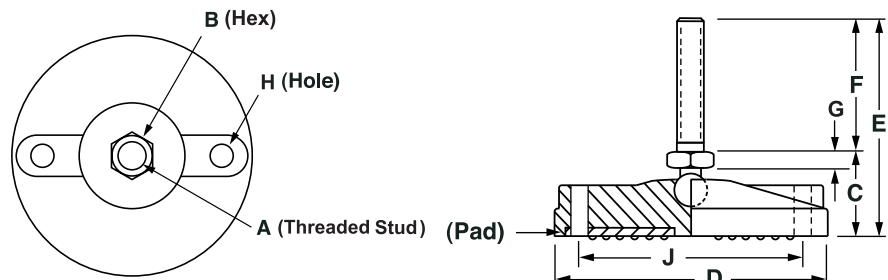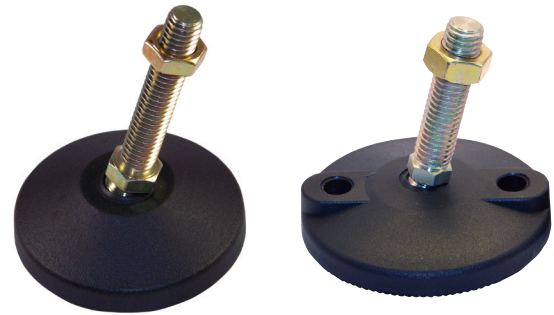

Metric Threads: 1" to 3-1/8" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL90-M6GX3-P	IL90-M6SX3-P	100	M6X1	1/2	1	1	4	3	3/16	-	-
IL90-M8GX3-P	IL90-M8SX3-P	500	M8X1.25	1/2	1	1	4	3	3/16	-	-
IL90-M10GX3-P	IL90-M10SX3-P	2000	M10X1.50	1/2	1	1	4	3	3/16	-	-
IL90-M12GX3-P	IL90-M12SX3-P	2000	M12X1.75	1/2	1	1	4	3	3/16	-	-
IL90-M16GX3-P	IL90-M16SX3-P	2000	M16X2.00	5/8	1	1	4	3	3/16	-	-
IL90-M20GX3-P	IL90-M20SX3-P	2000	M20X2.50	3/4	1	1	4	3	3/16	-	-
IL90-M24GX3-P	IL90-M24SX3-P	2000	M24X3.00	1	1 1/4	1	4 1/4	3	7/16	-	-
IL92-M6GX3-P	IL92-M6SX3-P	100	M6X1	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M8GX3-P	IL92-M8SX3-P	500	M8X1.25	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M10GX3-P	IL92-M10SX3-P	2000	M10X1.50	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M12GX3-P	IL92-M12SX3-P	2000	M12X1.75	1/2	1	1 1/2	4	3	3/16	-	-
IL92-M16GX3-P	IL92-M16SX3-P	2000	M16X2.00	5/8	1	1 1/2	4	3	3/16	-	-
IL92-M20GX3-P	IL92-M20SX3-P	2000	M20X2.50	3/4	1	1 1/2	4	3	3/16	-	-
IL92-M24GX3-P	IL92-M24SX3-P	2000	M24X3.00	1	1 1/4	1 1/2	4 1/4	3	7/16	-	-
IL94-M6GX3-P	IL94-M6SX3-P	100	M6X1	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M8GX3-P	IL94-M8SX3-P	500	M8X1.25	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M10GX3-P	IL94-M10SX3-P	2500	M10X1.50	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M12GX3-P	IL94-M12SX3-P	2500	M12X1.75	1/2	1	2 3/8	4	3	3/16	-	-
IL94-M16GX3-P	IL94-M16SX3-P	2500	M16X2.00	5/8	1	2 3/8	4	3	3/16	-	-
IL94-M20GX3-P	IL94-M20SX3-P	2500	M20X2.50	3/4	1	2 3/8	4	3	3/16	-	-
IL94-M24GX3-P	IL94-M24SX3-P	2500	M24X3.00	1	1 1/4	2 3/8	4 1/4	3	7/16	-	-
IL96-M6GX3-H-P	IL96-M6SX3-H-P	100	M6X1	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M8GX3-H-P	IL96-M8SX3-H-P	500	M8X1.25	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M10GX3-H-P	IL96-M10SX3-H-P	3000	M10X1.50	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M12GX3-H-P	IL96-M12SX3-H-P	3000	M12X1.75	1/2	1	3 1/8	4	3	3/16	.39	2.2
IL96-M16GX3-H-P	IL96-M16SX3-H-P	3000	M16X2.00	5/8	1	3 1/8	4	3	3/16	.39	2.2
IL96-M20GX3-H-P	IL96-M20SX3-H-P	3000	M20X2.50	3/4	1	3 1/8	4	3	3/16	.39	2.2
IL96-M24GX3-H-P	IL96-M24SX3-H-P	3000	M24X3.00	1	1 1/4	3 1/8	4 1/4	3	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad





The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

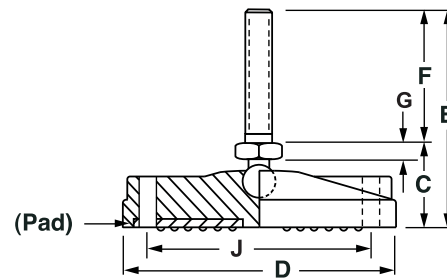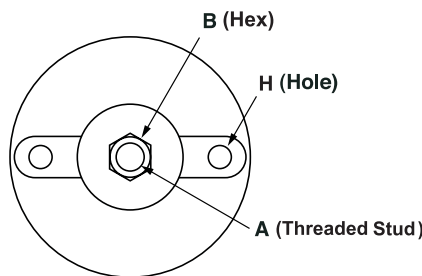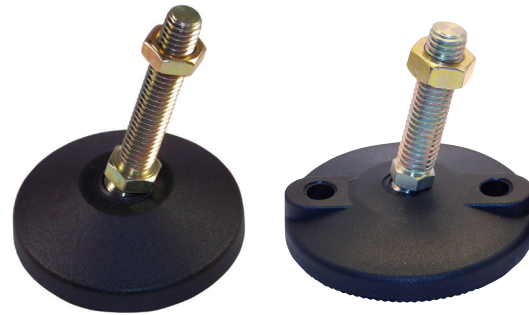

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-3" Stud and Rubber Pad											
IL98-M6GX3-H-P	IL98-M6SX3-H-P	100	M6X1	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M8GX3-H-P	IL98-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M10GX3-H-P	IL98-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M12GX3-H-P	IL98-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M16GX3-H-P	IL98-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M20GX3-H-P	IL98-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	4	4 1/4	3	3/16	.51	2.9
IL98-M24GX3-H-P	IL98-M24SX3-H-P	3000	M24X3.00	1	1 1/2	4	4 1/2	3	7/16	.51	2.9
IL98A-M6GX3-H-P	IL98A-M6SX3-H-P	100	M6X1	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M8GX3-H-P	IL98A-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M10GX3-H-P	IL98A-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M12GX3-H-P	IL98A-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M16GX3-H-P	IL98A-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M20GX3-H-P	IL98A-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	6	4 1/4	3	3/16	.51	4.9
IL98A-M24GX3-H-P	IL98A-M24SX3-H-P	3000	M24X3.00	1	1 1/2	6	4 1/2	3	7/16	.51	4.9
IL98B-M6GX3-H-P	IL98B-M6SX3-H-P	100	M6X1	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M8GX3-H-P	IL98B-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M10GX3-H-P	IL98B-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M12GX3-H-P	IL98B-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M16GX3-H-P	IL98B-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M20GX3-H-P	IL98B-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	8	4 1/4	3	3/16	.51	6.9
IL98B-M24GX3-H-P	IL98B-M24SX3-H-P	3000	M24X3.00	1	1 1/2	8	4 1/2	3	7/16	.51	6.9
IL98C-M6GX3-H-P	IL98C-M6SX3-H-P	100	M6X1	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M8GX3-H-P	IL98C-M8SX3-H-P	500	M8X1.25	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M10GX3-H-P	IL98C-M10SX3-H-P	3000	M10X1.50	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M12GX3-H-P	IL98C-M12SX3-H-P	3000	M12X1.75	1/2	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M16GX3-H-P	IL98C-M16SX3-H-P	3000	M16X2.00	5/8	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M20GX3-H-P	IL98C-M20SX3-H-P	3000	M20X2.50	3/4	1 1/4	10	4 1/4	3	3/16	.51	8.9
IL98C-M24GX3-H-P	IL98C-M24SX3-H-P	3000	M24X3.00	1	1 1/2	10	4 1/2	3	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**





The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

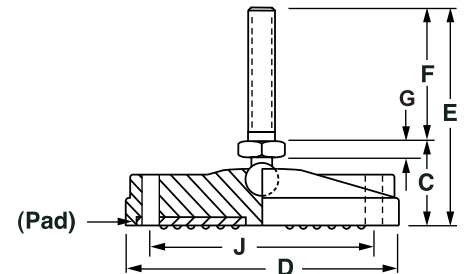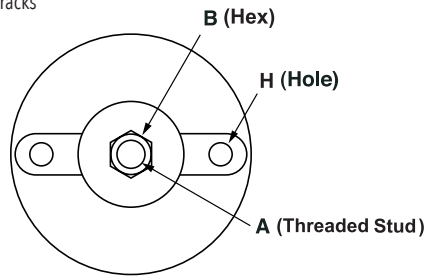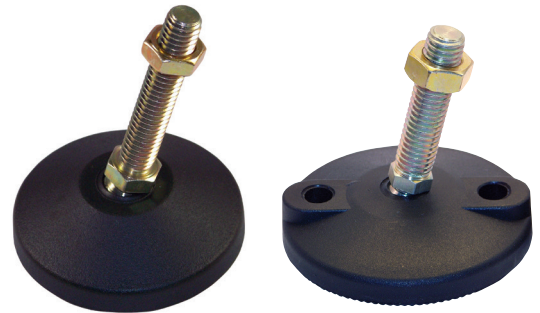

Metric Threads: 1" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL90-M8GX4-P	IL90-M8SX4-P	500	M8X1.25	1/2	1	1	5	4	3/16	-	-
IL90-M10GX4-P	IL90-M10SX4-P	2000	M10X1.50	1/2	1	1	5	4	3/16	-	-
IL90-M12GX4-P	IL90-M12SX4-P	2000	M12X1.75	5/8	1	1	5	4	3/16	-	-
IL90-M16GX4-P	IL90-M16SX4-P	2000	M16X2.00	3/4	1	1	5	4	3/16	-	-
IL90-M20GX4-P	IL90-M20SX4-P	2000	M20X2.50	3/4	1	1	5	4	3/16	-	-
IL90-M24GX4-P	IL90-M24SX4-P	2000	M24X3.00	1	1 1/4	1	5 1/4	4	7/16	-	-
IL92-M8GX4-P	IL92-M8SX4-P	500	M8X1.25	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M10GX4-P	IL92-M10SX4-P	2000	M10X1.50	1/2	1	1 1/2	5	4	3/16	-	-
IL92-M12GX4-P	IL92-M12SX4-P	2000	M12X1.75	5/8	1	1 1/2	5	4	3/16	-	-
IL92-M16GX4-P	IL92-M16SX4-P	2000	M16X2.00	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M20GX4-P	IL92-M20SX4-P	2000	M20X2.50	3/4	1	1 1/2	5	4	3/16	-	-
IL92-M24GX4-P	IL92-M24SX4-P	2000	M24X3.00	1	1 1/4	1 1/2	5 1/4	4	7/16	-	-
IL94-M8GX4-P	IL94-M8SX4-P	500	M8X1.25	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M10GX4-P	IL94-M10SX4-P	2500	M10X1.50	1/2	1	2 3/8	5	4	3/16	-	-
IL94-M12GX4-P	IL94-M12SX4-P	2500	M12X1.75	5/8	1	2 3/8	5	4	3/16	-	-
IL94-M16GX4-P	IL94-M16SX4-P	2500	M16X2.00	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M20GX4-P	IL94-M20SX4-P	2500	M20X2.50	3/4	1	2 3/8	5	4	3/16	-	-
IL94-M24GX4-P	IL94-M24SX4-P	2500	M24X3.00	1	1 1/4	2 3/8	5 1/4	4	7/16	-	-
IL96-M8GX4-H-P	IL96-M8SX4-H-P	500	M8X1.25	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M10GX4-H-P	IL96-M10SX4-H-P	3000	M10X1.50	1/2	1	3 1/8	5	4	3/16	.39	2.2
IL96-M12GX4-H-P	IL96-M12SX4-H-P	3000	M12X1.75	5/8	1	3 1/8	5	4	3/16	.39	2.2
IL96-M16GX4-H-P	IL96-M16SX4-H-P	3000	M16X2.00	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M20GX4-H-P	IL96-M20SX4-H-P	3000	M20X2.50	3/4	1	3 1/8	5	4	3/16	.39	2.2
IL96-M24GX4-H-P	IL96-M24SX4-H-P	3000	M24X3.00	1	1 1/4	3 1/8	5 1/4	4	7/16	.39	2.2

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**





The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

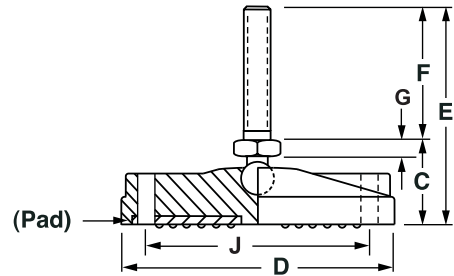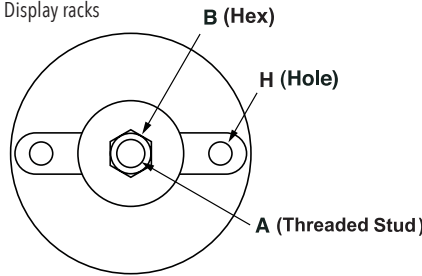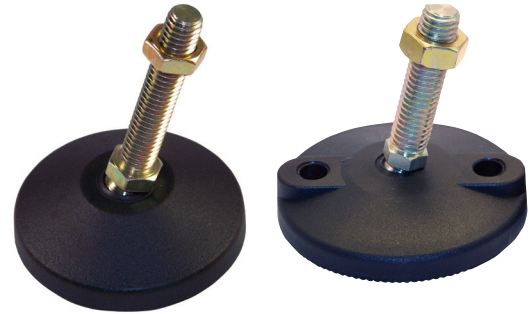

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-4" Stud and Rubber Pad											
IL98-M8GX4-H-P	IL98-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M10GX4-H-P	IL98-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M12GX4-H-P	IL98-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M16GX4-H-P	IL98-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M20GX4-H-P	IL98-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	4	5 1/4	4	3/16	.51	2.9
IL98-M24GX4-H-P	IL98-M24SX4-H-P	3000	M24X3.00	1	1 1/2	4	5 1/2	4	7/16	.51	2.9
IL98A-M8GX4-H-P	IL98A-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M10GX4-H-P	IL98A-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M12GX4-H-P	IL98A-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M16GX4-H-P	IL98A-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M20GX4-H-P	IL98A-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	6	5 1/4	4	3/16	.51	4.9
IL98A-M24GX4-H-P	IL98A-M24SX4-H-P	3000	M24X3.00	1	1 1/2	6	5 1/2	4	7/16	.51	4.9
IL98B-M8GX4-H-P	IL98B-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M10GX4-H-P	IL98B-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M12GX4-H-P	IL98B-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M16GX4-H-P	IL98B-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M20GX4-H-P	IL98B-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	8	5 1/4	4	3/16	.51	6.9
IL98B-M24GX4-H-P	IL98B-M24SX4-H-P	3000	M24X3.00	1	1 1/2	8	5 1/2	4	7/16	.51	6.9
IL98C-M8GX4-H-P	IL98C-M8SX4-H-P	500	M8X1.25	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M10GX4-H-P	IL98C-M10SX4-H-P	3000	M10X1.50	1/2	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M12GX4-H-P	IL98C-M12SX4-H-P	3000	M12X1.75	5/8	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M16GX4-H-P	IL98C-M16SX4-H-P	3000	M16X2.00	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M20GX4-H-P	IL98C-M20SX4-H-P	3000	M20X2.50	3/4	1 1/4	10	5 1/4	4	3/16	.51	8.9
IL98C-M24GX4-H-P	IL98C-M24SX4-H-P	3000	M24X3.00	1	1 1/2	10	5 1/2	4	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

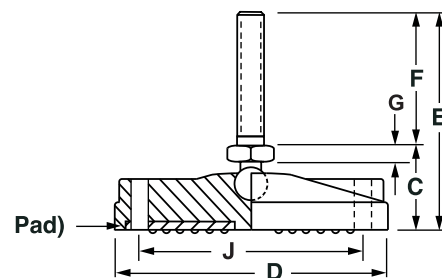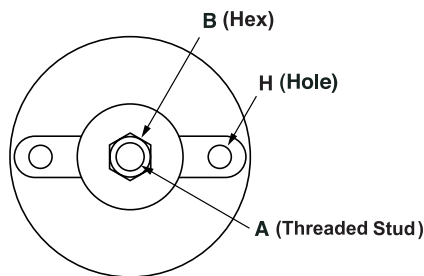

Metric Threads: 1" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL90-M10GX5-P	IL90-M10SX5-P	2000	M10X1.50	1/2	1	1	6	5	3/16	-	-
IL90-M12GX5-P	IL90-M12SX5-P	2000	M12X1.75	1/2	1	1	6	5	3/16	-	-
IL90-M16GX5-P	IL90-M16SX5-P	2000	M16X2.00	5/8	1	1	6	5	3/16	-	-
IL90-M20GX5-P	IL90-M20SX5-P	2000	M20X2.50	3/4	1	1	6	5	3/16	-	-
IL90-M24GX5-P	IL90-M24SX5-P	2000	M24X3.00	1	1 1/4	1	6 1/4	5	7/16	-	-
IL92-M10GX5-P	IL92-M10SX5-P	2000	M10X1.50	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M12GX5-P	IL92-M12SX5-P	2000	M12X1.75	1/2	1	1 1/2	6	5	3/16	-	-
IL92-M16GX5-P	IL92-M16SX5-P	2000	M16X2.00	5/8	1	1 1/2	6	5	3/16	-	-
IL92-M20GX5-P	IL92-M20SX5-P	2000	M20X2.50	3/4	1	1 1/2	6	5	3/16	-	-
IL92-M24GX5-P	IL92-M24SX5-P	2000	M24X3.00	1	1 1/4	1 1/2	6 1/4	5	7/16	-	-
IL94-M10GX5-P	IL94-M10SX5-P	2500	M10X1.50	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M12GX5-P	IL94-M12SX5-P	2500	M12X1.75	1/2	1	2 3/8	6	5	3/16	-	-
IL94-M16GX5-P	IL94-M16SX5-P	2500	M16X2.00	5/8	1	2 3/8	6	5	3/16	-	-
IL94-M20GX5-P	IL94-M20SX5-P	2500	M20X2.50	3/4	1	2 3/8	6	5	3/16	-	-
IL94-M24GX5-P	IL94-M24SX5-P	2500	M24X3.00	1	1 1/4	2 3/8	6 1/4	5	7/16	-	-
IL96-M10GX5-H-P	IL96-M10SX5-H-P	3000	M10X1.50	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M12GX5-H-P	IL96-M12SX5-H-P	3000	M12X1.75	1/2	1	3 1/8	6	5	3/16	.39	2.2
IL96-M16GX5-H-P	IL96-M16SX5-H-P	3000	M16X2.00	5/8	1	3 1/8	6	5	3/16	.39	2.2
IL96-M20GX5-H-P	IL96-M20SX5-H-P	3000	M20X2.50	3/4	1	3 1/8	6	5	3/16	.39	2.2
IL96-M24GX5-H-P	IL96-M24SX5-H-P	3000	M24X3.00	1	1 1/4	3 1/8	6 1/4	5	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad





The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

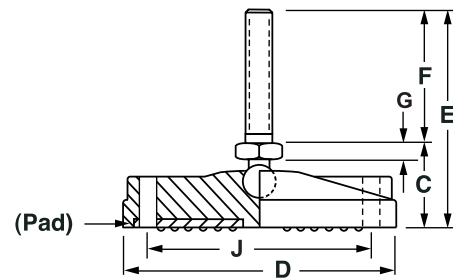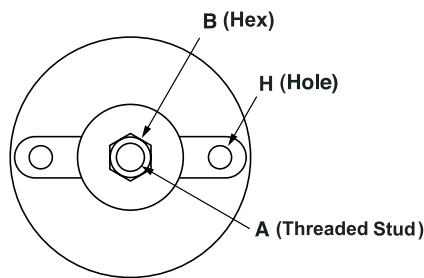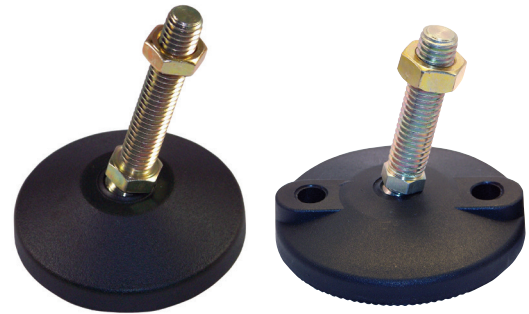

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-5" Stud and Rubber Pad											
IL98-M10GX5-H-P	IL98-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M12GX5-H-P	IL98-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M16GX5-H-P	IL98-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M20GX5-H-P	IL98-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	4	6 1/4	5	3/16	.51	2.9
IL98-M24GX5-H-P	IL98-M24SX5-H-P	3000	M24X3.00	1	1 1/2	4	6 1/2	5	7/16	.51	2.9
IL98A-M10GX5-H-P	IL98A-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M12GX5-H-P	IL98A-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M16GX5-H-P	IL98A-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M20GX5-H-P	IL98A-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	6	6 1/4	5	3/16	.51	4.9
IL98A-M24GX5-H-P	IL98A-M24SX5-H-P	3000	M24X3.00	1	1 1/2	6	6 1/2	5	7/16	.51	4.9
IL98B-M10GX5-H-P	IL98B-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M12GX5-H-P	IL98B-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M16GX5-H-P	IL98B-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M20GX5-H-P	IL98B-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	8	6 1/4	5	3/16	.51	6.9
IL98B-M24GX5-H-P	IL98B-M24SX5-H-P	3000	M24X3.00	1	1 1/2	8	6 1/2	5	7/16	.51	6.9
IL98C-M10GX5-H-P	IL98C-M10SX5-H-P	3000	M10X1.50	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M12GX5-H-P	IL98C-M12SX5-H-P	3000	M12X1.75	1/2	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M16GX5-H-P	IL98C-M16SX5-H-P	3000	M16X2.00	5/8	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M20GX5-H-P	IL98C-M20SX5-H-P	3000	M20X2.50	3/4	1 1/4	10	6 1/4	5	3/16	.51	8.9
IL98C-M24GX5-H-P	IL98C-M24SX5-H-P	3000	M24X3.00	1	1 1/2	10	6 1/2	5	7/16	.51	8.9

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



**NYLON METRIC SWIVEL STUD STYLE
LEVELERS – with Rubber Pad**




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

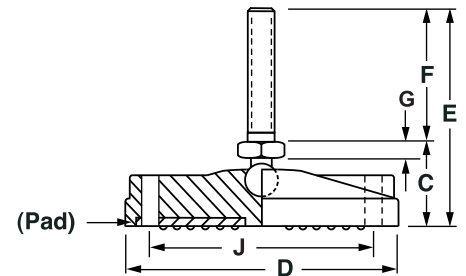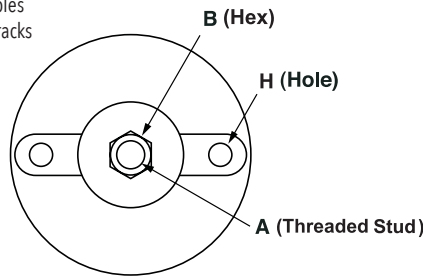

Metric Threads: 1" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL90-M8GX6-P	IL90-M8SX6-P	2000	M8X1.25	1/4	1	1	7	6	3/16	-	-
IL90-M10GX6-P	IL90-M10SX6-P	2000	M10X1.50	1/2	1	1	7	6	3/16	-	-
IL90-M12GX6-P	IL90-M12SX6-P	2000	M12X1.75	1/2	1	1	7	6	3/16	-	-
IL90-M16GX6-P	IL90-M16SX6-P	2000	M16X2.00	5/8	1	1	7	6	3/16	-	-
IL90-M20GX6-P	IL90-M20SX6-P	2000	M20X2.50	3/4	1	1	7	6	3/16	-	-
IL90-M24GX6-P	IL90-M24SX6-P	2000	M24X3.00	1	1 1/4	1	7 1/4	6	7/16	-	-
L92-M8GX6-P	IL92-M8SX6-P	2000	M8X1.25	1/4	1	1 1/2	7	6	3/16	-	-
L92-M10GX6-P	IL92-M10SX6-P	2000	M10X1.50	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M12GX6-P	IL92-M12SX6-P	2000	M12X1.75	1/2	1	1 1/2	7	6	3/16	-	-
IL92-M16GX6-P	IL92-M16SX6-P	2000	M16X2.00	5/8	1	1 1/2	7	6	3/16	-	-
IL92-M20GX6-P	IL92-M20SX6-P	2000	M20X2.50	3/4	1	1 1/2	7	6	3/16	-	-
IL92-M24GX6-P	IL92-M24SX6-P	2000	M24X3.00	1	1 1/4	1 1/2	7 1/4	6	7/16	-	-
IL94-M8GX6-P	IL94-M8SX6-P	2500	M8X1.25	1/4	1	2 3/8	7	6	3/16	-	-
IL94-M10GX6-P	IL94-M10SX6-P	2500	M10X1.50	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M12GX6-P	IL94-M12SX6-P	2500	M12X1.75	1/2	1	2 3/8	7	6	3/16	-	-
IL94-M16GX6-P	IL94-M16SX6-P	2500	M16X2.00	5/8	1	2 3/8	7	6	3/16	-	-
IL94-M20GX6-P	IL94-M20SX6-P	2500	M20X2.50	3/4	1	2 3/8	7	6	3/16	-	-
IL94-M24GX6-P	IL94-M24SX6-P	2500	M24X3.00	1	1 1/4	2 3/8	7 1/4	6	7/16	-	-
IL96-M8GX6-H-P	IL96-M8SX6-H-P	3000	M8X1.25	1/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-M10GX6-H-P	IL96-M10SX6-H-P	3000	M10X1.50	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M12GX6-H-P	IL96-M12SX6-H-P	3000	M12X1.75	1/2	1	3 1/8	7	6	3/16	.39	2.2
IL96-M16GX6-H-P	IL96-M16SX6-H-P	3000	M16X2.00	5/8	1	3 1/8	7	6	3/16	.39	2.2
IL96-M20GX6-H-P	IL96-M20SX6-H-P	3000	M20X2.50	3/4	1	3 1/8	7	6	3/16	.39	2.2
IL96-M24GX6-H-P	IL96-M24SX6-H-P	3000	M24X3.00	1	1 1/4	3 1/8	7 1/4	6	7/16	.39	2.2

"H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H."
To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad




The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

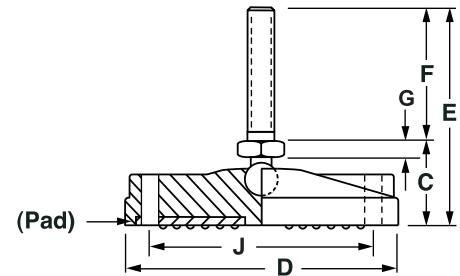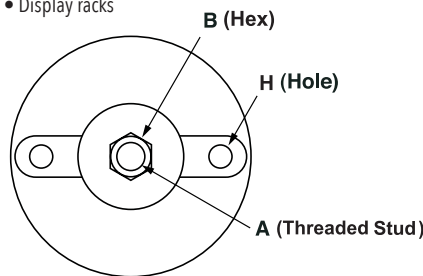

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers-6" Stud and Rubber Pad											
IL98-M8GX6-H-P	IL98-M8SX6-H-P	3000	M8X1.25	1/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M10GX6-H-P	IL98-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M12GX6-H-P	IL98-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M16GX6-H-P	IL98-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M20GX6-H-P	IL98-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	4	7 1/4	6	3/16	.51	2.9
IL98-M24GX6-H-P	IL98-M24SX6-H-P	3000	M24X3.00	1	1 1/2	4	7 1/2	6	7/16	.51	2.9
IL98A-M8GX6-H-P	IL98A-M8SX6-H-P	3000	M8X1.25	1/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M10GX6-H-P	IL98A-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M12GX6-H-P	IL98A-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M16GX6-H-P	IL98A-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M20GX6-H-P	IL98A-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	6	7 1/4	6	3/16	.51	4.9
IL98A-M24GX6-H-P	IL98A-M24SX6-H-P	3000	M24X3.00	1	1 1/2	6	7 1/2	6	7/16	.51	4.9
IL98B-M8GX6-H-P	IL98B-M8SX6-H-P	3000	M8X1.25	1/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M10GX6-H-P	IL98B-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M12GX6-H-P	IL98B-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M16GX6-H-P	IL98B-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M20GX6-H-P	IL98B-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	8	7 1/4	6	3/16	.51	6.9
IL98B-M24GX6-H-P	IL98B-M24SX6-H-P	3000	M24X3.00	1	1 1/2	8	7 1/2	6	7/16	.51	6.9
IL98C-M8GX6-H-P	IL98C-M8SX6-H-P	3000	M8X1.25	1/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M10GX6-H-P	IL98C-M10SX6-H-P	3000	M10X1.50	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M12GX6-H-P	IL98C-M12SX6-H-P	3000	M12X1.75	1/2	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M16GX6-H-P	IL98C-M16SX6-H-P	3000	M16X2.00	5/8	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M20GX6-H-P	IL98C-M20SX6-H-P	3000	M20X2.50	3/4	1 1/4	10	7 1/4	6	3/16	.51	8.9
IL98C-M24GX6-H-P	IL98C-M24SX6-H-P	3000	M24X3.00	1	1 1/2	10	7 1/2	6	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P-". To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad





The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

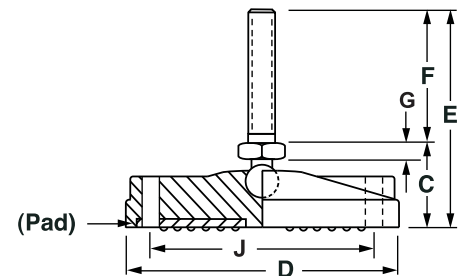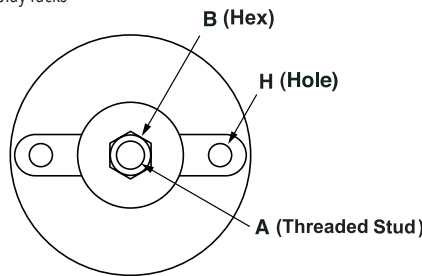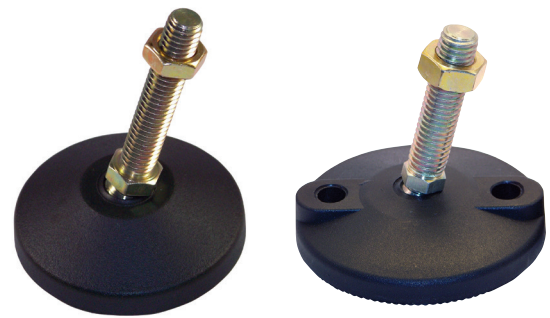

Metric Threads: 1" to 4" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—8" Stud and Rubber Pad											
IL90-M12GX8-P	IL90-M12SX8-P	2000	M12X1.75	1/2	1	1	9	8	3/16	-	-
IL90-M16GX8-P	IL90-M16SX8-P	2000	M16X2.00	5/8	1	1	9	8	3/16	-	-
IL90-M20GX8-P	IL90-M20SX8-P	2000	M20X2.50	3/4	1	1	9	8	3/16	-	-
IL90-M24GX8-P	IL90-M24SX8-P	2000	M24X3.00	1	1 1/4	1	9 1/4	8	7/16	-	-
IL92-M12GX8-P	IL92-M12SX8-P	2000	M12X1.75	1/2	1	1 1/2	9	8	3/16	-	-
IL92-M16GX8-P	IL92-M16SX8-P	2000	M16X2.00	5/8	1	1 1/2	9	8	3/16	-	-
IL92-M20GX8-P	IL92-M20SX8-P	2000	M20X2.50	3/4	1	1 1/2	9	8	3/16	-	-
IL92-M24GX8-P	IL92-M24SX8-P	2000	M24X3.00	1	1 1/4	1 1/2	9 1/4	8	7/16	-	-
IL94-M12GX8-P	IL94-M12SX8-P	2500	M12X1.75	1/2	1	2 3/8	9	8	3/16	-	-
IL94-M16GX8-P	IL94-M16SX8-P	2500	M16X2.00	5/8	1	2 3/8	9	8	3/16	-	-
IL94-M20GX8-P	IL94-M20SX8-P	2500	M20X2.50	3/4	1	2 3/8	9	8	3/16	-	-
IL94-M24GX8-P	IL94-M24SX8-P	2500	M24X3.00	1	1 1/4	2 3/8	9 1/4	8	7/16	-	-
IL96-M12GX8-H-P	IL96-M12SX8-H-P	3000	M12X1.75	1/2	1	3 1/8	9	8	3/16	.39	2.2
IL96-M16GX8-H-P	IL96-M16SX8-H-P	3000	M16X2.00	5/8	1	3 1/8	9	8	3/16	.39	2.2
IL96-M20GX8-H-P	IL96-M20SX8-H-P	3000	M20X2.50	3/4	1	3 1/8	9	8	3/16	.39	2.2
IL96-M24GX8-H-P	IL96-M24SX8-H-P	3000	M24X3.00	1	1 1/4	3 1/8	9 1/4	8	7/16	.39	2.2

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



NYLON METRIC SWIVEL STUD STYLE LEVELERS – with Rubber Pad





The IEC Metric Nylon Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 10" with 15 degree swivel from centerline. Loads to 3,000 lbs. Steel stud features trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Non skid rubber pad
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown below (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

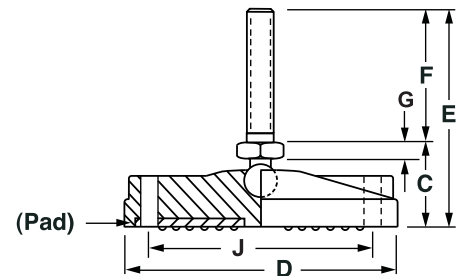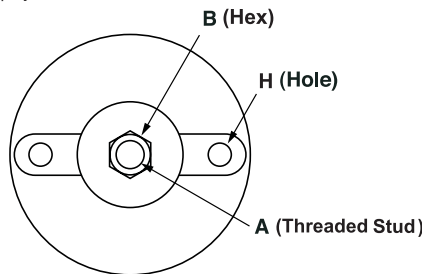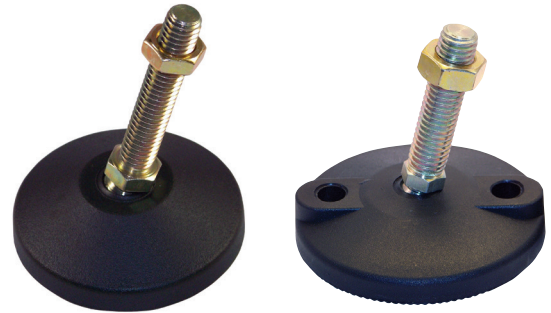

Metric Threads: 4", 6", 8" & 10" Base Diameters

Steel	Stainless	Load	A	B	C	D	E	F	G	H	J
Nylon Swivel Stud Levelers—8" Stud and Rubber Pad											
IL98-M12GX8-H-P	IL98-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M16GX8-H-P	IL98-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M20GX8-H-P	IL98-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	4	9 1/4	8	3/16	.51	2.9
IL98-M24GX8-H-P	IL98-M24SX8-H-P	3000	M24X3.00	1	1 1/2	4	9 1/2	8	7/16	.51	2.9
IL98A-M12GX8-H-P	IL98A-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M16GX8-H-P	IL98A-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M20GX8-H-P	IL98A-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	6	9 1/4	8	3/16	.51	4.9
IL98A-M24GX8-H-P	IL98A-M24SX8-H-P	3000	M24X3.00	1	1 1/2	6	9 1/2	8	7/16	.51	4.9
IL98B-M12GX8-H-P	IL98B-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M16GX8-H-P	IL98B-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M20GX8-H-P	IL98B-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	8	9 1/4	8	3/16	.51	6.9
IL98B-M24GX8-H-P	IL98B-M24SX8-H-P	3000	M24X3.00	1	1 1/2	8	9 1/2	8	7/16	.51	6.9
IL98C-M12GX8-H-P	IL98C-M12SX8-H-P	3000	M12X1.75	1/2	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M16GX8-H-P	IL98C-M16SX8-H-P	3000	M16X2.00	5/8	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M20GX8-H-P	IL98C-M20SX8-H-P	3000	M20X2.50	3/4	1 1/4	10	9 1/4	8	3/16	.51	8.9
IL98C-M24GX8-H-P	IL98C-M24SX8-H-P	3000	M24X3.00	1	1 1/2	10	9 1/2	8	7/16	.51	8.9

"-H" denotes two lag holes in base. To order without rubber pad, remove "-P." To order without lag holes, remove "-H." To order optional top broached hex, "allen drive," add "-BR"

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Fixed Stud Metric Levelers


The IEC Saucer Base® Fixed Stud Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel stud and washer have clear zinc plating.

Features

- Loads to 2500 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



METRIC LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL120-M6Bx25	IL120-M6BSx25	100	M6	1/2	3/4	25	3/4
IL120-M6Bx38	IL120-M6BSx38	100	M6	1/2	3/4	38	3/4
IL120-M6Bx51	IL120-M6BSx51	100	M6	1/2	3/4	51	3/4
IL120-M8Bx38	IL120-M8BSx38	500	M8	1/2	3/4	38	3/4
IL120-M8Bx51	IL120-M8BSx51	500	M8	1/2	3/4	51	3/4
IL120-M8Bx62	IL120-M8BSx62	500	M8	1/2	3/4	62	3/4
IL120-M10Bx38	IL120-M10BSx38	1000	M10	1/2	3/4	38	3/4
IL120-M10Bx51	IL120-M10BSx51	1000	M10	1/2	3/4	51	3/4
IL120-M10Bx62	IL120-M10BSx62	1000	M10	1/2	3/4	62	3/4
IL120-M12Bx38	IL120-M12BSx38	2000	M12	1/2	3/4	38	3/4
IL120-M12Bx51	IL120-M12BSx51	2000	M12	1/2	3/4	51	3/4
IL120-M12Bx75	IL120-M12BSx75	2000	M12	1/2	3/4	75	3/4
IL120-M12Bx102	IL120-M12BSx102	2000	M12	1/2	3/4	102	3/4
IL120-M16Bx51	IL120-M16BSx51	2500	M16	5/8	3/4	51	3/4
IL120-M16Bx90-BR	IL120-M16BSx90-BR	2500	M16	5/8	3/4	90	3/4
IL120-M16Bx102	IL120-M16BSx102	2500	M16	5/8	3/4	102	3/4
IL120-M16Bx115-BR	IL120-M16BSx115-BR	2500	M16	5/8	3/4	115	3/4
IL121-M6Bx25	IL121-M6BSx25	100	M6	1/2	1	25	3/4
IL121-M6Bx38	IL121-M6BSx38	100	M6	1/2	1	38	3/4
IL121-M6Bx51	IL121-M6BSx51	100	M6	1/2	1	51	3/4
IL121-M8Bx38	IL121-M8BSx38	500	M8	1/2	1	38	3/4
IL121-M8Bx51	IL121-M8BSx51	500	M8	1/2	1	51	3/4
IL121-M8Bx62	IL121-M8BSx62	500	M8	1/2	1	62	3/4
IL121-M10Bx38	IL121-M10BSx38S	1000	M10	1/2	1	38	3/4
IL121-M10Bx51	IL121-M10BSx51S	1000	M10	1/2	1	51	3/4
IL121-M10Bx62	IL121-M10BSx62S	1000	M10	1/2	1	62	3/4
IL121-M12Bx38	IL121-M12BSx38	2000	M12	1/2	1	38	3/4
IL121-M12Bx51	IL121-M12BSx51	2000	M12	1/2	1	51	3/4
IL121-M12Bx75	IL121-M12BSx75	2000	M12	1/2	1	75	3/4
IL121-M12Bx102	IL121-M12BSx102	2000	M12	1/2	1	102	3/4
IL121-M16Bx51	IL121-M16BSx51	2500	M16	5/8	1	51	3/4
IL121-M16Bx90-BR	IL121-M16BSx90-BR	2500	M16	5/8	1	90	3/4
IL121-M16Bx102	IL121-M16BSx102	2500	M16	5/8	1	102	3/4
IL121-M16Bx115-BR	IL121-M16BSx115-BR	2500	M16	5/8	1	115	3/4

These metric threads may be special-ordered with an optional Top-A-Just™ internal top allen-drive broached hex (add -BR to P/N) or with the external top hex shown here (add -HX to P/N). Many top hex options (-HX) are already stock items in the english thread version of these levelers.



Medium Duty Low-Profile, SAUCER BASE® Fixed Stud Metric Levelers


The IEC *Saucer Base® Fixed Stud Metric Levelers* have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick **with a bottom hex drive molded into the base.** Steel stud and washer have clear zinc plating.

Features

- Loads to 2500 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



METRIC LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL122-M6Bx25	IL122-M6BSx25	100	M6	1/2	1-1/4	25	3/4
IL122-M6Bx38	IL122-M6BSx38	100	M6	1/2	1-1/4	38	3/4
IL122-M6Bx51	IL122-M6BSx51	100	M6	1/2	1-1/4	51	3/4
IL122-M8Bx38	IL122-M8BSx38	500	M8	1/2	1-1/4	38	3/4
IL122-M8Bx51	IL122-M8BSx51	500	M8	1/2	1-1/4	51	3/4
IL122-M8Bx62	IL122-M8BSx62	500	M8	1/2	1-1/4	62	3/4
IL122-M10Bx38	IL122-M10BSx38	1000	M10	1/2	1-1/4	38	3/4
IL122-M10Bx51	IL122-M10BSx51	1000	M10	1/2	1-1/4	51	3/4
IL122-M10Bx62	IL122-M10BSx62	1000	M10	1/2	1-1/4	62	3/4
IL122-M12Bx38	IL122-M12BSx38	2000	M12	1/2	1-1/4	38	3/4
IL122-M12Bx51	IL122-M12BSx51	2000	M12	1/2	1-1/4	51	3/4
IL122-M12Bx75	IL122-M12BSx75	2000	M12	1/2	1-1/4	75	3/4
IL122-M12Bx102	IL122-M12BSx102	2000	M12	1/2	1-1/4	102	3/4
IL122-M16Bx51	IL122-M16BSx51	2500	M16	5/8	1-1/4	51	3/4
IL122-M16Bx90-BR	IL122-M16BSx90-BR	2500	M16	5/8	1-1/4	90	3/4
IL122-M16Bx102	IL122-M16BSx102	2500	M16	5/8	1-1/4	102	3/4
IL122-M16Bx115-BR	IL122-M16BSx115-BR	2500	M16	5/8	1-1/4	115	3/4
IL123-M6Bx25	IL123-M6BSx25	100	M6	1/2	1-1/2	25	3/4
IL123-M6Bx38	IL123-M6BSx38	100	M6	1/2	1-1/2	38	3/4
IL123-M6Bx51	IL123-M6BSx51	100	M6	1/2	1-1/2	51	3/4
IL123-M8Bx38	IL123-M8BSx38	500	M8	1/2	1-1/2	38	3/4
IL123-M8Bx51	IL123-M8BSx51	500	M8	1/2	1-1/2	51	3/4
IL123-M8Bx62	IL123-M8BSx62	500	M8	1/2	1-1/2	62	3/4
IL123-M10Bx38	IL123-M10Bx38S	1000	M10	1/2	1-1/2	38	3/4
IL123-M10Bx51	IL123-M10Bx51S	1000	M10	1/2	1-1/2	51	3/4
IL123-M10Bx62	IL123-M10Bx62S	1000	M10	1/2	1-1/2	62	3/4
IL123-M12Bx38	IL123-M12BSx38	2000	M12	1/2	1-1/2	38	3/4
IL123-M12Bx51	IL123-M12BSx51	2000	M12	1/2	1-1/2	51	3/4
IL123-M12Bx75	IL123-M12BSx75	2000	M12	1/2	1-1/2	75	3/4
IL123-M12Bx102	IL123-M12BSx102	2000	M12	1/2	1-1/2	102	3/4
IL123-M16Bx51	IL123-M16BSx51	2500	M16	5/8	1-1/2	51	3/4
IL123-M16Bx90-BR	IL123-M16BSx90-BR	2500	M16	5/8	1-1/2	90	3/4
IL123-M16Bx102	IL123-M16BSx102	2500	M16	5/8	1-1/2	102	3/4
IL123-M16Bx115-BR	IL123-M16BSx115-BR	2500	M16	5/8	1-1/2	115	3/4

These metric threads may be special-ordered with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N) or with the external top hex shown here (add -HX to P/N). Many top hex options (-HX) are already stock items in the english thread version of these levelers.



Medium Duty Low-Profile, SAUCER BASE® Fixed Stud Metric Levelers

The IEC Saucer Base® Fixed Stud Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel stud and washer have clear zinc plating.


Features

- Loads to 2500 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables



METRIC LOW PROFILE FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL124-M6Bx25	IL124-M6BSx25	100	M6	1/2	1-3/4	25	3/4
IL124-M6Bx38	IL124-M6BSx38	100	M6	1/2	1-3/4	38	3/4
IL124-M6Bx51	IL124-M6BSx51	100	M6	1/2	1-3/4	51	3/4
IL124-M8Bx38	IL124-M8BSx38	500	M8	1/2	1-3/4	38	3/4
IL124-M8Bx51	IL124-M8BSx51	500	M8	1/2	1-3/4	51	3/4
IL124-M8Bx62	IL124-M8BSx62	500	M8	1/2	1-3/4	62	3/4
IL124-M10Bx38	IL124-M10BSx38	1000	M10	1/2	1-3/4	38	3/4
IL124-M10Bx51	IL124-M10BSx51	1000	M10	1/2	1-3/4	51	3/4
IL124-M10Bx62	IL124-M10BSx62	1000	M10	1/2	1-3/4	62	3/4
IL124-M12Bx38	IL120-M12BSx38	2000	M12	1/2	1-3/4	38	3/4
IL124-M12Bx51	IL124-M12BSx51	2000	M12	1/2	1-3/4	51	3/4
IL124-M12Bx75	IL124-M12BSx75	2000	M12	1/2	1-3/4	75	3/4
IL124-M12Bx102	IL124-M12BSx102	2000	M12	1/2	1-3/4	102	3/4
IL124-M16Bx51	IL124-M16BSx51	2500	M16	5/8	1-3/4	51	3/4
IL124-M16Bx90-BR	IL124-M16BSx90-BR	2500	M16	5/8	1-3/4	90	3/4
IL124-M16Bx102	IL124-M16BSx102	2500	M16	5/8	1-3/4	102	3/4
IL124-M16Bx115-BR	IL124-M16BSx115-BR	2500	M16	5/8	1-3/4	115	3/4
IL125-M6Bx25	IL125-M6BSx25	100	M6	1/2	2	25	3/4
IL125-M6Bx38	IL125-M6BSx38	100	M6	1/2	2	38	3/4
IL125-M6Bx51	IL125-M6BSx51	100	M6	1/2	2	51	3/4
IL125-M8Bx38	IL125-M8BSx38	500	M8	1/2	2	38	3/4
IL125-M8Bx51	IL125-M8BSx51	500	M8	1/2	2	51	3/4
IL125-M8Bx62	IL125-M8BSx62	500	M8	1/2	2	62	3/4
IL125-M10Bx38	IL125-M10Bx38S	1000	M10	1/2	2	38	3/4
IL125-M10Bx51	IL125-M10Bx51S	1000	M10	1/2	2	51	3/4
IL125-M10Bx62	IL125-M10Bx62S	1000	M10	1/2	2	62	3/4
IL125-M12Bx38	IL125-M12BSx38	2000	M12	1/2	2	38	3/4
IL125-M12Bx51	IL125-M12BSx51	2000	M12	1/2	2	51	3/4
IL125-M12Bx75	IL125-M12BSx75	2000	M12	1/2	2	75	3/4
IL125-M12Bx102	IL125-M12BSx102	2000	M12	1/2	2	102	3/4
IL125-M16Bx51	IL125-M16BSx51	2500	M16	5/8	2	51	3/4
IL125-M16Bx90-BR	IL125-M16BSx90-BR	2500	M16	5/8	2	90	3/4
IL125-M16Bx102	IL125-M16BSx102	2500	M16	5/8	2	102	3/4
IL125-M16Bx115-BR	IL125-M16BSx115-BR	2500	M16	5/8	2	115	3/4

These metric threads may be special-ordered with an optional Top-A-Just™ internal top allen-drive broached hex (add -BR to P/N) or with the external top hex shown here (add -HX to P/N). Many top hex options (-HX) are already stock items in the english thread version of these levelers.



Medium Duty Low-Profile, SAUCER BASE® Fixed Stud Metric Levelers

The IEC Saucer Base® Fixed Stud Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel stud and washer have clear zinc plating.


Features

- Loads to 2500 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



METRIC LOW PROFILE FIXED STUD LEVELERS


Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL126-M6Bx25	IL126-M6BSx25	100	M6	1/2	3	25	3/4
IL126-M6Bx38	IL126-M6BSx38	100	M6	1/2	3	38	3/4
IL126-M6Bx51	IL126-M6BSx51	100	M6	1/2	3	51	3/4
<hr/>							
IL126-M8Bx38	IL126-M8BSx38	500	M8	1/2	3	38	3/4
IL126-M8Bx51	IL126-M8BSx51	500	M8	1/2	3	51	3/4
IL126-M8Bx62	IL126-M8BSx62	500	M8	1/2	3	62	3/4
<hr/>							
IL126-M10Bx38	IL126-M10BSx38	1000	M10	1/2	3	38	3/4
IL126-M10Bx51	IL126-M10BSx51	1000	M10	1/2	3	51	3/4
IL126-M10Bx62	IL126-M10BSx62	1000	M10	1/2	3	62	3/4
<hr/>							
IL126-M12Bx38	IL126-M12BSx38	2000	M12	1/2	3	38	3/4
IL126-M12Bx51	IL126-M12BSx51	2000	M12	1/2	3	51	3/4
IL126-M12Bx75	IL126-M12BSx75	2000	M12	1/2	3	75	3/4
IL126-M12Bx102	IL126-M12BSx102	2000	M12	1/2	3	102	3/4
<hr/>							
IL126-M16Bx51	IL126-M16BSx51	2500	M16	5/8	3	51	3/4
IL126-M16Bx90-BR	IL126-M16BSx90-BR	2500	M16	5/8	3	90	3/4
IL126-M16Bx102	IL126-M16BSx102	2500	M16	5/8	3	102	3/4
IL126-M16Bx115-BR	IL126-M16BSx115-BR	2500	M16	5/8	3	115	3/4
<hr/>							
IL127-M6Bx25	IL127-M6BSx25	100	M6	1/2	4	25	3/4
IL127-M6Bx38	IL127-M6BSx38	100	M6	1/2	4	38	3/4
IL127-M6Bx51	IL127-M6BSx51	100	M6	1/2	4	51	3/4
<hr/>							
IL127-M8Bx38	IL127-M8BSx38	500	M8	1/2	4	38	3/4
IL127-M8Bx51	IL127-M8BSx51	500	M8	1/2	4	51	3/4
IL127-M8Bx62	IL127-M8BSx62	500	M8	1/2	4	62	3/4
<hr/>							
IL127-M10Bx38	IL127-M10BSx38	1000	M10	1/2	4	38	3/4
IL127-M10Bx51	IL127-M10BSx51	1000	M10	1/2	4	51	3/4
IL127-M10Bx62	IL127-M10BSx62	1000	M10	1/2	4	62	3/4
<hr/>							
IL127-M12Bx38	IL127-M12BSx38	2000	M12	1/2	4	38	3/4
IL127-M12Bx51	IL127-M12BSx51	2000	M12	1/2	4	51	3/4
IL127-M12Bx75	IL127-M12BSx75	2000	M12	1/2	4	75	3/4
IL127-M12Bx102	IL127-M12BSx102	2000	M12	1/2	4	102	3/4
<hr/>							
IL127-M16Bx51	IL127-M16BSx51	2500	M16	5/8	4	51	3/4
IL127-M16Bx90-BR	IL127-M16BSx90-BR	2500	M16	5/8	4	90	3/4
IL127-M16Bx102	IL127-M16BSx102	2500	M16	5/8	4	102	3/4
IL127-M16Bx115-BR	IL127-M16BSx115-BR	2500	M16	5/8	4	115	3/4

These metric threads may be special-ordered with an optional Top-A-Just™ internal top allen-drive broached hex (add -BR to P/N) or with the external top hex shown here (add -HX to P/N). Many top hex options (-HX) are already stock items in the english thread version of these levelers.



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers

The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.



PATENT PENDING



Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 1" to 2" STUDS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M6Gx1	IL130-M6Sx1	100	M6x1	1/2	3/4	3/4	1-3/4	1	3/16
IL130-M6G	IL130-M6S	100	M6x1	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M8Gx1	IL130-M8Sx1	500	M8x1.25	1/2	3/4	3/4	1-3/4	1	3/16
IL130-M8G	IL130-M8S	500	M8x1.25	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M10G	IL130-M10S	1000	M10x1.5	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M12G	IL130-M12S	2000	M12x1.75	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M16G	IL130-M16S	3000	M16x2.00	1/2	3/4	3/4	2-3/4	2	3/16
IL130-M20G	IL130-M20S	3000	M20x2.50	1/2	3/4	3/4	2-3/4	2	3/16
IL131-M6Gx1	IL131-M6Sx1	100	M6x1	1/2	3/4	1	1-3/4	1	3/16
IL131-M6G	IL131-M6S	100	M6x1	1/2	3/4	1	2-3/4	2	3/16
IL131-M8Gx1	IL131-M8Sx1	500	M8x1.25	1/2	3/4	1	1-3/4	1	3/16
IL131-M8G	IL131-M8S	500	M8x1.25	1/2	3/4	1	2-3/4	2	3/16
IL131-M10G	IL131-M10S	1000	M10x1.5	1/2	3/4	1	2-3/4	2	3/16
IL131-M12G	IL131-M12S	2000	M12x1.75	1/2	3/4	1	2-3/4	2	3/16
IL131-M16G	IL131-M16S	3000	M16x2.00	1/2	3/4	1	2-3/4	2	3/16
IL131-M20G	IL131-M20S	3000	M20x2.50	1/2	3/4	1	2-3/4	2	3/16
IL132-M6Gx1	IL132-M6Sx1	100	M6x1	1/2	3/4	1-1/4	1-3/4	1	3/16
IL132-M6G	IL132-M6S	100	M6x1	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M8Gx1	IL132-M8Sx1	500	M8x1.25	1/2	3/4	1-1/4	1-3/4	1	3/16
IL132-M8G	IL132-M8S	500	M8x1.25	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M10G	IL132-M10S	1000	M10x1.5	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M12G	IL132-M12S	2000	M12x1.75	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M16G	IL132-M16S	3000	M16x2.00	1/2	3/4	1-1/4	2-3/4	2	3/16
IL132-M20G	IL132-M20S	3000	M20x2.50	1/2	3/4	1-1/4	2-3/4	2	3/16
IL133-M6Gx1	IL133-M6Sx1	100	M6x1	1/2	3/4	1-1/2	1-3/4	1	3/16
IL133-M6G	IL133-M6S	100	M6x1	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M8Gx1	IL133-M8Sx1	500	M8x1.25	1/2	3/4	1-1/2	1-3/4	1	3/16
IL133-M8G	IL133-M8S	500	M8x1.25	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M10G	IL133-M10S	1000	M10x1.5	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M12G	IL133-M12S	2000	M12x1.75	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M16G	IL133-M16S	3000	M16x2.00	1/2	3/4	1-1/2	2-3/4	2	3/16
IL133-M20G	IL133-M20S	3000	M20x2.50	1/2	3/4	1-1/2	2-3/4	2	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com


MEDIUM-DUTY METRIC

SAUCER BASE® METRIC SWIVEL

1" to 2" STUD LENGTHS

Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers

The IEC Saucer Base® Metric Swivel Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

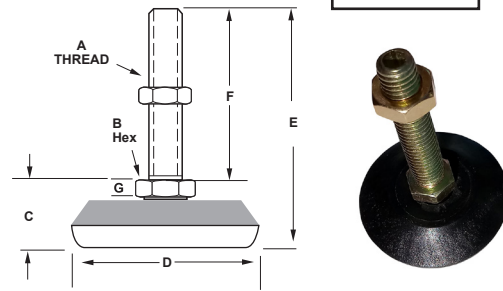

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 1-3/4" to 4" STUDS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M6Gx1	IL134-M6Sx1	100	M6x1	1/2	3/4	1-3/4	1-3/4	1	3/16
IL134-M6G	IL134-M6S	100	M6x1	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M8Gx1	IL134-M8Sx1	500	M8x1.25	1/2	3/4	1-3/4	1-3/4	1	3/16
IL134-M8G	IL134-M8S	500	M8x1.25	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M10G	IL134-M10S	1000	M10x1.5	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M12G	IL134-M12S	2000	M12x1.75	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M16G	IL134-M16S	3000	M16x2.00	1/2	3/4	1-3/4	2-3/4	2	3/16
IL134-M20G	IL134-M20S	3000	M20x2.50	1/2	3/4	1-3/4	2-3/4	2	3/16
IL135-M6Gx1	IL135-M6Sx1	100	M6x1	1/2	3/4	2	1-3/4	1	3/16
IL135-M6G	IL135-M6S	100	M6x1	1/2	3/4	2	2-3/4	2	3/16
IL135-M8Gx1	IL135-M8Sx1	500	M8x1.25	1/2	3/4	2	1-3/4	1	3/16
IL135-M8G	IL135-M8S	500	M8x1.25	1/2	3/4	2	2-3/4	2	3/16
IL135-M10G	IL135-M10S	1000	M10x1.5	1/2	3/4	2	2-3/4	2	3/16
IL135-M12G	IL135-M12S	2000	M12x1.75	1/2	3/4	2	2-3/4	2	3/16
IL135-M16G	IL135-M16S	3000	M16x2.00	1/2	3/4	2	2-3/4	2	3/16
IL135-M20G	IL135-M20S	3000	M20x2.50	1/2	3/4	2	2-3/4	2	3/16
IL136-M6Gx1	IL136-M6Sx1	100	M6x1	1/2	3/4	3	1-3/4	1	3/16
IL136-M6G	IL136-M6S	100	M6x1	1/2	3/4	3	2-3/4	2	3/16
IL136-M8Gx1	IL136-M8Sx1	500	M8x1.25	1/2	3/4	3	1-3/4	1	3/16
IL136-M8G	IL136-M8S	500	M8x1.25	1/2	3/4	3	2-3/4	2	3/16
IL136-M10G	IL136-M10S	1000	M10x1.5	1/2	3/4	3	2-3/4	2	3/16
IL136-M12G	IL136-M12S	2000	M12x1.75	1/2	3/4	3	2-3/4	2	3/16
IL136-M16G	IL136-M16S	3000	M16x2.00	1/2	3/4	3	2-3/4	2	3/16
IL136-M20G	IL136-M20S	3000	M20x2.50	1/2	3/4	3	2-3/4	2	3/16
IL137-M6Gx1	IL137-M6Sx1	100	M6x1	1/2	3/4	4	1-3/4	1	3/16
IL137-M6G	IL137-M6S	100	M6x1	1/2	3/4	4	2-3/4	2	3/16
IL137-M8Gx1	IL137-M8Sx1	500	M8x1.25	1/2	3/4	4	1-3/4	1	3/16
IL137-M8G	IL137-M8S	500	M8x1.25	1/2	3/4	4	2-3/4	2	3/16
IL137-M10G	IL137-M10S	1000	M10x1.5	1/2	3/4	4	2-3/4	2	3/16
IL137-M12G	IL137-M12S	2000	M12x1.75	1/2	3/4	4	2-3/4	2	3/16
IL137-M16G	IL137-M16S	3000	M16x2.00	1/2	3/4	4	2-3/4	2	3/16
IL137-M20G	IL137-M20S	3000	M20x2.50	1/2	3/4	4	2-3/4	2	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers


The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



PATENT PENDING



OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 3" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M6Gx3	IL130-M6Sx3	100	M6x1	1/2	3/4	3/4	3-3/4	3	3/16
IL130-M8Gx3	IL130-M8Sx3	500	M8x1.25	1/2	3/4	3/4	3-3/4	3	3/16
IL130-M10Gx3	IL130-M10Sx3	1000	M10x1.50	1/2	3/4	3/4	3-3/4	3	3/16
IL130-M12Gx3	IL130-M12Sx3	2000	M12x1.75	1/2	3/4	3/4	3-3/4	3	3/16
IL130-M16Gx3	IL130-M16Sx3	3000	M16x2.00	5/8	3/4	3/4	3-3/4	3	3/16
IL130-M20Gx3	IL130-M20Sx3	3000	M20x2.50	3/4	3/4	3/4	3-3/4	3	3/16
IL131-M6Gx3	IL131-M6Sx3	100	M6x1	1/2	3/4	1	3-3/4	3	3/16
IL131-M8Gx3	IL131-M8Sx3	500	M8x1.25	1/2	3/4	1	3-3/4	3	3/16
IL131-M10Gx3	IL131-M10Sx3	1000	M10x1.50	1/2	3/4	1	3-3/4	3	3/16
IL131-M12Gx3	IL131-M12Sx3	2000	M12x1.75	1/2	3/4	1	3-3/4	3	3/16
IL131-M16Gx3	IL131-M16Sx3	3000	M16x2.00	5/8	3/4	1	3-3/4	3	3/16
IL131-M20Gx3	IL131-M20Sx3	3000	M20x2.50	3/4	3/4	1	3-3/4	3	3/16
IL132-M6Gx3	IL132-M6Sx3	100	M6x1	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-M8Gx3	IL132-M8Sx3	500	M8x1.25	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-M10Gx3	IL132-M10Sx3	1000	M10x1.50	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-M12Gx3	IL132-M12Sx3	2000	M12x1.75	1/2	3/4	1-1/4	3-3/4	3	3/16
IL132-M16Gx3	IL132-M16Sx3	3000	M16x2.00	5/8	3/4	1-1/4	3-3/4	3	3/16
IL132-M20Gx3	IL132-M20Sx3	3000	M20x2.50	3/4	3/4	1-1/4	3-3/4	3	3/16
IL133-M6Gx3	IL133-M6Sx3	100	M6x1	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-M8Gx3	IL133-M8Sx3	500	M8x1.25	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-M10Gx3	IL133-M10Sx3	1000	M10x1.50	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-M12Gx3	IL133-M12Sx3	2000	M12x1.75	1/2	3/4	1-1/2	3-3/4	3	3/16
IL133-M16Gx3	IL133-M16Sx3	3000	M16x2.00	5/8	3/4	1-1/2	3-3/4	3	3/16
IL133-M20Gx3	IL133-M20Sx3	3000	M20x2.50	3/4	3/4	1-1/2	3-3/4	3	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers


The IEC Saucer Base® Metric Swivel Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

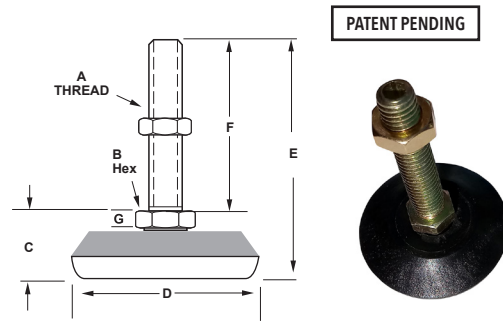

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 3" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M6Gx3	IL134-M6Sx3	100	M6x1	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-M8Gx3	IL134-M8Sx3	500	M8x1.25	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-M10Gx3	IL134-M10Sx3	1000	M10x1.50	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-M12Gx3	IL134-M12Sx3	2000	M12x1.75	1/2	3/4	1-3/4	3-3/4	3	3/16
IL134-M16Gx3	IL134-M16Sx3	3000	M16x2.00	5/8	3/4	1-3/4	3-3/4	3	3/16
IL134-M20Gx3	IL134-M20Sx3	3000	M20x2.50	3/4	3/4	1-3/4	3-3/4	3	3/16
IL135-M6Gx3	IL135-M6Sx3	100	M6x1	1/2	3/4	2	3-3/4	3	3/16
IL135-M8Gx3	IL135-M8Sx3	500	M8x1.25	1/2	3/4	2	3-3/4	3	3/16
IL135-M10Gx3	IL135-M10Sx3	1000	M10x1.50	1/2	3/4	2	3-3/4	3	3/16
IL135-M12Gx3	IL135-M12Sx3	2000	M12x1.75	1/2	3/4	2	3-3/4	3	3/16
IL135-M16Gx3	IL135-M16Sx3	3000	M16x2.00	5/8	3/4	2	3-3/4	3	3/16
IL135-M20Gx3	IL135-M20Sx3	3000	M20x2.50	3/4	3/4	2	3-3/4	3	3/16
IL136-M6Gx3	IL136-M6Sx3	100	M6x1	1/2	3/4	3	3-3/4	3	3/16
IL136-M8Gx3	IL136-M8Sx3	500	M8x1.25	1/2	3/4	3	3-3/4	3	3/16
IL136-M10Gx3	IL136-M10Sx3	1000	M10x1.50	1/2	3/4	3	3-3/4	3	3/16
IL136-M12Gx3	IL136-M12Sx3	2000	M12x1.75	1/2	3/4	3	3-3/4	3	3/16
IL136-M16Gx3	IL136-M16Sx3	3000	M16x2.00	5/8	3/4	3	3-3/4	3	3/16
IL136-M20Gx3	IL136-M20Sx3	3000	M20x2.50	3/4	3/4	3	3-3/4	3	3/16
IL137-M6Gx3	IL137-M6Sx3	100	M6x1	1/2	3/4	4	3-3/4	3	3/16
IL137-M8Gx3	IL137-M8Sx3	500	M8x1.25	1/2	3/4	4	3-3/4	3	3/16
IL137-M10Gx3	IL137-M10Sx3	1000	M10x1.50	1/2	3/4	4	3-3/4	3	3/16
IL137-M12Gx3	IL137-M12Sx3	2000	M12x1.75	1/2	3/4	4	3-3/4	3	3/16
IL137-M16Gx3	IL137-M16Sx3	3000	M16x2.00	5/8	3/4	4	3-3/4	3	3/16
IL137-M20Gx3	IL137-M20Sx3	3000	M20x2.50	3/4	3/4	4	3-3/4	3	3/16


Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers

The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.



PATENT PENDING



Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	<p>Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.</p>	<p>Top allen-drive broached hex (-BR) Dimension table at bottom of page.</p>

SAUCER BASE METRIC SWIVEL — 4" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M8Gx4	IL130-M8Sx4	500	M8x1.25	1/2	3/4	3/4	4-3/4	4	3/16
IL130-M10Gx4	IL130-M10Sx4	1000	M10x1.50	1/2	3/4	3/4	4-3/4	4	3/16
IL130-M12Gx4	IL130-M12Sx4	2000	M12x1.75	1/2	3/4	3/4	4-3/4	4	3/16
IL130-M16Gx4	IL130-M16Sx4	3000	M16x2.00	5/8	3/4	3/4	4-3/4	4	3/16
IL130-M20Gx4	IL130-M20Sx4	3000	M20x2.50	3/4	3/4	3/4	4-3/4	4	3/16
IL131-M8Gx4	IL131-M8Sx4	500	M8x1.25	1/2	3/4	1	4-3/4	4	3/16
IL131-M10Gx4	IL131-M10Sx4	1000	M10x1.50	1/2	3/4	1	4-3/4	4	3/16
IL131-M12Gx4	IL131-M12Sx4	2000	M12x1.75	1/2	3/4	1	4-3/4	4	3/16
IL131-M16Gx4	IL131-M16Sx4	3000	M16x2.00	5/8	3/4	1	4-3/4	4	3/16
IL131-M20Gx4	IL131-M20Sx4	3000	M20x2.50	3/4	3/4	1	4-3/4	4	3/16
IL132-M8Gx4	IL132-M8Sx4	500	M8x1.25	1/2	3/4	1-1/4	4-3/4	4	3/16
IL132-M10Gx4	IL132-M10Sx4	1000	M10x1.50	1/2	3/4	1-1/4	4-3/4	4	3/16
IL132-M12Gx4	IL132-M12Sx4	2000	M12x1.75	1/2	3/4	1-1/4	4-3/4	4	3/16
IL132-M16Gx4	IL132-M16Sx4	3000	M16x2.00	5/8	3/4	1-1/4	4-3/4	4	3/16
IL132-M20Gx4	IL132-M20Sx4	3000	M20x2.50	3/4	3/4	1-1/4	4-3/4	4	3/16
IL133-M8Gx4	IL133-M8Sx4	500	M8x1.25	1/2	3/4	1-1/2	4-3/4	4	3/16
IL133-M10Gx4	IL133-M10Sx4	1000	M10x1.50	1/2	3/4	1-1/2	4-3/4	4	3/16
IL133-M12Gx4	IL133-M12Sx4	2000	M12x1.75	1/2	3/4	1-1/2	4-3/4	4	3/16
IL133-M16Gx4	IL133-M16Sx4	3000	M16x2.00	5/8	3/4	1-1/2	4-3/4	4	3/16
IL133-M20Gx4	IL133-M20Sx4	3000	M20x2.50	3/4	3/4	1-1/2	4-3/4	4	3/16


Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers

The IEC Saucer Base® Metric Swivel Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

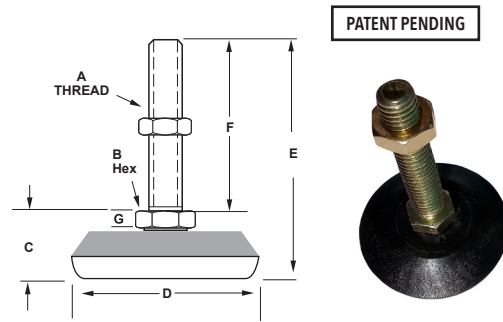

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 4" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M8Gx4	IL134-M8Sx4	500	M8x1.25	1/2	3/4	1-3/4	4-3/4	4	3/16
IL134-M10Gx4	IL134-M10Sx4	1000	M10x1.50	1/2	3/4	1-3/4	4-3/4	4	3/16
IL134-M12Gx4	IL134-M12Sx4	2000	M12x1.75	1/2	3/4	1-3/4	4-3/4	4	3/16
IL134-M16Gx4	IL134-M16Sx4	3000	M16x2.00	5/8	3/4	1-3/4	4-3/4	4	3/16
IL134-M20Gx4	IL134-M20Sx4	3000	M20x2.50	3/4	3/4	1-3/4	4-3/4	4	3/16
IL135-M8Gx4	IL135-M8Sx4	500	M8x1.25	1/2	3/4	2	4-3/4	4	3/16
IL135-M10Gx4	IL135-M10Sx4	1000	M10x1.50	1/2	3/4	2	4-3/4	4	3/16
IL135-M12Gx4	IL135-M12Sx4	2000	M12x1.75	1/2	3/4	2	4-3/4	4	3/16
IL135-M16Gx4	IL135-M16Sx4	3000	M16x2.00	5/8	3/4	2	4-3/4	4	3/16
IL135-M20Gx4	IL135-M20Sx4	3000	M20x2.50	3/4	3/4	2	4-3/4	4	3/16
IL136-M8Gx4	IL136-M8Sx4	500	M8x1.25	1/2	3/4	3	4-3/4	4	3/16
IL136-M10Gx4	IL136-M10Sx4	1000	M10x1.50	1/2	3/4	3	4-3/4	4	3/16
IL136-M12Gx4	IL136-M12Sx4	2000	M12x1.75	1/2	3/4	3	4-3/4	4	3/16
IL136-M16Gx4	IL136-M16Sx4	3000	M16x2.00	5/8	3/4	3	4-3/4	4	3/16
IL136-M20Gx4	IL136-M20Sx4	3000	M20x2.50	3/4	3/4	3	4-3/4	4	3/16
IL137-M8Gx4	IL137-M8Sx4	500	M8x1.25	1/2	3/4	4	4-3/4	4	3/16
IL137-M10Gx4	IL137-M10Sx4	1000	M10x1.50	1/2	3/4	4	4-3/4	4	3/16
IL137-M12Gx4	IL137-M12Sx4	2000	M12x1.75	1/2	3/4	4	4-3/4	4	3/16
IL137-M16Gx4	IL137-M16Sx4	3000	M16x2.00	5/8	3/4	4	4-3/4	4	3/16
IL137-M20Gx4	IL137-M20Sx4	3000	M20x2.50	3/4	3/4	4	4-3/4	4	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers


The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



PATENT PENDING



OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	<p>Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.</p>	<p>Top allen-drive broached hex (-BR) Dimension table at bottom of page.</p>

SAUCER BASE METRIC SWIVEL — 5" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M8Gx5	IL130-M8Sx5	500	M8x1.25	1/2	3/4	3/4	5-3/4	5	3/16
IL130-M10Gx5	IL130-M10Sx5	1000	M10x1.50	1/2	3/4	3/4	5-3/4	5	3/16
IL130-M12Gx5	IL130-M12Sx5	2000	M12x1.75	1/2	3/4	3/4	5-3/4	5	3/16
IL130-M16Gx5	IL130-M16Sx5	3000	M16x2.00	5/8	3/4	3/4	5-3/4	5	3/16
IL130-M20Gx5	IL130-M20Sx5	3000	M20x2.50	3/4	3/4	3/4	5-3/4	5	3/16
IL131-M8Gx5	IL131-M8Sx5	500	M8x1.25	1/2	3/4	1	5-3/4	5	3/16
IL131-M10Gx5	IL131-M10Sx5	1000	M10x1.50	1/2	3/4	1	5-3/4	5	3/16
IL131-M12Gx5	IL131-M12Sx5	2000	M12x1.75	1/2	3/4	1	5-3/4	5	3/16
IL131-M16Gx5	IL131-M16Sx5	3000	M16x2.00	5/8	3/4	1	5-3/4	5	3/16
IL131-M20Gx5	IL131-M20Sx5	3000	M20x2.50	3/4	3/4	1	5-3/4	5	3/16
IL132-M8Gx5	IL132-M8Sx5	500	M8x1.25	1/2	3/4	1-1/4	5-3/4	5	3/16
IL132-M10Gx5	IL132-M10Sx5	1000	M10x1.50	1/2	3/4	1-1/4	5-3/4	5	3/16
IL132-M12Gx5	IL132-M12Sx5	2000	M12x1.75	1/2	3/4	1-1/4	5-3/4	5	3/16
IL132-M16Gx5	IL132-M16Sx5	3000	M16x2.00	5/8	3/4	1-1/4	5-3/4	5	3/16
IL132-M20Gx5	IL132-M20Sx5	3000	M20x2.50	3/4	3/4	1-1/4	5-3/4	5	3/16
IL133-M8Gx5	IL133-M8Sx5	500	M8x1.25	1/2	3/4	1-1/2	5-3/4	5	3/16
IL133-M10Gx5	IL133-M10Sx5	1000	M10x1.50	1/2	3/4	1-1/2	5-3/4	5	3/16
IL133-M12Gx5	IL133-M12Sx5	2000	M12x1.75	1/2	3/4	1-1/2	5-3/4	5	3/16
IL133-M16Gx5	IL133-M16Sx5	3000	M16x2.00	5/8	3/4	1-1/2	5-3/4	5	3/16
IL133-M20Gx5	IL133-M20Sx5	3000	M20x2.50	3/4	3/4	1-1/2	5-3/4	5	3/16


Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers

The IEC Saucer Base® Metric Swivel Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

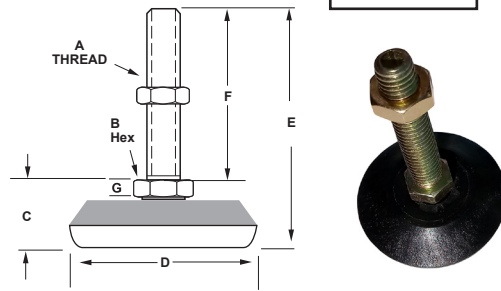

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 5" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M8Gx5	IL134-M8Sx5	500	M8x1.25	1/2	3/4	1-3/4	5-3/4	5	3/16
IL134-M10Gx5	IL134-M10Sx5	1000	M10x1.50	1/2	3/4	1-3/4	5-3/4	5	3/16
IL134-M12Gx5	IL134-M12Sx5	2000	M12x1.75	1/2	3/4	1-3/4	5-3/4	5	3/16
IL134-M16Gx5	IL134-M16Sx5	3000	M16x2.00	5/8	3/4	1-3/4	5-3/4	5	3/16
IL134-M20Gx5	IL134-M20Sx5	3000	M20x2.50	3/4	3/4	1-3/4	5-3/4	5	3/16
IL135-M8Gx5	IL135-M8Sx5	500	M8x1.25	1/2	3/4	2	5-3/4	5	3/16
IL135-M10Gx5	IL135-M10Sx5	1000	M10x1.50	1/2	3/4	2	5-3/4	5	3/16
IL135-M12Gx5	IL135-M12Sx5	2000	M12x1.75	1/2	3/4	2	5-3/4	5	3/16
IL135-M16Gx5	IL135-M16Sx5	3000	M16x2.00	5/8	3/4	2	5-3/4	5	3/16
IL135-M20Gx5	IL135-M20Sx5	3000	M20x2.50	3/4	3/4	2	5-3/4	5	3/16
IL136-M8Gx5	IL136-M8Sx5	500	M8x1.25	1/2	3/4	3	5-3/4	5	3/16
IL136-M10Gx5	IL136-M10Sx5	1000	M10x1.50	1/2	3/4	3	5-3/4	5	3/16
IL136-M12Gx5	IL136-M12Sx5	2000	M12x1.75	1/2	3/4	3	5-3/4	5	3/16
IL136-M16Gx5	IL136-M16Sx5	3000	M16x2.00	5/8	3/4	3	5-3/4	5	3/16
IL136-M20Gx5	IL136-M20Sx5	3000	M20x2.50	3/4	3/4	3	5-3/4	5	3/16
IL137-M8Gx5	IL137-M8Sx5	500	M8x1.25	1/2	3/4	4	5-3/4	5	3/16
IL137-M10Gx5	IL137-M10Sx5	1000	M10x1.50	1/2	3/4	4	5-3/4	5	3/16
IL137-M12Gx5	IL137-M12Sx5	2000	M12x1.75	1/2	3/4	4	5-3/4	5	3/16
IL137-M16Gx5	IL137-M16Sx5	3000	M16x2.00	5/8	3/4	4	5-3/4	5	3/16
IL137-M20Gx5	IL137-M20Sx5	3000	M20x2.50	3/4	3/4	4	5-3/4	5	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers


The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Conveyors
- Machinery
- Work tables



PATENT PENDING



OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	<p>Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.</p>	<p>Top allen-drive broached hex (-BR) Dimension table at bottom of page.</p>

SAUCER BASE METRIC SWIVEL — 6" STUD LENGTHS (3/4" to 1-1/2" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M8Gx6	IL130-M8Sx6	500	M8x1.25	1/2	3/4	3/4	6-3/4	6	3/16
IL130-M10Gx6	IL130-M10Sx6	1000	M10x1.50	1/2	3/4	3/4	6-3/4	6	3/16
IL130-M12Gx6	IL130-M12Sx6	2000	M12x1.75	1/2	3/4	3/4	6-3/4	6	3/16
IL130-M16Gx6	IL130-M16Sx6	3000	M16x2.00	5/8	3/4	3/4	6-3/4	6	3/16
IL130-M20Gx6	IL130-M20Sx6	3000	M20x2.50	3/4	3/4	3/4	6-3/4	6	3/16
IL131-M8Gx6	IL131-M8Sx6	500	M8x1.25	1/2	3/4	1	6-3/4	6	3/16
IL131-M10Gx6	IL131-M10Sx6	1000	M10x1.50	1/2	3/4	1	6-3/4	6	3/16
IL131-M12Gx6	IL131-M12Sx6	2000	M12x1.75	1/2	3/4	1	6-3/4	6	3/16
IL131-M16Gx6	IL131-M16Sx6	3000	M16x2.00	5/8	3/4	1	6-3/4	6	3/16
IL131-M20Gx6	IL131-M20Sx6	3000	M20x2.50	3/4	3/4	1	6-3/4	6	3/16
IL132-M8Gx6	IL132-M8Sx6	500	M8x1.25	1/2	3/4	1-1/4	6-3/4	6	3/16
IL132-M10Gx6	IL132-M10Sx6	1000	M10x1.50	1/2	3/4	1-1/4	6-3/4	6	3/16
IL132-M12Gx6	IL132-M12Sx6	2000	M12x1.75	1/2	3/4	1-1/4	6-3/4	6	3/16
IL132-M16Gx6	IL132-M16Sx6	3000	M16x2.00	5/8	3/4	1-1/4	6-3/4	6	3/16
IL132-M20Gx6	IL132-M20Sx6	3000	M20x2.50	3/4	3/4	1-1/4	6-3/4	6	3/16
IL133-M8Gx6	IL133-M8Sx6	500	M8x1.25	1/2	3/4	1-1/2	6-3/4	6	3/16
IL133-M10Gx6	IL133-M10Sx6	1000	M10x1.50	1/2	3/4	1-1/2	6-3/4	6	3/16
IL133-M12Gx6	IL133-M12Sx6	2000	M12x1.75	1/2	3/4	1-1/2	6-3/4	6	3/16
IL133-M16Gx6	IL133-M16Sx6	3000	M16x2.00	5/8	3/4	1-1/2	6-3/4	6	3/16
IL133-M20Gx6	IL133-M20Sx6	3000	M20x2.50	3/4	3/4	1-1/2	6-3/4	6	3/16


Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers

The IEC Saucer Base® Metric Swivel Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just,™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.

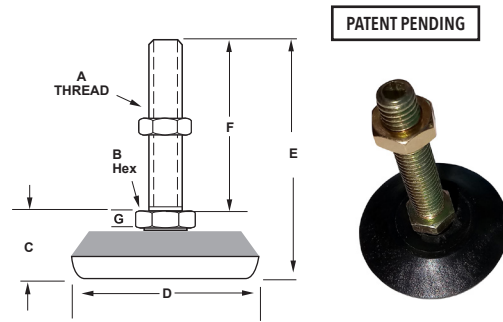

Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 6" STUD LENGTHS (1-3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL134-M8Gx6	IL134-M8Sx6	500	M8x1.25	1/2	3/4	1-3/4	6-3/4	6	3/16
IL134-M10Gx6	IL134-M10Sx6	1000	M10x1.50	1/2	3/4	1-3/4	6-3/4	6	3/16
IL134-M12Gx6	IL134-M12Sx6	2000	M12x1.75	1/2	3/4	1-3/4	6-3/4	6	3/16
IL134-M16Gx6	IL134-M16Sx6	3000	M16x2.00	5/8	3/4	1-3/4	6-3/4	6	3/16
IL134-M20Gx6	IL134-M20Sx6	3000	M20x2.50	3/4	3/4	1-3/4	6-3/4	6	3/16
IL135-M8Gx6	IL135-M8Sx6	500	M8x1.25	1/2	3/4	2	6-3/4	6	3/16
IL135-M10Gx6	IL135-M10Sx6	1000	M10x1.50	1/2	3/4	2	6-3/4	6	3/16
IL135-M12Gx6	IL135-M12Sx6	2000	M12x1.75	1/2	3/4	2	6-3/4	6	3/16
IL135-M16Gx6	IL135-M16Sx6	3000	M16x2.00	5/8	3/4	2	6-3/4	6	3/16
IL135-M20Gx6	IL135-M20Sx6	3000	M20x2.50	3/4	3/4	2	6-3/4	6	3/16
IL136-M8Gx6	IL136-M8Sx6	500	M8x1.25	1/2	3/4	3	6-3/4	6	3/16
IL136-M10Gx6	IL136-M10Sx6	1000	M10x1.50	1/2	3/4	3	6-3/4	6	3/16
IL136-M12Gx6	IL136-M12Sx6	2000	M12x1.75	1/2	3/4	3	6-3/4	6	3/16
IL136-M16Gx6	IL136-M16Sx6	3000	M16x2.00	5/8	3/4	3	6-3/4	6	3/16
IL136-M20Gx6	IL136-M20Sx6	3000	M20x2.50	3/4	3/4	3	6-3/4	6	3/16
IL137-M8Gx6	IL137-M8Sx6	500	M8x1.25	1/2	3/4	4	6-3/4	6	3/16
IL137-M10Gx6	IL137-M10Sx6	1000	M10x1.50	1/2	3/4	4	6-3/4	6	3/16
IL137-M12Gx6	IL137-M12Sx6	2000	M12x1.75	1/2	3/4	4	6-3/4	6	3/16
IL137-M16Gx6	IL137-M16Sx6	3000	M16x2.00	5/8	3/4	4	6-3/4	6	3/16
IL137-M20Gx6	IL137-M20Sx6	3000	M20x2.50	3/4	3/4	4	6-3/4	6	3/16


Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



Medium Duty Low-Profile, SAUCER BASE® Metric Swivel Levelers

The IEC Saucer Base® Swivel Metric Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design with composite materials and incorporate many features requested by commercial and retail customers. They are available with an optional Top-A-Just™ internal top allen-drive broached hex (add -BR to P/N). Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud and jam nut with gold trivalent zinc plating.



PATENT PENDING



Features

- Gold trivalent zinc
- Top hex drive (add -BR to P/N)
- Loads to 3000 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

OPTIONAL BASE COLORS	OTHER FINISHES	TOP ALLEN-DRIVE BROACHED HEX (-BR)
	Standard finish is gold trivalent zinc. (shown to right) For black finish, see IEC's Ruggedized Light Duty Glide catalog.	 Top allen-drive broached hex (-BR) Dimension table at bottom of page.

SAUCER BASE METRIC SWIVEL — 8" STUD LENGTHS (3/4" to 4" BASE DIAMETERS)

Steel	Stainless	Load	A	B	C	D	E	F	G
IL130-M12Gx8	IL130-M12Sx8	2000	M12x1.75	1/2	3/4	3/4	8-3/4	8	3/16
IL130-M16Gx8	IL130-M16Sx8	3000	M16x2.00	5/8	3/4	3/4	8-3/4	8	3/16
IL130-M20Gx8	IL130-M20Sx8	3000	M20x2.50	3/4	3/4	3/4	8-3/4	8	3/16
IL131-M12Gx8	IL131-M12Sx8	2000	M12x1.75	1/2	3/4	1	8-3/4	8	3/16
IL131-M16Gx8	IL131-M16Sx8	3000	M16x2.00	5/8	3/4	1	8-3/4	8	3/16
IL131-M20Gx8	IL131-M20Sx8	3000	M20x2.50	3/4	3/4	1	8-3/4	8	3/16
IL132-M12Gx8	IL132-M12Sx8	2000	M12x1.75	1/2	3/4	1-1/4	8-3/4	8	3/16
IL132-M16Gx8	IL132-M16Sx8	3000	M16x2.00	5/8	3/4	1-1/4	8-3/4	8	3/16
IL132-M20Gx8	IL132-M20Sx8	3000	M20x2.50	3/4	3/4	1-1/4	8-3/4	8	3/16
IL133-M12Gx8	IL133-M12Sx8	2000	M12x1.75	1/2	3/4	1-1/2	8-3/4	8	3/16
IL133-M16Gx8	IL133-M16Sx8	3000	M16x2.00	5/8	3/4	1-1/2	8-3/4	8	3/16
IL133-M20Gx8	IL133-M20Sx8	3000	M20x2.50	3/4	3/4	1-1/2	8-3/4	8	3/16
IL134-M12Gx8	IL134-M12Sx8	2000	M12x1.75	1/2	3/4	1-3/4	8-3/4	8	3/16
IL134-M16Gx8	IL134-M16Sx8	3000	M16x2.00	5/8	3/4	1-3/4	8-3/4	8	3/16
IL134-M20Gx8	IL134-M20Sx8	3000	M20x2.50	3/4	3/4	1-3/4	8-3/4	8	3/16
IL135-M12Gx8	IL135-M12Sx8	2000	M12x1.75	1/2	3/4	2	8-3/4	8	3/16
IL135-M16Gx8	IL135-M16Sx8	3000	M16x2.00	5/8	3/4	2	8-3/4	8	3/16
IL135-M20Gx8	IL135-M20Sx8	3000	M20x2.50	3/4	3/4	2	8-3/4	8	3/16
IL136-M12Gx8	IL136-M12Sx8	2000	M12x1.75	1/2	3/4	3	8-3/4	8	3/16
IL136-M16Gx8	IL136-M16Sx8	3000	M16x2.00	5/8	3/4	3	8-3/4	8	3/16
IL136-M20Gx8	IL136-M20Sx8	3000	M20x2.50	3/4	3/4	3	8-3/4	8	3/16
IL137-M12Gx8	IL137-M12Sx8	2000	M12x1.75	1/2	3/4	4	8-3/4	8	3/16
IL137-M16Gx8	IL137-M16Sx8	3000	M16x2.00	5/8	3/4	4	8-3/4	8	3/16
IL137-M20Gx8	IL137-M20Sx8	3000	M20x2.50	3/4	3/4	4	8-3/4	8	3/16

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6x1	M8x1.25	M10x1.50	M12x1.75	M16x2.00	M20x2.50	M24x3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY METRIC

SAUCER BASE® FIXED SOCKET—METRIC

Medium Duty Low-Profile, SAUCER BASE® Fixed Socket Metric Levelers


The IEC Saucer Base® Metric Fixed Socket Levelers have metric threads and a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel socket and washer have clear zinc plating.

Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures



OPTIONAL BASE COLORS



LOW PROFILE FIXED — METRIC SOCKET LEVELERS

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL120-M6B-T	IL120-M6BS-T	100	M6x1.0	1/2	3/4	1/4	3/4	1/4
IL120-M8B-T	IL120-M8BS-T	500	M8x1.25	1/2	3/4	3/8	7/8	1/4
IL120-M10B-T	IL120-M10BS-T	1000	M10x1.50	1/2	3/4	1/2	1	3/8
IL120-M12B-T	IL120-M12BS-T	2000	M12x1.75	5/8	3/4	1/2	1	3/8
IL120-M16B-T	IL120-M16BS-T	2500	M16x2.0	3/4	3/4	5/8	1-1/8	1/2
IL120-M20B-T	IL120-M20BS-T	3000	M20x2.5	1	3/4	3/4	1-1/4	5/8
IL121-M6B-T	IL121-M6BS-T	100	M6x1.0	1/2	1	1/4	3/4	1/4
IL121-M8B-T	IL121-M8BS-T	500	M8x1.25	1/2	1	3/8	7/8	1/4
IL121-M10B-T	IL121-M10BS-T	1000	M10x1.50	1/2	1	1/2	1	3/8
IL121-M12B-T	IL121-M12BS-T	2000	M12x1.75	5/8	1	1/2	1	3/8
IL121-M16B-T	IL121-M16BS-T	2500	M16x2.0	3/4	1	5/8	1-1/8	1/2
IL121-M20B-T	IL121-M20BS-T	3000	M20x2.5	1	1	3/4	1-1/4	5/8
IL122-M6B-T	IL122-M6BS-T	100	M6x1.0	1/2	1-1/4	1/4	3/4	1/4
IL122-M8B-T	IL122-M8BS-T	500	M8x1.25	1/2	1-1/4	3/8	7/8	1/4
IL122-M10B-T	IL122-M10BS-T	1000	M10x1.50	1/2	1-1/4	1/2	1	3/8
IL122-M12B-T	IL122-M12BS-T	2000	M12x1.75	5/8	1-1/4	1/2	1	3/8
IL122-M16B-T	IL122-M16BS-T	2500	M16x2.0	3/4	1-1/4	5/8	1-1/8	1/2
IL122-M20B-T	IL122-M20BS-T	3000	M20x2.5	1	1-1/4	3/4	1-1/4	5/8
IL123-M6B-T	IL123-M6BS-T	100	M6x1.0	1/2	1-1/2	1/4	3/4	1/4
IL123-M8B-T	IL123-M8BS-T	500	M8x1.25	1/2	1-1/2	3/8	7/8	1/4
IL123-M10B-T	IL123-M10BS-T	1000	M10x1.50	1/2	1-1/2	1/2	1	3/8
IL123-M12B-T	IL123-M12BS-T	2000	M12x1.75	5/8	1-1/2	1/2	1	3/8
IL123-M16B-T	IL123-M16BS-T	2500	M16x2.0	3/4	1-1/2	5/8	1-1/8	1/2
IL123-M20B-T	IL123-M20BS-T	3000	M20x2.5	1	1-1/2	3/4	1-1/4	5/8
IL124-M6B-T	IL124-M6BS-T	100	M6x1.0	1/2	1-3/4	1/4	3/4	1/4
IL124-M8B-T	IL124-M8BS-T	500	M8x1.25	1/2	1-3/4	3/8	7/8	1/4
IL124-M10B-T	IL124-M10BS-T	1000	M10x1.50	1/2	1-3/4	1/2	1	3/8
IL124-M12B-T	IL124-M12BS-T	2000	M12x1.75	5/8	1-3/4	1/2	1	3/8
IL124-M16B-T	IL124-M16BS-T	2500	M16x2.0	3/4	1-3/4	5/8	1-1/8	1/2
IL124-M20B-T	IL124-M20BS-T	3000	M20x2.5	1	1-3/4	3/4	1-1/4	5/8
IL125-M6B-T	IL125-M6BS-T	100	M6x1.0	1/2	2	1/4	3/4	1/4
IL125-M8B-T	IL125-M8BS-T	500	M8x1.25	1/2	2	3/8	7/8	1/4
IL125-M10B-T	IL125-M10BS-T	1000	M10x1.50	1/2	2	1/2	1	3/8
IL125-M12B-T	IL125-M12BS-T	2000	M12x1.75	5/8	2	1/2	1	3/8
IL125-M16B-T	IL125-M16BS-T	2500	M16x2.0	3/4	2	5/8	1-1/8	1/2
IL125-M20B-T	IL125-M20BS-T	3000	M20x2.5	1	2	3/4	1-1/4	5/8
IL126-M6B-T	IL126-M6BS-T	100	M6x1.0	1/2	3	1/4	3/4	1/4
IL126-M8B-T	IL126-M8BS-T	500	M8x1.25	1/2	3	3/8	7/8	1/4
IL126-M10B-T	IL126-M10BS-T	1000	M10x1.50	1/2	3	1/2	1	3/8
IL126-M12B-T	IL126-M12BS-T	2000	M12x1.75	5/8	3	1/2	1	3/8
IL126-M16B-T	IL126-M16BS-T	2500	M16x2.0	3/4	3	5/8	1-1/8	1/2
IL126-M20B-T	IL126-M20BS-T	3000	M20x2.5	1	3	3/4	1-1/4	5/8
IL127-M6B-T	IL127-M6BS-T	100	M6x1.0	1/2	4	1/4	3/4	1/4
IL127-M8B-T	IL127-M8BS-T	500	M8x1.25	1/2	4	3/8	7/8	1/4
IL127-M10B-T	IL127-M10BS-T	1000	M10x1.50	1/2	4	1/2	1	3/8
IL127-M12B-T	IL127-M12BS-T	2000	M12x1.75	5/8	4	1/2	1	3/8
IL127-M16B-T	IL127-M16BS-T	2500	M16x2.0	3/4	4	5/8	1-1/8	1/2
IL127-M20B-T	IL127-M20BS-T	3000	M20x2.5	1	4	3/4	1-1/4	5/8



MEDIUM-DUTY METRIC
SAUCER BASE® SWIVEL SOCKET—METRIC

Medium Duty Low-Profile, SAUCER BASE® Swivel Socket Metric Levelers

The IEC Saucer Base® Swivel Metric Socket Levelers have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick .
Steel socket has gold zinc plating.


Features

- Loads to 3000 lbs
- Corrosion resistant
- Bottom hex drive
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS

METRIC LOW PROFILE SWIVEL — SOCKET LEVELERS

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL130-M6-T	IL130-M6S-T	100	M6x1	1/2	3/4	1/4	3/4	1/4
IL130-M8-T	IL130-M8S-T	500	M8x1.25	1/2	3/4	3/8	7/8	1/4
IL130-M10-T	IL130-M10S-T	1000	M10x1.50	1/2	3/4	1/2	1	3/8
IL130-M12-T	IL130-M12S-T	2000	M12x1.75	5/8	3/4	1/2	1	3/8
IL130-M16-T	IL130-M16S-T	3000	M16x2.00	3/4	3/4	5/8	1-1/8	1/2
IL130-M20-T	IL130-M20S-T	3000	M20x2.50	1	3/4	3/4	1-1/4	5/8
IL131-M6-T	IL131-M6S-T	100	M6x1	1/2	1	1/4	3/4	1/4
IL131-M8-T	IL131-M8S-T	500	M8x1.25	1/2	1	3/8	7/8	1/4
IL131-M10-T	IL131-M10S-T	1000	M10x1.50	1/2	1	1/2	1	3/8
IL131-M12-T	IL131-M12S-T	2000	M12x1.75	5/8	1	1/2	1	3/8
IL131-M16-T	IL131-M16S-T	3000	M16x2.00	3/4	1	5/8	1-1/8	1/2
IL131-M20-T	IL131-M20S-T	3000	M20x2.50	1	1	3/4	1-1/4	5/8
IL132-M6-T	IL132-M6S-T	100	M6x1	1/2	1-1/4	1/4	3/4	1/4
IL132-M8-T	IL132-M8S-T	500	M8x1.25	1/2	1-1/4	3/8	7/8	1/4
IL132-M10-T	IL132-M10S-T	1000	M10x1.50	1/2	1-1/4	1/2	1	3/8
IL132-M12-T	IL132-M12S-T	2000	M12x1.75	5/8	1-1/4	1/2	1	3/8
IL132-M16-T	IL132-M16S-T	3000	M16x2.00	3/4	1-1/4	5/8	1-1/8	1/2
IL132-M20-T	IL132-M20S-T	3000	M20x2.50	1	1-1/4	3/4	1-1/4	5/8
IL133-M6-T	IL133-M6S-T	100	M6x1	1/2	1-1/2	1/4	3/4	1/4
IL133-M8-T	IL133-M8S-T	500	M8x1.25	1/2	1-1/2	3/8	7/8	1/4
IL133-M10-T	IL133-M10S-T	1000	M10x1.50	1/2	1-1/2	1/2	1	3/8
IL133-M12-T	IL133-M12S-T	2000	M12x1.75	5/8	1-1/2	1/2	1	3/8
IL133-M16-T	IL133-M16S-T	3000	M16x2.00	3/4	1-1/2	5/8	1-1/8	1/2
IL133-M20-T	IL133-M20S-T	3000	M20x2.50	1	1-1/2	3/4	1-1/4	5/8
IL134-M6-T	IL134-M6S-T	100	M6x1	1/2	1-3/4	1/4	3/4	1/4
IL134-M8-T	IL134-M8S-T	500	M8x1.25	1/2	1-3/4	3/8	7/8	1/4
IL134-M10-T	IL134-M10S-T	1000	M10x1.50	1/2	1-3/4	1/2	1	3/8
IL134-M12-T	IL134-M12S-T	2000	M12x1.75	5/8	1-3/4	1/2	1	3/8
IL134-M16-T	IL134-M16S-T	3000	M16x2.00	3/4	1-3/4	5/8	1-1/8	1/2
IL134-M20-T	IL134-M20S-T	3000	M20x2.50	1	1-3/4	3/4	1-1/4	5/8
IL135-M6-T	IL135-M6S-T	100	M6x1	1/2	2	1/4	3/4	1/4
IL135-M8-T	IL135-M8S-T	500	M8x1.25	1/2	2	3/8	7/8	1/4
IL135-M10-T	IL135-M10S-T	1000	M10x1.50	1/2	2	1/2	1	3/8
IL135-M12-T	IL135-M12S-T	2000	M12x1.75	5/8	2	1/2	1	3/8
IL135-M16-T	IL135-M16S-T	3000	M16x2.00	3/4	2	5/8	1-1/8	1/2
IL135-M20-T	IL135-M20S-T	3000	M20x2.50	1	2	3/4	1-1/4	5/8
IL136-M6-T	IL136-M6S-T	100	M6x1	1/2	3	1/4	3/4	1/4
IL136-M8-T	IL136-M8S-T	500	M8x1.25	1/2	3	3/8	7/8	1/4
IL136-M10-T	IL136-M10S-T	1000	M10x1.50	1/2	3	1/2	1	3/8
IL136-M12-T	IL136-M12S-T	2000	M12x1.75	5/8	3	1/2	1	3/8
IL136-M16-T	IL136-M16S-T	3000	M16x2.00	3/4	3	5/8	1-1/8	1/2
IL136-M20-T	IL136-M20S-T	3000	M20x2.50	1	3	3/4	1-1/4	5/8
IL137-M6-T	IL137-M6S-T	100	M6x1	1/2	4	1/4	3/4	1/4
IL137-M8-T	IL137-M8S-T	500	M8x1.25	1/2	4	3/8	7/8	1/4
IL137-M10-T	IL137-M10S-T	1000	M10x1.50	1/2	4	1/2	1	3/8
IL137-M12-T	IL137-M12S-T	2000	M12x1.75	5/8	4	1/2	1	3/8
IL137-M16-T	IL137-M16S-T	3000	M16x2.00	3/4	4	5/8	1-1/8	1/2
IL137-M20-T	IL137-M20S-T	3000	M20x2.50	1	4	3/4	1-1/4	5/8



HI-PRO® METRIC POLY BASE FIXED STUD GLIDES


The IEC High Profile Metric Steel and Stainless Steel Poly Base Fixed Stud Glide feature metric threads and IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 1" thick. Two base sizes to choose from (1-1/2" to 2"). Many sizes available with Top-A-Just® top-end external hex (-HX). You may also request top broached hex. allen drive (-BR).



Top-A-Just® (-HX)



Top-A-Just® (-BR)



Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant
- Top hex options

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables

METRIC HI-PRO® POLY FIXED STUD—METRIC LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL140-M6Bx25	IL140-M6BSx25	100	M6	1/2	1-1/2	25	1-5/16
IL140-M6Bx38	IL140-M6BSx38	100	M6	1/2	1-1/2	38	1-5/16
IL140-M6Bx51	IL140-M6BSx51	100	M6	1/2	1-1/2	51	1-5/16
IL140-M8Bx38	IL140-M8BSx38	500	M8	1/2	1-1/2	38	1-5/16
IL140-M8Bx51	IL140-M8BSx51	500	M8	1/2	1-1/2	51	1-5/16
IL140-M8Bx62	IL140-M8BSx62	500	M8	1/2	1-1/2	62	1-5/16
IL140-M10Bx38	IL140-M10BSx38	1000	M10	1/2	1-1/2	38	1-5/16
IL140-M10Bx51	IL140-M10BSx51	1000	M10	1/2	1-1/2	51	1-5/16
IL140-M10Bx62	IL140-M10BSx62	1000	M10	1/2	1-1/2	62	1-5/16
IL140-M12Bx38	IL140-M12BSx38	2000	M12	1/2	1-1/2	38	1-5/16
IL140-M12Bx51	IL140-M12BSx51	2000	M12	1/2	1-1/2	51	1-5/16
IL140-M12Bx75	IL140-M12BSx75	2000	M12	1/2	1-1/2	75	1-5/16
IL140-M12Bx102	IL140-M12BSx102	2000	M12	1/2	1-1/2	102	1-5/16
IL140-M16Bx51	IL140-M16BSx51	2500	M16	5/8	1-1/2	51	1-5/16
IL140-M16Bx90-BR	IL140-M16BSx90-BR	2500	M16	5/8	1-1/2	90	1-5/16
IL140-M16Bx102	IL140-M16BSx102	2500	M16	5/8	1-1/2	102	1-5/16
IL140-M16Bx115-BR	IL140-M16BSx115-BR	2500	M16	5/8	1-1/2	115	1-5/16
IL141-M6Bx25	IL141-M6BSx25	100	M6	1/2	2	25	1-5/16
IL141-M6Bx38	IL141-M6BSx38	100	M6	1/2	2	38	1-5/16
IL141-M6Bx51	IL141-M6BSx51	100	M6	1/2	2	51	1-5/16
IL141-M8Bx38	IL141-M8BSx38	500	M8	1/2	2	38	1-5/16
IL141-M8Bx51	IL141-M8BSx51	500	M8	1/2	2	51	1-5/16
IL141-M8Bx62	IL141-M8BSx62	500	M8	1/2	2	62	1-5/16
IL141-M10Bx38	IL141-M10BSx38S	1000	M10	1/2	2	38	1-5/16
IL141-M10Bx51	IL141-M10BSx51S	1000	M10	1/2	2	51	1-5/16
IL141-M10Bx62	IL141-M10BSx62S	1000	M10	1/2	2	62	1-5/16
IL141-M12Bx38	IL141-M12BSx38	2000	M12	1/2	2	38	1-5/16
IL141-M12Bx51	IL141-M12BSx51	2000	M12	1/2	2	51	1-5/16
IL141-M12Bx75	IL141-M12BSx75	2000	M12	1/2	2	75	1-5/16
IL141-M12Bx102	IL141-M12BSx102	2000	M12	1/2	2	102	1-5/16
IL141-M16Bx51	IL141-M16BSx51	2500	M16	5/8	2	51	1-5/16
IL141-M16Bx90-BR	IL141-M16BSx90-BR	2500	M16	5/8	2	90	1-5/16
IL141-M16Bx102	IL141-M16BSx102	2500	M16	5/8	2	102	1-5/16
IL141-M16Bx115-BR	IL141-M16BSx115-BR	2500	M16	5/8	2	115	1-5/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.



Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

MEDIUM-DUTY METRIC
HI-PRO® POLY FIXED SOCKET—METRIC
 1-1/2" to 2" BASE DIAMETER

HI-PRO® POLY BASE FIXED SOCKET METRIC GLIDES

The IEC High Profile Steel and Stainless Steel Poly Base Fixed Socket Metric Glide features metric threads and IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel socket and black polypropylene base, 1" thick. Two base sizes to choose from (1-1/2" to 2").

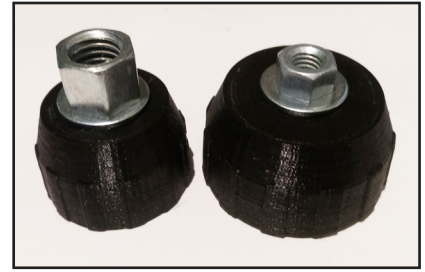

Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables

Steel	SS	Load	Thread	Hex	A	B	C	F
High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL140-M6B-T	IL140-M6BS-T	100	M6x1.0	1/2	1-1/2	1/4	1-5/16	1/4
IL140-M8B-T	IL140-M8BS-T	500	M8x1.25	1/2	1-1/2	3/8	1-7/16	1/4
IL140-M10B-T	IL140-M10BS-T	1000	M10x1.5	1/2	1-1/2	1/2	1-9/16	3/8
IL140-M12B-T	IL140-M12BS-T	2000	M12x1.75	1/2	1-1/2	1/2	1-9/16	3/8
IL140-M16B-T	IL140-M16BS-T	2500	M16x2.0	5/8	1-1/2	5/8	1-11/16	1/2
IL140-M20B-T	IL140-M20BS-T	3000	M20x2.5	3/4	1-1/2	3/4	1-13/16	5/8

Steel	SS	Load	Thread	Hex	A	B	C	F
High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL141-M6B-T	IL141-M6BS-T	100	M6x1.0	1/2	2	1/4	1-5/16	1/4
IL141-M8B-T	IL141-M8BS-T	500	M8x1.25	1/2	2	3/8	1-7/16	1/4
IL141-M10B-T	IL141-M10BS-T	1000	M10x1.5	1/2	2	1/2	1-9/16	3/8
IL141-M12B-T	IL141-M12BS-T	2000	M12x1.75	1/2	2	1/2	1-9/16	3/8
IL141-M16B-T	IL141-M16BS-T	2500	M16x2.0	5/8	2	5/8	1-11/16	1/2
IL141-M20B-T	IL141-M20BS-T	3000	M20x2.5	3/4	2	3/4	1-13/16	5/8



MEDIUM-DUTY METRIC

HI-PRO® & DOUBLE HI-PRO® POLY FIXED STUD

1-1/2" & 2" BASE DIAMETER

HI-PRO® & DOUBLE HIGH PROFILE METRIC POLY BASE FIXED STUD GLIDES

The IEC High Profile & Double High Profile Metric Steel and Stainless Steel Poly Base Fixed Stud Glide feature metric threads and IEC's Ridge-Grip® design and is ideal for light and medium-duty load requirements. The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc. The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base, 1" and 2" thick. Two base sizes to choose from (1-1/2" to 2"). Many sizes available with Top-A-Just® top-end external hex (-HX). You may also request top broached hex, allen drive (-BR).



Top-A-Just® (-HX)




Top-A-Just® (-BR)

Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant
- Top hex options

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables



METRIC (Double High Profile) POLY FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Double High Profile Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL140-DHP-M6Bx25	IL140-DHP-M6BSx25	100	M6	1/2	1-1/2	25	2-5/16
IL140-DHP-M6Bx38	IL140-DHP-M6BSx38	100	M6	1/2	1-1/2	38	2-5/16
IL140-DHP-M6Bx51	IL140-DHP-M6BSx51	100	M6	1/2	1-1/2	51	2-5/16
IL140-DHP-M8Bx38	IL140-DHP-M8BSx38	500	M8	1/2	1-1/2	38	2-5/16
IL140-DHP-M8Bx51	IL140-DHP-M8BSx51	500	M8	1/2	1-1/2	51	2-5/16
IL140-DHP-M8Bx62	IL140-DHP-M8BSx62	500	M8	1/2	1-1/2	62	2-5/16
IL140-DHP-M10Bx38	IL140-DHP-M10BSx38	1000	M10	1/2	1-1/2	38	2-5/16
IL140-DHP-M10Bx51	IL140-DHP-M10BSx51	1000	M10	1/2	1-1/2	51	2-5/16
IL140-DHP-M10Bx62	IL140-DHP-M10BSx62	1000	M10	1/2	1-1/2	62	2-5/16
IL140-DHP-M12Bx38	IL140-DHP-M12BSx38	2000	M12	1/2	1-1/2	38	2-5/16
IL140-DHP-M12Bx51	IL140-DHP-M12BSx51	2000	M12	1/2	1-1/2	51	2-5/16
IL140-DHP-M12Bx75	IL140-DHP-M12BSx75	2000	M12	1/2	1-1/2	75	2-5/16
IL140-DHP-M12Bx102	IL140-DHP-M12BSx102	2000	M12	1/2	1-1/2	102	2-5/16
IL140-DHP-M16Bx51	IL140-DHP-M16BSx51	2500	M16	5/8	1-1/2	51	2-5/16
IL140-DHP-M16Bx90-BR	IL140-DHP-M16BSx90-BR	2500	M16	5/8	1-1/2	90	2-5/16
IL140-DHP-M16Bx102	IL140-DHP-M16BSx102	2500	M16	5/8	1-1/2	102	2-5/16
IL140-DHP-M16Bx115-BRIL	IL140-DHP-M16BSx115-BR	2500	M16	5/8	1-1/2	115	2-5/16

METRIC HI-PRO® POLY FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
High Profile Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL141-M6Bx25	IL141-M6BSx25	100	M6	1/2	2	25	1-5/16
IL141-M6Bx38	IL141-M6BSx38	100	M6	1/2	2	38	1-5/16
IL141-M6Bx51	IL141-M6BSx51	100	M6	1/2	2	51	1-5/16
IL141-M8Bx38	IL141-M8BSx38	500	M8	1/2	2	38	1-5/16
IL141-M8Bx51	IL141-M8BSx51	500	M8	1/2	2	51	1-5/16
IL141-M8Bx62	IL141-M8BSx62	500	M8	1/2	2	62	1-5/16
IL141-M10Bx38	IL141-M10BSx38S	1000	M10	1/2	2	38	1-5/16
IL141-M10Bx51	IL141-M10BSx51S	1000	M10	1/2	2	51	1-5/16
IL141-M10Bx62	IL141-M10BSx62S	1000	M10	1/2	2	62	1-5/16
IL141-M12Bx38	IL141-M12BSx38	2000	M12	1/2	2	38	1-5/16
IL141-M12Bx51	IL141-M12BSx51	2000	M12	1/2	2	51	1-5/16
IL141-M12Bx75	IL141-M12BSx75	2000	M12	1/2	2	75	1-5/16
IL141-M12Bx102	IL141-M12BSx102	2000	M12	1/2	2	102	1-5/16
IL141-M16Bx51	IL141-M16BSx51	2500	M16	5/8	2	51	1-5/16
IL141-M16Bx90-BR	IL141-M16BSx90-BR	2500	M16	5/8	2	90	1-5/16
IL141-M16Bx102	IL141-M16BSx102	2500	M16	5/8	2	102	1-5/16
IL141-M16Bx115-BR	IL141-M16BSx115-BR	2500	M16	5/8	2	115	1-5/16

METRIC HI-PRO® POLY FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
High Profile Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL140-M6Bx25	IL140-M6BSx25	100	M6	1/2	1-1/2	25	1-5/16
IL140-M6Bx38	IL140-M6BSx38	100	M6	1/2	1-1/2	38	1-5/16
IL140-M6Bx51	IL140-M6BSx51	100	M6	1/2	1-1/2	51	1-5/16
IL140-M8Bx38	IL140-M8BSx38	500	M8	1/2	1-1/2	38	1-5/16
IL140-M8Bx51	IL140-M8BSx51	500	M8	1/2	1-1/2	51	1-5/16
IL140-M8Bx62	IL140-M8BSx62	500	M8	1/2	1-1/2	62	1-5/16
IL140-M10Bx38	IL140-M10BSx38	1000	M10	1/2	1-1/2	38	1-5/16
IL140-M10Bx51	IL140-M10BSx51	1000	M10	1/2	1-1/2	51	1-5/16
IL140-M10Bx62	IL140-M10BSx62	1000	M10	1/2	1-1/2	62	1-5/16
IL140-M12Bx38	IL140-M12BSx38	2000	M12	1/2	1-1/2	38	1-5/16
IL140-M12Bx51	IL140-M12BSx51	2000	M12	1/2	1-1/2	51	1-5/16
IL140-M12Bx75	IL140-M12BSx75	2000	M12	1/2	1-1/2	75	1-5/16
IL140-M12Bx102	IL140-M12BSx102	2000	M12	1/2	1-1/2	102	1-5/16
IL140-M16Bx51	IL140-M16BSx51	2500	M16	5/8	1-1/2	51	1-5/16
IL140-M16Bx90-BR	IL140-M16BSx90-BR	2500	M16	5/8	1-1/2	90	1-5/16
IL140-M16Bx102	IL140-M16BSx102	2500	M16	5/8	1-1/2	102	1-5/16
IL140-M16Bx115-BR	IL140-M16BSx115-BR	2500	M16	5/8	1-1/2	115	1-5/16

METRIC (Double High Profile) POLY FIXED STUD LEVELERS

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Double High Profile Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL141-DHP-M6Bx25	IL141-DHP-M6BSx25	100	M6	1/2	2	25	2-5/16
IL141-DHP-M6Bx38	IL141-DHP-M6BSx38	100	M6	1/2	2	38	2-5/16
IL141-DHP-M6Bx51	IL141-DHP-M6BSx51	100	M6	1/2	2	51	2-5/16
IL141-DHP-M8Bx38	IL141-DHP-M8BSx38	500	M8	1/2	2	38	2-5/16
IL141-DHP-M8Bx51	IL141-DHP-M8BSx51	500	M8	1/2	2	51	2-5/16
IL141-DHP-M8Bx62	IL141-DHP-M8BSx62	500	M8	1/2	2	62	2-5/16
IL141-DHP-M10Bx38	IL141-DHP-M10BSx38S	1000	M10	1/2	2	38	2-5/16
IL141-DHP-M10Bx51	IL141-DHP-M10BSx51S	1000	M10	1/2	2	51	2-5/16
IL141-DHP-M10Bx62	IL141-DHP-M10BSx62S	1000	M10	1/2	2	62	2-5/16
IL141-DHP-M12Bx38	IL141-DHP-M12BSx38	2000	M12	1/2	2	38	2-5/16
IL141-DHP-M12Bx51	IL141-DHP-M12BSx51	2000	M12	1/2	2	51	2-5/16
IL141-DHP-M12Bx75	IL141-DHP-M12BSx75	2000	M12	1/2	2	75	2-5/16
IL141-DHP-M12Bx102	IL141-DHP-M12BSx102	2000	M12	1/2	2	102	2-5/16
IL141-DHP-M16Bx51	IL141-DHP-M16BSx51	2500	M16	5/8	2	51	2-5/16
IL141-DHP-M16Bx90-BR	IL141-DHP-M16BSx90-BR	2500	M16	5/8	2	90	2-5/16
IL141-DHP-M16Bx102	IL141-DHP-M16BSx102	2500	M16	5/8	2	102	2-5/16
IL141-DHP-M16Bx115-BR	IL141-DHP-M16BSx115-BR	2500	M16	5/8	2	115	2-5/16



HI-PRO® & DOUBLE HIGH PROFILE POLY BASE FIXED SOCKET METRIC GLIDES


The IEC *Hi-Profile & Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Metric Glide* features metric threads and IEC's *Ridge-Grip®* design and is ideal for light and medium-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Zinc plated steel socket and black polypropylene base, 1" and 2" thick. Two base sizes to choose from (1-1/2" to 2").

Features

- High-profile base
- Ridge-Grip® design
- Loads to 3000 lbs
- Steel and Stainless studs
- Corrosion resistant
- RoHS compliant

Applications

- Kitchen Equipment
- Displays
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic equipment
- Medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables



MEDIUM-DUTY METRIC
HI-PRO® & DOUBLE HI-PRO®
POLY FIXED SOCKET-METRIC GLIDES
1-1/2" to 2" BASE DIAMETER



Steel	SS	Load	Thread	Hex	A	B	C	F
High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL140-M6B-T	IL140-M6BS-T	100	M6x1.0	1/2	1-1/2	1/4	1-5/16	1/4
IL140-M8B-T	IL140-M8BS-T	500	M8x1.25	1/2	1-1/2	3/8	1-7/16	1/4
IL140-M10B-T	IL140-M10BS-T	1000	M10x1.5	1/2	1-1/2	1/2	1-9/16	3/8
IL140-M12B-T	IL140-M12BS-T	2000	M12x1.75	1/2	1-1/2	1/2	1-9/16	3/8
IL140-M16B-T	IL140-M16BS-T	2500	M16x2.0	5/8	1-1/2	5/8	1-11/16	1/2
IL140-M20B-T	IL140-M20BS-T	3000	M20x2.5	3/4	1-1/2	3/4	1-13/16	5/8

Steel	SS	Load	Thread	Hex	A	B	C	F
Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL140-DHP-M6B-T	IL140-DHP-M6BS-T	100	M6x1.0	1/2	1-1/2	1/4	2-5/16	1/4
IL140-DHP-M8B-T	IL140-DHP-M8BS-T	500	M8x1.25	1/2	1-1/2	3/8	2-7/16	1/4
IL140-DHP-M10B-T	IL140-DHP-M10BS-T	1000	M10x1.5	1/2	1-1/2	1/2	2-9/16	3/8
IL140-DHP-M12B-T	IL140-DHP-M12BS-T	2000	M12x1.75	1/2	1-1/2	1/2	2-9/16	3/8
IL140-DHP-M16B-T	IL140-DHP-M16BS-T	2500	M16x2.0	5/8	1-1/2	5/8	2-11/16	1/2
IL140-DHP-M20B-T	IL140-DHP-M20BS-T	3000	M20x2.5	3/4	1-1/2	3/4	2-13/16	5/8


Steel	SS	Load	Thread	Hex	A	B	C	F
High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL141-M6B-T	IL141-M6BS-T	100	M6x1.0	1/2	2	1/4	1-5/16	1/4
IL141-M8B-T	IL141-M8BS-T	500	M8x1.25	1/2	2	3/8	1-7/16	3/8
IL141-M10B-T	IL141-M10BS-T	1000	M10x1.5	1/2	2	1/2	1-9/16	3/8
IL141-M12B-T	IL141-M12BS-T	2000	M12x1.75	1/2	2	1/2	1-9/16	1/2
IL141-M16B-T	IL141-M16BS-T	2500	M16x2.0	5/8	2	5/8	1-11/16	5/8
IL141-M20B-T	IL141-M20BS-T	3000	M20x2.5	3/4	2	3/4	1-13/16	

Steel	SS	Load	Thread	Hex	A	B	C	F
Double High Profile Steel and Stainless Steel Poly Base Fixed Socket Glides								
IL141-DHP-M6B-T	IL141-DHP-M6BS-T	100	M6x1.0	1/2	2	1/4	2-5/16	1/4
IL141-DHP-M8B-T	IL141-DHP-M8BS-T	500	M8x1.25	1/2	2	3/8	2-7/16	1/4
IL141-DHP-M10B-T	IL141-DHP-M10BS-T	1000	M10x1.5	1/2	2	1/2	2-9/16	3/8
IL141-DHP-M12B-T	IL141-DHP-M12BS-T	2000	M12x1.75	1/2	2	1/2	2-9/16	3/8
IL141-DHP-M16B-T	IL141-DHP-M16BS-T	2500	M16x2.0	5/8	2	5/8	2-11/16	1/2
IL141-DHP-M20B-T	IL141-DHP-M20BS-T	3000	M20x2.5	3/4	2	3/4	2-13/16	5/8



LOW PROFILE METRIC POLY SWIVEL SOCKET LEVELERS

The IEC Poly Base Steel and Stainless Steel Swivel Socket Leveler is ideal for medium-duty load requirements. Nylon bases 1" to 4" with 15 degree swivel from centerline. Steel Socket has trivalent zinc, yellow chromate finish.



Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- RoHS compliant

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



Nut Height: "G" = 1/2", 5/8", 11/16", 3/4"
for Threads: M12, M16, M20, M24

Nut Height: "G" = 3/16"
for Threads: M6, M8, M10

LOW PROFILE METRIC POLY SWIVEL — SOCKET LEVELERS

Steel	Stainless	Load	A	B	C	D	F	G
IL51-M6G	IL51-M6S	100	M6X1	1/2	5/8	1	3/8	3/16
IL51-M8G	IL51-M8S	500	M8X1.25	1/2	5/8	1	3/8	3/16
IL51-M10G	IL51-M10S	1000	M10X1.50	1/2	5/8	1	3/8	3/16
IL51-M12G	IL51-M12S	2000	M12X1.75	5/8	15/16	1	3/8	1/2
IL51-M16G	IL51-M16S	3000	M16X2.00	3/4	1-1/8	1	1/2	5/8
IL51-M20G	IL51-M20S	3000	M20X2.50	1	1-3/16	1	9/16	11/16
IL51-M24G	IL51-M24S	3000	M24X3.00	1-1/4	1-1/4	1	5/8	3/4
IL53-M6G	IL53-M6S	100	M6X1	1/2	5/8	1 1/2	3/8	3/16
IL53-M8G	IL53-M8S	500	M8X1.25	1/2	5/8	1 1/2	3/8	3/16
IL53-M10G	IL53-M10S	1000	M10X1.50	1/2	5/8	1 1/2	3/8	3/16
IL53-M12G	IL53-M12S	2000	M12X1.75	5/8	15/16	1 1/2	3/8	1/2
IL53-M16G	IL53-M16S	3000	M16X2.00	3/4	1-1/8	1 1/2	1/2	5/8
IL53-M20G	IL53-M20S	3000	M20X2.50	1	1-3/16	1 1/2	9/16	11/16
IL53-M24G	IL53-M24S	3000	M24X3.00	1-1/4	1-1/4	1 1/2	5/8	3/4
IL55-M6G	IL55-M6S	100	M6X1	1/2	5/8	2	3/8	3/16
IL55-M8G	IL55-M8S	500	M8X1.25	1/2	5/8	2	3/8	3/16
IL55-M10G	IL55-M10S	1000	M10X1.50	1/2	5/8	2	3/8	3/16
IL55-M12G	IL55-M12S	2000	M12X1.75	5/8	15/16	2	3/8	1/2
IL55-M16G	IL55-M16S	3000	M16X2.00	3/4	1-1/8	2	1/2	5/8
IL55-M20G	IL55-M20S	3000	M20X2.50	1	1-3/16	2	9/16	11/16
IL55-M24G	IL55-M24S	3000	M24X3.00	1-1/4	1-1/4	2	5/8	3/4
IL57-M6G	IL57-M6S	100	M6X1	1/2	5/8	3	3/8	3/16
IL57-M8G	IL57-M8S	500	M8X1.25	1/2	5/8	3	3/8	3/16
IL57-M10G	IL57-M10S	1000	M10X1.50	1/2	5/8	3	3/8	3/16
IL57-M12G	IL57-M12S	2000	M12X1.75	5/8	15/16	3	3/8	1/2
IL57-M16G	IL57-M16S	3000	M16X2.00	3/4	1-1/8	3	1/2	5/8
IL57-M20G	IL57-M20S	3000	M20X2.50	1	1-3/16	3	9/16	11/16
IL57-M24G	IL57-M24S	3000	M24X3.00	1-1/4	1-1/4	3	5/8	3/4
IL59-M6G	IL59-M6S	100	M6X1	1/2	5/8	4	3/8	3/16
IL59-M8G	IL59-M8S	500	M8X1.25	1/2	5/8	4	3/8	3/16
IL59-M10G	IL59-M10S	1000	M10X1.50	1/2	5/8	4	3/8	3/16
IL59-M12G	IL59-M12S	2000	M12X1.75	5/8	15/16	4	3/8	1/2
IL59-M16G	IL59-M16S	3000	M16X2.00	3/4	1-1/8	4	1/2	5/8
IL59-M20G	IL59-M20S	3000	M20X2.50	1	1-3/16	4	9/16	11/16
IL59-M24G	IL59-M24S	3000	M24X3.00	1-1/4	1-1/4	4	5/8	3/4



LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS



The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- M6 & M8 available in 1" (25mm) length
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 1 & 2" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M6Gx1	IL50-M6Sx1	100	M6X1	1/2	3/4	1	1-3/4	1	3/16
IL50-M8Gx1	IL50-M8Sx1	500	M8X1.25	1/2	3/4	1	1-3/4	1	3/16
IL50-M6G	IL50-M6S	100	M6X1	1/2	3/4	1	2-3/4	2	3/16
IL50-M8G	IL50-M8S	500	M8X1.25	1/2	3/4	1	2-3/4	2	3/16
IL50-M10G	IL50-M10S	1000	M10X1.50	1/2	3/4	1	2-3/4	2	3/16
IL50-M12G	IL50-M12S	2000	M12X1.75	1/2	3/4	1	2-3/4	2	3/16
IL50-M16G	IL50-M16S	3000	M16X2.00	5/8	3/4	1	2-3/4	2	3/16
IL50-M20G	IL50-M20S	3000	M20X2.50	3/4	3/4	1	2-3/4	2	3/16
IL50-M24G	IL50-M24S	3000	M24X3.00	1	1	1	3	2	1/2
IL52-M6Gx1	IL52-M6Sx1	100	M6X1	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-M8Gx1	IL52-M8Sx1	500	M8X1.25	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-M6G	IL52-M6S	100	M6X1	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M8G	IL52-M8S	500	M8X1.25	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M10G	IL52-M10S	1000	M10X1.50	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M12G	IL52-M12S	2000	M12X1.75	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-M16G	IL52-M16S	3000	M16X2.00	5/8	3/4	1-1/2	2-3/4	2	3/16
IL52-M20G	IL52-M20S	3000	M20X2.50	3/4	3/4	1-1/2	2-3/4	2	3/16
IL52-M24G	IL52-M24S	3000	M24X3.00	1	1	1-1/2	3	2	1/2
IL54-M6Gx1	IL54-M6Sx1	100	M6X1	1/2	3/4	2	1-3/4	1	3/16
IL54-M8Gx1	IL54-M8Sx1	500	M8X1.25	1/2	3/4	2	1-3/4	1	3/16
IL54-M6G	IL54-M6S	100	M6X1	1/2	3/4	2	2-3/4	2	3/16
IL54-M8G	IL54-M8S	500	M8X1.25	1/2	3/4	2	2-3/4	2	3/16
IL54-M10G	IL54-M10S	1000	M10X1.50	1/2	3/4	2	2-3/4	2	3/16
IL54-M12G	IL54-M12S	2000	M12X1.75	1/2	3/4	2	2-3/4	2	3/16
IL54-M16G	IL54-M16S	3000	M16X2.00	5/8	3/4	2	2-3/4	2	3/16
IL54-M20G	IL54-M20S	3000	M20X2.50	3/4	3/4	2	2-3/4	2	3/16
IL54-M24G	IL54-M24S	3000	M24X3.00	1	1	2	3	2	1/2
IL56-M6Gx1	IL56-M6Sx1	100	M6X1	1/2	3/4	3	1-3/4	1	3/16
IL56-M8Gx1	IL56-M8Sx1	500	M8X1.25	1/2	3/4	3	1-3/4	1	3/16
IL56-M6G	IL56-M6S	100	M6X1	1/2	3/4	3	2-3/4	2	3/16
IL56-M8G	IL56-M8S	500	M8X1.25	1/2	3/4	3	2-3/4	2	3/16
IL56-M10G	IL56-M10S	1000	M10X1.50	1/2	3/4	3	2-3/4	2	3/16
IL56-M12G	IL56-M12S	2000	M12X1.75	1/2	3/4	3	2-3/4	2	3/16
IL56-M16G	IL56-M16S	3000	M16X2.00	5/8	3/4	3	2-3/4	2	3/16
IL56-M20G	IL56-M20S	3000	M20X2.50	3/4	3/4	3	2-3/4	2	3/16
IL56-M24G	IL56-M24S	3000	M24X3.00	1	1	3	3	2	1/2
IL58-M6Gx1	IL58-M6Sx1	100	M6X1	1/2	3/4	4	1-3/4	1	3/16
IL58-M8Gx1	IL58-M8Sx1	500	M8X1.25	1/2	3/4	4	1-3/4	1	3/16
IL58-M6G	IL58-M6S	100	M6X1	1/2	3/4	4	2-3/4	2	3/16
IL58-M8G	IL58-M8S	500	M8X1.25	1/2	3/4	4	2-3/4	2	3/16
IL58-M10G	IL58-M10S	1000	M10X1.50	1/2	3/4	4	2-3/4	2	3/16
IL58-M12G	IL58-M12S	2000	M12X1.75	1/2	3/4	4	2-3/4	2	3/16
IL58-M16G	IL58-M16S	3000	M16X2.00	5/8	3/4	4	2-3/4	2	3/16
IL58-M20G	IL58-M20S	3000	M20X2.50	3/4	3/4	4	2-3/4	2	3/16
IL58-M24G	IL58-M24S	3000	M24X3.00	1	1	4	3	2	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS



The IEC *Poly Base Steel and Stainless Steel Swivel Stud Leveler* is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 3" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M6Gx3	IL50-M6Sx3	100	M6X1	1/2	3/4	1	3-3/4	3	3/16
IL50-M8Gx3	IL50-M8Sx3	500	M8X1.25	1/2	3/4	1	3-3/4	3	3/16
IL50-M10Gx3	IL50-M10Sx3	1000	M10X1.50	1/2	3/4	1	3-3/4	3	3/16
IL50-M12Gx3	IL50-M12Sx3	2000	M12X1.75	1/2	3/4	1	3-3/4	3	3/16
IL50-M16Gx3	IL50-M16Sx3	3000	M16X2.00	5/8	3/4	1	3-3/4	3	3/16
IL50-M20Gx3	IL50-M20Sx3	3000	M20X2.50	3/4	3/4	1	3-3/4	3	3/16
IL50-M24Gx3	IL50-M24Sx3	3000	M24X3.00	1	1	1	4	3	1/2
IL52-M6Gx3	IL52-M6Sx3	100	M6X1	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M8Gx3	IL52-M8Sx3	500	M8X1.25	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M10Gx3	IL52-M10Sx3	1000	M10X1.50	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M12Gx3	IL52-M12Sx3	2000	M12X1.75	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-M16Gx3	IL52-M16Sx3	3000	M16X2.00	5/8	3/4	1-1/2	3-3/4	3	3/16
IL52-M20Gx3	IL52-M20Sx3	3000	M20X2.50	3/4	3/4	1-1/2	3-3/4	3	3/16
IL52-M24Gx3	IL52-M24Sx3	3000	M24X3.00	1	1	1-1/2	4	3	1/2
IL54-M6Gx3	IL54-M6Sx3	100	M6X1	1/2	3/4	2	3-3/4	3	3/16
IL54-M8Gx3	IL54-M8Sx3	500	M8X1.25	1/2	3/4	2	3-3/4	3	3/16
IL54-M10Gx3	IL54-M10Sx3	1000	M10X1.50	1/2	3/4	2	3-3/4	3	3/16
IL54-M12Gx3	IL54-M12Sx3	2000	M12X1.75	1/2	3/4	2	3-3/4	3	3/16
IL54-M16Gx3	IL54-M16Sx3	3000	M16X2.00	5/8	3/4	2	3-3/4	3	3/16
IL54-M20Gx3	IL54-M20Sx3	3000	M20X2.50	3/4	3/4	2	3-3/4	3	3/16
IL54-M24Gx3	IL54-M24Sx3	3000	M24X3.00	1	1	2	4	3	1/2
IL56-M6Gx3	IL56-M6Sx3	100	M6X1	1/2	3/4	3	3-3/4	3	3/16
IL56-M8Gx3	IL56-M8Sx3	500	M8X1.25	1/2	3/4	3	3-3/4	3	3/16
IL56-M10Gx3	IL56-M10Sx3	1000	M10X1.50	1/2	3/4	3	3-3/4	3	3/16
IL56-M12Gx3	IL56-M12Sx3	2000	M12X1.75	1/2	3/4	3	3-3/4	3	3/16
IL56-M16Gx3	IL56-M16Sx3	3000	M16X2.00	5/8	3/4	3	3-3/4	3	3/16
IL56-M20Gx3	IL56-M20Sx3	3000	M20X2.50	3/4	3/4	3	3-3/4	3	3/16
IL56-M24Gx3	IL56-M24Sx3	3000	M24X3.00	1	1	3	4	3	1/2
IL58-M6Gx3	IL58-M6Sx3	100	M6X1	1/2	3/4	4	3-3/4	3	3/16
IL58-M8Gx3	IL58-M8Sx3	500	M8X1.25	1/2	3/4	4	3-3/4	3	3/16
IL58-M10Gx3	IL58-M10Sx3	1000	M10X1.50	1/2	3/4	4	3-3/4	3	3/16
IL58-M12Gx3	IL58-M12Sx3	2000	M12X1.75	1/2	3/4	4	3-3/4	3	3/16
IL58-M16Gx3	IL58-M16Sx3	3000	M16X2.00	5/8	3/4	4	3-3/4	3	3/16
IL58-M20Gx3	IL58-M20Sx3	3000	M20X2.50	3/4	3/4	4	3-3/4	3	3/16
IL58-M24Gx3	IL58-M24Sx3	3000	M24X3.00	1	1	4	4	3	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 4" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M8Gx4	IL50-M8Sx4	500	M8X1.25	1/2	3/4	1	4-3/4	4	3/16
IL50-M10Gx4	IL50-M10Sx4	1000	M10X1.50	1/2	3/4	1	4-3/4	4	3/16
IL50-M12Gx4	IL50-M12Sx4	2000	M12X1.75	1/2	3/4	1	4-3/4	4	3/16
IL50-M16Gx4	IL50-M16Sx4	3000	M16X2.00	5/8	3/4	1	4-3/4	4	3/16
IL50-M20Gx4	IL50-M20Sx4	3000	M20X2.50	3/4	3/4	1	4-3/4	4	3/16
IL50-M24Gx4	IL50-M24Sx4	3000	M24X3.00	1	1	1	5	4	1/2
IL52-M8Gx4	IL52-M8Sx4	500	M8X1.25	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M10Gx4	IL52-M10Sx4	1000	M10X1.50	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M12Gx4	IL52-M12Sx4	2000	M12X1.75	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-M16Gx4	IL52-M16Sx4	3000	M16X2.00	5/8	3/4	1-1/2	4-3/4	4	3/16
IL52-M20Gx4	IL52-M20Sx4	3000	M20X2.50	3/4	3/4	1-1/2	4-3/4	4	3/16
IL52-M24Gx4	IL52-M24Sx4	3000	M24X3.00	1	1	1-1/2	5	4	1/2
IL54-M8Gx4	IL54-M8Sx4	500	M8X1.25	1/2	3/4	2	4-3/4	4	3/16
IL54-M10Gx4	IL54-M10Sx4	1000	M10X1.50	1/2	3/4	2	4-3/4	4	3/16
IL54-M12Gx4	IL54-M12Sx4	2000	M12X1.75	1/2	3/4	2	4-3/4	4	3/16
IL54-M16Gx4	IL54-M16Sx4	3000	M16X2.00	5/8	3/4	2	4-3/4	4	3/16
IL54-M20Gx4	IL54-M20Sx4	3000	M20X2.50	3/4	3/4	2	4-3/4	4	3/16
IL54-M24Gx4	IL54-M24Sx4	3000	M24X3.00	1	1	2	5	4	1/2
IL56-M8Gx4	IL56-M8Sx4	500	M8X1.25	1/2	3/4	3	4-3/4	4	3/16
IL56-M10Gx4	IL56-M10Sx4	1000	M10X1.50	1/2	3/4	3	4-3/4	4	3/16
IL56-M12Gx4	IL56-M12Sx4	2000	M12X1.75	1/2	3/4	3	4-3/4	4	3/16
IL56-M16Gx4	IL56-M16Sx4	3000	M16X2.00	5/8	3/4	3	4-3/4	4	3/16
IL56-M20Gx4	IL56-M20Sx4	3000	M20X2.50	3/4	3/4	3	4-3/4	4	3/16
IL56-M24Gx4	IL56-M24Sx4	3000	M24X3.00	1	1	3	5	4	1/2
IL58-M8Gx4	IL58-M8Sx4	500	M8X1.25	1/2	3/4	4	4-3/4	4	3/16
IL58-M10Gx4	IL58-M10Sx4	1000	M10X1.50	1/2	3/4	4	4-3/4	4	3/16
IL58-M12Gx4	IL58-M12Sx4	2000	M12X1.75	1/2	3/4	4	4-3/4	4	3/16
IL58-M16Gx4	IL58-M16Sx4	3000	M16X2.00	5/8	3/4	4	4-3/4	4	3/16
IL58-M20Gx4	IL58-M20Sx4	3000	M20X2.50	3/4	3/4	4	4-3/4	4	3/16
IL58-M24Gx4	IL58-M24Sx4	3000	M24X3.00	1	1	4	5	4	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 5" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M10Gx5	IL50-M10Sx5	1000	M10X1.50	1/2	3/4	1	5-3/4	5	3/16
IL50-M12Gx5	IL50-M12Sx5	2000	M12X1.75	1/2	3/4	1	5-3/4	5	3/16
IL50-M16Gx5	IL50-M16Sx5	3000	M16X2.00	5/8	3/4	1	5-3/4	5	3/16
IL50-M20Gx5	IL50-M20Sx5	3000	M20X2.50	3/4	3/4	1	5-3/4	5	3/16
IL50-M24Gx5	IL50-M24Sx5	3000	M24X3.00	1	1	1	6	5	1/2
IL52-M10Gx5	IL52-M10Sx5	1000	M10X1.50	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-M12Gx5	IL52-M12Sx5	2000	M12X1.75	1/2	3/4	1-1/2	5-3/4	5	3/16
IL52-M16Gx5	IL52-M16Sx5	3000	M16X2.00	5/8	3/4	1-1/2	5-3/4	5	3/16
IL52-M20Gx5	IL52-M20Sx5	3000	M20X2.50	3/4	3/4	1-1/2	5-3/4	5	3/16
IL52-M24Gx5	IL52-M24Sx5	3000	M24X3.00	1	1	1-1/2	6	5	1/2
IL54-M10Gx5	IL54-M10Sx5	1000	M10X1.50	1/2	3/4	2	5-3/4	5	3/16
IL54-M12Gx5	IL54-M12Sx5	2000	M12X1.75	1/2	3/4	2	5-3/4	5	3/16
IL54-M16Gx5	IL54-M16Sx5	3000	M16X2.00	5/8	3/4	2	5-3/4	5	3/16
IL54-M20Gx5	IL54-M20Sx5	3000	M20X2.50	3/4	3/4	2	5-3/4	5	3/16
IL54-M24Gx5	IL54-M24Sx5	3000	M24X3.00	1	1	2	6	5	1/2
IL56-M10Gx5	IL56-M10Sx5	1000	M10X1.50	1/2	3/4	3	5-3/4	5	3/16
IL56-M12Gx5	IL56-M12Sx5	2000	M12X1.75	1/2	3/4	3	5-3/4	5	3/16
IL56-M16Gx5	IL56-M16Sx5	3000	M16X2.00	5/8	3/4	3	5-3/4	5	3/16
IL56-M20Gx5	IL56-M20Sx5	3000	M20X2.50	3/4	3/4	3	5-3/4	5	3/16
IL56-M24Gx5	IL56-M24Sx5	3000	M24X3.00	1	1	3	6	5	1/2
IL58-M10Gx5	IL58-M10Sx5	1000	M10X1.50	1/2	3/4	4	5-3/4	5	3/16
IL58-M12Gx5	IL58-M12Sx5	2000	M12X1.75	1/2	3/4	4	5-3/4	5	3/16
IL58-M16Gx5	IL58-M16Sx5	3000	M16X2.00	5/8	3/4	4	5-3/4	5	3/16
IL58-M20Gx5	IL58-M20Sx5	3000	M20X2.50	3/4	3/4	4	5-3/4	5	3/16
IL58-M24Gx5	IL58-M24Sx5	3000	M24X3.00	1	1	4	6	5	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 6" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M10Gx6	IL50-M10Sx6	1000	M10X1.50	1/2	3/4	1	6-3/4	6	3/16
IL50-M12Gx6	IL50-M12Sx6	2000	M12X1.75	1/2	3/4	1	6-3/4	6	3/16
IL50-M16Gx6	IL50-M16Sx6	3000	M16X2.00	5/8	3/4	1	6-3/4	6	3/16
IL50-M20Gx6	IL50-M20Sx6	3000	M20X2.50	3/4	3/4	1	6-3/4	6	3/16
IL50-M24Gx6	IL50-M24Sx6	3000	M24X3.00	1	1	1	7	6	1/2
IL52-M10Gx6	IL52-M10Sx6	1000	M10X1.50	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-M12Gx6	IL52-M12Sx6	2000	M12X1.75	1/2	3/4	1-1/2	6-3/4	6	3/16
IL52-M16Gx6	IL52-M16Sx6	3000	M16X2.00	5/8	3/4	1-1/2	6-3/4	6	3/16
IL52-M20Gx6	IL52-M20Sx6	3000	M20X2.50	3/4	3/4	1-1/2	6-3/4	6	3/16
IL52-M24Gx6	IL52-M24Sx6	3000	M24X3.00	1	1	1-1/2	7	6	1/2
IL54-M10Gx6	IL54-M10Sx6	1000	M10X1.50	1/2	3/4	2	6-3/4	6	3/16
IL54-M12Gx6	IL54-M12Sx6	2000	M12X1.75	1/2	3/4	2	6-3/4	6	3/16
IL54-M16Gx6	IL54-M16Sx6	3000	M16X2.00	5/8	3/4	2	6-3/4	6	3/16
IL54-M20Gx6	IL54-M20Sx6	3000	M20X2.50	3/4	3/4	2	6-3/4	6	3/16
IL54-M24Gx6	IL54-M24Sx6	3000	M24X3.00	1	1	2	7	6	1/2
IL56-M10Gx6	IL56-M10Sx6	1000	M10X1.50	1/2	3/4	3	6-3/4	6	3/16
IL56-M12Gx6	IL56-M12Sx6	2000	M12X1.75	1/2	3/4	3	6-3/4	6	3/16
IL56-M16Gx6	IL56-M16Sx6	3000	M16X2.00	5/8	3/4	3	6-3/4	6	3/16
IL56-M20Gx6	IL56-M20Sx6	3000	M20X2.50	3/4	3/4	3	6-3/4	6	3/16
IL56-M24Gx6	IL56-M24Sx6	3000	M24X3.00	1	1	3	7	6	1/2
IL58-M10Gx6	IL58-M10Sx6	1000	M10X1.50	1/2	3/4	4	6-3/4	6	3/16
IL58-M12Gx6	IL58-M12Sx6	2000	M12X1.75	1/2	3/4	4	6-3/4	6	3/16
IL58-M16Gx6	IL58-M16Sx6	3000	M16X2.00	5/8	3/4	4	6-3/4	6	3/16
IL58-M20Gx6	IL58-M20Sx6	3000	M20X2.50	3/4	3/4	4	6-3/4	6	3/16
IL58-M24Gx6	IL58-M24Sx6	3000	M24X3.00	1	1	4	7	6	1/2

To order optional top broached hex, "allen drive," add "-BR".

Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



LOW-PROFILE METRIC POLY SWIVEL STUD LEVELERS



The IEC Poly Base Steel and Stainless Steel Swivel Stud Leveler is ideal for medium-duty load requirements. Nylon bases from 1" to 4" with 15 degree swivel from centerline. Steel Stud has trivalent zinc, yellow chromate finish.

Features

- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Loads to 3,000 lbs.
- Supplied with jam nut
- RoHS compliant
- Optional Top-A-Just™ shown to right (add "-BR" to P/N)

Applications

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks



LOW PROFILE METRIC POLY SWIVEL — 8" STUD LENGTHS

Steel	Stainless	Load	A	B	C	D	E	F	G
IL50-M12Gx8	IL50-M12Sx8	2000	M12X1.75	1/2	3/4	1	8-3/4	8	3/16
IL50-M16Gx8	IL50-M16Sx8	3000	M16X2.00	5/8	3/4	1	8-3/4	8	3/16
IL50-M20Gx8	IL50-M20Sx8	3000	M20X2.50	3/4	3/4	1	8-3/4	8	3/16
IL50-M24Gx8	IL50-M24Sx8	3000	M24X3.00	1	1	1	9	8	1/2
IL52-M12Gx8	IL52-M12Sx8	2000	M12X1.75	1/2	3/4	1-1/2	8-3/4	8	3/16
IL52-M16Gx8	IL52-M16Sx8	3000	M16X2.00	5/8	3/4	1-1/2	8-3/4	8	3/16
IL52-M20Gx8	IL52-M20Sx8	3000	M20X2.50	3/4	3/4	1-1/2	8-3/4	8	3/16
IL52-M24Gx8	IL52-M24Sx8	3000	M24X3.00	1	1	1-1/2	9	8	1/2
IL54-M12Gx8	IL54-M12Sx8	2000	M12X1.75	1/2	3/4	2	8-3/4	8	3/16
IL54-M16Gx8	IL54-M16Sx8	3000	M16X2.00	5/8	3/4	2	8-3/4	8	3/16
IL54-M20Gx8	IL54-M20Sx8	3000	M20X2.50	3/4	3/4	2	8-3/4	8	3/16
IL54-M24Gx8	IL54-M24Sx8	3000	M24X3.00	1	1	2	9	8	1/2
IL56-M12Gx8	IL56-M12Sx8	2000	M12X1.75	1/2	3/4	3	8-3/4	8	3/16
IL56-M16Gx8	IL56-M16Sx8	3000	M16X2.00	5/8	3/4	3	8-3/4	8	3/16
IL56-M20Gx8	IL56-M20Sx8	3000	M20X2.50	3/4	3/4	3	8-3/4	8	3/16
IL56-M24Gx8	IL56-M24Sx8	3000	M24X3.00	1	1	3	9	8	1/2
IL58-M12Gx8	IL58-M12Sx8	2000	M12X1.75	1/2	3/4	4	8-3/4	8	3/16
IL58-M16Gx8	IL58-M16Sx8	3000	M16X2.00	5/8	3/4	4	8-3/4	8	3/16
IL58-M20Gx8	IL58-M20Sx8	3000	M20X2.50	3/4	3/4	4	8-3/4	8	3/16
IL58-M24Gx8	IL58-M24Sx8	3000	M24X3.00	1	1	4	9	8	1/2

To order optional top broached hex, "allen drive," add "-BR".





Top Hex (Allen-drive) Thread & Hex Size							
Thread	M6X1	M8X1.25	M10X1.50	M12X1.75	M16X2.00	M20X2.50	M24X3.00
Hex Size	3mm	4mm	5mm	6mm	8mm	10mm	12mm



METRIC POLY BASE FIXED SOCKET LEVELING GLIDES

The IEC *Metric Poly Base Steel and Stainless Steel Fixed Socket Glide* is ideal for medium-duty load requirements. A cost-effective socket glide suitable for applications not requiring a swivel base. Features a black polypropylene base and large adjustment hex nut.

Also available with non-skid, non-marring rubber pad.

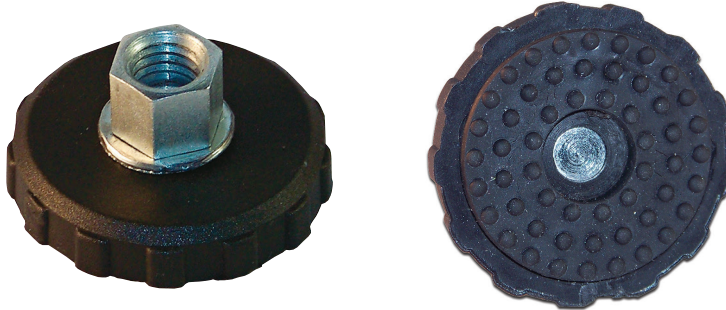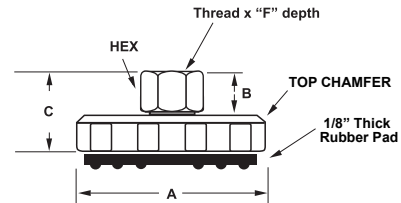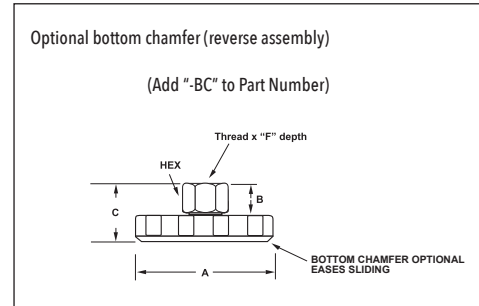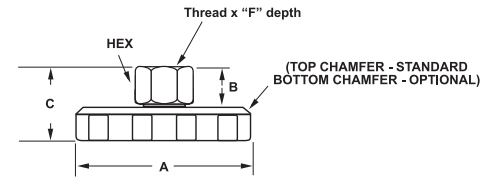

Rubber Pad Bottom View

LOW PROFILE POLY FIXED — METRIC SOCKET LEVELERS

Steel	Steel w/Rubber Pad	Stainless	Stainless w/Rubber Pad	Load	Thread	Hex	A	B	C	F
IL7-M6B-T	IL7-M6B-T-P	IL7-M6BS-T	IL7-M6BS-T-P	100	M6x1	1/2	1	1/4	5/8	1/4
IL7-M8B-T	IL7-M8B-T-P	IL7-M8BS-T	IL7-M8BS-T-P	500	M8x1.25	1/2	1	3/8	3/4	1/4
IL7-M10B-T	IL7-M10B-T-P	IL7-M10BS-T	IL7-M10BS-T-P	1000	M10x1.50	1/2	1	1/2	7/8	3/8
IL7-M12B-T	IL7-M12B-T-P	IL7-M12BS-T	IL7-M12BS-T-P	2000	M12x1.75	5/8	1	1/2	7/8	3/8
IL7-M16B-T	IL7-M16B-T-P	IL7-M16BS-T	IL7-M16BS-T-P	3000	M16x2.00	3/4	1	5/8	1	1/2
IL7-M20B-T	IL7-M20B-T-P	IL7-M20BS-T	IL7-M20BS-T-P	3000	M20x3.00	1	1	3/4	1-1/8	5/8
IL8-M6B-T	IL8-M6B-T-P	IL8-M6BS-T	IL8-M6BS-T-P	100	M6x1	1/2	1-1/2	1/4	5/8	1/4
IL8-M8B-T	IL8-M8B-T-P	IL8-M8BS-T	IL8-M8BS-T-P	500	M8x1.25	1/2	1-1/2	3/8	3/4	1/4
IL8-M10B-T	IL8-M10B-T-P	IL8-M10BS-T	IL8-M10BS-T-P	1000	M10x1.50	1/2	1-1/2	1/2	7/8	3/8
IL8-M12B-T	IL8-M12B-T-P	IL8-M12BS-T	IL8-M12BS-T-P	2000	M12x1.75	5/8	1-1/2	1/2	7/8	3/8
IL8-M16B-T	IL8-M16B-T-P	IL8-M16BS-T	IL8-M16BS-T-P	3000	M16x2.00	3/4	1-1/2	5/8	1	1/2
IL8-M20B-T	IL8-M20B-T-P	IL8-M20BS-T	IL8-M20BS-T-P	3000	M20x3.00	1	1-1/2	3/4	1-1/8	5/8
IL7A-M6B-T	IL7A-M6B-T-P	IL7A-M6BS-T	IL7A-M6BS-T-P	100	M6x1	1/2	2	1/4	5/8	1/4
IL7A-M8B-T	IL7A-M8B-T-P	IL7A-M8BS-T	IL7A-M8BS-T-P	500	M8x1.25	1/2	2	3/8	3/4	1/4
IL7A-M10B-T	IL7A-M10B-T-P	IL7A-M10BS-T	IL7A-M10BS-T-P	1000	M10x1.50	1/2	2	1/2	7/8	3/8
IL7A-M12B-T	IL7A-M12B-T-P	IL7A-M12BS-T	IL7A-M12BS-T-P	2000	M12x1.75	5/8	2	1/2	7/8	3/8
IL7A-M16B-T	IL7A-M16B-T-P	IL7A-M16BS-T	IL7A-M16BS-T-P	3000	M16x2.00	3/4	2	5/8	1	1/2
IL7A-M20B-T	IL7A-M20B-T-P	IL7A-M20BS-T	IL7A-M20BS-T-P	3000	M20x3.00	1	2	3/4	1-1/8	5/8
IL7M-M6B-T		IL7M-M6BS-T		100	M6x1	1/2	2-1/2	1/4	5/8	1/4
IL7M-M8B-T		IL7M-M8BS-T		500	M8x1.25	1/2	2-1/2	3/8	3/4	1/4
IL7M-M10B-T		IL7M-M10BS-T		1000	M10x1.50	1/2	2-1/2	1/2	7/8	3/8
IL7M-M12B-T		IL7M-M12BS-T		2000	M12x1.75	5/8	2-1/2	1/2	7/8	3/8
IL7M-M16B-T		IL7M-M16BS-T		3000	M16x2.00	3/4	2-1/2	5/8	1	1/2
IL7M-M20B-T		IL7M-M20BS-T		3000	M20x3.00	1	2-1/2	3/4	1-1/8	5/8
IL8A-M6B-T	IL8A-M6B-T-P	IL8A-M6BS-T	IL8A-M6BS-T-P	100	M6x1	1/2	3	1/4	5/8	1/4
IL8A-M8B-T	IL8A-M8B-T-P	IL8A-M8BS-T	IL8A-M8BS-T-P	500	M8x1.25	1/2	3	3/8	3/4	1/4
IL8A-M10B-T	IL8A-M10B-T-P	IL8A-M10BS-T	IL8A-M10BS-T-P	1000	M10x1.50	1/2	3	1/2	7/8	3/8
IL8A-M12B-T	IL8A-M12B-T-P	IL8A-M12BS-T	IL8A-M12BS-T-P	2000	M12x1.75	5/8	3	1/2	7/8	3/8
IL8A-M16B-T	IL8A-M16B-T-P	IL8A-M16BS-T	IL8A-M16BS-T-P	3000	M16x2.00	3/4	3	5/8	1	1/2
IL8A-M20B-T	IL8A-M20B-T-P	IL8A-M20BS-T	IL8A-M20BS-T-P	3000	M20x3.00	1	3	3/4	1-1/8	5/8



METRIC POLY BASE FIXED STUD LEVELING GLIDES


The IEC *Metric Poly Base Steel and Stainless Steel Fixed Stud Glide* offers metric threads and is ideal for medium-duty load requirements. The stud will tilt several degrees under load to adjust for unlevel surfaces. This glide is cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

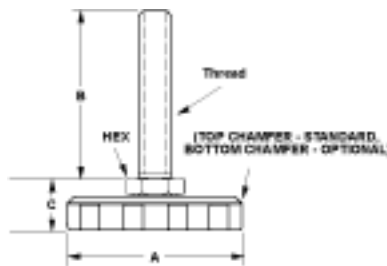

Optional bottom chamfer (reverse assembly) – with 90° top edge

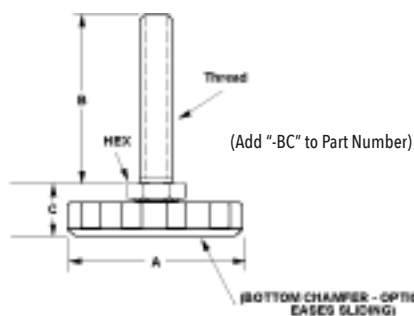

Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7-M6Bx25	IL7-M6BSx25	100	M6	1/2	1	25	11/16
IL7-M6Bx38	IL7-M6BSx38	100	M6	1/2	1	38	11/16
IL7-M6Bx51	IL7-M6BSx51	100	M6	1/2	1	51	11/16
IL7-M8Bx38	IL7-M8BSx38	500	M8	1/2	1	38	11/16
IL7-M8Bx51	IL7-M8BSx51	500	M8	1/2	1	51	11/16
IL7-M8Bx62	IL7-M8BSx62	500	M8	1/2	1	62	11/16
IL7-M10Bx38	IL7-M10BSx38	1000	M10	1/2	1	38	11/16
IL7-M10Bx51	IL7-M10BSx51	1000	M10	1/2	1	51	11/16
IL7-M10Bx62	IL7-M10BSx62	1000	M10	1/2	1	62	11/16
IL7-M12Bx38	IL7-M12BSx38	2000	M12	1/2	1	38	11/16
IL7-M12Bx51	IL7-M12BSx51	2000	M12	1/2	1	51	11/16
IL7-M12Bx75	IL7-M12BSx75	2000	M12	1/2	1	75	11/16
IL7-M12Bx102	IL7-M12BSx102	2000	M12	1/2	1	102	11/16
IL7-M16Bx51	IL7-M16BSx51	2500	M16	5/8	1	51	11/16
IL7-M16Bx90-BR	IL7-M16BSx90-BR	2500	M16	5/8	1	90	11/16
IL7-M16Bx102	IL7-M16BSx102	2500	M16	5/8	1	102	11/16
IL7-M16Bx115-BR	IL7-M16BSx115-BR	2500	M16	5/8	1	115	11/16
IL8-M6Bx25	IL8-M6BSx25	100	M6	1/2	1-1/2	25	11/16
IL8-M6Bx38	IL8-M6BSx38	100	M6	1/2	1-1/2	38	11/16
IL8-M6Bx51	IL8-M6BSx51	100	M6	1/2	1-1/2	51	11/16
IL8-M8Bx38	IL8-M8BSx38	500	M8	1/2	1-1/2	38	11/16
IL8-M8Bx51	IL8-M8BSx51	500	M8	1/2	1-1/2	51	11/16
IL8-M8Bx62	IL8-M8BSx62	500	M8	1/2	1-1/2	62	11/16
IL8-M10Bx38	IL8-M10BSx38S	1000	M10	1/2	1-1/2	38	11/16
IL8-M10Bx51	IL8-M10BSx51S	1000	M10	1/2	1-1/2	51	11/16
IL8-M10Bx62	IL8-M10BSx62S	1000	M10	1/2	1-1/2	62	11/16
IL8-M12Bx38	IL8-M12BSx38	2000	M12	1/2	1-1/2	38	11/16
IL8-M12Bx51	IL8-M12BSx51	2000	M12	1/2	1-1/2	51	11/16
IL8-M12Bx75	IL8-M12BSx75	2000	M12	1/2	1-1/2	75	11/16
IL8-M12Bx102	IL8-M12BSx102	2000	M12	1/2	1-1/2	102	11/16
IL8-M16Bx51	IL8-M16BSx51	2500	M16	5/8	1-1/2	51	11/16
IL8-M16Bx90-BR	IL8-M16BSx90-BR	2500	M16	5/8	1-1/2	90	11/16
IL8-M16Bx102	IL8-M16BSx102	2500	M16	5/8	1-1/2	102	11/16
IL8-M16Bx115-BR	IL8-M16BSx115-BR	2500	M16	5/8	1-1/2	115	11/16
IL7A-M6Bx25	IL7A-M6BSx25	100	M6	1/2	2	25	11/16
IL7A-M6Bx38	IL7A-M6BSx38	100	M6	1/2	2	38	11/16
IL7A-M6Bx51	IL7A-M6BSx51	100	M6	1/2	2	51	11/16
IL7A-M8Bx38	IL7A-M8BSx38	500	M8	1/2	2	38	11/16
IL7A-M8Bx51	IL7A-M8BSx51	500	M8	1/2	2	51	11/16
IL7A-M8Bx62	IL7A-M8BSx62	500	M8	1/2	2	62	11/16
IL7A-M10Bx38	IL7A-M10BSx38	1000	M10	1/2	2	38	11/16
IL7A-M10Bx51	IL7A-M10BSx51	1000	M10	1/2	2	51	11/16
IL7A-M10Bx62	IL7A-M10BSx62	1000	M10	1/2	2	62	11/16
IL7A-M12Bx38	IL7A-M12BSx38	2000	M12	1/2	2	38	11/16
IL7A-M12Bx51	IL7A-M12BSx51	2000	M12	1/2	2	51	11/16
IL7A-M12Bx75	IL7A-M12BSx75	2000	M12	1/2	2	75	11/16
IL7A-M12Bx102	IL7A-M12BSx102	2000	M12	1/2	2	102	11/16
IL7A-M16Bx51	IL7A-M16BSx51	2500	M16	5/8	2	51	11/16
IL7A-M16Bx90-BR	IL7A-M16BSx90-BR	2500	M16	5/8	2	90	11/16
IL7A-M16Bx102	IL7A-M16BSx102	2500	M16	5/8	2	102	11/16
IL7A-M16Bx115-BR	IL7A-M16BSx115-BR	2500	M16	5/8	2	115	11/16



METRIC POLY BASE FIXED STUD LEVELING GLIDES


The IEC *Metric Poly Base Steel and Stainless Steel Fixed Stud Glide* offers metric threads and is ideal for medium-duty load requirements. The stud will tilt several degrees under load to adjust for unlevel surfaces. This glide is cost-effective for applications not requiring a swivel base. Zinc plated steel stud and black polypropylene base. Some sizes available with Top-A-Just™ top broached hex, allen drive, (-BR) and top-end external hex (-HX).




Top-A-Just™ (-BR)



Top-A-Just™ (-HX)

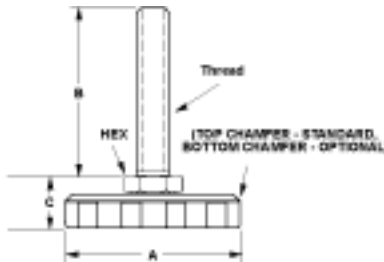

Optional bottom chamfer (reverse assembly) – with 90° top edge


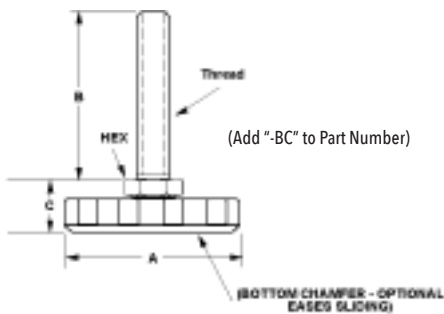


Steel	SS	Load	Thread	Hex	A	B(mm)	C
Metric Poly Base Steel and Stainless Steel Fixed Stud Glides							
IL7M-M6Bx25	IL7M-M6BSx25	100	M6	1/2	2-1/2	25	11/16
IL7M-M6Bx38	IL7M-M6BSx38	100	M6	1/2	2-1/2	38	11/16
IL7M-M6Bx51	IL7M-M6BSx51	100	M6	1/2	2-1/2	51	11/16
IL7M-M8Bx38	IL7M-M8BSx38	500	M8	1/2	2-1/2	38	11/16
IL7M-M8Bx51	IL7M-M8BSx51	500	M8	1/2	2-1/2	51	11/16
IL7M-M8Bx62	IL7M-M8BSx62	500	M8	1/2	2-1/2	62	11/16
IL7M-M10Bx38	IL7M-M10BSx38	1000	M10	1/2	2-1/2	38	11/16
IL7M-M10Bx51	IL7M-M10BSx51	1000	M10	1/2	2-1/2	51	11/16
IL7M-M10Bx62	IL7M-M10BSx62	1000	M10	1/2	2-1/2	62	11/16
IL7M-M12Bx38	IL7M-M12BSx38	2000	M12	1/2	2-1/2	38	11/16
IL7M-M12Bx51	IL7M-M12BSx51	2000	M12	1/2	2-1/2	51	11/16
IL7M-M12Bx75	IL7M-M12BSx75	2000	M12	1/2	2-1/2	75	11/16
IL7M-M12Bx102	IL7M-M12BSx102	2000	M12	1/2	2-1/2	102	11/16
IL7M-M16Bx51	IL7M-M16BSx51	2500	M16	5/8	2-1/2	51	11/16
IL7M-M16Bx90-BR	IL7M-M16BSx90-BR	2500	M16	5/8	2-1/2	90	11/16
IL7M-M16Bx102	IL7M-M16BSx102	2500	M16	5/8	2-1/2	102	11/16
IL7M-M16Bx115-BR	IL7M-M16BSx115-BR	2500	M16	5/8	2-1/2	115	11/16
IL8A-M6Bx25	IL8A-M6BSx25	100	M6	1/2	3	25	11/16
IL8A-M6Bx38	IL8A-M6BSx38	100	M6	1/2	3	38	11/16
IL8A-M6Bx51	IL8A-M6BSx51	100	M6	1/2	3	51	11/16
IL8A-M8Bx38	IL8A-M8BSx38	500	M8	1/2	3	38	11/16
IL8A-M8Bx51	IL8A-M8BSx51	500	M8	1/2	3	51	11/16
IL8A-M8Bx62	IL8A-M8BSx62	500	M8	1/2	3	62	11/16
IL8A-M10Bx38	IL8A-M10BSx38	1000	M10	1/2	3	38	11/16
IL8A-M10Bx51	IL8A-M10BSx51	1000	M10	1/2	3	51	11/16
IL8A-M10Bx62	IL8A-M10BSx62	1000	M10	1/2	3	62	11/16
IL8A-M12Bx38	IL8A-M12BSx38	2000	M12	1/2	3	38	11/16
IL8A-M12Bx51	IL8A-M12BSx51	2000	M12	1/2	3	51	11/16
IL8A-M12Bx75	IL8A-M12BSx75	2000	M12	1/2	3	75	11/16
IL8A-M12Bx102	IL8A-M12BSx102	2000	M12	1/2	3	102	11/16
IL8A-M16Bx51	IL8A-M16BSx51	2500	M16	5/8	3	51	11/16
IL8A-M16Bx90-BR	IL8A-M16BSx90-BR	2500	M16	5/8	3	90	11/16
IL8A-M16Bx102	IL8A-M16BSx102	2500	M16	5/8	3	102	11/16
IL8A-M16Bx115-BR	IL8A-M16BSx115-BR	2500	M16	5/8	3	115	11/16



KNOB STYLE GLIDES - New Metric Sizes

The IEC Metric Knob Style Steel, Stainless Steel and Nylon Thread Glide is ideal for light and medium duty load requirements. These low-profile, solid bottom, large diameter black polypropylene and PVC (rubber) base glides are perfect for leveling and stabilizing furniture, instruments, racks and appliances without the need for tools. The unique rigid design can withstand failure when subjected to "drop-tests" and excessive tilting. Useful in both feet and knob applications. Special thread lengths can be specified and easily manufactured. Top hex (-HX) and slot are standard (-SL) on some sizes. Top slot can be added to any item, add (-SL) to part number. Up to 1,000 lb. load ratings.

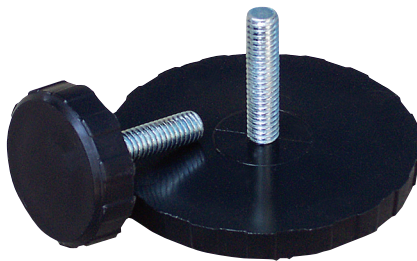

Top Hex (-HX) and Slot (-SL)



Many colors available as custom option.

Steel	SS	Load	Thread	A	B	C
METRIC - Steel and Stainless Steel Knob Style Glides						
IL82-M6Bx6	IL82-M6BSx6	100	M6	38	6	10
IL82-M6Bx12	IL82-M6BSx12	100	M6	38	12	10
IL82-M6Bx25	IL82-M6BSx25	100	M6	38	25	10
IL82-M8Bx6	IL82-M8BSx6	500	M8	38	6	10
IL82-M8Bx12	IL82-M8BSx12	500	M8	38	12	10
IL82-M8Bx25	IL82-M8BSx25	500	M8	38	25	10
IL82-M8Bx45	IL82-M8BSx45	500	M8	38	45	10
IL82-M10Bx15	IL82-M10BSx15	1000	M10	38	15	10
IL82-M10Bx20	IL82-M10BSx20	1000	M10	38	20	10
IL82-M10Bx25	IL82-M10BSx25	1000	M10	38	25	10
IL82-M10Bx40	IL82-M10BSx40	1000	M10	38	40	10
IL84-M6Bx6	IL84-M6BSx6	100	M6	51	6	10
IL84-M6Bx12	IL84-M6BSx12	100	M6	51	12	10
IL84-M6Bx25	IL84-M6BSx25	100	M6	51	25	10
IL84-M8Bx6	IL84-M8BSx6	500	M8	51	6	10
IL84-M8Bx12	IL84-M8BSx12	500	M8	51	12	10
IL84-M8Bx25	IL84-M8BSx25	500	M8	51	25	10
IL84-M8Bx45	IL84-M8BSx45	500	M8	51	45	10
IL84-M10Bx15	IL84-M10BSx15	1000	M10	51	15	10
IL84-M10Bx20	IL84-M10BSx20	1000	M10	51	20	10
IL84-M10Bx25	IL84-M10BSx25	1000	M10	51	25	10
IL84-M10Bx40	IL84-M10BSx40	1000	M10	51	40	10
IL86-M6Bx6	IL86-M6BSx6	100	M6	64	6	10
IL86-M6Bx12	IL86-M6BSx12	100	M6	64	12	10
IL86-M6Bx25	IL86-M6BSx25	100	M6	64	25	10
IL86-M8Bx6	IL86-M8BSx6	500	M8	64	6	10
IL86-M8Bx12	IL86-M8BSx12	500	M8	64	12	10
IL86-M8Bx25	IL86-M8BSx25	500	M8	64	25	10
IL86-M8Bx45	IL86-M8BSx45	500	M8	64	45	10
IL86-M10Bx15	IL86-M10BSx15	1000	M10	64	15	10
IL86-M10Bx20	IL86-M10BSx20	1000	M10	64	20	10
IL86-M10Bx25	IL86-M10BSx25	1000	M10	64	25	10
IL86-M10Bx40	IL86-M10BSx40	1000	M10	64	40	10
IL88-M6Bx6	IL88-M6BSx6	100	M6	76	6	10
IL88-M6Bx12	IL88-M6BSx12	100	M6	76	12	10
IL88-M6Bx25	IL88-M6BSx25	100	M6	76	25	10
IL88-M8Bx6	IL88-M8BSx6	500	M8	76	6	10
IL88-M8Bx12	IL88-M8BSx12	500	M8	76	12	10
IL88-M8Bx25	IL88-M8BSx25	500	M8	76	25	10
IL88-M8Bx45	IL88-M8BSx45	500	M8	76	45	10
IL88-M10Bx15	IL88-M10BSx15	1000	M10	76	15	10
IL88-M10Bx20	IL88-M10BSx20	1000	M10	76	20	10
IL88-M10Bx25	IL88-M10BSx25	1000	M10	76	25	10
IL88-M10Bx40	IL88-M10BSx40	1000	M10	76	40	10


36A - Metric Knob Style (PVC Base) The 1-1/2" and 2" diameter base is available in a flexible, non-skid, non-marring black PVC, rubber-like material.

Steel	SS	Load	Thread	A	B	C
36A - METRIC - Steel and Stainless Steel Knob Style Glides (PVC base)						
IL82-M6Bx6-PVC	IL82-M6BSx6-PVC	100	M6	38	6	10
IL82-M6Bx12-PVC	IL82-M6BSx12-PVC	100	M6	38	12	10
IL82-M6Bx25-PVC	IL82-M6BSx25-PVC	100	M6	38	25	10
IL82-M8Bx6-PVC	IL82-M8BSx6-PVC	100	M8	38	6	10
IL82-M8Bx12-PVC	IL82-M8BSx12-PVC	100	M8	38	12	10
IL82-M8Bx25-PVC	IL82-M8BSx25-PVC	100	M8	38	25	10
IL82-M8Bx45-PVC	IL82-M8BSx45-PVC	100	M8	38	45	10
IL82-M10Bx15-PVC	IL82-M10BSx15-PVC	100	M10	38	15	10
IL82-M10Bx20-PVC	IL82-M10BSx20-PVC	100	M10	38	20	10
IL82-M10Bx25-PVC	IL82-M10BSx25-PVC	100	M10	38	25	10
IL82-M10Bx40-PVC	IL82-M10BSx40-PVC	100	M10	38	40	10
IL84-M6Bx6-PVC	IL84-M6BSx6-PVC	100	M6	51	6	10
IL84-M6Bx12-PVC	IL84-M6BSx12-PVC	100	M6	51	12	10
IL84-M6Bx25-PVC	IL84-M6BSx25-PVC	100	M6	51	25	10
IL84-M8Bx6-PVC	IL84-M8BSx6-PVC	100	M8	51	6	10
IL84-M8Bx12-PVC	IL84-M8BSx12-PVC	100	M8	51	12	10
IL84-M8Bx25-PVC	IL84-M8BSx25-PVC	100	M8	51	25	10
IL84-M8Bx45-PVC	IL84-M8BSx45-PVC	100	M8	51	45	10
IL84-M10Bx15-PVC	IL84-M10BSx15-PVC	100	M10	51	15	10
IL84-M10Bx20-PVC	IL84-M10BSx20-PVC	100	M10	51	20	10
IL84-M10Bx25-PVC	IL84-M10BSx25-PVC	100	M10	51	25	10
IL84-M10Bx40-PVC	IL84-M10BSx40-PVC	100	M10	51	40	10




THREADED LEVELING GLIDES




1-4 Light Duty, (Non-Swivel & Free-Turning) threaded glides are designed for light duty applications. Zinc plated stud and plastic base with nickel plated steel shell for improved appearance (black plastic base has a black oxide shell). Also available with a PVC base (-PVC) and a gray rubber base (-GR). The IL9-CAST is made to replace caster wheels on tables and chairs. More caster glides are shown at the end of this section.



7-Light Duty, (Non-Swivel), Black Vinyl Base threaded glides have a zinc plated steel stud and non-skid, non-marring base.



8-Light Duty, (Non-Swivel), Steel Base threaded glides have a plastic cushion inside the nickel plated steel base which reduces noise. The stud is zinc plated. Steel based glides slide easily on carpet.



Part Nbr.	Thread	Hex	A	B	C	Base
-----------	--------	-----	---	---	---	------

1-Metric Light Duty, (Non-Swivel) Plastic Base

IL9-M6H	M6x1.0	YES	1-3/8	1	3/4	White
IL9-M8H	M8x1.25	YES	1-3/8	1	3/4	White
IL9-M10H	M10x1.50	YES	1-3/8	1	3/4	White
IL9-M10Hx38	M10x1.50	YES	1-3/8	1-1/2	3/4	White

5-Metric Light Duty, (Swivel), Plastic Base

IL13-M6x25	M6x1.0	YES	1-1/8	1	5/8	White
IL13-M8x25	M8x1.25	YES	1-1/8	1	5/8	White
IL13-M8x38	M8x1.25	YES	1-1/8	1-1/2	5/8	White
IL13-M10x25	M10x1.50	YES	1-1/8	1	5/8	White
IL13-M10x38	M10x1.50	YES	1-1/8	1-1/2	5/8	White

Part Nbr.	Thread	Hex	A	B	C	Base
-----------	--------	-----	---	---	---	------

-Metric Light Duty, (Non-Skid), Black Vinyl Base

IL15-M6	M6x1.00	NO	1-1/8	1	3/8	Black
IL15-M6x12	M6x1.00	NO	1-1/8	1/2	3/8	Black
IL15-M8	M8x1.25	NO	1-1/8	1	3/8	Black
IL15-M8x12	M8x1.25	NO	1-1/8	1/2	3/8	Black
IL15-M8x38	M8x1.25	NO	1-1/8	1-1/2	3/8	Black
IL15-M10	M10x1.50	NO	1-1/8	1	3/8	Black
IL15-M10x38	M10x1.50	NO	1-1/8	1-1/2	3/8	Black

Part Nbr.	Thread	Hex	A	B	C	Base
-----------	--------	-----	---	---	---	------

8-Light Duty, Metric Steel Base (with Black Plastic Cushion)

IL16-M6x10	M6x1.0	NO	3/4	3/8	7/16	Steel
IL16-M6x25	M6x1.0	NO	3/4	1	7/16	Steel
IL17-M8x25	M8x1.25	NO	1-1/16	1	7/16	Steel
IL17-M10x25	M10x1.50	NO	1-1/16	1	7/16	Steel
IL18-M6x25	M6x1.0	NO	1-1/4	1	7/16	Steel
IL18-M8x25	M8x1.25	NO	1-1/4	1	7/16	Steel
IL18-M10x25	M10x1.50	NO	1-1/4	1	7/16	Steel


Threaded Sliders - Metric

P/N	A DIA.	Base Ht.	Thread
IL15-M6-SLDR	7/8	1/4	M6X1
IL15-M6x12-SLDR	7/8	1/4	M6X1/2
IL15A-M8x12-SLDR	1-1/8	1/4	M8X1/2
IL15A-M8-SLDR	1-1/8	1/4	M8X1
IL15A-M10-SLDR	1-1/8	1/4	M10X1




Threaded Fixed Base Leveling Glides


18C-Metric Light Duty, Fixed Nylon Base threaded glides have a black, non-swivel base and black nylon top. The metric steel stud is zinc plated and has a top slot.



18D-Metric Light Duty, Fixed Rubber Base threaded glides have a black, non-swivel rubber base made of TPR (thermo-plastic rubber) which provides a non-skid, non-marring surface. The metric steel stud is zinc plated and has a top slot.



18E-Metric Light Duty, Fixed PTFE Base threaded sliders allow easy sliding, reduce floor scratching and provide noise reduction. They have a PTFE gray base (similar to teflon®) with a black nylon top and zinc plated metric stud with a top slot.

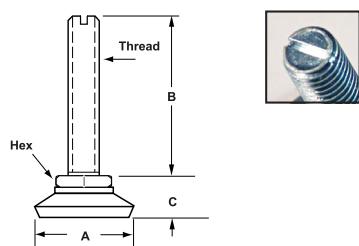


Part Nbr.	Thread	Hex	A	B	C	Base
18C-Metric Fixed Nylon Base Glides						
IL31B-M6X12-N	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-N	M6 X 1.0	YES	1-3/8	1	7/8	BLACK
IL31B-M8X12-N	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-N	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-N	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X25-N	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-N	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-N	M10 X 1.50	YES	1-3/8	2	1	BLACK
18D-Metric Fixed Rubber Base Glides						
IL31B-M6X12-R	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-R	M6 X 1.0	YES	1-3/8	1	7/8	BLACK
IL31B-M8X12-R	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-R	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-R	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X25-R	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-R	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-R	M10 X 1.50	YES	1-3/8	2	1	BLACK
18E-Metric Fixed PTFE Slider Base Glides						
IL31B-M6X12-PTFE	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-PTFE	M6 X 1.0	YES	1-3/8	1	7/8	BLACK
IL31B-M8X12-PTFE	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-PTFE	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-PTFE	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X25-PTFE	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-PTFE	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-PTFE	M10 X 1.50	YES	1-3/8	2	1	BLACK




Threaded Fixed Base Leveling Glides

18F-Metric Light Duty, Fixed Steel Base threaded glides have a black nylon top above the steel base. The metric stud is zinc plated and has a top slot. Steel based glides slide easily on carpet.



18G-Metric Light Duty, Fixed Felt Base threaded glides (right) offer floor protection and reduce noise. They have a black nylon top above the brown felt base. The threaded metric stud is zinc plated and has a top slot. For wood legs that are not threaded, use IEC's threaded insert "T-nuts" or propeller nuts.




Part Nbr.	Thread	Hex	A	B	C	Base
18F-Metric Fixed Steel Base Glides						
IL31B-M6X12-S	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-S	M6 X 1.0	YES	1-3/8	1	7/8	BLACK
IL31B-M8X12-S	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-S	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-S	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X25-S	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-S	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-S	M10 X 1.50	YES	1-3/8	2	1	BLACK
18G-Metric Fixed Felt Base Glides						
IL31B-M6X12-F	M6 X 1.0	YES	1-3/8	1/2	7/8	BLACK
IL31B-M6X25-F	M6 X 1.0	YES	1-3/8	1	7/8	BLACK
IL31B-M8X12-F	M8 X 1.25	YES	1-3/8	1/2	1	BLACK
IL31B-M8X25-F	M8 X 1.25	YES	1-3/8	1	1	BLACK
IL31B-M8X38-F	M8 X 1.25	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X25-F	M10 X 1.50	YES	1-3/8	1	1	BLACK
IL31B-M10X38-F	M10 X 1.50	YES	1-3/8	1-1/2	1	BLACK
IL31B-M10X51-F	M10 X 1.50	YES	1-3/8	2	1	BLACK




Threaded Swivel Base Leveling Glides


18C-Metric Light Duty, Swivel Nylon Base threaded glides have a black, swivel base and black nylon top. The metric steel stud is zinc plated and has a top slot.



18D-Metric Light Duty, Swivel Rubber Base threaded glides have a black, swivel rubber base made of TPR (thermo-plastic rubber) for non-skid, non-marring support. The metric steel stud is zinc plated and has a top slot.



18E-Metric Light Duty, Swivel PTFE Base threaded sliders allow for easy sliding, reduce floor scratching and provide noise reduction. They have a PTFE gray base (similar to teflon®) with a black nylon top and zinc plated metric stud with a top slot.




Part Nbr.	Thread	Hex	A	B	C	Base
18H-Metric Swivel Nylon Base Glides						
IL31C-M6X12-N	M6x1.0	YES	1-3/8	1/2	7/8	BLACK
IL31C-M6X25-N	M6x1.0	YES	1-3/8	1	7/8	BLACK
IL31C-M8X12-N	M8x1.25	YES	1-3/8	1/2	1	BLACK
IL31C-M8X25-N	M8x1.25	YES	1-3/8	1	1	BLACK
IL31C-M8X38-N	M8x1.50	YES	1-3/8	1-1/2	1	BLACK
IL31C-M10X25-N	M10x1.5	YES	1-3/8	1	1	BLACK
IL31C-M10X38-N	M10x1.5	YES	1-3/8	1-1/2	1	BLACK
18J-Metric Swivel Rubber Base Glides						
IL31C-M6X12-R	M6x1.0	YES	1-3/8	1/2	7/8	BLACK
IL31C-M6X25-R	M6x1.0	YES	1-3/8	1	7/8	BLACK
IL31C-M8X12-R	M8x1.25	YES	1-3/8	1/2	1	BLACK
IL31C-M8X25-R	M8x1.25	YES	1-3/8	1	1	BLACK
IL31C-M8X38-R	M8x1.50	YES	1-3/8	1-1/2	1	BLACK
IL31C-M10X25-R	M10x1.5	YES	1-3/8	1	1	BLACK
IL31C-M10X38-R	M10x1.5	YES	1-3/8	1-1/2	1	BLACK
18K-Metric Swivel PTFE Slider Base Glides						
IL31C-M6X12-PTFE	M6x1.0	YES	1-3/8	1/2	7/8	BLACK
IL31C-M6X25-PTFE	M6x1.0	YES	1-3/8	1	7/8	BLACK
IL31C-M8X12-PTFE	M8x1.25	YES	1-3/8	1/2	1	BLACK
IL31C-M8X25-PTFE	M8x1.25	YES	1-3/8	1	1	BLACK
IL31C-M8X38-PTFE	M8x1.50	YES	1-3/8	1-1/2	1	BLACK
IL31C-M10X25-PTFE	M10x1.5	YES	1-3/8	1	1	BLACK
IL31C-M10X38-PTFE	M10x1.5	YES	1-3/8	1-1/2	1	BLACK




Threaded Swivel Base Leveling Glides

18L-Metric Light Duty, Swivel Steel Base threaded glides have a black nylon top above the steel base. The metric stud is zinc plated and has a top slot. Steel based glides slide easily on carpet.




18M-Metric Light Duty, Swivel, Felt Base threaded glides (right) offer floor protection and reduce noise. They have a black nylon top above the brown felt base. The threaded metric stud is zinc plated and has a top slot. For wood legs that are not threaded, use IEC's threaded insert "T-nuts" or propeller nuts




Part Nbr.	Thread	Hex	A	B	C	Base
18L-Metric Swivel Steel Slider Base Glides						
IL31C-M6X1/2-S	M6x1.0	YES	1-3/8	1/2	7/8	BLACK
IL31C-M6X1-S	M6x1.0	YES	1-3/8	1	7/8	BLACK
IL31C-M8X1/2-S	M8x1.25	YES	1-3/8	1/2	1	BLACK
IL31C-M8X1-S	M8x1.25	YES	1-3/8	1	1	BLACK
IL31C-M8X3/8-S	M8x1.50	YES	1-3/8	1-1/2	1	BLACK
IL31C-M10X1-S	M10x1.5	YES	1-3/8	1	1	BLACK
IL31C-M10X1/2-S	M10x1.5	YES	1-3/8	1-1/2	1	BLACK
18M-Swivel Felt Slider Base Glides						
IL31C-4X1/2-F	1/4-20	YES	1-3/8	1/2	1	BLACK
IL31C-41-F	1/4-20	YES	1-3/8	1	1	BLACK
IL31C-4X15-F	1/4-20	YES	1-3/8	1-1/2	1	BLACK
IL31C-51-F	5/16-18	YES	1-3/8	1	1	BLACK
IL31C-5X15-F	5/16-18	YES	1-3/8	1-1/2	1	BLACK
IL31C-52-F	5/16-18	YES	1-3/8	2	1	BLACK
IL31C-61-F	3/8-16	YES	1-3/8	1	1	BLACK
IL31C-6X15-F	3/8-16	YES	1-3/8	1-1/2	1	BLACK
IL31C-62-F	3/8-16	YES	1-3/8	2	1	BLACK



19-Light Duty, (Molded Hex), Black Plastic Base These glides feature a hex molded into the base which allows the base to be low profile.

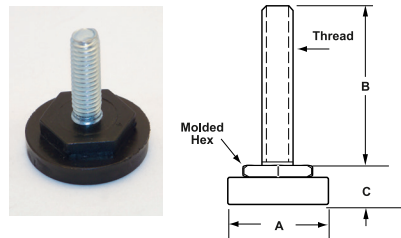


20A-Threaded Felt Pads IEC's threaded felt pads or IEC's wood screw felt pads (see Nail Glide section) provide floor protection and reduce noise. The threaded stud allows for leveling adjustment to reduce table and chair wobble. For wood legs that are not threaded, use IEC's threaded insert "T-nuts" or propeller nuts.






(20A-Threaded Felt Pads)

26-Light Duty, Black, Plastic Base Hex Glides These hex glides are offered with a 1/4-20, 5/16-18 and 3/8-16 thread size. The 5/16-18 and metric sizes have a top end slot.



(IL39-4Bx15)

(IL39-5Bx15-SL)

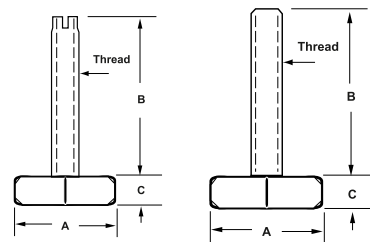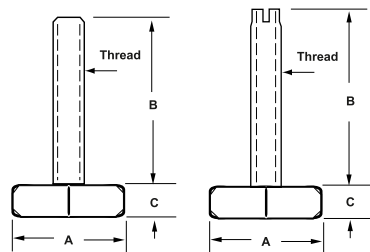

Part Nbr.	Thread	Hex	A	B	C	Base
19-Metric Round Molded Hex Glides						
IL32-M8Bx38-SL	M8x1.25	YES	1-1/4	1-1/2	3/8	BLACK
IL32-M10Bx38-SL	M10x1.50	YES	1-1/4	1-1/2	3/8	BLACK

20A - Metric Threaded Felt Pads - Brown

Part Nbr.	Dia	Felt Thk.	Base Ht.	Thread
IL33C-M6B-FELT	1	5/16	1/2	M6x1.0
IL33C-M8B-FELT	1	5/16	1/2	M8x1.25
IL33C-M10B-FELT	1	5/16	1/2	M10x1.50

Thread length is 1" (25mm) for the metric threaded felt pads.

20A - Metric Threaded Felt Pads - White

Part Nbr.	Dia	Felt Thk.	Base Ht.	Thread
IL33C-M6W-FELT	1	5/16	1/2	M6x1.0
IL33C-M8W-FELT	1	5/16	1/2	M8x1.25
IL33C-M10W-FELT	1	5/16	1/2	M10x1.50

Thread length is 1" (25mm) for the metric threaded felt pads.

Part Nbr.	Thread	Hex	A	B	C	Base
26-Metric Plastic Hex Glides						
IL39-M8Bx38-SL	M8x1.25	YES	3/4	1-1/2	1/4	BLACK
IL39-M10Bx38-SL	M10x1.25	YES	3/4	1-1/2	1/4	BLACK

27-Medium Duty, Zinc Plated, Steel Hex Glides These hex glides are low profile and can handle heavy loads. Some sizes are available with a slot (-SL). Also available with top hex and slot (-HX-SL) Available with a gray polyethylene cap that fits over the hex, (-CAP). Limited offering in metric sizes.

Part Nbr.	Thread	Hex	A	B	C	Base
27-Steel Hex Glides - Metric						
IL40-M6x30	M6x1	YES	9/16	1	3/32	ZINC
IL40-M8x25	M8x1.25	YES	3/4	1	7/64	ZINC
IL40-M8x40-SL	M8x1.25	YES	3/4	1-1/2	7/64	ZINC
IL40-M10x35	M10x1.50	YES	7/8	1-1/4	9/64	ZINC
IL40-M10x40-SL	M10x1.50	YES	7/8	1-1/2	9/64	ZINC
IL40-M10x60	M10x1.50	YES	7/8	2-3/8	9/64	ZINC
IL40-M10x65-SL	M10x1.50	YES	7/8	2-1/2	9/64	ZINC
IL40-M12x65	M12x1.75	YES	1-1/16	2-1/2	11/64	ZINC

30-Light Duty, Nickel Plated, Slotted Swivel Glides These swivel glides have a white plastic base with a nickel plated shell. The stud swivels 20° from the centerline. The top slot is standard but may also be ordered with a top hex and slot (-HX-SL).

Part Nbr.	Thread	Hex	A	B	C	Base
30-Metric Slotted Swivel Glides						
IL43-M8x38-HX-SL	M8x1.25	YES	1-1/2	1-1/2	5/8	NICKEL
IL43-M10x38-HX-SL	M10x1.50	YES	1-1/2	1-1/2	5/8	NICKEL

NOTE: Part Numbers with a "HX" have a top hex on stud.



Ruggedized® Light Duty, (RLD) Low-Profile, SAUCER BASE® Socket Glides

The IEC Saucer Base® Ruggedized® Light Duty (RLD) Fixed Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with abottom hex drive molded into the base. Steel socket and washer have black trivalent zinc plating.


Features

- Black trivalent zinc
- Loads to 3000 lbs
- Corrosion resistant
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables



LOW PROFILE FIXED — METRIC SOCKET GLIDES

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL100-RLD-M6B-T	IL100-RLD-M6BS-T	100	M6x1	1/2	3/4	1/4	3/4	1/4
IL100-RLD-M8B-T	IL100-RLD-M8BS-T	400	M8x1.25	1/2	3/4	3/8	7/8	1/4
IL100-RLD-M10B-T	IL100-RLD-M10BS-T	750	M10x1.50	1/2	3/4	1/2	1	3/8
IL100-RLD-M12B-T	IL100-RLD-M12BS-T	1000	M12x1.75	5/8	3/4	1/2	1	3/8
IL100-RLD-M16B-T	IL100-RLD-M16BS-T	1250	M16x2.00	3/4	3/4	5/8	1-1/8	1/2
IL100-RLD-M20B-T	IL100-RLD-M20BS-T	1500	M20x3.00	1	3/4	3/4	1-1/4	5/8
IL101-RLD-M6B-T	IL101-RLD-M6BS-T	100	M6x1	1/2	1	1/4	3/4	1/4
IL101-RLD-M8B-T	IL101-RLD-M8BS-T	400	M8x1.25	1/2	1	3/8	7/8	1/4
IL101-RLD-M10B-T	IL101-RLD-M10BS-T	750	M10x1.50	1/2	1	1/2	1	3/8
IL101-RLD-M12B-T	IL101-RLD-M12BS-T	1000	M12x1.75	5/8	1	1/2	1	3/8
IL101-RLD-M16B-T	IL101-RLD-M16BS-T	1250	M16x2.00	3/4	1	5/8	1-1/8	1/2
IL101-RLD-M20B-T	IL101-RLD-M20BS-T	1500	M20x3.00	1	1	3/4	1-1/4	5/8
IL102-RLD-M6B-T	IL102-RLD-M6BS-T	100	M6x1	1/2	1-1/4	1/4	3/4	1/4
IL102-RLD-M8B-T	IL102-RLD-M8BS-T	400	M8x1.25	1/2	1-1/4	3/8	7/8	1/4
IL102-RLD-M10B-T	IL102-RLD-M10BS-T	750	M10x1.50	1/2	1-1/4	1/2	1	3/8
IL102-RLD-M12B-T	IL102-RLD-M12BS-T	1000	M12x1.75	5/8	1-1/4	1/2	1	3/8
IL102-RLD-M16B-T	IL102-RLD-M16BS-T	1250	M16x2.00	3/4	1-1/4	5/8	1-1/8	1/2
IL102-RLD-M20B-T	IL102-RLD-M20BS-T	1500	M20x3.00	1	1-1/4	3/4	1-1/4	5/8
IL103-RLD-M6B-T	IL103-RLD-M6BS-T	100	M6x1	1/2	1-1/2	1/4	3/4	1/4
IL103-RLD-M8B-T	IL103-RLD-M8BS-T	400	M8x1.25	1/2	1-1/2	3/8	7/8	1/4
IL103-RLD-M10B-T	IL103-RLD-M10BS-T	750	M10x1.50	1/2	1-1/2	1/2	1	3/8
IL103-RLD-M12B-T	IL103-RLD-M12BS-T	1000	M12x1.75	5/8	1-1/2	1/2	1	3/8
IL103-RLD-M16B-T	IL103-RLD-M16BS-T	1250	M16x2.00	3/4	1-1/2	5/8	1-1/8	1/2
IL103-RLD-M20B-T	IL103-RLD-M20BS-T	1500	M20x3.00	1	1-1/2	3/4	1-1/4	5/8
IL104-RLD-M6B-T	IL104-RLD-M6BS-T	100	M6x1	1/2	1-3/4	1/4	3/4	1/4
IL104-RLD-M8B-T	IL104-RLD-M8BS-T	400	M8x1.25	1/2	1-3/4	3/8	7/8	1/4
IL104-RLD-M10B-T	IL104-RLD-M10BS-T	750	M10x1.50	1/2	1-3/4	1/2	1	3/8
IL104-RLD-M12B-T	IL104-RLD-M12BS-T	1000	M12x1.75	5/8	1-3/4	1/2	1	3/8
IL104-RLD-M16B-T	IL104-RLD-M16BS-T	1250	M16x2.00	3/4	1-3/4	5/8	1-1/8	1/2
IL104-RLD-M20B-T	IL104-RLD-M20BS-T	1500	M20x3.00	1	1-3/4	3/4	1-1/4	5/8
IL105-RLD-M6B-T	IL105-RLD-M6BS-T	100	M6x1	1/2	2	1/4	3/4	1/4
IL105-RLD-M8B-T	IL105-RLD-M8BS-T	400	M8x1.25	1/2	2	3/8	7/8	1/4
IL105-RLD-M10B-T	IL105-RLD-M10BS-T	750	M10x1.50	1/2	2	1/2	1	3/8
IL105-RLD-M12B-T	IL105-RLD-M12BS-T	1000	M12x1.75	5/8	2	1/2	1	3/8
IL105-RLD-M16B-T	IL105-RLD-M16BS-T	1250	M16x2.00	3/4	2	5/8	1-1/8	1/2
IL105-RLD-M20B-T	IL105-RLD-M20BS-T	1500	M20x3.00	1	2	3/4	1-1/4	5/8
IL106-RLD-M6B-T	IL106-RLD-M6BS-T	100	M6x1	1/2	3	1/4	3/4	1/4
IL106-RLD-M8B-T	IL106-RLD-M8BS-T	400	M8x1.25	1/2	3	3/8	7/8	1/4
IL106-RLD-M10B-T	IL106-RLD-M10BS-T	750	M10x1.50	1/2	3	1/2	1	3/8
IL106-RLD-M12B-T	IL106-RLD-M12BS-T	1000	M12x1.75	5/8	3	1/2	1	3/8
IL106-RLD-M16B-T	IL106-RLD-M16BS-T	1250	M16x2.00	3/4	3	5/8	1-1/8	1/2
IL106-RLD-M20B-T	IL106-RLD-M20BS-T	1500	M20x3.00	1	3	3/4	1-1/4	5/8
IL107-RLD-M6B-T	IL107-RLD-M6BS-T	100	M6x1	1/2	4	1/4	3/4	1/4
IL107-RLD-M8B-T	IL107-RLD-M8BS-T	400	M8x1.25	1/2	4	3/8	7/8	1/4
IL107-RLD-M10B-T	IL107-RLD-M10BS-T	750	M10x1.50	1/2	4	1/2	1	3/8
IL107-RLD-M12B-T	IL107-RLD-M12BS-T	1000	M12x1.75	5/8	4	1/2	1	3/8
IL107-RLD-M16B-T	IL107-RLD-M16BS-T	1250	M16x2.00	3/4	4	5/8	1-1/8	1/2
IL107-RLD-M20B-T	IL107-RLD-M20BS-T	1500	M20x3.00	1	4	3/4	1-1/4	5/8



Ruggedized® Light Duty, (RLD) Low-Profile, SAUCER BASE® Swivel Socket Metric Glides

The IEC Saucer Base® Ruggedized® Light Duty (RLD) Low-Profile Metric Swivel Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. The socket swivels approximately 15 degrees from centerline. **Steel socket has black trivalent zinc plating.**


Features

- Black trivalent zinc
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables



LOW PROFILE SAUCER BASE — METRIC SWIVEL SOCKET GLIDES

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL110-RLD-M6B-T	IL110-RLD-M6BS-T	100	M6x1	1/2	3/4	1/4	3/4	1/4
IL110-RLD-M8B-T	IL110-RLD-M8BS-T	400	M8x1.25	1/2	3/4	3/8	7/8	1/4
IL110-RLD-M10B-T	IL110-RLD-M10BS-T	750	M10x1.50	1/2	3/4	1/2	1	3/8
IL110-RLD-M12B-T	IL110-RLD-M12BS-T	1000	M12x1.75	5/8	3/4	1/2	1	3/8
IL110-RLD-M16B-T	IL110-RLD-M16BS-T	1250	M16x2.00	3/4	3/4	5/8	1-1/8	1/2
IL110-RLD-M20B-T	IL110-RLD-M20BS-T	1500	M20x3.00	1	3/4	3/4	1-1/4	5/8
IL111-RLD-M6B-T	IL111-RLD-M6BS-T	100	M6x1	1/2	1	1/4	3/4	1/4
IL111-RLD-M8B-T	IL111-RLD-M8BS-T	400	M8x1.25	1/2	1	3/8	7/8	1/4
IL111-RLD-M10B-T	IL111-RLD-M10BS-T	750	M10x1.50	1/2	1	1/2	1	3/8
IL111-RLD-M12B-T	IL111-RLD-M12BS-T	1000	M12x1.75	5/8	1	1/2	1	3/8
IL111-RLD-M16B-T	IL111-RLD-M16BS-T	1250	M16x2.00	3/4	1	5/8	1-1/8	1/2
IL111-RLD-M20B-T	IL111-RLD-M20BS-T	1500	M20x3.00	1	1	3/4	1-1/4	5/8
IL112-RLD-M6B-T	IL112-RLD-M6BS-T	100	M6x1	1/2	1-1/4	1/4	3/4	1/4
IL112-RLD-M8B-T	IL112-RLD-M8BS-T	400	M8x1.25	1/2	1-1/4	3/8	7/8	1/4
IL112-RLD-M10B-T	IL112-RLD-M10BS-T	750	M10x1.50	1/2	1-1/4	1/2	1	3/8
IL112-RLD-M12B-T	IL112-RLD-M12BS-T	1000	M12x1.75	5/8	1-1/4	1/2	1	3/8
IL112-RLD-M16B-T	IL112-RLD-M16BS-T	1250	M16x2.00	3/4	1-1/4	5/8	1-1/8	1/2
IL112-RLD-M20B-T	IL112-RLD-M20BS-T	1500	M20x3.00	1	1-1/4	3/4	1-1/4	5/8
IL113-RLD-M6B-T	IL113-RLD-M6BS-T	100	M6x1	1/2	1-1/2	1/4	3/4	1/4
IL113-RLD-M8B-T	IL113-RLD-M8BS-T	400	M8x1.25	1/2	1-1/2	3/8	7/8	1/4
IL113-RLD-M10B-T	IL113-RLD-M10BS-T	750	M10x1.50	1/2	1-1/2	1/2	1	3/8
IL113-RLD-M12B-T	IL113-RLD-M12BS-T	1000	M12x1.75	5/8	1-1/2	1/2	1	3/8
IL113-RLD-M16B-T	IL113-RLD-M16BS-T	1250	M16x2.00	3/4	1-1/2	5/8	1-1/8	1/2
IL113-RLD-M20B-T	IL113-RLD-M20BS-T	1500	M20x3.00	1	1-1/2	3/4	1-1/4	5/8
IL114-RLD-M6B-T	IL114-RLD-M6BS-T	100	M6x1	1/2	1-3/4	1/4	3/4	1/4
IL114-RLD-M8B-T	IL114-RLD-M8BS-T	400	M8x1.25	1/2	1-3/4	3/8	7/8	1/4
IL114-RLD-M10B-T	IL114-RLD-M10BS-T	750	M10x1.50	1/2	1-3/4	1/2	1	3/8
IL114-RLD-M12B-T	IL114-RLD-M12BS-T	1000	M12x1.75	5/8	1-3/4	1/2	1	3/8
IL114-RLD-M16B-T	IL114-RLD-M16BS-T	1250	M16x2.00	3/4	1-3/4	5/8	1-1/8	1/2
IL114-RLD-M20B-T	IL114-RLD-M20BS-T	1500	M20x3.00	1	1-3/4	3/4	1-1/4	5/8
IL115-RLD-M6B-T	IL115-RLD-M6BS-T	100	M6x1	1/2	2	1/4	3/4	1/4
IL115-RLD-M8B-T	IL115-RLD-M8BS-T	400	M8x1.25	1/2	2	3/8	7/8	1/4
IL115-RLD-M10B-T	IL115-RLD-M10BS-T	750	M10x1.50	1/2	2	1/2	1	3/8
IL115-RLD-M12B-T	IL115-RLD-M12BS-T	1000	M12x1.75	5/8	2	1/2	1	3/8
IL115-RLD-M16B-T	IL115-RLD-M16BS-T	1250	M16x2.00	3/4	2	5/8	1-1/8	1/2
IL115-RLD-M20B-T	IL115-RLD-M20BS-T	1500	M20x3.00	1	2	3/4	1-1/4	5/8
IL116-RLD-M6B-T	IL116-RLD-M6BS-T	100	M6x1	1/2	3	1/4	3/4	1/4
IL116-RLD-M8B-T	IL116-RLD-M8BS-T	400	M8x1.25	1/2	3	3/8	7/8	1/4
IL116-RLD-M10B-T	IL116-RLD-M10BS-T	750	M10x1.50	1/2	3	1/2	1	3/8
IL116-RLD-M12B-T	IL116-RLD-M12BS-T	1000	M12x1.75	5/8	3	1/2	1	3/8
IL116-RLD-M16B-T	IL116-RLD-M16BS-T	1250	M16x2.00	3/4	3	5/8	1-1/8	1/2
IL116-RLD-M20B-T	IL116-RLD-M20BS-T	1500	M20x3.00	1	3	3/4	1-1/4	5/8
IL117-RLD-M6B-T	IL117-RLD-M6BS-T	100	M6x1	1/2	4	1/4	3/4	1/4
IL117-RLD-M8B-T	IL117-RLD-M8BS-T	400	M8x1.25	1/2	4	3/8	7/8	1/4
IL117-RLD-M10B-T	IL117-RLD-M10BS-T	750	M10x1.50	1/2	4	1/2	1	3/8
IL117-RLD-M12B-T	IL117-RLD-M12BS-T	1000	M12x1.75	5/8	4	1/2	1	3/8
IL117-RLD-M16B-T	IL117-RLD-M16BS-T	1250	M16x2.00	3/4	4	5/8	1-1/8	1/2
IL117-RLD-M20B-T	IL117-RLD-M20BS-T	1500	M20x3.00	1	4	3/4	1-1/4	5/8



Your Contact Information

NAME:	TITLE:
COMPANY:	E-MAIL:
STREET ADDRESS OR POB:	CITY:
STATE:	ZIP CODE:
PHONE:	FAX:

Standard Product Request

ITEM #	IEC PART NUMBER	DESCRIPTION	QUANTITY
1			
Comments:			
2			
Comments:			
3			
Comments:			
4			
Comments:			

CUSTOM or MODIFIED Product Request

SIMILAR TO IEC PN#: _____

BASE	STUD
DIAMETER:	LENGTH:
MATERIAL:	THREAD:
SWIVEL:	MATERIAL:
FINISH: <input type="checkbox"/> Gold Iridite <input type="checkbox"/> Black Chromate	
<input type="checkbox"/> Clear Chromate	

OPTIONAL FEATURES

<input type="checkbox"/> TOP-A-JUST:	<input type="checkbox"/> INTERNAL BROACH:
<input type="checkbox"/> NON-SKID PAD:	<input type="checkbox"/> HEX HEAD:
<input type="checkbox"/> LAG HOLES:	<input type="checkbox"/> SQUARE HEAD:
<input type="checkbox"/> HEAT TREATED STUD:	<input type="checkbox"/> TOP SLOT:
QUANTITY REQUESTED:	EST ANNUAL USAGE:
Comments / Special Instructions:	

PLEASE FAX THIS FORM TO: 562-498-2275



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

METRIC LEVELERS/GLIDES

WARRANTY

Warranty & Disclaimer

IEC warrants each product against defects in workmanship and material for 90 days from the date of delivery to the user. The warranty is limited to the repair or replacement of any part(s) which are found by IEC to be defective and does not apply to ordinary wear tear, abuse, misapplications and altered products.

All data, dimensions and tables have been thoroughly checked but we can not assume liability for any possible errors or omissions. If you find an error, please notify us so we can correct it for future editions. We reserve the right to change designs and/or specifications without notice. In the event of a change, every attempt will be made to notify the current users.

INTERNATIONAL EQUIPMENT COMPONENTS, INC.

INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

HEAVY-DUTY LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

LIGHT-DUTY LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE

**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.iec-corp.com | www.levelingmounts.com

VIBRATION DAMPENING

NEW FOR 2020 VIBE-GLIDES®

**DAMPEN
ISOLATE
NON-SKID
NON-MARR
OIL-RESISTANT**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT-DUTY

3D DESIGNED LEVELING GLIDES

IMPROVED SLIDING CAPABILITIES

**LEVEL
SWIVEL
SLIDE
GLIDE**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

KNOB & HANDLE

**CLAMP
ADJUST
STABILIZE
FASTEN**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

CAP & PLUG PRODUCTS

**FEET
SLIDE
PROTECT
FINISH**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

SURFACE PROTECTION

SLIDERS, GRIPPERS & FELT

**CUSHION
QUIET
SLIDE
PROTECT**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

LEG & CASTER PRODUCTS

**LEVEL
EXTEND
SUPPORT
ROLL**

Ph. 562.597.4533

2201 E. Willow Street, D-104 Signal Hill, CA 90755
 Email: sales@iec-corp.com | Phone: 562-597-4533
 Fax: 562-498-2275 | Web: www.iec-corp.com