ACCESSORIES FOR THE DRAPER EXPERT PROLASER® RANGE

A collection of accessories and replacement items for the Prolaser® Series listed on pages 328-329.



Prolaser® Laser Level Tripod

Expert Quality; aluminium construction with 5/8" UNC screw thread. For use with Prolaser® line levels. Closed height 1117mm, open height 2300mm. Display packed.

Stock	Box	Price
No.	Qty	each
22125	– €1	82.28P



LWM

Prolaser® Laser Wall Mount For mounting laser levels to wall. Hand wheel for fine adjustments within 150mm. 5/8" UNC screw thread. Display packed.

Stock No.	Box Qty	Price each
23617	-	€72.13P



7 D845 **Prolaser® Laser Target**

Magnetic with special reflective surface for extending length of laser beam when working outside. Graduations in metric and imperial. For use with Draper Stock Nos. 22212, 22219, 24322 and 24323, Display packed.

	puono	u.
Stock No.	Box Qty	Price each
22127	-	€13.10P



5 LTMS5

Stock

Prolaser® 5M Telescopic Measuring Staff

Five sections, dual marked with abrasion-resistant scale in metric and imperial graduations. Sold loose.

	ary outin	
5	- €182.28P	23619
	-	
	10	
And a		
A REAL PROPERTY AND A REAL	and an other states of the sta	
	NAME OF TAXABLE PARTY.	
		And and a second s
CONTRACTOR DE LA CONTRACT	The second s	
	States of the second second	
	STATISTICS.	A DESCRIPTION OF THE OWNER OWNER OF THE OWNER OWNE
TO THE REPORT OF	THE OWNER WATCHING THE PARTY OF	CONTRACTOR OF THE OWNER OF
	No. of Concession, Name	

LEMP

Extendable Pole for Mounting Prolaser® Laser Levels

Five sections with maximum height of 3.3M. Spring-loaded pad on pole allows easy clamping between floor and ceiling door frames. Sliding platform has 1/4" and 5/8" UNC screw threads. 5/8" is a hollow screw for plumb down levels. Display packed.

Stock	Box	Price
No.	Qty	each
23620	-	€72.13P



Prolaser® Laser Angle Mount

Accurately indicates angles and range in excess of 90°. Vial for levelling purposes. 5/8" UNC screw thread allows connection from above and below. Display packed

Stock	Box	Price
No.	Qty	each
23618	- €	163.93P



Prolaser® 5/8" to 1/4" UNC **Tripod Adaptor**

Converts tripod threads from 5/8" to 1/4" UNC to allow usage with smaller laser levels. Sold loose.

Stock	Box	Price
No.	Qty	each
80491	-	€6.53P



Price

each

Box Qty

5/8" Laser Level Tripod

Aluminium construction for use with Prolaser® and Draper line levels. Open height 1118mm. Display packed

Stock	Box	Price
No.	Qty	each
65643	-	€32.13D



Laser Enhancement Glasses

For looking at Class 2 laser beams. Universal fitting. Display packed

Stock	Box	Price
No.	Qty	each
65644	-	€5.75D








1 LLK3

3 piece Self-Levelling Laser Level Kit

Designed for use where a constant level or repeat level measurements are required. Applications include alignment of windows, dado rails, kitchen units, stairs, outdoor levelling etc. Class 2 laser projects a horizontal, vertical or cross beam lines on surfaces. Accuracy 0.5mm per 1M within the operating distance of 3-8M. Self-levelling range ±6°. Supplied with heavy duty adjustable tripod (max. height 1.18M), rotating laser enhancement glasses and three AAA batteries. Comprehensive instruction manual included. Packed in blow mould carrying case with display sleeve.

Stock No.	Description	Box Qty	Price each
88640	Laser Level Kit	-	€72.98P
65643	Tripod	-	€32.13D
65644	Glasses	-	€5.75D
61833	Batteries (4 x AAA)	-	€4.38D

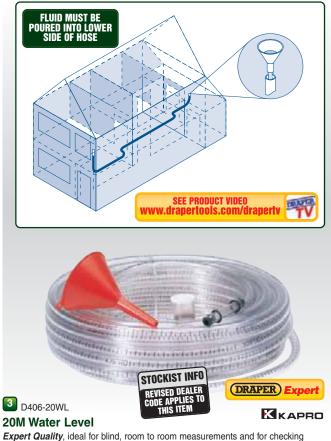

Expert Quality, ideal for blind, room to room measurements and for checking gradients over long distances. Hose is filled with water and level is found when both graduations chosen are the same. Comprises 20M (approx.) length of PVC hose graded in 0.5 and single centimetre graduations, funnel, colouring crystals, water stop plugs and marker rings. Manufactured for Draper Tools by Kapro. Shrink wrapped with descriptive label.

69565 – €29.75	Stock	Box	Price
	No.	Qty	each
	69565	-	€29.79P





2 LLK2

400mm Rotating Laser Level Kit

Designed for use where a constant level or repeat level measurements are required. Applications include alignment of windows, dado rails, kitchen units, stairs, outdoor levelling etc. One horizontal vial and revolving angle finder. Accuracy 0.5mm per 1M = 0.029° in standard position. Supplied with heavy duty adjustable tripod (max. height 1.18M), rotating base marked 360° for mounting level, laser enhancement glasses, two brass 90° line generating glass prisms and two AAA batteries. Supplied with manual. Packed in blow mould carrying case with display sleeve.

Stock No.	Description	Box Qty	Price each
69580	Laser Level Kit	-	€42.13P
65642	Rotary Base	-	€28.28D
65643	Tripod	-	€32.13D
65644	Glasses	-	€5.75D
61833	Batteries (4 x AAA)	-	€4.38D



The hinged body opens to any angle and allows use on square, round and hexagonal posts, as well as girders (RSJ's). Dual fixing - elastic straps for non magnetic surfaces and magnets for steel fence posts, RSJ's, etc. Plastic construction with acrylic vials. Size 188 x 133mm. Accuracy 1.75mm per 1M = 0.1° . Manufactured for Draper Tools by Kapro. Display packed.

Stock	Box	Price
No.	Qty	each
69555	-	€10.41P

section 7





D170


Plumb Site® Dual View™ 'I' Beam Girder Section Levels

Expert Quality, with front viewing Plumb Site® Dual View[™] vial and 'l' beam vial. Manufactured from hardened aluminium electrostatically powder coated and baked with polyester acrylic paint, milled top and base and rubber end caps. One horizontal and two vertical vials, one of which has a front viewing Plumb Site® Dual View™ vial. Accuracy 1mm per 1M = 0.001° in standard position. Manufactured for Draper Tools by Kapro. Sold loose with display hanger.

Stock No.	Length	Box Qty	Price each
41213	600mm	-	€23.06P
41214	900mm	-	€29.85P
41215	1200mm	-	€36.00P



DIFFERENCE

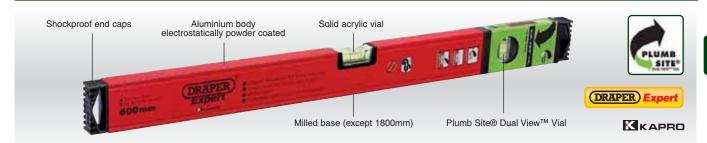



2 D781-40/41P

Plumb Site® Dual View[™] Box Section Levels

Expert Quality, with front viewing Plumb Site® Dual ViewTM vial. Aluminium box section extrusion electrostatically standard position. Manufactured for Draper Tools by Kapro. Sold loose with display hanger.

Stock No.	Length	Box Price Qty each
69540	300mm	– €18.44P
69541	600mm	– €21.08P
69542	900mm	- €26.85P
69543	1200mm	– €31.23P
69544	1800mm	– €48.69P



3 D150-81C

Plumb Site® Dual View[™] 'I' Beam Levels

Levels with front viewing Plumb Site® Dual View™ vials. Manufactured from hardened aluminium electrostatically powder coated and baked with polyester acrylic paint. One horizontal and two vertical vials, one of which has a front viewing Plumb Site® Dual View™ vial. Accuracy 1.75mm per 1M = 0.1° in standard position. Manufactured for Draper Tools by Kapro. Sold loose with display hanger.

	H P

Stock No.	Length	Box Price Qty each
41393	600mm	– €16.65P
41394	900mm	- €20.40P
41395	1200mm	– €24.40P

FOR YOUR CONVENIENCE, WE RECOMMEND ORDERING IN BOX QUANTITY OR MULTIPLES OF BOX QUANTITY WHERE SHOWN. YOU CAN STILL ORDER IN ANY QUANTITY UNLESS SPECIFICALLY STATED OTHERWISE 333 OX QUANTITY







Box Section Levels

Aluminium powder coated box level with precision milled base. One horizontal and two vertical vials (except 300mm long which only has one vial of each orientation) and antislip wall pads. Average accuracy 0.5mm per 1M = 0.029° in standard position. Hanging tabs for user convenience. Manufactured for Draper Tools by Kapro. Display packed.

Stock No.	Length	Box Price Qty each
79575 79576 79577 79578	300mm 600mm 900mm 1200mm	- €14.65P - €15.53P - €18.38P - €18.38P - €22.35P




Box Section Levels with Ergo Grip[™] Handles

Extruded aluminium electrostatic coated box section level with precision milled base and Ergo Grip™ nonslip soft grip handles. One horizontal and two vertical. Average accuracy 0.5mm per 1M = 0.029° in standard position. Hanging tabs for user convenience. Manufactured for Draper Tools by Kapro. Display packed.

-20	

0 0	, , , , , , , , , , , , , , , , , , , ,	
Stock No.	Length	Box Price Qty each
13408	600mm	– €15.96P
13413	900mm	– €21.90P
13414	1200mm	– €25.29P



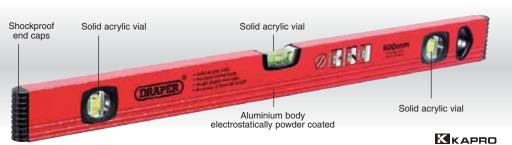

4 D786-40/41 **Box Section Levels**

Extruded aluminium electrostatic coated box section level with precision milled base. One horizontal and two vertical vials, except 300mm long which has one of each. Average accuracy 0.5mm per 1M = 0.029° in standard position. Hanging tabs for users convenience. Manufactured for Draper Tools by Kapro. Display packed.

Stock No.	Length	Box Qty	
13382 13384 13397 13400	300mm 600mm	-	€7.40P €9.83P
13397 13400	900mm 1200mm		€12.15P €14.76P



🚺 D992 KAPRO 250mm Digital Angle Finder

Expert Quality, for angle finding in various applications. Anodized finish with lockable adjustable blade. LCD with LED backlight display with various functions including level, pitch, presets with buzzer. LCD readout reads 'right way' when turned through 180°. Accuracy 0.1°. Manufactured for Draper Tools by Kapro. Display packed.

Stock	Box	Price
No.	Qty	each
03077	-	€84.74P



4 D241

225mm Plumb Site® Dual View[™] Level with Magnetic Base and Detachable Mini Level

A multi-purpose magnetic level incorporating a detachable mini level (size: 53 x 27mm). The level has one horizontal and front viewing Plumb Site® Dual View™ vials plus a magnetic strip in the base. The mini level has a horizontal vial, magnetic base, line suspension facility and is held securely in the main level by a locking switch. Accuracy 1.75mm per $1M = 0.1^{\circ}$ in standard position. Manufactured for Draper Tools by Kapro. Display packed.

Stock No.	Box Qty	Price each
69608	-	€11.89P



230mm Boat Level with Magnetic Base

Moulded from polystyrene with a magnetic strip in the base. Unbreakable all-round reading horizontal, vertical and 45° vials. Incorporates a V groove in the top and a hang hole. Accuracy 1.75mm per $1M = 0.1^{\circ}$ in standard position. Manufactured for Draper Tools by Kapro. . Display packed

Display packed.		
Stock No.	Box Qty	Price each
69563	-	€4.89P



250mm Plumb Site® Dual View™ Boat Spirit Level with Magnetic Base

Expert Quality, with front viewing Plumb Site® Dual View[™] vial. Cast aluminium with one horizontal, one 45° and a Plumb Site® Dual View[™] vial. Special milled base with two rare earth magnets. Accuracy: 0.5mm per 1M = 0.029° in standard position. Manufactured for Draper Tools by Kapro. Display packed.

Stock	Box	Price
No.	Qty	each
69550	-	€26.49P



230mm Torpedo Level KAPRO with Magnetic Base

ABS with a magnetic strip in the base. Unbreakable all-round reading horizontal, vertical and 45° vials. Incorporates a V groove in the top, rubber end caps and a hang hole. Accuracy 1.75mm per 1M = 0.57° in standard position. Manufactured for Draper Tools by Kapro. Display packed.

Stock Price Box No. Qty each €4.61P 79579



100mm Mini Level

ABS moulded level with two vials and 0-90° angle finder in body. Accuracy 1.75mm per 1M = 0.1° in standard position. Manufactured for Draper Tools by Kapro. Display packed.

Stock No. Box Qty Price each 44444 €2.95P

LEVELS/MEASURING



250mm Plumb Site® KAPRO Dual View[™] Torpedo Level with Magnetic Base

Expert Quality, magnetic 'V' groove level with front viewing Plumb Site® Dual View™ vial. The 'V' groove is especially useful in levelling pipework. Three vials: horizontal, 45° and vertical with Plumb Site® Dual View[™] window. Accuracy 1.75mm per 1M = 0.1° in standard position. Manufactured for Draper Tools by Kapro. Display packed.

Stock	Box	Price
No.	Qty	each
69554	10	€10.54P

NEW

KAPRO



250mm Cast Boat Levels

Horizontal and vertical vials, with precision milled base. Accuracy 1.0mm per $1M = 0.057^{\circ}$ in standard position. Multiples of 12 levels only, supplied in countertop display. Minimum order 12 or multiples thereof

Stock	Box	Price
No.	Qty	each
45868	12	€6.23P



D440LL 78mm Line Level

KAPRO

335

Manufactured from impact resistant plastic, incorporating a pocket clip, line suspension hooks and V grooved ends. Can be used to check any surfaces including pipework. Accuracy 1.75mm per $1M = 0.1^{\circ}$ in standard position. Manufactured for Draper Tools by Kapro. Display packed.

Stock	Box	Price
No.	Qty	each
69562	-	€2.86P



EMTSS Professional **Measuring Tapes**

5 (a a) Expert Quality, in stainless steel case with soft grip. Large positive blade locking button and belt clip. Power return nylon coated blade has clear black and red graduations, metres into cm/mm and feet into inches, 1/8" and 1/16". Yellow wear resistant coating. Stud centre markings every 16". Self-aligning double plated end hook for very accurate internal/external measurements. Display packed.

DRIVER

5M/16ft

Sto	Blade	Blade	Box	Price
No.	.ength	Width	Qty	each
360	BM/10ft	19mm	6	€8.28D
360	5M/16ft	19mm	6	€11.60D
360	3M/26ft	25mm	6	€20.10D



Metric scale manufactured to EC Class II accuracy Expert Quality, tough impact resistant ABS case with rubber soft grip, blade locking button and belt clip. Power return nylon coated blade has clear black and red graduations, metres into cm/mm and feet into inches, 1/8" and 1/16". Yellow wear resistant coating. Stud centre markings every 16". Self-aligning end hook for very accurate internal/external measurements. Display packed.

Stock No.	Tape Length	Tape Width	Box Price Qty each
35946	5M/16ft	19mm	6 €10.58D
36001	8M/26ft	25mm	6 €18.65D
36002	10M/33ft	32mm	6 €24.28D



Expert Quality, in tough impact resistant satin chrome plated ABS case with soft grip, blade locking button and belt clip. Power return nylon coated blade has clear metric graduations. Self-aligning end hook for very accurate internal/external measurements. Display packed.

Stock	Tape	Box Price
No.	Width	Qty each
69592	19mm	4 €12.20D



5 RTD/B

Soft Grip Heavy Duty Trade Measuring Tapes

Metric scale manufactured to EC Class II accuracy

Tough impact resistant ABS case with rubber soft grip, blade locking button and belt clip. Power return nylon coated blade has clear black and red graduations, metres into cm/mm and feet into inches, 1/8" and 1/16". Yellow wear resistant coating. Stud centre markings every 16". Self-aligning end hook for very accurate internal/external measurements. Display packed.

Stock	Tape	Tape	Box	Price
No.	Length	Width	Qty	each
33918	5M	19mm	-	€9.98D
33920	8M	25mm		€18.73D

PERSONALISED TAPE MEASURES **MAKE YOUR COMPANY STAND OUT FROM THE CROWD**

Choose from two tape lengths and two designs. Item No. 3: 5M/16ft or 7.5M/25ft and item No. 5: 5M/16ft or 7.5M/25ft

Personalised Tape Measures are also available using 5M/16ft or 7.5M/25ft Draper DIY Series Soft Grip Measuring Tapes. See page 773 for tape details. NOTE: Tapes can only be ordered via a special order form obtainable from the Draper Tools Sales Desk: Tel +44 (0) 23 8049 4333.

Delivery time usually six weeks from ordering date. Minimum order quantities apply.





ALMT Soft Grip Auto Lock Measuring Tapes

Tough impact resistant ABS case with soft grip, blade locking button and belt clip. Blade remains out when extended without use of locking button. Power return nylon coated blade has clear black and red graduations, metres into cm/mm and feet into inches, 1/8" and 1/16". Yellow wear resistant coating. Stud centre markings every 16". Self-aligning end hook for very accurate internal/external measurements. Display packed with 'Try Me' feature on pack.

Stock	Tape	Tape	Box	Price	
No.	Length	Width	Qty	each	
30863	3M/10ft	13mm	6	€6.98D	
30937	5M/16ft	19mm	6	€9.30D	
30941	8M/28ft	25mm	6	€18.68D	

EMTG Soft Grip Measuring Tapes

DRAPER

Tough impact resistant ABS case with soft grip, blade locking button and belt clip. Hold and measure button allows user to lock tape for accurate measurements with button on base to control speed of return blade into tape. Power return nylon coated blade has clear black and red graduations, metres into cm/mm and feet into inches, 1/8" and 1/16". Yellow wear resistant coating. Stud centre markings every 16". Self-aligning end hook for very accurate internal/external measurements. Display packed.





5 ЕМТС

Easy Find Measuring Tapes

Brightly coloured plastic tape case with locking button and belt clip. Power return blade has clear graduations, metres into cm/mm and feet into inches, 1/8", 1/16" and 1/32". Yellow wear resistant coating. Stud centre markings every 16". Self-aligning end hook for accurate internal/external measurements. Random colours only. Sold loose

Stock No.	Tape Length	Tape Width	Box Qty	Price each
75880	3M/10ft	13mm	12	€5.95D
75881	5M/16ft	19mm	12	€10.13D
75882	7.5M/25ft	25mm	12	€12.98D



Tough impact resistant ABS cases with soft grip, blade

allows user to lock tape for accurate measurements with

locking button and belt clip. Hold and measure button

button on base to control speed of return blade into

tape. Power return nylon coated blade has clear black

and red graduations, metres into cm/mm and feet into

Stud centre markings every 16". Self-aligning end hook

order 24 or 30 tapes or multiples thereof

Tape

Width

19mm

25mm

inches, 1/8" and 1/16". Yellow wear resistant coating

for very accurate internal/external measurements. Multiples of 30 or 24 tapes only, supplied in countertop

Tape

Length

5M/16ft

7.5M/25f

Soft Grip Measuring Tapes

displays

Minimun

Stock

75373

75374

No.

Qty. per Disp.

30

24

2 ЕМТСМ 10M/33ft Soft Grip Magnetic **Measuring Tape**

Tough impact resistant ABS case with soft grip, blade locking button and belt clip. Magnetic tip/hold and measure button allows user to lock tape for accurate measurements with button on base to control speed of return blade into tape. Power return nylon coated blade has clear black and red graduations, metres into cm/mm and feet into inches, 1/8" and 1/16". Yellow wear resistant coating. Stud centre markings every 16". Self-aligning end hook for very accurate internal/external Diaplay

measurements. Display packeu.						
Stock No.	Tape Width	Box Qty	Price each			
79107	32mm	8	€19.08D			

6 EMTC/DB

Easy Find Measuring Tapes

Brightly coloured plastic tape cases with locking button and belt clip. Power return blade has clear graduations, metres into cm/mm and feet into inches, 1/8", 1/16" and 1/32". Yellow wear resistant coating. Stud centre markings every 16". Self-aligning end hook for accurate internal/external measurements. Packed 1/3 of each colour - orange, green and yellow per dispenser. Multiples of 30 tapes (3M/10ft and 5M/16ft) or 24 (7.5M/25ft) only, supplied in countertop displays.

imum order 24 or 30 or multiples th

Stock No.	Qty. per Disp.	Tape Length	Tape Width	Box Qty	Price each
75883	30	3M/10ft	16mm	30	€5.95D
75884	30	5M/16ft	19mm		10.13D
75886	24	7 5M/25ft	25mm	24 £	12 98D

FOR YOUR CONVENIENCE, WE RECOMMEND ORDERING IN BOX QUANTITY OR MULTIPLES OF BOX QUANTITY Where shown. You can still order in any quantity unless specifically stated otherwise BOX QUANTITY

Box

Qty


30 €11.03D 24

Price

each

€14.50D



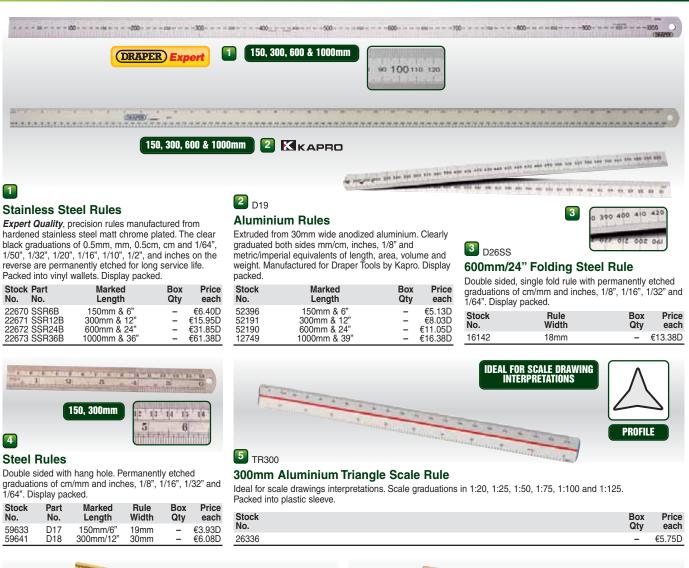



Plastic Folding Rule

Manufactured from tough, impact resistant ABS plastic with clear graduations of cm/mm one side and 1/16"/inches on the other. Display packed.

Stock	Marked	Rule	Box Price
No.	Length	Width	Qty each
12392	1000mm/39"	17mm	4 €12.63D



Hardwood Rule

Clear black graduations with solid brass hinges and tips. Graduated cm/mm one side, with 1/16", 1/8"/inches on reverse. Display packed.

Rule	Box	Price	Stock	Marked	Rule	Box	Price
Width	Qty	each	No.	Length	Width	Qty	each
17mm	4 €	12.63D	36522	1M & 39"	15mm	_	€16.35D



Digital Caliper Gauge

General purpose gauge with carbon fibre components fitted with metric/imperial digital LCD display. Can be used for internal and external measurements. Display packed

Stock	Range	Box	Price
No.		Qty	each
24816	150mm & 6"	10	€26.50D



1

18066

_	Box	Price	Stock No.	Pai No
Range	Qty	each	39493	481
50mm & 6"	6	€4.75D	39500	



Caliper Gauges

General purpose calipers with thumb wheel fine adjustment. Can be used for internal, external and depth measurements. Metric/imperial graduations, cm/mm and 1/16"/inches. Display packed

.,	ionoon Biopic	y paono ai		
Stock	Part	Range	Box	Price
No.	No.		Qty	each
39493		115mm & 4.1/2"	6	€12.25D
39500		150mm & 6"	6	€14.75D

889

ELECTRICAL TOOLS

DIGITAL MULTIMETER QUICK REFERENCE TABLE

Item Nos. 1, 2 & 3 on this page and 1, 2 & 3 on page 367 show our quality range of digital multimeters.

Image: Section of the sectio	
AC Voltage •	
AC Voltage •	
AC Current Resistance .	
Resistance •	
Continuity Buzzer .	
Buzzer • <td></td>	
Positions: Rotary Function & Range Selector 16 20 20 13 manual autoranging 30 12 manual autoranging Recessed input terminals •	
Rotary Function & Range Selector 16 20 20 manual/ autoranging 30 manual/ autoranging Recessed input terminals •	
terminals•••••Stand••••••Stand••••••Stand••••••Specification••••••Rubber•••••••Rubber••••••••Storage case/wallet••••••••Probe Set•• <td></td>	
Stand • <td></td>	
Specification \cdot \cdot \cdot \cdot \cdot \cdot Rubber bump cover \cdot \cdot \cdot \cdot \cdot \cdot \cdot \cdot Storage case/wallet \cdot \cdot \cdot \cdot \cdot \cdot \cdot \cdot Probe Set \cdot \cdot \cdot \cdot \cdot \cdot \cdot \cdot Crocodile ClipsoptionaloptionaloptionaloptionaloptionaloptionalAdditional Functions9V Battery TestData hold. Transistor HFE test facility. Illuminated display.Data hold. Battery test facility. Illuminated display.Data hold. Tequency. Ut Cycle. Illuminated display. Auto power off.Data hold. Temperature. Frequency. Ut Cycle. Illuminated display. Auto. power off.Data hold. Data hold. Temperature. Frequency. Illuminated display. Auto. power off.Data hold. Test Illuminated display. Auto. power off.Data hold. Test Illuminated display. Auto. power off.Data hold. Test Illuminated display. Auto. power off.Data hold. Test Illuminated display. Auto. power off.Data hold. Test 	
bump cover Storage case/wallet••••Storage case/wallet·····Probe Set••••••Crocodile ClipsoptionaloptionaloptionaloptionaloptionaloptionalAdditional Functions9V Battery TestData hold. Transistor HFE test facility. Illuminated display.Data hold. Battery test facility. Illuminated display.Data hold. Battery test facility. Illuminated display.Data hold. Prequency. Duty Cycle. Ultrained display.Data hold. TestData hold. TestDa	
case/wallet Probe Set .	
Probe Set•••••Crocodile ClipsoptionaloptionaloptionaloptionaloptionaloptionaloptionalAdditional Functions9V Battery TestData hold. Transistor HFE test facility. Illuminated display.Data hold. Battery test facility. Illuminated display.Data hold. Data hold. Battery test facility. Illuminated display.Data hold. Data hold. Data hold. TestData hold. TestData hold. Transistor HFE test facility. Illuminated display.Data hold. Data hold. Data hold. TestData hold. <td></td>	
Additional Functions9V Battery TestData hold. Transistor HFE test 	
Additional Functions 9V Battery Test Data hold. Transistor HFE test facility. Illuminated display. Data hold. Battery test facility. Illuminated display. Data hold. Transistor HFE test facility. Illuminated display. Data hold. Battery test facility. Illuminated display. Data hold. Temperature. Frequency. Illuminated display. Data hold. Temperature. Huminated display. Data hold. Temperature. Frequency. Auto power off. Data hold. Temperature. Illuminated display. Auto power off. Data hold. Temperature. Huminated display. Auto power off. DC Voltage 200mV, 2000mV, (acc: ± 0.5%) 200mV, 2000mV, 200V, 500V (acc: ± 0.8%) 200mV, 2000mV, 200V, 600V (acc: ± 1%) 200mV, 4V, 40V, 400mV, 4V, 40V, (acc: ± 1.5%) 200mV, 20V, 20V, 200V, 200V, (acc: ± 2.5%) 400mV, 4V, 40V, 40V, 40V, (acc: ± 2.5%)	al
DC Voltage 200mV, 2000mV, 20V, 200V, 500V (acc: ± 0.5%) 200mV, 2000mV, 20V, 200V, 600V (acc: ± 1%) @ 600V) 200mV, 2000mV, 20V, 200V, 600V (acc: ± 1%) @ 600V) 400mV, 4V, 40V, 400V, 1000V (acc: ± 1.5%) 200mV, 2V, 20V, 200W, 100VV (acc: ± 1%) 400mV, 4V, 40V, 400V, 1000V AC Voltage 200V, 500V, (acc: ± 2%) 200V, 600V (acc: ± 1.2%) 200V, 600V (acc: ± 1.2%) 400mV, 4V, 40V, @ 1000V 2V, 20V, 20V, @ 100VV 4V, 40V, 700V	erature 2. Duty Battery display
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	əd
DC Voltage 2001, 2000, 200	
AC Voltage 200V, 500V, 200V, 600V 200V, 600V 400V, 750V 700V 4V, 40V, 700V (acc: ± 2%) (acc: ± 2%) (acc: ± 2.5% (acc: ± 2.5%) (acc: ± 2.5%)	00V .5%
DC Current 2000 A, 20mA, 200mA 2000 A, 20mA, 200mA 2000 A, 20mA, 200mA, 10A 2000 A, 20mA, 200mA, 10A 2000 A, 20mA, 200mA, 10A 400 A, 4000 A, 40mA, 400mA, acc: ± 2.5% 2mA, 20mA, 200mA, 20A 400 A, 40 0 A 400 A, 20mA, 40mA, 400mA, acc: ± 2.5% 200mA, 10A 200mA, 10A 200mA, 20A 20A 400 A, 40 0 A 400 A, 40 0 A 400 A, 10A 200 A, 20MA, 10A 10A 10A 20A 400 A, 20A 0 B 400 A, 10A 400 A, 40 400 A, 40 400 A, 40 400 A, 40	nA, 4A 5%
AC Current 400 A, 4000 A, 400	nA, 4A
Resistance 2000, 2000, 20k0, 20k0, 20k0, 20k0, 20k0, 20k0, 20k0, 20k0, 20k0, 20k0, 200k0, (acc: ±15%) 2000, 2000, 20k0, 20k0, 20k0, 20k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0, 200k0,	ΜΩ, <u>),</u> 2%
Capacitance 4nF, 40nF, 40nF, 40nF, 40nF, 40nF, 2nF, 20nF, 20nF, 20nF, 20nF, 20nF, 40F, 10 (acc: ±5%) 4nF, 40 F, 200 F (acc: ±5%) 2nF, 20n F (acc: ±4%) 40nF, 40nF	
Size-mm (W - H - D) 55 x 112 x 40 68 x 140 x 45 75 x 155 x 46 75 x 155 x 45 92 x 195 x 38 92 x 195	0 F
Weight 70g 220g 442g 200g 380g 400g	0 F @100
Battery Type 1 x 12V 1 x 9V 1 x 9V <th1 9v<="" th="" x=""> <th1< td=""><td>0 F @100 x 38</td></th1<></th1>	0 F @100 x 38



section 7

DMM7 Digital Multimeter

Specification shown in 'Digital Multimeters' Table or the meter's instruction manual. Display packed.

Stock	Description	Box	Price
No.		Qty	each
52320	Multimeter	-€	27.10D
53549	Crocodile Clips		€5.75D
53548	Probe Set		€5.65D



2 DMM1A

Digital Multimeter

Specification shown in 'Digital Multimeters' Table or the meter's instruction manual. Display packed.

Stock	Description	Box	Price
No.		Qty	each
60792	Multimeter	- €	32.93D
51348	Crocodile Clips		€6.30D
53551	Probe Set		€7.53D
61837	Battery (PP3)	12	€7.38D



3 DMM2B

Digital Multimeter Specification shown in 'Digital Multimeters' Table or the meter's instruction manual. Display carton.

Stock No.	Description	Box Qty	Price each
78993	Multimeter	- €5	3.05D
51348	Crocodile Clips	- €	6.30D
53551	Probe Set	- €	7.53D
61837	Battery (PP3)	12 €	7.38D



366



Autoranging Digital Multimeter

Specification shown in 'Digital Multimeters' Table or the meter's instruction manual. Display carton.

Stock No.	Description	Box Qty	Price each
78997	Multimeter	- €8	7.60D
51348	Crocodile Clips	- €	6.30D
53551	Probe Set	- €	7.53D
53552	Temperature Probe	- €1	2.85D
61837	Battery (PP3)	12 €	7.38D



2 DMM10B **Digital Multimeter**

Expert Quality. Specification shown in 'Digital Multimeters' Table or the meter's instruction

manual. Battery supplied - PP3 type. Display carton.

Stock No.	Description	Box Qty	Price each
78998	Multimeter	– €	106.43D
88813	Crocodile Clips	-	€4.63D
53551	Probe Set	-	€7.53D
53552	Temperature Probe	- 4	€12.85D
61837	Battery (PP3)	12	€7.38D



Autoranging Digital Multimeter

Expert Quality, specification shown in 'Digital Multimeters' Table or the meter's instruction manual. Display carton.

Stock No.	Description	Box Qty	Price each
78999	Multimeter	-€	114.98D
88813	Crocodile Clips	-	€4.63D
53551	Probe Set	-	€7.53D
53552	Temperature Probe		€12.85D
61837	Battery (PP3)	12	€7.38D

DIGITAL CLAMP METER OUICK REFERENCE TABLE

Item Nos. 4, 5, 6 & 7 on this page show our range of clamp meters.

Recessed input terminalsStandStandIEC 61010-1 SpecificationRubber bump coverStorage caseProbe SetCrocodile Clipsoptional Uminatedoptional Data hold. Dum power of UminatedData hold. Dut Cycle. Temperature. Frequency. Max cable $35mm0$. Illuminated display.Data hold. Dut Cycle. Temperature. Frequency. Max cable $35mm0$. Illuminated display.Data hold. Duty Cycle. Temperature. Frequency. Max cable $60mm0$.Data hold. Duty Cycle. Temperature. Frequency. Insulation Tester. Illuminated display.Data hold. Duty Cycle. Temperature. Frequency. Max cable $60mm0$.Data hold. Duty Cycle. Temperature. Frequency. Insulation Tester. Max. cable $60mm0$.Data hold. Duty Cycle. Tester. Max. cable $60mm0$.Data hold. Duty Cycle. Tester. Max. cable $60mm0$.Duty Cycle. Temperature. Frequency. Max. cable $600m0$.Duty Cycle. Temperature. Frequency. Max. cable $600m0$.Duty Cycle. Temperature. Frequency. Max. cable $600m0$.Duty Cycle. <th>Stock No. Part No.</th> <th>79000 DMM8B</th> <th>79002 DMM9B</th> <th>34280 DCM2</th> <th>04698 DCM1B</th>	Stock No. Part No.	79000 DMM8B	79002 DMM9B	34280 DCM2	04698 DCM1B
AC Voltage • • • DC Current • • • • AC Current • • • • Resistance • • • • Continuity • • • • Diode Check • • • • Poisitions: 8 8 6 17 Range Selector autoranging autoranging autoranging Recessed input • • • • Stand • • • • Stand • • • • Rubber • • • • • Probe Set • • • • • • Additional Auto. power oft. Max. cable 3mm.ol. 3ata hold. Duty Cycle. Data hold. Duty Cycle. Data hold. Duty Cycle. Sec. B 0 0 0 0 0 0 0 0 </th <th></th> <th></th> <th></th> <th></th> <th></th>					
DC CurrentAC CurrentAC CurrentResistanceContinuityBuzzerDide CheckPositions:886Rotary FunctionRecessed inputterminalsStandIEC 61010-1SpecificationRubberDrobe SetCrocodile ClipsoptionaloptionalOptionaloptionaloptionalData holdData holdData holdMunimatedMark cable.MunimatedBatterySuppliedSuppliedSuppliedSuppliedSuppliedColorAC Voltage20, 200, 200, 200, 200, 200, 200, 200,		•	•	•	•
AC Current••••Resistance•••••Continuity $uccontinuity••••Buzzer•••••Diode Check•••••Positions:88617manual/Range SelectorautorangingautorangingautorangingautorangingRecessed input terminals••••Stand•••••IEC 61010-1•••••Specification•••••Rubber•••••bump cover•••••Storage•••••Crocodile ClipsoptionaloptionaloptionaloptionalData hold, Auto, power oft, FunctionsData hold, Auto, power oft, Biglay, Biglay$					
Continuity BuzzerBuzzerDidde CheckPositions: Rotary Function & Range SelectorRecessed input terminalsStandStandStandStandStandProbe SetCrocodile Clips Punctionsoptional Max. cable 2mmn0optional Optionaloptional Optional OptionalOptional Duty Cycle. Temperature. Max. cable 3mm0.Data hold. Duty Cycle. Temperature. Hax. cable 3mm0.Data hold. 					
Buzzer•••Didde Check•••Positions: Rotary Function & Range Selector8manual/ autorangingmanual/ autorangingmanual/ autorangingRecessed input terminals•••Stand•••Stand•••Stand•••Stand•••Bubber bump cover•••Storage case•••Crocodile Clipsoptional Batteryoptional Batteryoptional Optionaloptional Data hold. Duty Cycle. Temperature. Auto power ofb 2mmol 2mmolData hold. Data hold. Duty Cycle. Temperature. Auto case 2mmol.Data hold. Duty Cycle. Temperature. Frequency. Range and AccuracyData hold. Duty Cycle. Temperature. Max. cable 8mmol.Data hold. Duty Cycle. Temperature. Max. cable 8mmol.Dotmv, 2V, 400 wt, 4V, 400 wt, 4V, 400 wt, 4V, 400 wt, 40V, 40V, 400 wt, 40V,	Resistance	•	•	•	•
Positions: Rotary Function & Range Selector Recessed input terminals8 manual/ autoranging17 manual/ autoranging autoranging autorangingRecessed input terminals••••Stand•••••Rubber bump cover•••••Storage case•••••Probe Set•••••Crocodile Clips Functionsoptional Data hold. Data hold. Data hold. Data kak, hold. Auto, power off. BatteryData hold. Data hold. Data hold. Data hold. Data cable 35mm0 Billiminated display.Data hold. Data hold. Duty Cycle. Temperature. Temper		•	•	•	•
Rotary Function & Range Selector autorangingmanual/ autorangingmanual/ autorangingmanual/ autorangingmanual/ autorangingRecessed input terminals••••Stand••••Stand••••IEC 61010-1 Specification••••Rubber bump cover••••Storage case••••Crocodile Clipsoptional Data hold, Aux. cableoptional Optionaloptional Data hold, Data hold, Data cable 36mm0, illuminatedData hold, Data hold, Data cable 36mm0, illuminatedData hold, Data hold, Data cable 36mm0, idsplay.Data hold, Data hold, 200mV, 2V, 200mV, 2V, 					•
terminals•••Stand•••Stand•••IEC 61010-1 Specification•••Rubber bump cover•••Storage case•••Storage case•••Probe Set•••Crocodile Clipsoptional Data hold, Max. cable 28mm0Data hold, Duty Cycle. Tequency. Insulation 35mm0Data hold, Duty Cycle. Tequency. Insulation 35mm0Data hold, Duty Cycle. Tequency. Insulation 35mm0Data hold, Duty Cycle. Tequency. Insulation 35mm0Data hold, Duty Cycle. Tequency. Insulation 35mm0Data hold, Duty Cycle. Tequency. Insulation Tester. Max. cable 60mm0.Data hold, Duty Cycle. Tequency. Insulation Tester. Max. cable 60mm0.Data hold, Duty Cycle. Tequency. Insulation Tester. Max. cable 60mm0.Data hold, Duty Cycle. Tequency. Insulation Tester. Max. cable 60mm0.Data hold, Duty Cycle. Teguency. Insulation Tester. Max. cable 60mm0.Data hold, Duty Cycle. 200m/24/ 200m/24/ 200m/2000/ (acc: $\pm 2.5\%$ (ecc) \pm	Rotary Function	manual/	manual/	manual/	
StandIEC 61010-1 Specification.Rubber bump cover.Storage case.Probe Set.Crocodile ClipsoptionalAdditional FunctionsData hold, Max. cable 29mm0 Illuminated display.Data hold, Data hold, Duty Cycle. Temperature, Frequency, Illuminated display.Data hold, Data hold, Duty Cycle. Temperature, Frequency, Illuminated display.Data hold, Duty Cycle. Temperature, Frequency, Illuminated display.Data hold, Duty Cycle. Temperature, Frequency, Illuminated display.Data hold, Duty Cycle. Temperature, Frequency, Illuminated display.Data hold, Duty Cycle. Tester, Illuminated display.Data hold, Duty Cycle. Tester, Illuminated display.Data hold, Duty Cycle. Tester, Illuminated display.Data hold, Duty Cycle. Tester, Illuminated display.Data hold, Duty Cycle. Tester, Illuminated display.Data hold, Duty Cycle. Tester, Illuminated display.Data hold, Duty Cycle. Tester, Illuminated display.Duty Cycle.		•	•	•	•
Specification Rubber bump cover \cdot \cdot \cdot Rubber bump cover \cdot \cdot \cdot \cdot Storage case \cdot \cdot \cdot \cdot Probe Set \cdot \cdot \cdot \cdot Crocodile ClipsoptionaloptionaloptionaloptionalAdditional FunctionsData hold, Max, cable 29mm0 Illuminated display.Data hold, Duty Cycle. Temperature, Frequency, Max, cable display.Data hold, Duty Cycle. Temperature, Frequency, Max, cable 60mm0.Data hold, Duty Cycle. Tenguency, Insulation Tester, Illuminated display.Data hold, Duty Cycle. Temperature, Frequency, Insulation Tester, Illuminated display.Data hold, Duty Cycle. Tenguency, Insulation Tester, Illuminated display.Data hold, Duty Cycle. Tenguency, Insulation Tester, Illuminated display.Data hold, Duty Cycle. Tenguency, Insulation Tester, Illuminated display.Data hold, Duty Cycle. Tenguency, Insulation Tester, Illuminated display.Dommo, 200mV, 2V, 20V, 20V, (acc: $\pm 2\%$ @600V)SuppliedSuppliedSuppliedDC Voltage200mV, 2V, 20V, 20V, (acc: $\pm 2\%$ @600V)200mV, 4V, 400, 400V, (acc: $\pm 2\%$ @600V)200mV, 2V, 20V, 20V, (acc: $\pm 2\%$ @600V)200mV, 2V, 20V, 20V, (acc: $\pm 2\%$ @600V)200mV, 2V, 20V, 20V, 20V, 20V, (acc: $\pm 2\%$ @600V)200mV, 2V, 20V, 20V, (acc: $\pm 2\%$ @600V)200mV, 2V, 20V, 20V, 20V, 20V, (acc: $\pm 2\%$ @600V)200mV, 2V, 20V, 20V, 20V, 20V		•	•	•	•
bump cover Storage caseStorage caseProbe SetCrocodile ClipsoptionaloptionaloptionaloptionalAdditional FunctionsData hold, Max. cable 29mm0 Illuminated display.Data hold, Duty Cycle, Temperature, Frequency, Max. cable display.Data hold, Duty Cycle, Temperature, Frequency, Max. cable display.Data hold, Duty Cycle, Temperature, Frequency, Max. cable display.Data hold, Duty Cycle, Tester, Illuminated display.Data hold, Duty Cycle, Tester, Immediation Tester, Max. cable domm0.Data hold, Duty Cycle, Terguency, Insulation Tester, Max. cable domm0.Data hold, Duty Cycle, Tester, Max. cable domm0.Data hold, Duty Cycle, Terguency, Insulation Tester, Max. cable domm0.Data hold, Duty Cycle, Tester, Max. cable domm0.Data hold, Duty Cycle, 200m, 2V, 200, 400V, doc: $\pm 2.5\%$ @600VData hold, Max. cable domm0.Data hold, Duty Cycle, 200, 200V, 2V, 200, 200V, doc: $\pm 2.5\%$ @600VData hold, Max. cable docov, <br< th=""><th></th><th>•</th><th>•</th><th>•</th><th>•</th></br<>		•	•	•	•
caseProbe SetCrocodile ClipsoptionaloptionaloptionalAdditional FunctionsData hold. Max. hold. Data hold. Data hold. Max. cableData hold. Duty Cycle. Temperature. Frequency. Max. cable display.Data hold. Duty Cycle. Temperature. Frequency. Insulation Temperature. Temperature. Temperature. Temperature. Temperature. Temperature. Temperature. Temperature. Temperature. Temperature. Temperature. Tester. Max. cable 60mm0.Data hold. Duty Cycle. Temperature. Temperature. Temperature. Tester. Max. cable 60mm0.BatterySuppliedSuppliedSuppliedSuppliedDC Voltage200ml/, 2V, 200W, 2V, 00V (acc: $\pm 15\%$ @ 600V)400mV, 4V, 40V, 400V, 600V (acc: $\pm 2\%$ @ 600V)200mV, 2V, 200W, 2V, 200W, 2V, 200W, 2V, 200W, 200V, 600V (acc: $\pm 2.5\%$ @ 600V)200mV, 2V, 200W, 2V, 200W, 2V, 200W, 2V, 200W, 2V, 200W, 200V, 600V (acc: $\pm 2.5\%$ @ 600V)200mV, 2V, 200W, 200W, 600V (acc: $\pm 2.5\%$ @ 600A)200mV, 2V, 200W, 2V, 200		•	•	•	•
Crocodile ClipsoptionaloptionaloptionaloptionalAdditional FunctionsData hold, Max. cable 29mm0 110minated display.Data hold, Data hold, Data hold, Duty Cycle, Terequency, Insulation Tester, Insulati		•	•	•	•
Additional FunctionsData hold. Max. hold. Auto. power off. Max. cable gemm0 Illuminated display.Data hold. Duty Cycle. Temperature. Frequency. Insulation Tester. Max. cable gemm0. Illuminated display.Data hold. Duty Cycle. Temperature. Frequency. Insulation Tester. Max. cable 60mm0.Data hold. Duty Cycle. Temperature. Frequency. Insulation Tester. Max. cable 60mm0.Data hold. Duty Cycle. Temperature. Frequency. Insulation Tester. Max. cable 60mm0.Data hold. Duty Cycle. Temperature. Frequency. Insulation Tester. Max. cable 60mm0.Data hold. Duty Cycle. Temperature. Temperature. Frequency. Insulation Tester. Max. cable 60mm0.BatterySuppliedSuppliedSuppliedSuppliedSuppliedDC Voltage200mV, 2V, 200W, 2V, 00V (acc: $\pm 15\%$ @ 600V)400mV, 4V, 40V, 400V, 600V (acc: $\pm 2\%$ @ 600V)200mV, 2V, 200W, 2V, 200W, 2V, 200W, 2V, 20V, 200V, 600V (acc: $\pm 2.5\%$ @ 600V)200mV, 2V, 200W, 2V, 200W, 750V (acc: $\pm 2.5\%$ @ 600V)DC Voltage2A, 20A, 20X, 20V, @ 600V)40A, 400V, (acc: $\pm 2.5\%$ @ 600V)200M, 750V (acc: $\pm 2.5\%$ @ 600A)DC Current2A, 20A, 20A, 20AA, 40AA (acc: $\pm 3\%$ @ 600A)6A, 60A, (acc: $\pm 3\%$ @ 600A)20A, 200A, 20A, (acc: $\pm 2.5\%$ @ 800A)AC Current2A, 20A, 20A, 20MQ, (acc: $\pm 3\%$ @ 20MQ)400A, 400A, (acc: $\pm 3\%$ @ 800A)6A, 60A, (acc: $\pm 2.5\%$ @ 800A)20A, 20A, 20A, 20A, 20A, 20A, 20A, 20A, 20A, 20A, 20AA, 20A, 20AA, (acc:	Probe Set	•	•	•	•
Additional Functions Data field. Max. hold. Auto. power off. Max. cable SymmO liluminated display. Duty Cycle. Temperature. Temperature. Max. cable display. Duty Cycle. Temperature. Tequency. Max. cable display. Duty Cycle. Temperature. Tequency. Max. cable dommO. Duty Cycle. Temperature. Tequency. Max. cable dommO. Battery Supplied Supplied Supplied Supplied Supplied Supplied DC Voltage 200mV, 2V, $00C (acc: \pm 15\%)@600V) 400mV, 4V,(acc: \pm 2\%)@600V) 400mV, 4V,(acc: \pm 2\%)@600V) 200mV, 2V,(acc: \pm 2\%) 200MV, 4V,(acc: \pm 2\%) 200MV,$	Crocodile Clips	optional		•	
Battery Supplied		Max. hold. Auto. power off. Max. cable 29mmØ Illuminated	Duty Cycle. Temperature. Frequency. Max. cable 35mmØ. Illuminated	Duty Cycle. Temperature. Frequency. Insulation Tester. Max. cable	Duty Cycle. Temperature. Frequency. Insulation Tester. Max. cable
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Battery	Supplied	Supplied	Supplied	Supplied
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $		Range	and Accurac	У	1
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	DC Voltage	20V, 200V, 600V (acc: ± 1.5%	40V, 400V, 600V (acc: ± 2%	40V, 400V, 600V (acc: ± 2%	20V, 200V, 1000V (acc: ± 1.5%
Current 2A, 20A, 200A, 400A 40A, 400A, 1000A 6A, 60A, 600A 20A, 200A, 1000A AC Current 2A, 20A, 200A, 400A 40A, 400A, 1000A 6A, 60A, 600A 20A, 200A, 1000A Resistance 2000, 2kQ, 2MQ, 20MQ, (acc: ± 3%) 400Q, 4kQ, 40kQ, 400kQ, (acc: ± 3%) 400Q, 4kQ, 40kQ, 400kQ, (acc: ± 3.5%) 200Q, 2kkQ, 2MQ (acc: ± 1.5%) 200Q, 2kQ, 2MQ Capacitance 40nF, 40nF, 100 F 40nF, 40nF, 100 F 200Q, 2kQ, 40MQ 200Q, 2kQ, 2MQ	AC Voltage	20V, 200V, 600V (acc: ± 2%	40V, 400V, 600V (acc: ± 2.5%	40V, 400V, 600V (acc: ± 2.5%	(acc: ± 2.0%
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	DC Current			600A (acc: ± 3%	
Resistance 20kΩ, 200kΩ, 2MΩ, 20MΩ, (acc: ± 3%) 40kΩ, 400kΩ, 4MΩ, 40MΩ, (acc: ± 3%) 40kΩ, 400kΩ, 4MΩ, 40MΩ, (acc: ± 3.5%) 2002, 2002, 4MΩ, (acc: ± 3.5%) Capacitance 40kΩ, 400kΩ, (acc: ± 4.5%) 40kΩ, 400kΩ, (acc: ± 3.5%) 2002, 2002, (acc: ± 1.5%) Capacitance 40kR, 400F, 4 F, 40 F, 100 F 400K, 400KΩ, (acc: ± 1.5%) 2002, 2002, (acc: ± 1.5%)	AC Current	200A, 400A (acc: ± 3%	1000A (acc: ± 3%	600A (acc: ± 3%	1000A (acc: ± 2.5%
Capacitance 4 F, 40 F, 100 F	Resistance	20kΩ, 200kΩ, 2MΩ, 20MΩ, (acc: ± 3%	40kΩ, 400kΩ, 4MΩ, 40MΩ, (acc: ± 3.5% @40MΩ)	40kΩ, 400kΩ, 4MΩ, 40MΩ, (acc: ± 3.5%	2MΩ (acc: ± 1.5%
@100 F)			4 F, 40 F, 100 F (acc: ± 5%		
Size-mm (W - H - D) 50x200x35 80x229x49 80x229x49 100x237x45		50 x 200 x 35	80 x 229 x 49	80 x 229 x 49	100 x 237 x 45
Weight 200g 303g 280g 310g	Weight	200g	303g	280g	310g
Battery Type 2 x 1.5V 1 x 9V 1 x 9V 1 x 9V (AAA) (PP3) (PP3) (PP3)	Battery Type				

Autoranging Digital Clamp Meter Expert Quality, for specification see table (left). Display carton. Stock No. Price each Box Qty Description - €87.58D 79000 Clamp Meter 51348 Crocodile Clips Probe Set €6.30D €7.53D _ 53551 61833 Batteries (4 x AAA) €4.38D (DRAPER) Exper

(DRAPER) Expert



Autoranging Digital Clamp Meter

Expert Quality, for specification see table (left). Display carton.

Stock No.	Description	Box Price Qty each
79002	Clamp Meter	- €137.98D
51348 53551	Crocodile Clips Probe Set	- €6.30D - €7.53D
53552	Temperature Probe	- €12.85D
61837	Battery (PP3)	12 €7.38D



Autoranging Digital Clamp Meter Expert Quality, for specification see table (left). Display carton.

Stock No.	Description	Box Price Qty each
34280	Clamp Meter	- €169.98D
61837	Battery (PP3)	12 €7.38D



Autoranging Digital Clamp Meter For specification see table (left). Display carton.

	()		,
Stock No.	Description	Box Qty	Price each
04698	Clamp Meter	-	€35.20D
61837	Battery (PP3)	12	€7.38D

FOR YOUR CONVENIENCE, WE RECOMMEND ORDERING IN BOX QUANTITY OR MULTIPLES OF BOX QUANTITY WHERE SHOWN. YOU CAN STILL ORDER IN ANY QUANTITY UNLESS SPECIFICALLY STATED OTHERWISE OX QUANTITY



ELECTRICAL TOOLS



AMM1

Pocket Analogue Multimeter

IEC61010 Specifications

Handy pocket analogue multimeter for use in electrical and automotive applications. A crocodile clip probe set is available - see entry below. Display packed. Features: • Measures AC and DC Voltage • Measures DC current • Measures resistance • 16 position rotary function and range selector • Recessed input terminals • Test probes and lead included • Battery check facility Ponetification:

27217	Multimotor	2	£10 72D
Stock No.	Description	Box Qty	Price each
Battery	1 x A	AA (not supp	lied)
Size	64 x	100 x 35mm	n
Resistance - ohi	ms x10,	x1K (acc. ±	5%)
DC current		uA, 10mA, 2 . ±5% of full	
AC voltage		50, 250, 500 . ±5% of full	
	(. ±5% of full	,
DC voltage	2.5,	10, 50, 250,	500V
Specification:			

No.	Description	Qty	each
37317	Multimeter	2	€18.73D
51346	Crocodile Clips	-	€5.60D
37470	Probe Set	-	€4.45D
61834	Batteries (4 x AA)	-	€4.38D

BATTERY, BULB, FUSE & CONTINUITY TESTER



Multi-purpose tester for dry cell 1.5V batteries (AAA, AA, C, D and button-type), 9V batteries (PP3 /6LR61), household and automotive fuses, bulbs (with bayonet

fitting and push/screw type torch light bulbs). Readings show up on clear scale. There is also an audible continuity tester via test probes supplied. Size 70 x 145mm. Runs off 1 x 9V PP3/6LR61 battery (supplied).

Description

Tester

Battery (PP3)

Box Qty

4

12

Price

each

€22.00D

€7.38D











AC/DC Voltage Tester

Twin LED indicators identify voltage between 12-600V. Suitable for testing a host of wiring around the home or workplace, vehicle circuitry and electronic equipment etc. Probes fitted to 825mm of VDE approved cable. Display packed.

Stock	Box Price
No.	Qty each
51957	- €21.23D



Battery Tester

368

Handy battery tester suitable for AAA, AA, C, D, PP3 and 3R12 size batteries. Size 52 x 55 x 22mm. Display packed.

Stock No.	Box Qty	Price each
72090	-	€6.15D



5 _{ST-1} 13A Socket Tester

BBFC1

Display packed.

Stock No.

57574

61837

Battery, Bulb, Fuse and Continuity Tester

Expert Quality, for testing 13A sockets and RCD's rated less than 30mA. Detects the following electrical faults on sockets: true earth error (through LCD); no earth; L and N reverse; L and E reverse; E live; E open; N open and L open. Display packed.

Stock	Box	Price
No.	Qty	each
22278	-	€27.28D



13A Socket Tester

For testing 13A sockets for the following faults: no Earth; L and N reverse; L and E reverse; Neutral fault and Live fault. Display packed.

Stock	Box Price
No.	Qty each
34279	- €18.73D

NEW





LAN Tester

Automatically runs tests for continuity, open, shorted and crossed wire pairs on Local Area Networks (LAN). Supplied with master and remote units enabling cable testing in situ and from distance with LED indicators showing malfunctions. Can be used on RJ11 and RJ45 cables. Uses PP3 battery (sold separately). Display packed.

е	Stock No.	Description	Box Qty	Price each
٦	31907	Tester	10	€13.73D
)	61837	Battery (PP3)	12	€7.38D

ELECTRICAL TOOLS



DAVE SAYS

Screwdriver type testers contain an indicator in the handle which lights up when the point is touched on voltages between 220-250V and a finger or thumb is placed on the end of the tester to create a circuit. Non-contact voltage detectors work by sensing the fluctuations in the electric field which surround AC charged objects. This means no contact with the circuit is ever needed giving the user extra safety.



VDE Approved Euro Mains Testers

Tested and approved to GS and VDE Specifications Expert Quality, fully insulated one piece moulding manufactured to the latest European Specifications for complete safety including anti-slip guard and pocket clip. Neon indicator will show current present in the range 125 - 250V. Supplied with 13A safety gate tool which allows testing without removing socket from wall. Display packed

Stock	Part	Overall	Blade	Box	Price
No.	No.	Length	Tip	Qty	each
57659	EMT1	150mm	3.5mm	6	€3.53D
57660	EMT2	190mm	3.5mm	6	€4.30D





4 PDT

Punch Down Tool

For telephone and computer network installation and maintenance. Terminates wire and cuts off excess. Suitable for all CW1308 telecom cable. Cable locking, insertion blades and cable shears included. Display packed.

Stock	Box	Price
No.	Qty	each
40417	10	€11.28D




🚺 мт2

Digital Multi-Function Tester

Multi-functional tester with plain slot blade that allows the checking of wiring without dismantling or having any contact with live parts. Applications include 'break point' in wiring, continuity testing, bulb and fuse testing, microwave leakage, socket testing and testing for static. Fully insulated. Full instructional leaflet supplied. Supplied with 2 x 1.5V alkaline batteries. Display packed.

Stock	Overall	Blade	Box	Price
No.	Length	Tip	Qty	each
66201	182mm	3.5mm	12	€10.98D



2 4171 **105mm Mains Tester**

Tested and approved to GS Specifications Quality tester with plain slot blade, one piece moulded insulated blade sheath and transparent plastic handle for maximum safety. Without pocket clip. Testing range 220-250V. Supplied with 13A safety gate tool which allows testing without removing socket from wall. Display packed.

Stock	Blade	Box	Price
No.	Tip	Qty	each
30493	4mm	6	€3.93D



5 VS2

Non Contact Voltage Sensor

Useful tool for detecting live circuits, location of breaks in cabling, fault finding and low voltage. Adjustable sensitivity. Voltage range 5-1000V. Audio/visual signal indicates voltages present. Powered by 4 x LR44 batteries (supplied). Full instructional leaflet included. Display packed.

Stock	Box	Price
No.	Qty	each
71389	-	



Cat III 1000V Non Contact Voltage Tester

Expert Quality, non contact voltage tester with integrated inspection lamp. Suitable for identifying live wires, broken wires and fault finding. Sensitive voltage detection between the range of 100-600V. Fitted with inspection light on one end and audible/visual indicators. Powered by 2 x AAA batteries (supplied). Display packed.


Stock	Box	Price
No.	Qty	each
34278	-	€18.73D



63mm Mains Tester

Tested and approved to GS Specifications Quality tester with plain slot blade, one piece moulded insulated blade sheath and transparent plastic handle for maximum safety. With pocket clip. Testing range 220-250V. Supplied with 13A safety gate tool which allows testing without removing socket from wall. Display

раскеа.				
Stock No.	Blade Length	Blade Tip	Box Qty	Price each
11895	63mm	3mm	6	€2.40D



Multi-Tester

Multi-functional tester with plain slot blade that allows the checking of wiring without dismantling or having any contact with live parts. Applications include 'break point' in wiring, continuity testing, bulb and fuse testing, microwave leakage, socket testing and testing for static. Fully insulated. Full instructional leaflet supplied. Display

packed.

Stock	Blade	Blade	Box	Price
No.	Length	Tip	Qty	each
54850	45mm	4mm	12	€7.48D



🧐 VS3

Stock No. 34277

NEW

Cat III 600V Non Contact Voltage Tester

Non contact voltage tester. Suitable for identifying live wires, broken wires and fault finding. Voltage detection between the range of 200-600V. Powered by 2 x AAA batteries (sold separately). Display packed.

K	Box Qty	Price each
7	10	€8.73D





section 9

VERNIER ΝΠΙ CALIPERS

DAVE SAYS

All our Draper Expert vernier calipers are fully tested by the manufacturer to ensure high levels of accuracy and quality of materials used.



If you specify a Draper vernier caliper you know it's the best!



PDVC150M

Dual Reading Digital Vernier Caliper Expert Quality, metal-bodied manufactured from

brushed stainless steel. Extra large display reading 0.01mm and 0.005". Range 0-150mm/6". Supplied with SR44 battery. Display packed in plastic storage case.

Stock No.	Description	Box Qty	Price each
46610	Vernier Caliper	-	€58.08D
55361	Spare SR44 Battery	-	€4.38D



2 PVC150D

Dual Reading Digital Vernier Caliper

Expert Quality, manufactured from hardened stainless steel. Extra large display reading 0.01mm and 0.005". Range 0-150mm/6". Supplied with SR44 battery. Display packed in plastic storage case.

Stock No.	Description	Box Qty	Price each
52427	Vernier Caliper	- €1	29.60D
55361	Spare SR44 Battery	-	€4.38D



Metric Dial Caliper

Expert Quality, manufactured from hardened stainless steel. Slider displacements are amplified by a rack and pinion mechanism and indicated on the dial. Four way measurement: internal, external, depth and step. Reading 0.02mm. Slider has lockscrew function. Display

packed in pla	astic storage case.		
Stock No.	Range	Box Qty	Price each
52/17	0-150mm	_ f	77 70D



Vernier Caliper

Expert Quality. manufactured from hardened stainless steel. Reading 0.02mm and 1/1000". Four way measurement: internal, external, depth and step. Satin chrome plated beam with raised edges and thumblock. Display packed in plastic storage case

Stock No.	Range	Box Qty	Price each
50590	0 -150mm/6"	-	€59 20D

Vernier Calipers

Expert Quality, manufactured from hardened stainless steel. Reading 0.02mm/1/1000". Four way measurement: internal, external, depth and step. Satin scales with fine adjustment. Fine screw adjustment. Display packed in plastic storage case.

Stock No.	Part No.	Range	Box Qty	Price each
	PVC140F PVC200F		_	€51.58D €62.25D

EASURING & GAUGE SETS



6 piece Telescopic Gauge Set

Expert Quality, for measuring of bore diameter and groove width. The spring-loaded plunger expands within the hole. Knurled locking screw allows plunger contacts to be held in position, removed and measured with a micrometer. Satin chrome finish. Supplied in PVC storage wallet with ranges marked.

Contents:

- Gauge range: 8-13mm (5/16 1/2") Length: 115mm
- Gauge range: 13-19mm (1/2 3/4") Length: 115mm
- Gauge range: 19-31mm (3/4 1.1/4") Length: 115mm • Gauge range: 31-54mm (1.1/4 - 2.1/8") Length: 145mm
- Gauge range: 54-89mm (2.1/8 3.1/2") Length: 145mm

• Gauge range: 89-150mm (3.1/2 - 6") Length: 145mm			
Stock No.	Box Price Qty per set		
52416	– €53.65D		



Expert Quality, accurately measures bores, detect tapers or ovality. 0.01mm accuracy. Display packed in storage case. Contents:

- 3mm travel dial test indicator
 55mm extension bar
- 4 spacer rings size: 0.5, 1.0, 2.0 and 3.0mm

• 12 measuring rods size: 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100 and 105mm

Stock No.

Stock No.	Box Price Qty per set
02753	– €156.78D





Dual Reading Digital External Micrometers

Expert Quality, with enamelled frame, heat plates, satin chrome thimble and sleeve. Carbide tipped measuring anvils, lock and ratchet stop. Graduations 0.001mm and 0.0005". Ball end cap for measuring curved surfaces. Supplied with SR44 battery. Display packed in plastic storage case.

Stock No.	Description	Box Price Qty each
46599	M/meter 0-25mm-0-1"	– €179.95D
46600	M/meter 25-50mm-1-2"	- €187.48D
55361	Spare SR44 Battery	- €4.38D



Metric External Micrometers

Expert Quality, with enamelled frame, heat plates, satin chrome thimble and sleeve. Graduations 0.01mm. Carbide tipped anvils, lock and ratchet stop. Supplied in plastic storage case and display packed.

Stock No.	Range	Box Qty	Price each
46603	0-25mm	-	€36.93D
46604	25-50mm	-	€38.55D
46605	50-75mm	-	€42.75D
46606	75-100mm	-	€46.85D







PDDG

DRAPER Expert

Dual Reading Digital Dial Test Indicator *Expert Quality*, dial diameter 55mm with mounting lug.

0-25mm/0-1" travel. Uses CR2032 battery (supplied). Display packed in plastic storage case.

Stock No.	Graduations	Box Qty	Price each
46608	0.01mm/0.005"	- €1	07.08D
12282	Spare CR2032 Battery	-	€2.38D



5 PDG



Dial Test Indicators

Expert Quality, reading 0-50. Dial diameter 55mm. Display carton.

Stock No.	Scale	Graduations	Range	Box Qty	Price each
51830	Metric	0.01mm	0-10mm		€51.60D
51831	Imperial	0.005"	0-0.1"		€59.43D



(DRAPER) Expert

6 PDG05M

Metric Dial Test Indicator

Expert Quality, reading 0-100 in metric graduations. Range 0-5mm. Dial diameter 41mm. Display carton.

Stock	Graduations	Box	Price
No.		Qty	each
51855	0.01mm	-	€59.38D

7 MS-6

6 piece Measuring Set Useful set of precision measuring instruments.

- Display carton.
- Contents:
- spring divider outside caliper
- inside spring caliper
- depth gauge
- slide rule
- sliding caliper
- Stock No.
- 59110








D PDGS

Metric Dial Test Indicator Kit

Expert Quality, ideal all-round kit for engineers and apprentices. Dial test indicators accuracy 0.01mm. Packed in blow mould case with display sleeve. Contents: • Metric dial test indicator (0-25mm) with plunger • Metric dial test indicator (0-2.5mm) with stylus • Magnetic stand with fine adjustment • 22 interchangeable tips for dial test indicator with plunger • 6mm and 8mm stylus' for dial test indicator clamp

Stock	Box Price
No.	Qty per kit
46609	– €166.03D



MB-LDB **Magnetic Stand**

For use with dial gauges, etc. Powerful magnetic base with on/off switch. Precision ground surface. Display

Stock	Box	Price
No.	Qty	each
45276	-	€57.30D



150mm Outside Spring Calipers

Fine ground with adjustment by knurled wheel. Display packed.

Stock	Box	Price
No.	Qty	each
34237	-	€11.95D



28 Blade UNC-UNF Screwpitch Gauge Set

Folding leaves, individually stamped with accurately formed thread profiles. American National Thread UNC-UNF, in the range 4-62TPI. Sold loose.

Stock	Box	Price
No.	Qty	per set
51071	-	€9.68D



3 MB-LDFAB

Magnetic Stand with Fine Adjustment

For use with dial gauges etc. Powerful magnetic base with on/off switch. Fine adjustment screw for quick and accurate settings. Precision ground surface. Display carton.

Stock	Box	Price
No.	Qty	each
45277	-	€59.55D



150mm Inside Spring Calipers

Fine ground with adjustment by knurled wheel. Display nacked

Stock	Box	Price
No.	Qty	each
39451	-	€11.95D

NEV



Folding leaves, individually stamped with accurately formed thread profiles. Ranges 4-62BSW and 0.25-6.0mm. Sold loose

Stock No.	Box Qty	Price per set
51072	-	€13.28D



150mm Spring Dividers

Fine ground with adjustment by knurled wheel. Display packed.

Stock	Box	Price
No.	Qty	each
34196	-	€11.95D



🚺 401B

438

20 Blade Metric Screwpitch Gauge Set

Folding leaves, individually stamped with accurately formed thread profiles. 20 blades ranging from 0.4, 0.45, 0.5, 0.6, 0.7, 0.75, 0.8, 1.0, 1.25, 1.5, 1.75, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0mm. Sold loose.

Stock	Box	Price
No.	Qty	per set
51070	-	€8.13D



PAUL SAYS PRECISION ENGINEERS SQUARES (Stock Nos. 34049 & 34065) - Two of the few Engineers Squares that conform to BS939, workshop grade B for squareness. This guarantees the solid steel stock will never be



more or less than ± 0.016 mm from square. To all intents and purposes... that's square!



Engineers Precision Squares

Manufactured to BS 939 Workshop Grade B for

squareness tolerance only Solid steel stocks with hardened, tempered and finely polished blades. The squareness of the blade edges and the stock working face falls within ±0.016mm/0.0064" tolerance. Display packed.

toiciunee. Die	piay pacitoa.		
Stock	Size	Box	Price
No.		Qty	each
34049	100mm		€24.23D
34065	150mm		€34.00D



200mm Engineers Scriber

Double ended hardened scriber with straight and 90° hardened points. Display packed.

Stock	Box	Price
No.	Qty	each
34099	-	€8.15D



3 7325

125mm Engineers Pocket Scriber

Reversible scriber point. Body fitted with pocket clip. Display packed.

34104 5 €8.48D	Stock No.	Box Qty	Price each
	34104	5	€8.48D



4 PCS

150mm Carbide Tip Pocket Scriber

Plated steel body with carbide tip and pocket clip. For marking on hard and soft materials including steel and

ceramics. Display packed.		
Stock No.	Box Qty	Price each
37349	5	€7.20D



5 PBPS

Universal Bevel Protractor Set

Expert Quality, for accurate angle measurement of machines, moulds and jigs. Can also be used for assembling and machining. Fully calibrated to 360° with magnifying glass. Supplied with 300mm plain rule and acute angle attachment. Display packed in hinged plastic case.

Stock	
No.	

52430





Protractor with Depth Gauge

Graduated 0-180° with depth gauge 0-150mm. Display packed.

1	Stock No.	Box Qty	Price each
)	37342	2	€28.70D
_			

20 JE 40 NO 100 NO

8

Steel Rules

Stainless Steel Rules

(DRAPER) Expert



Box Qty

Price per set

€89.38D

Expert Quality, precision rules manufactured from hardened stainless steel matt chrome plated. The clear black graduations of 0.5mm, mm, 0.5cm, cm and 1/64", 1/50", 1/32", 1/20", 1/16", 1/10", 1/2", and inches on the reverse are permanently etched for long service life. Packed into vinyl wallets. Display packed.

Stock	Part	Marked	Box	Price
No.	No.	Length	Qty	each
22670	SSR6B	150mm & 6"		€6.40D
22671	SSR12B	300mm & 12"		€15.95D
22672	SSR24B	600mm & 24"		€31.85D
22673	SSR36B	1000mm & 36"		€61.38D



15	15	17	18	18	2.0	5
6			1	1	8	5

Double sided with hang hole. Permanently etched graduations of cm/mm and inche 1/8", 1/16", 1/32" and 1/64". Display packed.

Price	Stock No.	Part No.	Marked Length	Rule Width		ice ich
each	59633	D17	150mm/6"	19mm	- €3.9	
7.20D	59641	D18	300mm/12"	30mm	- €6.0	

FOR YOUR CONVENIENCE, WE RECOMMEND ORDERING IN BOX QUANTITY OR MULTIPLES OF BOX QUANTITY Where shown. You can still order in any quantity unless specifically stated otherwise BOX QUANTITY INFORMATION

