

Key Features

- Impressively large, bezelfree visual experiences
- · All-in-One design without complicated setup
- · Real-to-life colors and high brightness
- Immersive audio from built-in Harman Kardon speakers
- · Adaptable and flexible to suit any display scenario

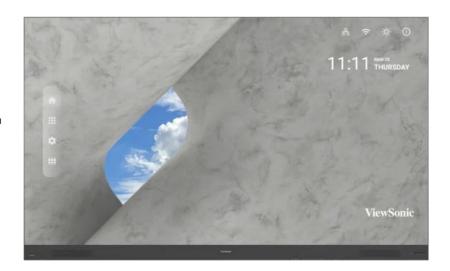

Product **Description**

Gaze upon astoundingly lifelike imagery on the minimalistic 2nd Gen 108" ViewSonic® LDP108-121 All-in-One Direct View LED display. The All-in-One modular design offers an effortless installation and maintenance process. This next-generation display is upgraded with advanced features to deliver a spectacular audiovisual experience and user-forward design. Delivering 120% Rec. 709 wide color gamut, lightning-fast up to 4,440Hz refresh rate, and a peak brightness of 500 nits, every video, presentation, or lecture will be an immersion of real-to-life color and extraordinary detail. The display is also equipped with Harman Kardon speakers, 4K/HDR/HLG support, and Frame Interpolation technology for unsurpassable, immersive content delivery. At 25mm slim and lined with a 5mm frameless edge, the sleek display exudes sophistication and elegance in any modern setting. It offers flexibility and adaptability in design - with portrait and landscape installations to complement any space and scenario. The screens can be easily fused together to form an ultra-wide 32:9 video wall to deliver a seamless visual experience in epic proportions. The system control box can also be easily detached to blend into every design.

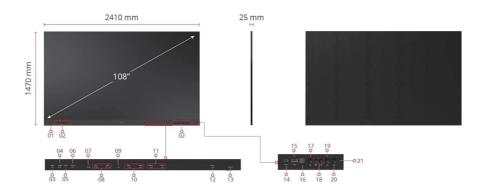

- 1. Power Switch
- 2. Harman Kardon Speakers
- 3. HDMI Out
- 4. Audio Out 5 Audio In
- 8. USB 2.0 (5V/1.5A) x 2 9. LAN & Control
 - 10. HDML 2.0 x 2
 - 11. HDMI 1.4 x 2
 - 12 HDML 2 1
- 15. USB 2.0 (5V/1.5A)
- 16. IR Receiver
- 17. Menu Control: Brightness Level
- 18. Menu Control: Volume
- 19 Menu Control: Input Source

6. S/PDIF Out 7. IR In

13. RS232 14. USB-C (5V/2A) 20. Power Button 21. Indicator Light

Visit Us www.viewsonic.com

SPECIFICATION		OTHERS	
Screen Size:	108"	Power Supply Voltage:	100-120V/30A~ 50/60Hz220-240V/15A~ 50Hz(vary by country)
Display Area (mm):	2400 (H) x 1350(V)		
Native Resolution:	1920x1080	Power Consumption:	1330W (typ), 1900W (max)< 0.5W (Sleep), < 0W (Off)
Panel Technology:	Direct view LED		
LED Package Type:	SMD 3 in 1	Operating Temperature:	0~40°C
Bonding Wire:	Gold	LED Module Quantity:	64
Pixel Pitch (mm):	1.25	Ingress Protection Rating:	IP30
Refresh Rate:	up to 4440Hz	Net Weight:	172 lbs(78 kg)
Brightness (max.):	500 nits (8 levels adjustable)	Gross Weight:	375 lbs(170 kg)
Contrast Ratio (typ.):	6000:1	Screen Dimensions (WxHxD):	94.9x57.9x1 inches(2410x1470.3x25
Orientation:	Landscape / Portrait		mm)
Viewing Angles (typ.):	H = 160, V = 160	Screen Dimensions (WxHxD) with wall mount:	94.9x57.9x2.2 inches(2410x1470.3x57 mm)
LED Lifetime (typ.):	100,000 Hours		
Local Storage:	Total 64GB (56GB available storage)	Packing Dimensions:	57.9x27.95x25.2 inches(1470x710x640 mm)
Embedded OS:	Android 9.0	STANDARD ACCESSORIES	,
Resolution Support:	VGA(640 x 480) to 1080p(1920 x 1080)	Power Cord:	x1
		LAN Cable (Cat 5A):	x1 (5m)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p,	IR Extender Cable:	x1(3m)
	2160P/60Hz	Remote Control:	x1
Horizontal Frequency:	23-120 kHz	QSG:	x1
Vertical Scan Rate:	15-135 Hz	Wall Mount:	x1
INPUT	vC/LIDMLO 4 v 4 LIDML	Spare Parts:	LED PCB Unit x7
HDMI:	x6(HDMI 2.1 x 1, HDMI 2.0 x 2, HDMI 1.4 x 2, HDMI 2.0 internal x1)	Maintenance Tool:	LD-MK-001 x1
USB Type A:	x3(USB2.0 x3)	OPTIONAL ACCESSORIES	
RJ45 Input (Internet):	x1	Maintenance Tool:	LD-MK-001
IR in:	x1	Floor Stand:	LD-STND-005
Wi-Fi Input:	2.4G/5G Hz	ViewBoard Cast Button(USB-C):	VB-WPS-001
USB Type C:	x1(Video input、 Power output (5V/2A))	ViewBoard Cast Button(USB- VB-WPS-A+HDMI):	VB-WPS-003
Audio-in (3.5mm):	x1		
HDBaseT:	x1(1080P@100m、 4K30Hz@70m)		
OUTPUT			
HDMI out:	x2(HDMI 2.0 external x1,internal x1)		
Speaker:	20W x2 (harman kardon)		
Audio out (3.5mm):	x1		
USB Type A (Power):	Shared with USB input(5V/1.5A x3)		
CONTROL			
RJ45 (LAN control):	x1(shared with internet)		
USB Type A (Services):	x1(shared with USB A input)		
RS232 (DB 9-pin female):	x1		
IR Receiver:	x1		

Copyright © ViewSonic Corporation 2000-2022. All rights reserved.