



Video Solutions for Security Professionals™



LOOK INSIDE

HIKVISION AUTHORIZED DISTRIBUTOR



Product Catalog

Q3/Q4 2017



IP Solutions
Pg. 2 - Pg. 15



PTZs
Pg. 16 - Pg. 17



HD-TVI Solutions
Pg. 18 - Pg. 27



Access Control
Pg. 28 - Pg. 29



Alarms & Acc
Pg. 34 - Pg. 39

LTS reserves the right to modify, add or remove sale items. Prices & product specifications may change without prior notice. LTS is not responsible for typographical errors. Images may be used for illustration purpose only and do not represent actual products. Tax not included. All prices effective August 1, 2017. LTS offers a 3 year warranty on Platinum products unless otherwise specified. © 2017 LTS.


H.265/ H.265+ Advanced Video Compression



Save Both Bandwidth And Storage

• Reduce an additional 30%-50% of bitrate from H.265/ H.265+

YouTube.com/LTSccctv

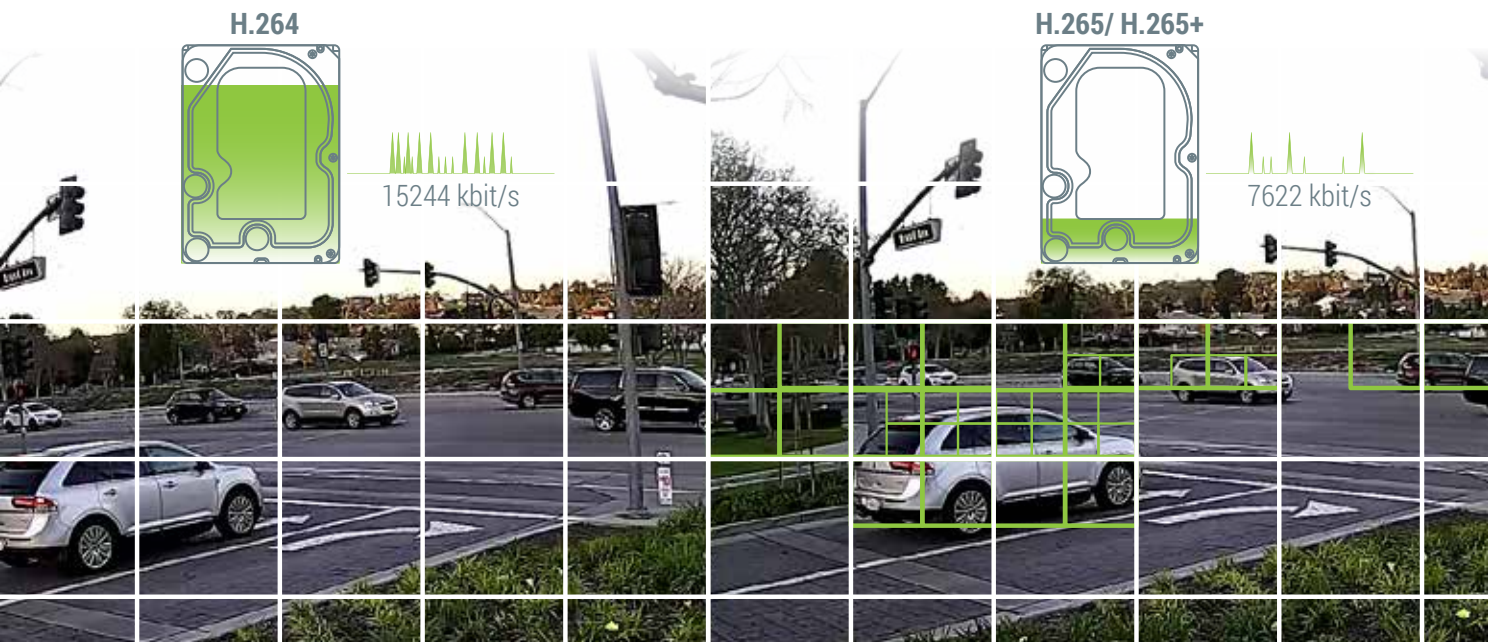

Professional Plus Level

Image		A Mini 1U Case B C D E 1U Case				
		4K H.265+ 4K H.265+ 4K H.265+ 4K H.265+				
Model Number		A	B	C	D	E
Price		LTN8704-P4	LTN8708K-P8	LTN8716K-P16	LTN8608-P8	LTN8616-P16
Video Input		4CH IP@40Mbps	8CH IP@80Mbps	16CH IP@160Mbps	8CH IP@80Mbps	16CH IP@160Mbps
Record	2MP	4CH@30fps/CH	8CH@30fps/CH	16CH@30fps/CH	8CH@30fps/CH	16CH@30fps/CH
	3MP/4MP	4CH@20fps/CH	8CH@20fps/CH	16CH@20fps/CH	8CH@20fps/CH	16CH@20fps/CH
	5MP	4CH@20fps/CH	8CH@20fps/CH	16CH@20fps/CH	8CH@20fps/CH	16CH@20fps/CH
Video Output		HDMI/VGA up to 1920x1080P	HDMI up to 4K(3840x2160), VGA up to 1920x1080P		HDMI up to 4K(3840x2160), VGA up to 1920x1080P, CVBS up to 704x480	
Recording Resolution		Up to 5 MegaPixels (2560x1920)	Up to 4K, 8 MegaPixels (3840x2160)		Up to 12 MegaPixels (4000x3072)	
Decoding Format		H.264/H.264+	H.265/H.265+/H.264/H.264+			
Synchronous Playback		4CH	8CH	16CH	8CH	16CH
Playback Resolution		Up to 5 MegaPixels (2560x1920)	Up to 4K, 8 MegaPixels (3840x2160)		Up to 12 MegaPixels (4000x3072)	
Audio In/Out		1CH/1CH, RCA				
Alarm In/Out		-	4/1			
Built-in PoE		4CH	8CH	16CH	8CH	16CH
Network		10/100/1000M				
Storage		1 SATA up to 6TB, NAS, IP SAN	2 SATA up to 12TB, NAS, IP SAN		2 SATA up to 16TB, NAS, IP SAN	
Support Fisheye Camera#		-	6			
Support POS#		1 (TCP)	-		4 (TCP)	
Dimensions		12.4"(W)x9.1"(D)x1.8" (H)	15"(W)x11.4"(D)x1.8" (H)			
Backup		1 USB 2.0, 1 USB 3.0				

Captivate the Speed of a Quad Core CPU

- Support H.265/ H.265+
- Support H.264 Zip+
- Support 4K

Secure Payment Transactions

Meet PCI compliant retail demands with LTS NVRs, ensuring all cardholder information stays protected.



Surveillance Grade Hard Drives Installed and Tested.

CALL FOR PRICE



DVD R/W 4TB HDD
500GB HDD 6TB HDD
1TB HDD 8TB HDD
2TB HDD 10TB HDD
3TB HDD

WD Purple™

- Engineered for high definition surveillance security systems
- AllFrame 4KTM technology

Enterprise Level

Image

F | G | H | I | J | K | L | 1.5 U Case



		F	G	H	I	J	K	L
Model Number		LTN8816K	LTN8816K-P16	LTN8832K-P16	LTN8916	LTN8916-P16	LTN8932	LTN8932-P16
Price								
Video Input		16CH IP@160Mbps		32CH IP@256Mbps	16CH IP@160Mbps		32CH IP@256Mbps	
Record	2MP	16CH@30fps/CH		32CH@30fps/CH	16CH@30fps/CH		32CH@30fps/CH	
	3MP/4MP	16CH@20fps/CH		32CH@20fps/CH	16CH@20fps/CH		32CH@20fps/CH	
	5MP	16CH@20fps/CH		32CH@15fps/CH	16CH@20fps/CH		32CH@15fps/CH	
Video Output		HDMI up to 4K(3840x2160), VGA up to 1920x1080P			HDMI up to 4K(3840x2160), VGA up to 1920x1080P, CVBS up to 704x480			
Recording Resolution		Up to 4K, 8 MegaPixels (3840x2160)			Up to 12 MegaPixels (4000x3072)			
Decoding Format		H.265/H.265+/H.264/H.264+						
Synchronous Playback		8CH		16CH				
Playback Resolution		Up to 4K, 8 MegaPixels (3840x2160)			Up to 12 MegaPixels (4000x3072)			
Audio In/Out		1CH/1CH, RCA						
Alarm In/Out		16/4						
Built-in PoE		-	16CH		-	16CH	-	16CH
Network		10/100/1000M, 2 RJ45	10/100/1000M		10/100/1000M, 2 RJ45	10/100/1000M	10/100/1000M, 2 RJ45	10/100/1000M
Storage		4SATA up to 24TB, NAS, IP SAN			4 SATA up to 32TB, eSATA, NAS, IP SAN			
Support Fisheye Camera#		-			8			
Support POS#		-			4 (TCP or RS232)		8 (TCP or RS232)	
Dimensions		17.5"(W)x15.3"(D)x2.8" (H)						
Backup		2 USB 2.0, 1 USB 3.0			2 USB 2.0, 1 USB 3.0, eSATA, DVD-RW			

Maryland
240-493-8988

New York
646-558-3888

Illinois
630-348-8088

Illinois - Chicago
312-800-0766

Texas - Dallas
469-289-5780


Arizona
877-284-2890

Achieve Redundancy and Greater Speed

- Increase Overall Capacity
- Minimize Video Loss



YouTube.com/LTSectv

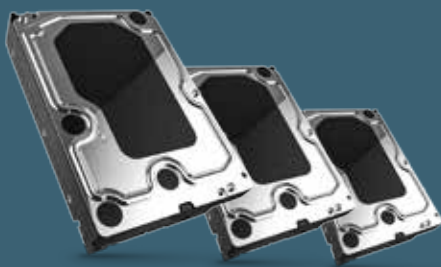

RAID 0
Striping



RAID 1
Mirroring




RAID 5
Parity Across All Drives



RAID 6
Double Parity



RAID 10
Stripe + Mirror

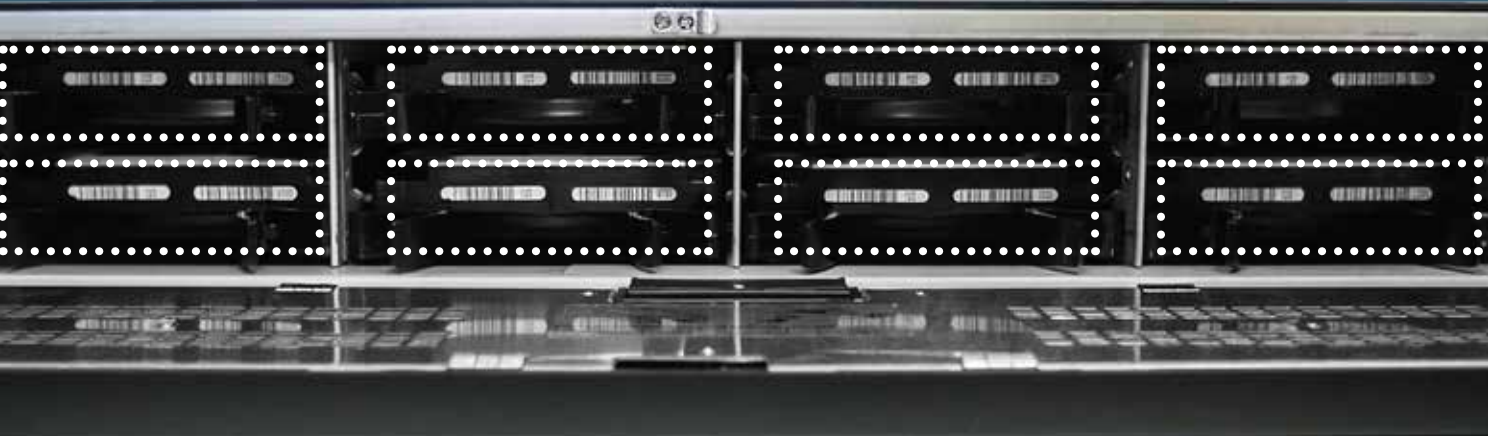

Enterprise Level

Image

A | 2U Case

B | 2U Case

C | D | 3U Case



A

B

C

D

Model Number		LTN8964-R	LTN0732D-R8	LTN07256-R	LTN07256-R16
Price					
Video Input		64CH IP@320Mbps	32CH IP@256Mbps	256CH IP@640Mbps	256CH IP@768Mbps
Record	2MP	64CH@30fps/CH	32CH@30fps/CH	256CH IP@12fps	256CH IP@15fps
	3MP/4MP	64CH@20fps/CH	32CH@20fps/CH	256CH IP@8fps	256CH IP@10fps
	5MP	64CH@10fps/CH	32CH@15fps/CH	256CH IP@4fps	256CH IP@7fps
Video Output		HDMI1 up to 4K(3840x2160), VGA1 up to 2K(2560x1440), HDMI2/VGA2 up to 1920x1080P	HDMI1 up to 4K(3840x2160)/VGA1 up to 2K(2560x1440), HDMI2/VGA2 up to 1920x1080P, CVBS up to 704x480	HDMI1/VGA, HDMI2 up to 1920x1080P Built-in 7" Touch Screen LCD 12 HDMI TV Wall	HDMI1, HDMI2 up to 4K(4096x2160) VGA up to 1920x1080P, Built-in 7" Touch Screen LCD 6 HDMI TV Wall
Recording Resolution		Up to 12 MegaPixels (4000x3072)		Up to 4K, 8 MegaPixels (3840x2160)	
Decoding Format		H.265/H.265+/H.264/H.264+		H.264	
Synchronous Playback		Up to 12 MegaPixels (4000x3072)		Up to 4K, 8 MegaPixels (3840x2160)	
Playback Resolution		Up to 12 MegaPixels (4000x3072)		Up to 12 MegaPixels (4000x3072)	
Audio In/Out		1CH/2CH, RCA		1CH/1CH, RCA	
Alarm In/Out		16/4		16/8	
Built-in PoE					
Network		10/100/1000M, 2 RJ45		10/100/1000M, 4 RJ45, 4 Fiber Optic	
Storage		8 SATA up to 64TB, eSATA, NAS, IP SAN RAID 0, 1, 5, 6, and 10, Hot Swap		16 SATA up to 96TB, NAS, IPSAN RAID 0, 1, 5 and 10, Hot Swap	
Support Fisheye Camera#		8CH		16CH	
Support POS#		8 (TCP or RS232)			
Dimensions		17.5"(W)x18.5"(D)x3.5"(H)		17.4"(W)x19.4"(D)x 5.7"(H)	
Backup		2 USB 2.0, 1 USB 3.0, eSATA		2 USB 2.0, 2 USB 3.0	



FREE DDNS

- Secured and Reliable Connectivity
- Remote Access Anywhere and Anytime
- No Need for Static IP

CCTV Monitors CALL FOR PRICE



M-185JPGM8



M-215JPGM8

Monitors come with:
Remote, BNC, HDMI & VGA Inputs



DVR Mounting Brackets

LTB191D

LTB380D

LTB201D

LTB202D

DVR Lockboxes

LT-DVRLB18-18-5

LT-DVRLB21-21-8

LT-DVRLB21-24-8

LTBHWB (Wall Mount Bracket)


Hybrid TVI 3.0 NVRs

Image

E | Mini 1U Case

F | G | Compact Case

H |



		E	F	G	H
Model Number		LTN8704T-HT	LTN8708T-HT	LTN8716T-HT	LTN8208-W
Price					
Video Input		4CH IP(40Mbps) + 4CH TVI3.0	8CH IP(80Mbps) + 8CH TVI3.0	16CH IP(72Mbps) + 16CH TVI3.0	8CH IP@50Mbps
Record	2MP	4CH IP@30fps + 4CH TVI 3MP@15fps	8CH IP@30fps + 8CH TVI 3MP@15fps	16CH IP@30fps + 16CH TVI 3MP@15fps	8CH@25fps/CH
	3MP/4MP	4CH IP@20fps + 4CH TVI 3MP@15fps	8CH IP@20fps + 8CH TVI 3MP@15fps	16CH IP@15fps + 16CH TVI 3MP@15fps	8CH@15fps/CH
	5MP	4CH IP@20fps + 4CH TVI 3MP@15fps	8CH IP@20fps + 8CH TVI 3MP@15fps	16CH IP@10fps + 16CH TVI 3MP@15fps	-
Video Output		VGA, HDMI up to 1920x1080P, CVBS up to 704x480			HDMI up to 1920x1080P
Recording Resolution		Up to 5 MegaPixels (2560x1920)			Up to 3 MegaPixels (2048x1536)
Decoding Format		H.264/H.264+			H.264
Synchronous Playback		4CH	8CH	16CH	8CH
Playback Resolution		Up to 5 MegaPixels (2560x1920)			Up to 3 MegaPixels (2048x1536)
Audio In/Out		4CH/1CH, RCA			-
Alarm In/Out		4CH/1CH	8CH/4CH	16CH/4CH	-
Network		10/100/1000M			1 10/100M WAN, 3 10/100M LAN Wifi 802.11n 300Mbps, 2x2 MIMO
Storage		1 SATA up to 6TB, NAS, IP SAN	2 SATA up to 12TB, NAS, IP SAN		1TB 2.5"HDD (Included), NAS, IP SAN
Support Fisheye Camera#		-			-
Support POS#		1 (TCP)	2 (TCP)		-
Dimensions		12.4"(W)x9.5"(D)x1.8" (H)	14.9"(W)x12.6"(D)x1.89" (H)		3.4 "(W)x3.4"(D) x6.2" (H)
Backup		2 USB 2.0	1 USB 2.0, 1 USB 3.0		1 USB 3.0



Unisight PNS Series NVRs



Professional Video Surveillance Solution



- Online Add/Remove Channels
- Server-side OSD
- Backup Manager
- Low Resource Requirement
- Record NVR-to-NVR or Embedded-to-NVR
- Live Bandwidth Display
- Fisheye Camera Support
- Secure window OS

High Performance X86 Platform with Redundant PS

- High-Grade Hardware Server
- Comprehensive Expansibility
- High Performance
- End-to-End Support

UNS-PNS4208R
2U



UNS-PNS4316R
3U



UNS-PNS4424R
4U



System	PNS4208R	PNS4316R	PNS4424R
Price			
CPU / Speed	Intel® CeleronTM N3160 Processor (Base Frequency 1.60 GHz, up to 2.24GHz)	Intel® CoreTM i7-6700 Processor (Base Frequency 3.40 GHz, up to 4.00 GHz)	
Memory	DDR3, 4 GB	DDR4, 2 channels have 8 GB respectively. Total 16 GB.	
Drive / Storage	8 SATA HDDs up to 64TB, Hot-swap, Online replacement	16 SATA/SAS HDDs up to 128TB, Independent HDD bracket, Hot-swap, Online replacement	24 SATA/SAS HDDs up to 192TB, Independent HDD bracket, Hot-swap, Online replacement
IP Video Inputs	32CH	64CH	128CH
Max Input/Record	384Mbps/384Mbps		512Mbps/512Mbps
I / O	2 Gigabit Ethernet: 2 × RJ-45 (10/100/1000Mbps). USB: 2 × USB2.0 on front panel, 1 × USB2.0 on rear panel, 1 × USB3.0 on rear panel, 1 × eSATA port on rear panel. Serial Interface: 1 × RS232 serial port.	4 Gigabit Ethernet: 4 × RJ-45 (10/100/1000Mbps). USB: 2 × USB2.0 on front panel, 2 × USB3.0 on rear panel, 1 × eSATA port on rear panel. SAS Interface: 2 × SAS3.0 port, for storage expansion. Serial Interface: 1 × 3.5mm serial port. Alarm Port: 16 × alarm input port, 8 × alarm output port.	
Expansion		1 × PCI-E3.0 x8; Optional 4 × Gigabit RJ-45/optical port, Optional 2 × 10GE optical port	
Video & Audio	2 x HDMI Output up to 3840x2160, 1 x VGA up to 1920x1080, 1 x Audio input, 1 x Audio output	3 x HDMI Output up to 3840x2160, 1 x VGA up to 1920x1080, 1 x Audio in, 1 x Audio out	
Power Input	AC 110V ~ 240V, 50 ~ 60Hz, 1+1 redundant	AC 110V ~ 240V, 50 ~ 60Hz, Hot-swap. 1+1 redundant, 550W CRPS Current-Sharing Power Supply	
Operating Systems	Microsoft Windows OS		
VMS Licenses	32 channel Professional licenses Included	64 channel Professional licenses Included	128 channel Professional licenses Included

4K UHD

with H.265+

Super 4K Solutions

- Sharper clarity both day and night
- Seamless 4K record and playback
- Capture Details and Save Space with H.265+



www.ltsecurityinc.com/4k



4K (3840 X 2160)

5MP (2560 X 1920)

4MP (2688 X 1520)

2MP (1920 X 1080)

Key Features

- UHD 4K Resolution
- H.265 and H.265+ Advanced Compression
- Matrix IR 2.0
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- IP67
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed



4K

H.265+

CMIP7382W-28M

- 8.0MP/4K
- 2.8mm Fixed Lens
- 3840 × 2160 @20fps
- IK10 Vandal Proof

Coming Soon



4K

H.265+

CMIP3382W-28M

- 8.0MP/4K
- 2.8mm Fixed Lens
- 3840 × 2160 @20fps

Coming Soon



4K

H.265+

CMIP9382W-28M

- 8.0MP/4K
- 2.8mm Fixed Lens
- 3840 × 2160 @20fps

Coming Soon



4K

H.265+

CMIP7883W-SZ

- 8.0MP/4K
- 2.8 - 12 mm VF Motorized Lens
- 3840 × 2160 @20fps
- IK10 Vandal Proof

Coming Soon



4K

H.265+

CMIP9883W-SZ

- 8.0MP/4K
- 2.8 - 12 mm VF Motorized Lens
- 3840 × 2160 @20fps

Coming Soon



4K

H.265+

CMIP3883W-SZ

- 8.0MP/4K
- 2.8 - 12 mm VF Motorized Lens
- 3840 × 2160 @20fps

Coming Soon



5MP IP Cameras



Key Features

- UHD 5MP Resolution
- H.265 and H.265+ Advanced Compression
- Matrix IR 2.0
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- IP67
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed



H.265+



H.265+

CMIP7352W/ CMIP7352W-28

- 5.0MP
- 4mm/ 2.8mm Fixed Lens
- 2560 × 1920 @20fps
- IK10 Vandal-Proof

CMIP3352W/ CMIP3352W-28

- 5.0MP
- 4mm/ 2.8mm Fixed Lens
- 2560 × 1920 @20fps



H.265+



H.265+



H.265+



H.265+

CMIP9352W-28

- 5.0MP
- 2.8mm Fixed Lens
- 2560 × 1920 @20fps

CMIP7853W-SZ

- 5.0MP
- 2.8 - 12 mm VF Motorized Lens
- 2560 × 1920 @20fps
- IK10 Vandal Proof

CMIP9853W-SZ

- 5.0MP
- 2.8 - 12 mm VF Motorized Lens
- 2560 × 1920 @20fps

CMIP3853W-SZ

- 5.0MP
- 2.8 - 12 mm VF Motorized Lens
- 2560 × 1920 @20fps


Coming Soon

Coming Soon


Coming Soon

Key Features

- 2.1 - 5.0 Megapixel Resolution
- 30 IR up to 100ft
- Varifocal Lens
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Audio I/O, Alarm I/O
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- 3-Axis
- IK10 Vandal-Proof
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed
- Z Model Features Smart Focus Motorized Lens



Unit: mm



CMIP7223-SZ

- 2.1MP
- 2.7-12mm VF Motorized Lens
- 1920x1080P@30fps
- DWDR
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP66

CMIP7243-SZ

- 4.1MP
- 2.8-12mm VF Motorized Lens
- 2688x1520P@20fps
- DWDR
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP67

CMIP7243W-SZ

- 4.1MP
- 2.8-12mm VF Motorized Lens
- 2688x1520P@20fps
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP67

CMIP7253-SZ

- 5.0MP
- 2.8-12mm VF Motorized Lens
- 2560x1920P@20fps
- DWDR
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP67



LTB342-135

Wall Mount



LTB342-135B

Junction Box



LTB378

Pole Mount



LTB379

Corner Mount

Matrix IR

Dramatically brighten up the dark with the best LED to help capture details.



Key Features

- 2.1 - 5.0 Megapixel Resolution
- Matrix IR LED up to 100ft
- Video Content Analytics
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed



Matrix IR



Traditional IR



[YouTube.com/LTSccTV](https://www.youtube.com/LTSccTV)

CMIP1122/CMIP3022

- 2.1MP
- 4mm Fixed Lens
- 1920x1080P@30fps
- DWDR
- IP66

CMIP1122-28/CMIP3022-28

- 2.1MP
- 2.8mm Fixed Lens
- 1920x1080P@30fps
- DWDR
- IP66

CMIP3022W

- 2.1MP
- 4mm Fixed Lens
- 1920x1080P@30fps
- True WDR 120dB
- IP67

CMIP3022W-28

- 2.1MP
- 2.8mm Fixed Lens
- 1920x1080P@30fps
- True WDR 120dB
- IP67

CMIP1142/CMIP3042

- 4.1MP
- 4mm Fixed Lens
- 2688x1520P@20fps
- DWDR
- IP67

CMIP1142-28/ CMIP3042-28

- 4.1MP
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- DWDR
- IP67

CMIP1142W/ CMIP3042W

- 4.1MP
- 4mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB
- IP67

CMIP1142W-28/ CMIP3042W-28


- 4.1MP
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB
- IP67

CMIP1142W-6/ CMIP3042W-6

- 4.1MP
- 6mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB
- IP67



- Longer IR Lifespan
- No Halo Effect
- 21% More Energy Efficient than Traditional IR

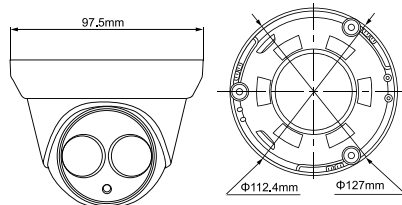

Unit: mm



LTB03-W

Junction Box



LTB307

Junction Box



LTB301

Wall Mount



LTB371

Pendant Mount



LTB378

Pole Mount



LTB379

Corner Mount



IP Cameras - Platinum Series



Key Features

- 2.1 - 5.0 Megapixel Resolution
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- 3-Axis
- IK10 Vandal-Proof
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed

*Junction Box Sold Separately

CMIP7422N-28M

- 2.1MP
- 12 IR up to 70ft
- 2.8mm Fixed Lens
- 1920x1080P@30fps
- DWDR
- IP66
- Special Design for Wide FoV

CMIP7422-M

- 2.1MP
- 30 IR up to 100ft
- 4mm Fixed Lens
- 1920x1080P@30fps
- DWDR
- IP66

CMIP7422W-M

- 2.1MP
- 30 IR up to 100ft
- 4mm Fixed Lens
- 1920x1080P@30fps
- True WDR 120dB
- IP67

CMIP7442-M

- 4.1MP
- 30 IR up to 100ft
- 4mm Fixed Lens
- 2688x1520P@20fps
- DWDR
- IP67

CMIP7442-28M

- 4.1MP
- 30 IR up to 100ft
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- DWDR
- IP67

CMIP7442B-28M

- 4.1MP
- 30 IR up to 100ft
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- DWDR
- IP67
- Black Housing

CMIP7442W-28M

- 4.1MP
- 30 IR up to 100ft
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB
- IP67

CMIP7442WB-28M


- 4.1MP
- 30 IR up to 100ft
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB
- IP67
- Black Housing

CMIP7452-M

- 5.0MP
- 30 IR up to 100ft
- 4mm Fixed Lens
- 2560x1920P@20fps
- DWDR
- IP67

CMIP7452B-M

- 5.0MP
- 30 IR up to 100ft
- 4mm Fixed Lens
- 2560x1920P@20fps
- DWDR
- IP67
- Black Housing

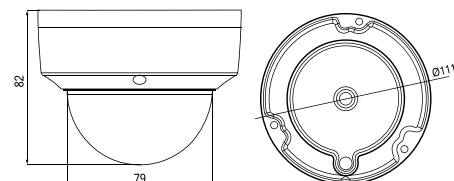

Unit: mm



LTB347/B

Junction Box
(White or Black)



LTB349

Ceiling Mount



LTB348 /B

Wall Mount
(White or Black)



LTB342-110

Wall Mount



LTB376

Pendant mount



LTB378

Pole Mount



LTB379

Corner Mount

Super Low Profile

Maximize forensic evidence with assurance of efficient on-board storage, audio, and optimal viewing resolution.



Key Features

- 4.1 - 5.0 Megapixel Resolution
- 10 IR up to 33ft
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- 3-Axis
- Built-in Microphone
- Audio Output, Alarm I/O
- IP67, IK8 Vandal-Proof
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed

CMIP3142-28S

- 4.1MP
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- DWDR

CMIP3142W-28S


- 4.1MP
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB

CMIP3152-28S

- 5.0MP
- 2.8mm Fixed Lens
- 2560x1920P@20fps
- DWDR

See License Plate Details at Night

The all-new Platinum VF Motorized Lens LPR Network IP Camera utilizes white flux LEDs to minimize reflections and improve clarity on plate numbers in color.




Key Features

- White Flux LEDs
- Varifocal Lens with Smart Focus
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- 3D DNR, BLC
- Audio I/O, Alarm I/O
- IP66
- DC 12V, PoE
- UL Listed



CMIP7923LPR-20

- 2.1MP
- 8-20mm VF Motorized Lens
- 1920x1080P@30fps
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB

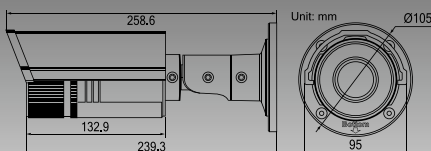

www.ltsecurityinc.com/iplpr



Flexible. Versatile. Wireless

Untether security solutions with wireless cameras

- Indoor/ Outdoor Applications

www.ltsecurityinc.com/wifi



CMIP7422N-28WIFI

- 2.1MP
- 12 IR up to 70ft
- 2.8mm Fixed Lens
- 1920x1080P@30fps
- DWDR
- Indoor/ Outdoor

CMIP7442W-28WIFI

- 4.1MP
- 30 IR up to 100ft
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB
- Indoor/ Outdoor

CMIP3142W-28SWIFI

- 4.1MP
- 10 IR up to 33ft
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Built-in Microphone
- Audio Output, Alarm I/O
- Indoor/ Outdoor

CMIP8222-WIFI

- 2.1MP
- 4mm Fixed Lens
- 1920x1080P@30fps
- DWDR
- Indoor/ Outdoor

CMIP8942W-28WIFI

- 4.1MP
- 2.8mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Alarm I/O
- Built-in Microphone & Speaker
- Indoor

Powerful Mini IP Cameras

Easy Point and Shoot Installation

Key Features

- 2.1 - 4.1 Megapixel Resolution
- 24 IR up to 100ft
- Video Content Analytics
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed



[YouTube.com/LTScctv](https://www.youtube.com/LTScctv)



CMIP8222/B

- 2.1MP
- 4mm Fixed Lens
- 1920x1080P@30fps
- DWDR
- White/Black Housing
- IP66

CMIP8222W/B

- 2.1MP
- 4mm Fixed Lens
- 1920x1080P@30fps
- True WDR 120dB
- White/Black Housing
- IP67

CMIP8242/B

- 4.1MP
- 4mm Fixed Lens
- 2688x1520P@20fps
- DWDR
- White/Black Housing
- IP67

CMIP8242W/B

- 4.1MP
- 4mm Fixed Lens
- 2688x1520P@20fps
- True WDR 120dB
- White/Black Housing
- IP67




LTB345

Universal Junction Box



LTB345B

Universal Junction Box (Black)



Unit: mm

Outdoor/ Indoor Bullet IP Camera

Powerful for any job with Smart Analytics

Key Features

- 2.1 - 5.0 Megapixel Resolution
- 30 IR up to 100ft
- Varifocal Lens
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Audio I/O, Alarm I/O
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed
- Junction Box Included
- Z Model Features Smart Focus Motorized Lens*



www.ltsecurityinc.com/vca

CMIP9723-S

- 2.1MP
- 2.8-12mm Varifocal Lens
- 1920x1080P@30fps
- DWDR
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP66

CMIP9723W-S

- 2.1MP
- 2.8-12mm Varifocal Lens
- 1920x1080P@30fps
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP67

CMIP9743-S

- 4.1MP
- 2.8-12mm Varifocal Lens
- 2688x1520P@20fps
- DWDR
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP67

Micro SD/SDHC/SDXC Card Slot up to 128GB



CMIP9743-SZ

- 4.1MP
- 2.8-12mm VF Motorized Lens
- 2688x1520P@20fps
- DWDR
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP67

CMIP9743W-SZ

- 4.1MP
- 2.8-12mm VF Motorized Lens
- 2688x1520P@20fps
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP67

CMIP9753-SZ

- 5.0MP
- 2.8-12mm VF Motorized Lens
- 2560x1920P@20fps
- DWDR
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IP67




LTB378

Pole Mount



LTB379

Corner Mount

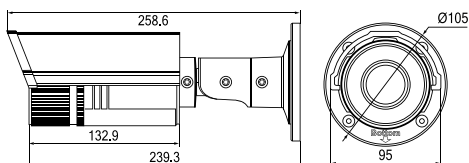

Unit: mm



Key Features

- 4.1 - 5.0 Megapixel Resolution
- 2 x Matrix IR LED up to 165ft
- Video Content Analytics
- IP67
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed
- Junction Box Included



[YouTube.com/LTScctv](https://www.youtube.com/LTScctv)

CMIP9142	CMIP9142W	CMIP9142W-6	CMIP9152
• 4.1MP • 4mm Fixed Lens • 2688x1520P@20fps • DWDR	• 4.1MP • 4mm Fixed Lens • 2688x1520P@20fps • True WDR 120dB	• 4.1MP • 6mm Fixed Lens • 2688x1520P@20fps • True WDR 120dB	• 5.0MP • 4mm Fixed Lens • 2560x1920P@20fps • DWDR

Key Features

- 4 x Matrix IR LED up to 394ft
- 20x Optical Zoom Motorized Lens with Auto Focus
- Up to 60fps
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- 3D DNR, BLC
- Audio I/O, Alarm I/O
- IP67
- DC12V, PoE
- UL Listed



CMIP9223W-SZ

- 2.1MP
- 4.7-94mm VF Motorized Lens with Auto Focus
- Ultra-Low Light
- 1920x1080P up to 60fps
- True WDR 120dB
- HLC
- Micro SD/SDHC/SDXC Card Slot up to 128GB

20X ZOOM
LONG RANGE BULLET CAMERA

Key Features

- Magnetic Snap-on Dome Cover, Screwless Installation
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- In-Ceiling Installation
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed



CMIP7122


- 2.1MP
- 4mm Fixed Lens
- 1920x1080P@30fps
- DWDR
- Micro SD/SDHC/SDXC Card Slot up to 128GB



**No Screws
Needed**

Key Features

- 6.3 & 12.3 Megapixel Resolution
- 360° Fisheye View
- Multiple Viewing Modes
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Video Content Analytics
- Heat Map for Motion Analytics
- IK10 Vandal-Proof
- IR up to 33ft
- Low-light, Virtual PTZ
- DWDR
- DC12V, PoE
- Audio I/O
- Built-in Microphone
- UL Listed

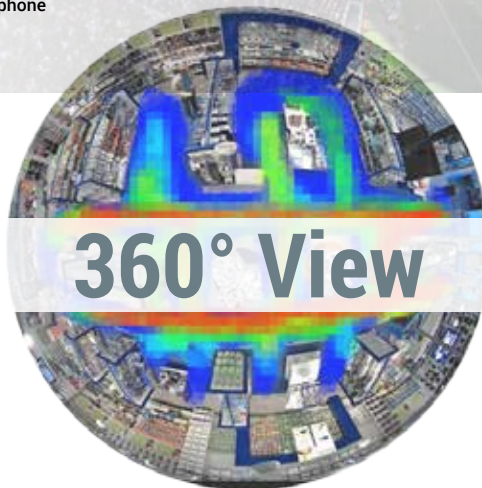

360° View

Fisheye



Split 180°



4/ PTZ



CMIP7562F-E

- Fisheye IP Camera
- 6.3MP
- 1.27mm Fixed Lens
- 3072 x 2048@25fps
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Vandal-Proof, IP66

CMIP75122F-SE

- Fisheye IP Camera
- 12.3MP
- 1.98mm Fixed Lens
- 4000 x 3072@25fps
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Vandal-Proof, IP66
- Alarm I/O



LTB756

Wall Mount



LTB759

Ceiling Mount



LTB755

Inclined Ceiling/Wall Mount



*Lens Sold Separately

CMIP2832DW-S

- Box IP Camera
- 3.2MP
- 2048x1536P@20fps
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Audio I/O, Alarm I/O
- DC12V/AC24V/PoE

Smarter Analytics

Using People Counting IP Camera



CMIP7812W

- People Counting IP Camera
- 1.3MP
- 2.8mm Fixed Lens
- 1280x960P@30fps
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Audio I/O, Alarm I/O
- Length of Cable: 2m
- DC12V



Varifocal Lenses



LTL550

2MP HD Lens, F1.4
Varifocal 5-50mm
1/3", Auto Iris, CS
Mount



LTL3M2812

3MP HD Lens, F1.4
Varifocal 2.8-12mm
1/2.7", Auto Iris, CS
Mount



LTL3M358

2MP HD Lens, F1.4
Varifocal 3.5-8mm
1/3", Auto Iris, CS
Mount



LTL510011

Long Range Lens, F1.6
Varifocal 5-100mm
1/3", Auto Iris, CS
Mount



CMIP183

- Pinhole IP Camera
- 1.3MP
- 2.8mm Fixed Lens
- 1280x960P@30fps
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Audio I/O, Alarm I/O
- DC12V, PoE



Smart Tracking PTZ

- Detects Moving targets
- Tracks Movement
- Zoom in for Forensic Details



Key Features


- Auto IR Intensity Adjustment
- MicroSD Card Slot up to 128GB
- 3D Zoom
- Schedule Task
- IP66
- Audio I/O, Alarm I/O 3D DNR, DWDR 3D Privacy Mask

PTZIP762X20IR

- Smart Tracking
- 2.1MP, Full HD 1080P
- 1920x1080P@30fps
- 4.7-94mm
- 20x Optical Zoom
- 1/2.8" CMOS
- 10 IR LEDs@495ft
- High PoE, AC 24V
- 6" (Φ)

Key Features

- 1/2.8" CMOS
- 20x Optical Zoom
- 4.7-94mm
- 3D Zoom
- Schedule Task
- Audio I/O, Alarm I/O
- True Day/Night
- 3D DNR, DWDR
- 3D Privacy Masking
- PoE Plus, AC 24V
- 4" (Φ)




Wall Mount Bracket Included

Ceiling & Flush Mount

A	B	C	D
PTZIP211X20	PTZIP211X20-C	PTZIP212X20	PTZIP212X20-C
• 1.3MP • 1280x720P@30fps • IP66 • Indoor/Outdoor	• 1.3MP • 1280x720P@30fps • Ceiling & Flush Mount • Indoor	• 2.1MP, Full HD 1080P • 1920x1080P@30fps • IP66 • Indoor/Outdoor	• 2.1MP, Full HD 1080P • 1920x1080P@30fps • Ceiling & Flush Mount • Indoor

Key Features

- 1/2.8" CMOS
- 30x Optical Zoom
- 4.3-129mm
- Auto IR Intensity Adjustment
- 3D Zoom
- Schedule Task
- IP66
- Audio I/O, Alarm I/O
- True Day/Night
- 3D DNR, DWDR
- 3D Privacy Masking
- PoE Plus, AC 24V
- 6" (Φ)
- Wall Mount Bracket Included



A	B
PTZIP512X20IR	PTZIP772X30NIR
• 2.1MP, Full HD 1080P • 1920x1080P@30fps • 4.7-94mm • 20x Optical Zoom • 1/2.8" CMOS • 4 IR LEDs@492ft • High PoE, AC 24V • BNC Output • 5" (Φ)	• 2.1MP, Full HD 1080P • 1920x1080P@30fps • 4.3-129mm • 30x Optical Zoom • 1/2.8" CMOS • 6 IR LEDs@394ft • High PoE, AC 24V • 6" (Φ)

Learn About
Smart Tracking



YouTube.com/LTSccvtv

Key Features

- 23x Optical Zoom, 4-92mm
- 1/3" CMOS
- True Day/Night, 3D DNR, DWDR
- 3D Privacy Masking
- 256 Preset Positions
- 4 Patterns, 8 Patrols
- Self-adaptive, RS485 Pelco D/Pelco P
- CVBS Output
- AC 24V
- Wall Mount Bracket Included/Ceiling & Flush Mount



Wall Mount Bracket Included Ceiling & Flush Mount

A	B	C
PTZH213X23-C	PTZH212X23	PTZH212X23-C
• 1.3MP • 1280x720P@30fps • Ceiling & Flush Mount • Indoor • 4" (Φ)	• 2.1MP, Full HD 1080P • 1920x1080P@30fps • IP66 • Indoor/Outdoor • 4" (Φ)	• 2.1MP, Full HD 1080P • 1920x1080P@30fps • Ceiling & Flush Mount • Indoor • 4" (Φ)

Key Features

- 1/3" CMOS
- True Day/Night, 3D DNR, DWDR
- 3D Privacy Masking
- 256 Preset Positions
- 4 Patterns, 8 Patrols
- Self-adaptive, RS485 Pelco D/Pelco P
- IP66, Indoor/ Outdoor
- AC 24V
- Wall Mount Bracket Included



D	E
PTZH773X23IR	PTZH512X30IR
• 1.3MP • 1280x720P @30fps • 23x Optical Zoom, 4-92mm • 6 IR LEDs@394ft • 6" (Φ)	• 2.1MP, Full HD 1080P • 1920X1080P @30fps • 30x Optical Zoom, 4-120mm • 4 IR LEDs@492ft • CVBS Output • 5" (Φ)



	A	B	C	D
	KB833	KB835	KB836	KB837
Connection Type	RS485		Network	USB
Compatible Model	TVI PTZs and Analog PTZs PTZIP762X20IR		TVI DVR and NVR IP PTZs	LTN87xx Series NVRs LTN89xx Series NVRs



LTB751

Pendant Mount



LTB751-20

Pendant Mount



LTB378

Pole Mount



LTB397

Corner Mount



LTB742

Parapet Wall Mount

HD-TVI 4.0 Technology

Higher Resolution in HD Analog
Save Bandwidth and Storage



HD-TVI 4.0 DVR

- Record and Playback up to 4K
- 5-1 Compatible DVR




H.265/H.265+

- H.265+ Video Compression



5MP Cameras

- 5MP
- Starlight
- Matrix IR 2.0

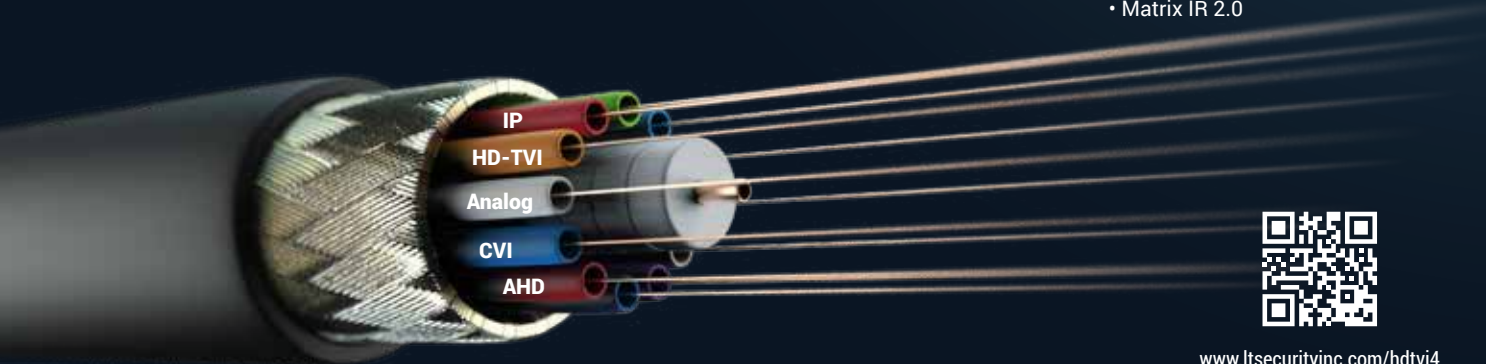

www.ltsecurityinc.com/hdtvi4

Professional Level

Image

A | Mini 1U Case

B | C | Compact Case



	A	B	C
Model Number	LTD8504K-ST	LTD8508K-ST	LTD8516K-ST
Price			
Analog & HD-TVI Video In	4CH	8CH	16CH
Record Rate	5MP (2560x1920P)@12fps/3MP (1920x1536P)@15fps/1920x1080P@30fps		
IPC Input	2CH, Up to 6MP (3032x2160P)		
Video Output	1CVBS, 1VGA/1HDMI, HDMI up to 1920x1080P	1CVBS, 1VGA/1HDMI, HDMI output up to 4K (3840x2160P)	
Playback Channel	4CH	8CH	16CH
Audio In/Out		4CH/1CH, RCA	
Alarm In/Out	4/1	8/4	16/4
Network		10/100/1000Mbps	
Storage	1 SATA up to 8TB,NAS,IP SAN	2 SATA up to 16TB,NAS,IP SAN	
eSATA		-	
USB	2, USB2.0		1 USB 2.0/1 USB 3.0
PTZ		1 RS485	
Support POS#	1	2	
Product Dimensions	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.6"(D)x1.8"(H)	

Advanced Level

Image

D | Mini 1U Case

E | F | Compact Case



	D	E	F
Model Number	LTD8304K-ET	LTD8308K-ET	LTD8316K-ET
Price			
Analog & HD-TVI Video In	4CH	8CH	16CH
Record Rate	Channel 1 up to 3MP	Channel 1, 2 up to 3MP	Channel 1,2,3,4 up to 3MP
IPC Input	1CH up to 4MP@20fps	2CH up to 4MP @20fps	
Video Output	1 CVBS, 1VGA/1HDMI, HDMI up to 1920x1080P		1 CVBS, 1VGA/1HDMI, HDMI output up to 4K (3840 × 2160@30Hz)
Playback Channel	4CH	8CH	16CH
Audio In/Out		1CH/1CH, RCA	
Alarm In/Out		-	
Network		10/100Mbps	10/100/1000Mbps
Storage	1 SATA up to 8TB, NAS, IP SAN	2 SATA up to 16TB, NAS, IP SAN	
eSATA		-	
USB		2, USB 2.0	1 USB 2.0, 1 USB 3.0
PTZ		1 RS485	
Support POS#		-	
Product Dimensions	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.6"(D)x1.8"(H)	

Professional Level

Image

G | Mini 1U Case

H | Compact Case

I | J | 1U Case



	G	H	I	J
Model Number	LTD8504T-ST	LTD8508T-ST	LTD8516T-ST(U)	LTD8308T-ST
Price				
Analog & HD-TVI Video In	4CH	8CH	16CH	8CH
Record Rate	3MP (1920x1536P)@15fps / 1920x1080P@30fps			8CH 1080P@30fps
IPC Input	2CH, Up to 4MP (2688x1520P)@20fps			2CH 1080P@30fps
Video Output	1 CVBS, 1VGA/1HDMI up to 1920x1080P	1 CVBS, 1VGA/1HDMI up to 4K (3840x2160P)		1 CVBS, 1VGA/1HDMI up to 1920x1080P
Playback Channel	4CH	8CH	16CH	8CH
Audio In/Out		4CH/1CH, RCA		
Alarm In/Out	4/1	8/4	16/4	8/4
Network	10/100Mbps	10/100/1000Mbps		
Storage	1 SATA up to 8TB,NAS,IP SAN	2 SATA up to 16TB,NAS,IP SAN		
eSATA		-		
USB		2, USB2.0		
PTZ		1 RS485		
Support POS#	1	2		4
Product Dimensions	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.6"(D)x1.8"(H)	17.5"(W)x11.4"(D)x1.8"(H)	17.5"(W)x11.4"(D)x1.8"(H)



DVR - Platinum Series

Advanced Level

Image

K | N | Mini 1U Case

L | O | Compact Case

M | P | 1U Case



	K	L	M	N	O	P
Model Number	LTD8304T-ET	LTD8308T-ET	LTD8316T-ET(U)	LTD8304T-EA	LTD8308T-EA	LTD8316T-EA(U)
Price						
Analog & HD-TVI Video In	4CH	8CH	16CH	4CH	8CH	16CH
Record Rate	Up to 960X1080@30fps with LTS Efficient Mode On					
IPC Input	1CH 1080P@30fps	2CH 1080P@30fps	1CH 1080P@30fps	2CH 1080P@30fps		
Video Output	1CVBS, 1VGA/1HDMI up to 1920x1080P					
Playback Channel	4CH	8CH	16CH	4CH	8CH	16CH
Audio In/Out	1CH/1CH, RCA					
Alarm In/Out	-	-	-	4/1	8/4	16/4
Network	10/100Mbps	10/100/1000Mbps	10/100Mbps	10/100Mbps	10/100/1000Mbps	
Storage	1 SATA up to 8TB,NAS,IP SAN	2 SATA up to 16TB,NAS,IP SAN	1 SATA up to 8TB,NAS,IP SAN	2 SATA up to 16TB,NAS,IP SAN		
eSATA	-	-	-	-	-	-
USB	2, USB 2.0	1 USB 2.0, 1 USB 3.0	2, USB 2.0	1 USB 2.0, 1 USB 3.0		
PTZ	1 RS485					
Support POS#	-	-	-	-	-	-
Product Dimensions	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.6"(D)x1.8"(H)	17.5"(W)x11.4"(D)x1.8"(H)	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.6"(D)x1.8"(H)	17.5"(W)x11.4"(D)x1.8"(H)

Enterprise Level

Image

Q | R | 1.5U Case


S | T | 2U Case



	Q	R	S	T
Model Number	LTD8424T-FA	LTD8432T-FA	LTD9224T-FA	LTD9232T-FA
Price				
Analog & HD-TVI Video In	24CH	32CH	24CH	32CH
Record Rate	24CH 720P@30fps 24CH 1080P@15fps	32CH 720P@30fps 32CH 1080P@15fps	24CH 720P@30fps 24CH 1080P@15fps	32CH 720P@30fps 32CH 1080P@15fps
IPC Input	Up to 8CH 1080P@30fps			
Video Output	VGA/HDMI up to 1080P			
Playback Channel	24CH	32CH	24CH	32CH
Audio In/Out	4CH/1CH, RCA			
Alarm In/Out	16/4			
Network	10/100/1000Mbps			
Storage	4 SATA up to 24TB,NAS, IP SAN			
eSATA	1			
USB	3, USB 2.0			
PTZ	1 RS485			
Support POS#	8			
Product Dimensions	17.5"(W)x15.3"(D)x2.7"(H)			

Key Features

- High Definition Turret HD-TVI Camera
- 2 Matrix IR 2.0 LED up to 131ft
- UTC Control to OSD Menu
- DC 12V

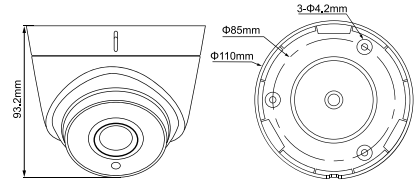

Unit: mm



CMHT1722W-28 CMHT1722W	CMHT1722WE-28	CMHT17T2-28 CMHT17T2 CMHT17T2-6	CMHT17T2W-28 CMHT17T2W CMHT17T2W-6	CMHT1752-28
• 2.1MP • 2.8mm/3.6mm Fixed Lens • 1920x1080P@30fps • 0.01 Lux, Smart IR • True WDR 120dB • IP66	• 2.1MP Ultra Low light • 2.8mm Fixed Lens • 1920x1080@30fps • 0.005 Lux @ F2.0 • True WDR 120dB • IP67	• 3MP • 2.8mm/3.6mm/6mm Fixed Lens • 1920x1536@18fps • 0.01 Lux, Smart IR • IP66	• 3MP • 2.8mm/3.6mm/6mm Fixed Lens • 1920x1536@18fps • 0.01 Lux, Smart IR • True WDR 120dB • IP66	• 5MP Ultra Low light • 2.8mm Fixed Lens • 2560x1944@20fps • 0.008 Lux@F1.2, Smart IR • IP67



LTB03-W
Junction Box



LTB307
Junction Box



LTB301
Wall Mount



LTB378
Pole Mount




LTB379
Corner Mount



LTB371
Pendant Mount

Key Features

- High Definition Turret HD-TVI Camera
- 2 Matrix IR 2.0 LED up to 65ft
- UTC Control to OSD Menu
- 0.01 Lux, Smart IR
- DC 12V

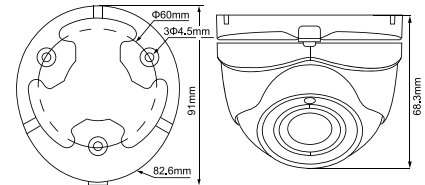

Unit: mm



CMHT1322W-28 CMHT1322W	CMHT13T2-28 CMHT13T2	CMHT13T2W-28 CMHT13T2W	CMHT1352-28
• 2.1MP • 2.8mm/3.6mm Fixed Lens • 1920x1080P@30fps • True WDR 120dB • IP66	• 3MP • 2.8mm/3.6mm Fixed Lens • 1920x1536@18fps • IP66	• 3MP • 2.8mm/3.6mm Fixed Lens • 1920x1536@18fps • True WDR 120dB • IP66	• 5MP Ultra Low light • 2.8mm Fixed Lens • 2560x1944@20fps • 0.008 Lux@F1.2 • IP67



LTB342-110T
Wall Mount



LTB378
Pole Mount



LTB379
Corner Mount



LTB345
Universal Junction Box

Key Features


- High Definition Turret HD-TVI Camera
- 24 IR LEDs up to 65ft
- 1920×1080P@30fps
- UTC Control to OSD Menu
- IP66
- DC 12V



CMHT2122/B-28

CMHT2122/B

- 2.1MP
- 2.8mm/3.6mm Fixed Lens
- Housing option (White/Black)

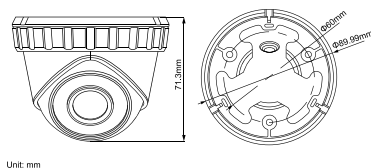

Unit: mm



LTB342-110T

Wall Mount



LTB378

Pole Mount



LTB379

Corner Mount



LTB345

Universal Junction
Box



LTB345B

Universal Junction
Box

Key Features

- High Definition Turret HD-TVI Camera
- 1 Matrix IR LED up to 131ft
- UTC Control to OSD Menu
- 0.01 Lux, Smart IR
- IP66
- DC 12V



CMHT2722-28


CMHT2722

- 2.1MP
- 2.8mm/3.6mm Fixed Lens
- 1920×1080P@30fps

CMHT2722W-28

CMHT2722W

- 2.1MP
- 2.8mm/3.6mm Fixed Lens
- 1920×1080P@30fps
- True WDR 120dB



Unit: mm



LTB03-W

Junction Box



LTB307

Junction Box



LTB301

Wall Mount



LTB378

Pole Mount



LTB379

Corner Mount



LTB371

Pendant Mount


Key Features

- High Definition Turret HD-TVI Camera
- 24 IR LEDs up to 65ft
- IP66
- DC 12V



CMHT1422W-28

- 2.1MP
- 2.8mm Fixed Lens
- 1920×1080P@30fps
- True WDR 120dB
- UTC Control to OSD Menu



Unit: mm

Key Features

- High Definition Turret HD-TVI Camera
- 2.8-12mm Varifocal Motorized Lens
- 6 Matrix IR 2.0 LED up to 131ft
- UTC Control to OSD Menu
- DC 12V



CMHT1923W-Z


- 2.1MP
- 1920×1080P@30fps
- 0.01 Lux, Smart IR
- True WDR 120dB
- IP66

CMHT1923WE-Z

- 2.1MP Ultra Low light
- 1920×1080@30fps
- 0.005 Lux @ F1.8
- True WDR 120dB
- IP67

CMHT19T3W-Z

- 3MP
- 1920×1536@18fps
- 0.01 Lux, Smart IR
- True WDR 120dB
- IP66

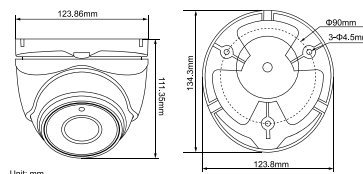

Unit: mm



LTB342-110T

Wall Mount



LTB378

Pole Mount



LTB379

Corner Mount



LTB345

Universal Junction Box



LTB307

Junction Box



LTB301

Wall Mount



LTB378

Pole Mount



LTB379

Corner Mount

Key Features

- High Definition Turret HD-TVI Camera
- 2.1MP
- 1920×1080P@30fps
- 42 IR LEDs up to 131ft
- UTC Control to OSD Menu
- IP66
- DC 12V




Key Features

- High Definition Turret HD-TVI Camera
- 2.1MP
- 1920×1080P@30fps
- IP66
- DC 12V



CMHT1823/B


- 2.8-12mm Varifocal Lens
- Housing option (White/Black)

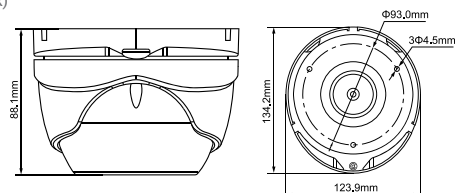

Unit: mm

CMHT2023R/B-A

- 2.8-12mm Varifocal Lens
- 36 IR LEDs up to 115ft
- CVBS Output (jumper included)
- Housing option (White/Black)



Unit: mm



LTB307

Junction Box



LTB301

Wall Mount



LTB378

Pole Mount



LTB379

Corner Mount



LTB01-W

Junction box




LTB01-B

Junction box

Key Features

- High Definition Dome HD-TVI Camera
- 2 Matrix IR 2.0 LED up to 65ft
- UTC Control to OSD Menu
- IK10 Vandal-Proof Dome
- 3-Axis Easy Installation

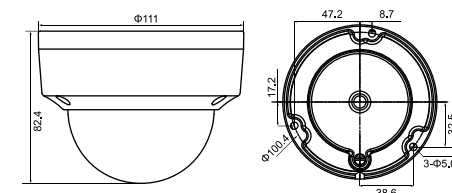

Unit: mm



CMHD7322WE-28

- 2.1MP Ultra Low light
- 2.8mm Fixed Lens
- 1920x1080@30fps
- 0.005 Lux @ F2.0
- True WDR 120dB
- IP67
- IK7

CMHD73T2-28

- 3MP
- 2.8mm Fixed Lens
- 1920x1536@18fps
- 0.01 Lux, Smart IR
- IP66
- IK10 Vandal-Proof Dome

CMHD73T2W-28 CMHD73T2W

- 3MP
- 2.8mm/3.6mm Fixed Lens
- 1920x1536@18fps
- 0.01 Lux, Smart IR
- True WDR 120dB
- IP66
- IK10 Vandal-Proof Dome

CMHD7352-28

- 5MP Ultra Low light
- 2.8mm Fixed Lens
- 2560x1944@20fps
- 0.008 Lux@F1.2, Smart IR
- IP67
- IK10 Vandal-Proof Dome



LTB347/B

Junction Box (White or Black)



LTB349

Ceiling Mount



LTB348/B

Wall Mount (White or Black)



LTB378

Pole Mount



LTB379

Corner Mount



LTB342-110

Wall Mount



Key Features

- High Definition Dome HD-TVI Camera
- 1920x1080P@30fps
- 18 IR LEDs up to 65ft
- IK10 Vandal-Proof Dome
- 3-Axis Easy Installation
- UTC Control to OSD Menu
- IP66
- DC 12V



Key Features

- High Definition Dome HD-TVI Camera
- 2.1MP
- 1920x1080P@30fps
- 2.8-12mm Varifocal Lens
- 24 IR LEDs up to 131ft
- IK10 Vandal-Proof Dome
- 3-Axis Easy Installation
- UTC Control to OSD Menu
- IP66



CMHD7422/B-28

- 2.1MP
- 2.8mm Fixed Lens
- AoV 105.8°

CMHD7422/B



- 2.1MP
- 3.6mm Fixed Lens
- AoV 84.3°
- Housing option (White/Black)

CMHD3423D

- DC 12V, AC 24V

CMHD3423DW

- DC 12V, AC 24V
- True WDR 120dB

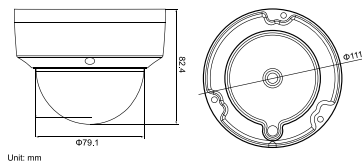

LTB347/B **LTB349** **LTB348/B** **LTB378** **LTB379** **LTB342-110**

Junction Box (White or Black) Ceiling Mount Wall Mount (White or Black) Pole Mount Corner Mount Wall Mount




LTB342-140 **LTB342-140B** **LTB378** **LTB379** **LTB340**

Wall Mount Wall Mount Pole Mount Corner Mount In-ceiling Mount

Key Features

- High Definition Dome HD-TVI Camera
- 2.8-12mm Varifocal Motorized Lens
- 2 Matrix IR 2.0 LED up to 131ft
- UTC Control to OSD Menu
- IK10 Vandal-Proof Dome
- 3-Axis Easy Installation
- DC 12V, AC 24V

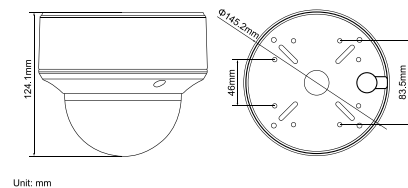

CMHD3523DW-Z

- 2.1MP
- 1920x1080P@30fps
- 0.01 Lux, Smart IR
- True WDR 120dB
- IP66
- IK10 Vandal-Proof Dome

CMHD3523DWE-Z

- 2.1MP Ultra Low light
- 1920x1080@30fps
- 0.005 Lux @ F1.8, Smart IR
- True WDR 120dB
- IP67
- IK8 Vandal-Proof Dome

CMHD35T3DW-Z

- 3MP
- 1920x1536@18fps
- 0.01 Lux, Smart IR
- True WDR 120dB
- IP66
- IK10 Vandal-Proof Dome

CMHD3553D-Z

- 5MP Ultra Low light
- 2560x1944@20fps
- 0.008 Lux@F1.2, Smart IR
- IP67
- IK10 Vandal-Proof Dome



LTB342-140
Wall Mount



LTB342-140B
Wall Mount



LTB378
Pole Mount



LTB379
Corner Mount



LTB340
In-ceiling Mount

Key Features

- High Definition Bullet HD-TVI Camera
- 3.6mm Fixed Lens
- 24 IR LEDs up to 65ft
- IP66
- DC 12V



3.0
HD-TVI

3.0
HD-TVI

CMHR6422W-28
CMHR6422W

- 2.1MP
- 2.8mm/3.6mm Fixed Lens
- 1920x1080P@30fps
- True WDR 120dB

CMHR64T2-28
CMHR64T2

- 3MP
- 2.8mm/3.6mm Fixed Lens
- 1920x1536@18fps

CMHR64T2W-28
CMHR64T2W

- 3MP
- 2.8mm/3.6mm Fixed Lens
- 1920x1536@18fps
- True WDR 120dB


Key Features

- High Definition Bullet HD-TVI Camera
- 2 Matrix IR 2.0 LED up to 65ft
- UTC Control to OSD Menu
- 0.01 Lux, Smart IR
- IP66
- DC 12V



CMHR6222/B

- 2.1MP
- 1920x1080P@30fps
- UTC Control to OSD Menu
- Housing option (White/Black)

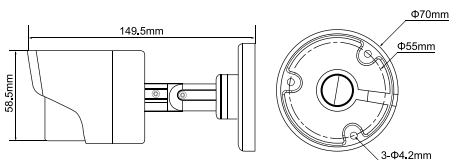

Unit: mm




LTB345

Universal Junction Box



LTB345B

Universal Junction Box



Unit: mm



LTB345

Universal Junction Box



LTB345B


Universal Junction Box

Key Features


- High Definition Bullet HD-TVI Camera
- 2 Matrix IR 2.0 LED up to 131ft
- UTC Control to OSD Menu
- 0.01 Lux, Smart IR
- Junction Box Included
- DC 12V



3.0
HD-TVI



Unit: mm



Special

3.0
HD-TVI

STARLIGHT

4.0
HD-TVI

CMHR9222W-28
CMHR9222W

- 2.1MP
- 2.8mm/3.6mm Fixed Lens
- 1920x1080P@30fps
- True WDR 120dB
- IP66

CMHR92T2-28
CMHR92T2
CMHR92T2-6

- 3MP
- 2.8mm/3.6mm/6mm Fixed Lens
- 1920x1536@18fps
- IP66

CMHR92T2W-28
CMHR92T2W
CMHR92T2W-6

- 3MP
- 2.8mm/3.6mm/6mm Fixed Lens
- 1920x1536@18fps
- True WDR 120dB
- IP66

CMHR9252-28

- 5MP Ultra Low light
- 2.8mm Fixed Lens
- 2560x1944@20fps
- 0.008 Lux@F1.2
- * IP67


Key Features

- High Definition Bullet HD-TVI Camera
- 3.6mm Fixed Lens
- 1 Matrix IR LED up to 131ft
- UTC Control to OSD Menu
- Junction Box Included
- IP66



CMHR9422

- 2.1MP
- 1920x1080P@30fps

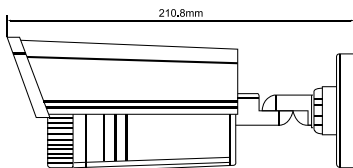

Unit: mm


Key Features

- High Definition Bullet HD-TVI Camera
- 2.8-12mm Varifocal Motorized Lens
- 42 IR LEDs up to 131ft
- IP66
- UTC Control to OSD Menu
- Junction Box Included
- DC 12V, AC 24V



CMHR6823D-Z

- 2.1MP
- 1920x1080P@30fps

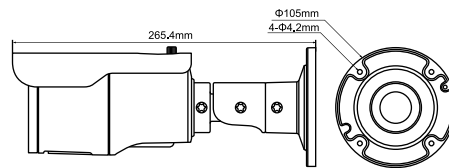

Unit: mm


Key Features

- High Definition Bullet HD-TVI Camera
- 2.8-12mm Varifocal Lens
- 42 IR LEDs up to 165ft
- UTC Control to OSD Menu
- Junction Box Included
- IP66



CMHR9323D

- 2.1MP
- 1920x1080P@30fps
- DC 12V, AC 24V
- Housing option (White)



Unit: mm


Key Features

- High Definition Bullet HD-TVI Camera
- 2.8-12mm Varifocal Lens
- 42 IR LEDs up to 165ft
- UTC Control to OSD Menu
- Junction Box Included
- IP66



CMHR9323DB

- 2.1MP
- 1920x1080P@30fps
- DC 12V, AC 24V
- Housing option (Black)



Unit: mm

Key Features

- High Definition Bullet HD-TVI Camera
- 2.8-12mm Varifocal Motorized Lens
- 6 Matrix IR LED up to 175ft
- UTC Control to OSD Menu
- 0.01 Lux, Smart IR
- Junction Box Included
- IP66
- DC 12V, AC 24V




CMHR9623DW-Z

- 2.1MP
- 1920x1080P@30fps
- True WDR 120dB

CMHR96T3DW-Z

- 3MP
- 1920x1536@18fps
- True WDR 120dB

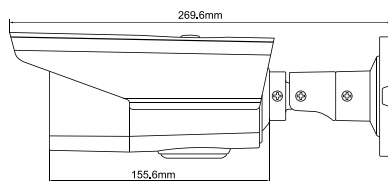

Unit: mm


Key Features

- High Definition Bullet HD-TVI Camera
- 2.8-12mm Varifocal Lens
- 1 Matrix IR LED up to 175ft
- 3D DNR, ICR, Smart IR
- UTC Control to OSD Menu
- Junction Box Included
- IP66
- DC 12V, AC 24V




CMHR9923DW

- 2.1MP
- 1920x1080P@30fps
- True WDR 120dB
- CVBS Output
- 0.014 Lux @ (AGC ON), 0 Lux with IR

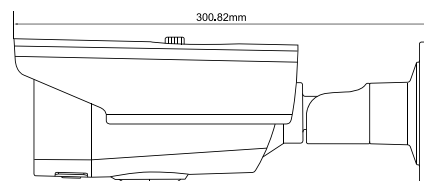

Unit: mm

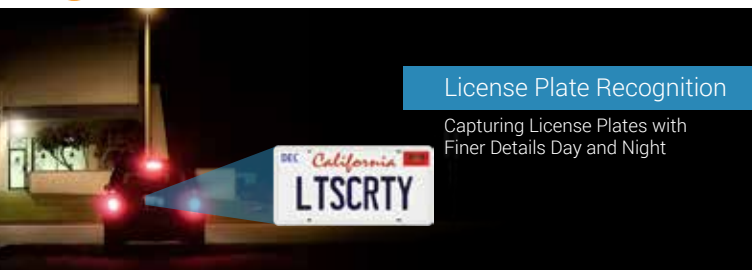

LPR100

- High Definition LPR HD-TVI Camera
- 1.3MP
- 1280x960P@30fps
- 6-22mm Varifocal Motorized Lens
- 6 White Giant Flux IR LEDs up to 131ft
- Ultra Low Lux
- 24/7 Color Mode
- Bracket LTB100 Included
- IP66
- DC 12V

24/7
**Color
Mode**



CMHR6123DWA

- High Definition Long-range HD-TVI Camera
- 2.1MP
- 1920x1080P@30fps
- 5-50mm Varifocal Long-range Lens
- Auto focus
- 2 Matrix IR LEDs up to 360ft
- True WDR 120dB
- CVBS Output
- Junction Box Included
- IP66
- UTC Control to OSD Menu
- DC 12V, AC 24V

Up to
360'



CM1922T

- High Definition Covert HD-TVI Camera
- 2.1MP
- 3.7mm Pinhole Lens
- 1920x1080P@30fps
- DC 12V
- HD-TVI/Analog/AHD/CVI 4-in-1 Toggle
- 1.6"x 1.9"x 1.5" (41mm x 48mm x 38mm)

CM1924T


- High Definition Covert HD-TVI Camera
- 2.1MP
- 3.7mm Pinhole Lens
- 1920x1080P@30fps
- DC 12V
- HD-TVI/Analog/AHD/CVI 4-in-1 Toggle
- 4.7"x 2.0"x 2.2" (120mm x 59mm x 57mm)

CM1925T

- High Definition Covert HD-TVI Camera
- 2.1MP
- 3.7mm Pinhole Lens
- 1920x1080P@30fps
- DC 12V
- HD-TVI/Analog/AHD/CVI 4-in-1 Toggle
- 2.7"x 4.7"x 1.9" (69mm x 120mm x 47mm)

Condo/Building Access Control

Provide visibility and security for your employee, customers, or tenants safety

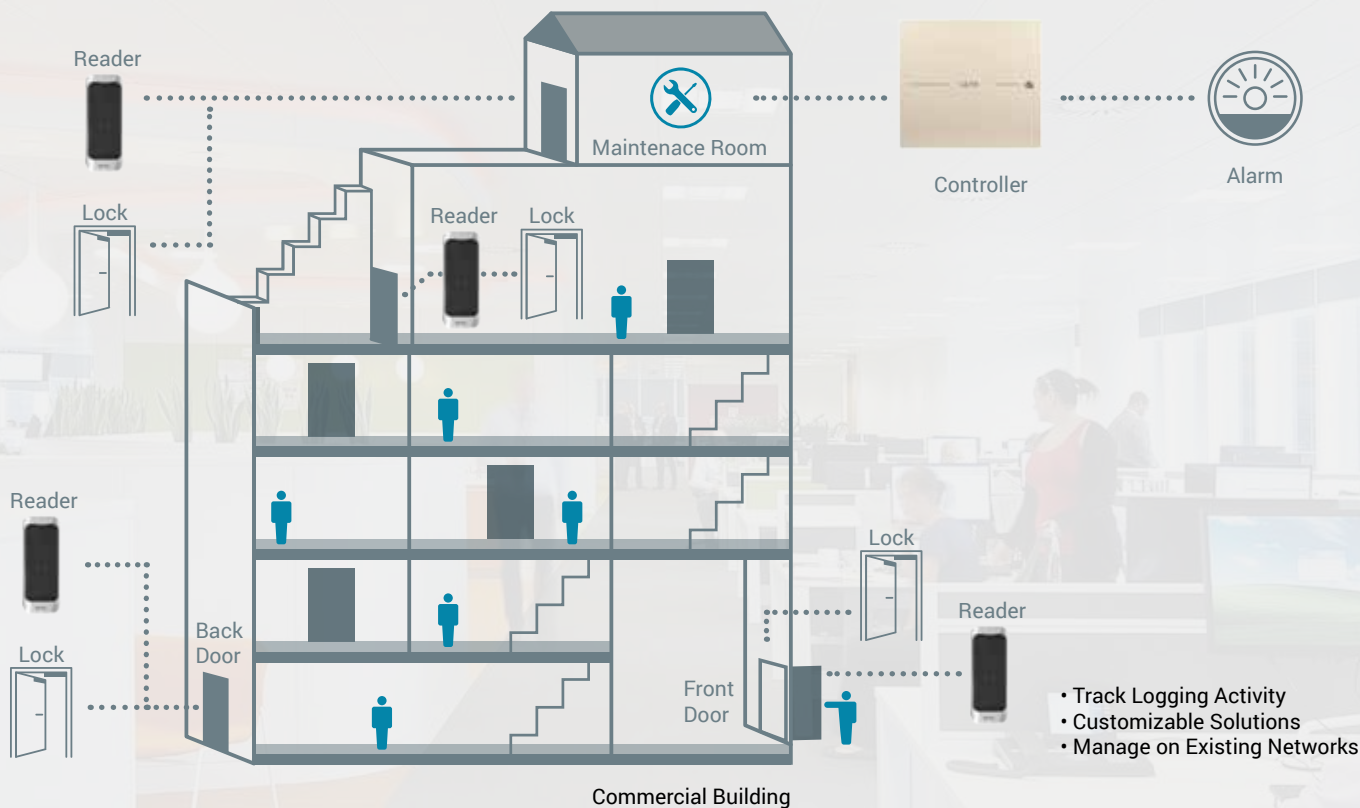

Coming Soon

Economic



LTK2804

LTK1802M

LTK1802MK

Coming Soon

Professional



LTK2604

LTK1103M

LTK1103MK

LTK1107M

LTK1107MK

LTK1200MF



NEW

LTK6128W-WIFI

- 2.1MP
- 180° Panoramic View
- 1920x1080P@30fps
- IR up to 15ft
- Two-Way Audio
- 16VAC - 24VAC
- Built-in Wi-Fi
- WDR, DNR
- Micro SD Card up to 128GB
- IP54

Video Doorbell

Security Starts at Your Front Door

The video / audio doorbell lets you see, hear, and speak to visitors, and is compatible to the LTS NVR/DVR (connect and record).

180°
PanoramicMicro SD
128GBLTS NVR
Compatible

Access Control



LTK2804

- Up to 4 Doors
- Wiegand Card Reader Compatible
- 32-bit High Speed Processor
- Up to 10,000 Card Storage
- Up to 50,000 Card Swiping Records



LTK1802M

- Wiegand Card Reader
- Mifare Card Compatible
- Built-in Buzzer
- Led Indicator
- IP65



LTK1802MK

- Wiegand Card Reader
- Keypad with 12 Keys
- Mifare Card Compatible
- Built-in Buzzer
- Led Indicator
- IP65



LTK2604

- Up to 4 Doors
- Wiegand & RS 485 Card Reader Compatible
- Up to 8 RS485 and 4 Wiegand Card Reader
- 32-bit High Speed Processor
- Up to 100,000 Card Information Storage
- Up to 300,000 Card Swiping Records
- Support Battery Backup



LTK1103M

- Wiegand/RS485 Card Reader
- Mifare Card Compatible
- Built-in Buzzer
- Led Indicator
- IP64



LTK1103MK

- Wiegand/RS485 Card Reader
- Keypad with 12 Keys
- Mifare Card Compatible
- Built-in Buzzer
- Led Indicator
- IP64



LTK1107M

- Wiegand/RS485 Card Reader
- Mifare Card Compatible
- Built-in Buzzer
- Led Indicator
- IP65



LTK1107MK

- Wiegand/RS485 Card Reader
- Keypad with 12 Keys
- Mifare Card Compatible
- Built-in Buzzer
- Led Indicator
- IP65



LTK1200MF

- RS485 Card Reader
- Fingerprint
- Mifare Card Compatible
- Built-in Buzzer
- Led Indicator
- IP65



LTK3200MF

- Fingerprint Access Control Terminal
- 320x240 2.8" LCD Display
- Backlit Touch Keypad with 16 keys
- 256MB Storage
- Micro SDCard Slot up to 32GB
- Mifare Card Compatible
- 32-bit High Speed Processor
- Up to 100,000 Card Information Storage
- Up to 300,000 Card Swiping Records
- Up to 9500 Fingerprint Storage
- TCP/IP and Wi-Fi



LTK3801MFA

- Fingerprint Access Control Terminal
- Attendance Information
- 320x240 2.8" LCD Display
- Keypad with 18 keys
- Mifare Card Compatible
- Up to 3,000 Card Information Storage
- Up to 10,000 Card Swiping Records
- Up to 3000 Fingerprint Storage
- TCP/IP, Wi-Fi & USB 2.0




LTK3500SF

- Video Access Control Terminal
- Fingerprint
- 2MP/1080P with IR
- Built-in Mic and Speaker
- Micro SDCard Slot up to 32GB
- Mifare Card Compatible
- 32-bit High Speed Processor
- Up to 50,000 Card Information Storage
- Up to 200,000 Card Swiping Records
- Up to 3000 Fingerprint Storage
- IP65
- LTS NVR Compatible



LTK100ME

- Mifare Card Issuer



LTKC101M

- Mifare Card



LTK800F

- Fingerprint Enrollment for LTK1200MF & LTK3200MF



LTK810F

- Fingerprint Enrollment for LTK3801MFA & LTK3500SF

LTS & Hikvision

LTS and Hikvision are leading the industry together while benefiting security professionals. As a Hikvision authorized distributor, LTS offers access to the full line of Hikvision products at a competitive cost. Security professionals will have access to more than 500 staff for expert consultation and product support.



DS-2TD4035 Series Network Bi-Spectrum Thermal/Optical PTZ Camera Systems feature a high performance 384x288 thermal imaging camera, with 25mm or 50mm lens option, combined with a 2MP CMOS true Day/Night camera with 30x zoom lens and 150 meter infrared illumination to improve the lowlight performance of the CMOS sensor. The true power of these systems is the Smart Tracking feature that uses the thermal sensor to capture targets in any lighting condition, while the visible light camera zooms to provide additional information that the thermal sensor cannot provide.





Hikvision Dealer Program

Apply today to see if you qualify for HDP,
or to add LTS to your HDP account

- Multi-tiered program allows more benefits as you level up
- Tailored to your business size to offer you the best benefits
- Access to exclusive savings



LTSecurityinc.com/hdp



Hikvision Project Registration

Let LTS help you get the best deals on
great security products

- Guaranteed protected project once submitted
- Deeper savings just by applying
- Expert product consultant to help advise on solution



LTSecurityinc.com/hikpr

				
1.3 MP 3 MP	2 MP 4 MP	3 MP	4 MP	2 MP 4 MP
DS-2CD2112F-I/ DS-2CD2132F-I	DS-2CD2122FWD-IS(B)/ DS-2CD2142FWD-IS(B)	DS-2CD2332-I	DS-2CD2342WD-I	DS-2CD2722FWD-IZS(B)/ DS-2CD2742FWD-IZS(B)
Value Series Network Outdoor Dome Cameras	Value Plus Series Network Outdoor Dome Cameras	Value Series Network Outdoor Turret Camera	Value Plus Series Network Outdoor Turret Camera	Value Plus Series Network Outdoor Dome Cameras
• 2.8/4/6/12mm fixed lens • MicroSD 128 GB max • IP66, IK10, UL/cUL Listed • Digital WDR • 100ft IR range max • Motion detection	• 2.8/4/6mm fixed lens • MicroSD 128 GB max • IP67, IK10, UL/cUL Listed • 120dB WDR • 100ft IR range max • Motion detection • H.264+/H.264/MJPEG	• 2.8/4/6/12mm fixed lens • IP66, UL/cUL Listed • Digital WDR • EXIR with 100ft range max • Motion detection • H.264+/H.264/MJPEG	• 2.8/4/6mm fixed lens • IP67, UL/cUL Listed • 120dB WDR • EXIR with 100ft range max • Motion detection • H.264+/H.264/MJPEG	• 2.8-12mm motorized lens • MicroSD 128 GB max • IP67, IK10, UL/cUL Listed • 120dB WDR • 100ft IR range max • Motion detection • H.264+/H.264/MJPEG
WMS + PC110, WM110, CB110, AB110, SRSM	AB110, WM110, WMS + PC110, CB110, SRSM	DS-1239ZJ-1, PC130T, ABM	ABM, CBM, PC130T + WMS + Wall Mount w/Junction Box	RCM-1, PC135 + WMS, AB135, SRSL, CB135

				
1080P				
DS-2CE56D1T-VPIR(B)	DS-7608NI-E2/8P	DS-7716NI-I4/16P	I7604N1TA/ I7608N2TA	T7104Q1TA/ T7108Q2TA
TurboHD Analog Outdoor Dome Cameras	Value Solution Plug-and-Play NVR	Value Solution Plug-and-Play NVR	Super Value IP Kits	Super Value TurboHD Kits
• 2.8/3.6/6mm fixed lens • IP66, IK10, UL/cUL Listed • HD-TVI video out • 60ft IR range max • 12 VDC	• 6 MP max recording resolution • H.264+/H.264 • 1920x1080P HDMI/VGA output • 4-ch/1-ch alarm input/output • Max 12 TB internal storage (2 x 6 TB) • UL/cUL Listed • 8-ch IPC with integrated • 8-port 803.af/at PoE switch • 120W PoE budget	• 12 MP max recording resolution • H.265+/H.265/H.264+/H.264/MPEG4 • 3840x2160p/1920x1080P HDMI/VGA output • 16-ch/4-ch alarm input/output • Max 24 TB internal storage (4 x 6 TB) • UL/cUL Listed • 16-ch IPC with integrated • 16-port 803.af/at PoE switch • 300W PoE budget	I7604N1TA includes: • 4 x 1080P outdoor IR dome cameras (DS-2CD2120F-I) • 1 x 4-ch NVR (DS-7604NI-EV1/4P) I7608N2TA includes: • 6 x 1080P outdoor IR dome cameras (DS-2CD2120F-I) • 1 x 8-ch NVR (DS-7608NI-EV2/8P)	T7104Q1TA includes: • 4 x 1080P outdoor IR Turret cameras (DS-2CE56D0T-IR) • 1 x 4-ch DVR (DS-7104HQHI-F1/NB) T7108Q2TA includes: • 6 x 1080p outdoor IR Turret cameras (DS-2CE56D0T-IR) • 1 x 8-ch DVR (DS-7108HQHI-F1/NB)
WMS + PC110 (Wall Mount), WM110 (Wall Mount), CB110 (Junction Box), AB110 Analog Base				

LTS offers ALL Hikvision Products

Professional Solutions Smart Series | Professional Solutions Smart Pro Series

Value Plus Solutions | Value Solutions WI-FI Solutions | IP KITS/TurboHD KITS


TurboHD/TurboHD 3.0/TurboHD 4.0 Analog Migration Solutions

Accessories | Video Management Client Software and MORE



The Core of H.265+

The codec technology that has outstanding bandwidth-light and storage-save performance

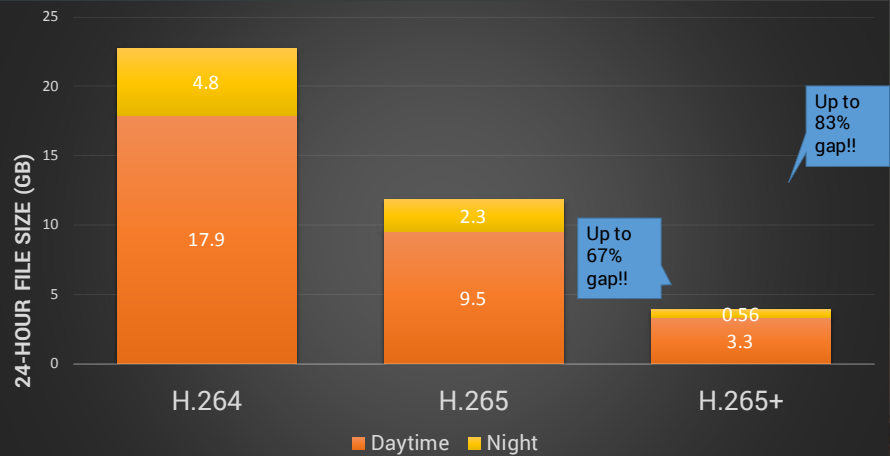

H.265+	H.265+	H.265+	H.265+	H.265+
2 MP 3 MP 5 MP 8 MP	2 MP 3 MP 5 MP 8 MP	3 MP 5 MP		
DS-2CD2125FWD-I/ DS-2CD2135FWD-I/ DS-2CD2155FWD-I/ DS-2CD2185FWD-I	DS-2CD2325FWD-I/ DS-2CD2335FWD-I/ DS-2CD2355FWD-I/ DS-2CD2385FWD-I	DS-2CD2935FWD-IS/ DS-2CD2955FWD-IS	DS-9616NI-I8/ DS-9632NI-I8/ DS-9664NI-I8	DS-7204HQI-K1/ DS-7208HQI-K2/ DS-7216HQI-K2
Value Plus Series H.265+ Network Outdoor Dome Cameras	Value Plus Series H.265+ Network Outdoor Turret Cameras	Value Plus Series H.265+ Network Fisheye Cameras	Pro Series NVR	Value Series TurboHD 4.0 Tribrid DVR
• 2.8/4/6/8mm fixed lens • H.265+/H.265/H.264+/H.264/MJPEG • 120dB WDR • EXIR 2.0 with 100ft IR range max • MicroSD 128 GB max • IP67, IK10, UL/cUL Listed • H.265+ Smart Suite	• 2.8/4/6/8mm fixed lens • H.265+/H.265/H.264+/H.264/MJPEG • 120dB WDR • EXIR 2.0 with 100ft IR range max • MicroSD 128 GB max • IP67, UL/cUL Listed • H.265+ Smart Suite	• 1.16/1.05mm fixed lens • H.265+/H.265/H.264+/H.264/MJPEG • 120dB WDR • EXIR 2.0 with 25ft IR range max • MicroSD 128 GB max • UL/cUL Listed • H.265+ Smart Suite	• 12 MP max recording resolution • H.265+/H.265/H.264+/H.264/MPEG4/MJPEG • 3840 x 2160p/1920 x 1080p HDMI1/VGA1 synchronous output • 1920 x 1080p/1920 x 1080p HDMI2/VGA2 synchronous output • 2 x USB 2.0, 1 x USB 3.0 • RAID 0/1/5/6/10 • Max 48 TB internal storage (8 x 6 TB) • Support DVD-RW (Replaces 4x SATA)	• 1 x 3MP, 3 x 1080P/2 x 3MP, 6 x 1080P/4 x 3MP, 12 x 1080P max recording resolution • H.265+/H.265/H.264+/H.264 • 1920 x 1080p/1920 x 1080p HDMI/VGA output (DS-7216HQI-K2 up to 3840 x 2160p HDMI) • Auto-detect HD-TVI/CVBS video standard • Max 8/16/16 TB internal storage • UL/cUL Listed
PC110, CB110, AB110, WM110, SRS, SRS-M	PC130T, CBM, ABM	AB-FE2, WM-C		


DS-2CD41C5F-IZ	DS-2CD4AC5F-IZH	DS-2DF8836I5V-AELW	DS-2CE56H1T-AVPIT3Z	DS-2CE56H1T-TIT3Z
Smart Series Network Indoor Dome Camera	Smart Series Network Outdoor Bullet Camera	Smart Pro Series Network Outdoor PTZ Camera	TurboHD 3.0 HD-TVI Outdoor Dome Camera	TurboHD 3.0 HD-TVI Outdoor Turret Camera
• 2.8-12mm motorized autofocus lens • Digital WDR • 100ft IR range max • H.264+/H.264/MPEG4/MJPEG • Full Smart Suite • MicroSD, 128GB max • IK10, UL/cUL Listed	• 2.8-12mm motorized autofocus lens • Digital WDR • EXIR with 150ft IR range max • H.264+/H.264/MJPEG • Full Smart Suite except audio feature • MicroSD, 128GB max • IP67, UL/cUL Listed	• 2.8-12mm motorized autofocus lens • 4096 x 2160P • 360° endless pan range • 20°-90° tilt range • 1500ft IR range max • MicroSD, 128GB max • IP66, UL/cUL Listed • Wiper and PoE injector included	• 2.8-12mm motorized lens • 2592 x 1944P HD-TVI resolution • 120dB WDR • EXIR with 120ft IR range max • IP67, UL/cUL Listed • Internal vertical synchronization	• 2.8-12mm motorized lens • 2592 x 1944P HD-TVI resolution • 120dB WDR • EXIR with 120ft IR range max • IP67, UL/cUL Listed • Internal vertical synchronization
CB-130, CB135, AB135, RCM-1, SRS, SRS-L	PC130, CBS	WMP-L, CMP, Pole Mount, JPBW-L, CPM-S, CPM-L, RPM, DS-1005KI, DS-1006KI, DS-1100KI	PM, WML + PC140, CMPL, CPM + PC140B, WMS + PC130, DS-1H18	

Cameras for Specialty Markets

Hikvision's Smart Pro Series answers the world's demands for more vigilant surveillance with Multi-sensor, DarkFighter, and Thermal specialty cameras.



LTSecurityinc.com/hikspecial

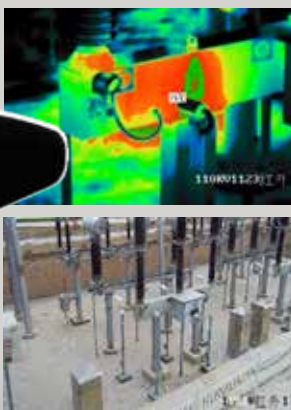

Thermal Imaging Camera Systems

Thermal imaging cameras are unique in video security applications in that they employ a different sensor technology than their color or day/night counterparts. Thermal cameras employ a thermal sensor (microbolometer), a sealed and vacuum-packed sensor array, that is capable of detecting IR light outside the visible spectrum.

PanoVu Multi-Imager Cameras

The PanoVu Multi-Imager camera systems from Hikvision present a unique surveillance tool for large open areas, traffic circles or intersections, and any application looking to surveil a large public or private area with the least impact on infrastructure. These camera systems provide 180- or 360-degree stitched panoramic images from the system's cameras.



DarkFighter Cameras

DarkFighter technology utilizes a larger sensor size and unique "backside illuminated sensor" pixel structure to improve light usage. Hikvision's exclusive Self-Adaptive Image Signal Processing mimics the way the human eye adjusts to low illumination. Auto Nonlinear Image Enhancement, Multi-Exposure, Smart Gain Control, and Self-Adaptive Detail Enhancement with Noise Reduction dynamically adjust key imaging factors to improve image quality.



2 MP



2 MP



2 MP



2 MP



8 MP

DS-2CD4A26FWD-IZH/DS-2CD4A26FWD-IZH8

Smart Series Network Outdoor Bullet Cameras

- 2.8 - 12/8 - 32mm motorized autofocus lens
- 120dB WDR
- DarkFighter
- IP67, IK10, UL/cUL Listed
- MicroSD 128 GB max
- H264+/H.264/MPEG4/MJPEG
- EXIR with 150ft/300ft IR range max

DS-2DF6236-AEL

Smart Pro Series Network Outdoor PTZ Camera

- 5.7 - 205.2mm motorized autofocus lens
- 120dB WDR
- DarkFighter
- IP67, IK10, UL/cUL Listed
- MicroSD 128 GB max
- H.264/MPEG4/MJPEG
- Optical zoom 36x (16x digital)

DS-2CD6626DS-IZHS

Smart Pro Series Specialty Outdoor Dome Camera

- 2.8-12mm motorized autofocus lens
- 1920 x 1080P
- 3D DNR, EIS, Defog image enhancement
- DarkFighter
- 316L stainless steel
- IP67, IK10, UL/cUL Listed
- MicroSD 128 GB max

DS-CD6026FHW-AD3/7/11

Smart Series Network Box Camera

- 3.8-16/7-33/11-40mm auto back focus lens
- 120dB WDR
- DarkFighter
- UL/cUL Listed
- MicroSD 128 GB max
- Motion detection
- PoE (802.3af)

DS-2CD6986F-H

Smart Series Network Multi-Sensor Camera

- 4 x 5mm lens
- 4096 x 1800P@30fps
- DarkFighter
- 3D DNR, EIS, Defog image enhancement
- IP66, IK10, UL/cUL Listed
- MicroSD 128 GB max
- 360° pan range
- 45° to 90° tilt range
- PoE+ (802.3at)

CB130

WMP-L, PMP, CMP, CPM-S, CPM-L

WMS-SS, JBM-SS

PC210



DS-2TD2166-15/25/35

Smart Pro Series Network Thermal Bullet Cameras

- Vanadium oxide UFPA thermal sensor
- 640 x 512P
- 15/25/35mm lens
- < 50mK NETD (Noise Equivalent Temperature Difference)
- 3D DNR, adaptive AGC, DDE image enhancement
- 10 accurate fire detection
- MicroSD 64 GB max
- IP66, UL/cUL Listed



DS-2TD2235D-25/50

Smart Pro Series Network Bi-Spectrum Thermal/Optical Camera

- Vanadium oxide UFPA thermal sensor
- 384 x 288P
- 25/50mm thermal lens, 25/36mm optical lens
- < 50mK NETD
- 0.5 MRAD (milliradians)
- 360ft Smart IR
- 3D DNR, BLC, AWB, WDR(120dB), EIS, Defog image enhancement
- 10 accurate fire detection
- MicroSD 64 GB max
- IP66, UL/cUL Listed



DS-2TD4035D-25/50

Smart Pro Series Network Bi-Spectrum Thermal/Optical PTZ Camera

- Vanadium oxide UFPA thermal sensor
- 384 x 288P
- 25/50mm thermal lens, 4.3-129mm motorized autofocus optical lens
- < 50mK NETD
- 450ft Smart IR
- 3D DNR, BLC, WDR, EIS, Defog image enhancement
- 10 detections with visible zoom
- Optical zoom 30x (16x digital)
- 360° endless pan range
- -15° to 90° tilt range



DS-2DY5223IW-AE

Smart Pro Series Specialty Outdoor PTZ

- 5.9-135.7mm motorized autofocus lens
- 450ft IR range max
- DarkFighter
- IP66, UL/cUL Listed
- MicroSD 128 GB max
- Optical zoom 23x (16x digital)
- 360° endless pan range
- -90° to 90° tilt range



DS-2DP1636-D

Smart Pro Series Outdoor Multi-Sensor PANOVU

- 8 x 4mm lens
- 2 x 2400 x 3840p@25fps
- 3D DNR, EIS, Defog image enhancement
- IP66, UL/cUL Listed
- MicroSD 128 GB max
- 360° ePTZ pan range
- 180° tilt range

WMP-L

Specialty Camera Solutions

Whether it is a coastline or food processing site, airport or highway, solar farm or critical infrastructure, Hikvision is committed to delivering solutions for demanding applications. Our specialty line also features advanced analytics and all of the smart essentials Hikvision customers have come to expect.





Blazer Express 32/16P

Windows-based Video Management Station

- Windows 7 embedded on built-in 64GB SSD
- 8 MP max recording resolution
- 4 x USB 2.0, 1 x USB 3.0
- Max 24 TB internal storage (4 x 6 TB)
- 32-ch IPC with integrated 16-port 803.af/at PoE switch (up to 150W)
- 2 x 10M/100M/1000M self-adaptive ethernet interfaces
- Central management with live view and playback from up to 15 remote NVRs or Blazers



HIKCENTRAL

Windows-based Central Management Software (CMS)

- Seamless management of 3000 cameras per CMS
- Remote Server Manager (RSM) can be added to 100k+ cameras
- Advanced user management including ActiveDirectory integration
- Advanced event & alarm management
- Health monitoring on all connected devices
- Concurrently 100 mobile and 100 web client connections



DS-2CD6424FD-10/20/30

Smart Series Network Covert Cameras

- 3.7mm cylindrical pinhole/3.7mm L-shaped pinhole/2.8mm Tube
- 65° horizontal angle of view (115° for Tube)
- 1920 x 1080P
- 120dB WDR
- H.264/MJPEG
- Motion detection
- MicroSD, 128GB max
- UL/cUL Listed



DS-96128NI-124/H/DS-96256NI-124/H

Pro Series NVR

- 12 MP max recording resolution
- H.265+/H.265/H.264+/H.264/MPEG4/MJPEG
- 2 x HDMI with 4K 4096 x 2160P/3840 x 2160P output
- 1 x VGA with 1920 x 1080P output
- Up to 128/256 IP video inputs
- 1 x USB 2.0, 2 x USB 3.0
- RAID 0/1/5/6/10
- Max 192 TB internal storage (24 x 8 TB)
- Max 768 Mbps incoming bandwidth



DS-A81016S

Network Storage Device

- 64-bit embedded multi-core processor with 4GB high-speed buffer
- 6 Gbps SAS transmission
- SBB 2.0 technology
- Max 300-ch 2Mbps concurrent writing and 20-ch synchronous playback
- Max 16 SATA hard disks
- RAID 0/1/3/5/6/10/50, JBOD, hot spare
- 2 x Gigabit ethernet ports
- Support N+1 hot spare system


DS-KV8102-IM/
DS-KV8202-IM/
DS-KV8402-IM

Intercom IP Villa Door Station

- Video Intercom and Access Control
- 1280 x 720p
- Built-In IC Card Reader and support External Card Readers
- One-Touch Calling
- Remote Reboot and Upgrade
- Time Synchronization via NTP
- Batch Configuration
- Remotely Unlock via Client or App
- Remotely Answer Call via Client or App



DS-KB8112-IM

Intercom Vandalproof IP Video Door Station

- Embedded SOC Processor with Linux OS
- 3.47mm fixed pinhole lens
- 1280 x 720P
- Digital WDR
- 16ft IR range max
- IP66 and IK9
- PoE (802.3af)



DS-KH8301-WT

Intercom 7-inch Touch Screen Video Indoor Station

- TFT LCD with 1024 x 600 Resolution
- Capacitive Touch Screen
- 8-ch Alarm Input Sensors
- Uploads Alarms to Master Station, Client, or App
- Noise Suppression and Echo Cancellation
- Monitors Door Stations and External Cameras
- Remote Door Unlocking via Client or App
- Support MicroSD Card up to 32GB max



DS-D5032FL-B

32" Public View Monitor (PVM)

- 1080P
- HDMI/VGA/BNC in/BNC out
- Support External TVI 1080p camera
- DC 24V or AC 100-240V
- USB play
- 7/24 playback
- Metal casing
- Fit with 3rd party VESA Ceiling mount


DS-MH2211/
DS-MH2111/
DS-MH6111

Body Cameras

- 1080P/1080P/720P
- 8hrs recording time
- LCD (DS-MH6111 no LCD)

Vertical Markets

Hikvision products serve a diverse set of vertical markets that includes retail, banking and finance, transportation, education, commercial, government, and residential applications.



COMMERCIAL SOLUTIONS



EDUCATION SOLUTIONS



RETAIL SOLUTIONS



Advantages of Purchasing
Hikvision Through LTS

Save More on Hikvision Products

Now Available at ALL LTS Branch Offices



LTSecurityinc.com/hikpromotion



Full Access to Hikvision Product Line

Local Expert Product Consultants
and Tech Support



Exclusive Invitation and Discounts to
Free Seminar and Workshops

Helix Wireless Home Intrusion Alarm System

- Internet based alarm platform
- Fully wireless peripherals
- App control
- 2-3x range of other wireless systems



www.ltsecurityinc.com/alarm



LTRE622

NanoMax Door/Window Sensor

LTRE610

PIR Motion Pet Immunity

LTRE609

Glass Break Wireless

LTRE606

Tilt Sensor Garage door

LTRE618

Trident Sensor Flood, Freeze & Heat

LTRE616

Wireless Sirens 85dB



LTRE927RSA

GSM Expansion Card

LTRE928RSV

CDMA Expansion Card

LTRE657W

HeliTouch™ w/WiFi Expansion Card

LTRE934Z

Helix Z-Wave Expansion Card

LTRE934T

Helix Translator Expansion Card



LTRE6100S

Helix Wireless Alarm Panel

LTRE656

Helix Keypad E-Link Display

LTRE508X

Helix Universal Hardwired Translator Honeywell, GE, 2GiG, DSC

LTRE600

Helix Keyfob

LTRE612

Helix Smoke Sensor

LTRE613

Helix CO (Carbon Monoxide) Sensor

Supported by Most Monitoring Service Providers



5-in-1 Multi-Purpose Camera Tester Offers Convenience

Adjust camera settings on-site instead of the NVR/DVR. 5-1 allows you to test IP, HD-TVI, CVI, AHD, and Analog in Full 1080P HD



LTA-AU25S

Multi-Function Network Cable Tester
Testing RJ45=USOC 4/6/8, 10 Base-T, ELA/
TIA 568A/B, AT&T58A, Token Ring, BNC,
LED, USB

LTA-X43M

4.3 inch Touch Screen, 800X480 Resolution
5-1 Multi-purpose Camera Tester
5MP IP, 5MP TVI, 2MP AHD, 2MP CVI, Analog
test

LTA-X48M

4.3 inch IPS Touch Screen, 960X540 Resolution;
5-1 Multi-purpose Camera Tester;
8MP IP, 5MP TVI, 4MP AHD, 4MP CVI, Analog
test; H.265/H.264, 4K video display via main-
stream; Built in WIFI; HDMI input & output

LTA-X78M

7 inch retina Touch Screen, 1920x1200
Resolution; 5-1 Multi-purpose Camera Tester;
8MP IP, 5MP TVI, 4MP AHD, 4MP CVI, Analog
test; H.265/H.264, 4K video display via main-
stream; Built in WIFI; HDMI input & output

Wireless Solutions



LTUBNSM5

5GHz NanoStation M5
15+ km; 150+Mbps



LTUBNBM5-16/ LTUBNBM5-19

5GHz NanoBeam M5
150+ Mbps
16dBi (10+ km) / 19dBi (15+ km)



LTUBNBE-5AC-16 / LTUBNBE-5AC-19

5GHz NanoBeam AC
450+ Mbps
16dBi (10+ km) / 19dBi (15+ km)



LTUBNBE-WMK

Ubiquiti NanoBeam Wall Mount
Kit



LTUBAMO-5G10

5GHz airMAX Omni 10dBi
Antenna+5GHz 150+Mbps Rocket
M5 BaseStation

Injectors / Switches / Repeaters



POE-I100H

Single Port Injector
19W-802.3af-10/100Mbps



POE-I100GL/ POE-I100GH

Single Port Gigabit Injector
15.4W-802.3af/ 30W-802.3af-
10/100/1000Mbps



POE-RP101

Single Port Repeater
Passive-802.3af-330ft-10/100Mbps



POE-SW401

4 PoE Port Switch
with 1 Port Uplink
58W-802.3af/at-10/100Mbps
Up to 820ft



POE-SW541E

4 Port Switch+ 1 Uplink
65W-802.3af-10/100Mbps
DIP Switch



POE-SW800G

8 Port Gigabit Switch
130W-802.3af-10/100/1000Mbps



POE-SW801

8 PoE Port Switch
with 1 Port Uplink
123W-802.3af/at-10/100Mbps
Up to 820ft



POE-SW1602

16 PoE Port Switch
with 2 Gb Uplink and 2 SFP Ports
230W-802.3af/at-10/100Mbps
Up to 820ft



POE-SW2402

24 PoE Port Switch
with 2 Gb Uplink and 2 SFP Ports
370W-802.3af/at-10/100Mbps
Up to 820ft



POE-SW2402A

24 PoE Port Switch
with 2 Gb Uplink Ports
250W-802.3af/at-10/100/1000Mbps
DIP Switch

Accessories

IR Illuminators & Emergency Lights



NEW



NEW



LTIR802

6 IRs@210ft/45°
DC 12V

LTIR803

12 IRs@210ft/80°
DC 12V

LTLE001

Twin Head Emergency Universal
Mount LED Thermoplastic Unit

LTLE002G / LTLE002R

LED Exit with Battery Backup
Green/Red Letters
120/277V

LTLE004G / LTLE004R

Combo EXIT & Emergency Universal
Green/Red Letters
Mount LED Thermoplastic Unit

Power Adapters



PS120V0800

800mA
DC 12V

PS120V1000

1000mA
DC 12V

PS120V2000

2000mA
DC 12V

PS120V3000

3000mA
DC 12V

TS5-6W

5000mA
DC 12V

PS240V1000

1000mA
AC 24V

PS240V3000

3000mA
AC 24V

DV-AT12015-D01

1500mA (Max)
AC 24V to DC 12V

Power Supplies



PS120V5-D

4 Port; 5 Amp
Protection: PTC
DC 12V

DV-AT1207M-D09

9 Port; 7 Amp
Protection: PTC
DC 12V

DV-AT1209A-D9P

9 Port; 9 Amp
Protection: PTC
DC 12V

DV-AT1212A-D18P

18 Port; 12 Amp
Protection: PTC
DC 12V

DV-RT1224A-D24

24 Port; 24 Amp
Protection: PTC
DC 12V



DV-RT1232A-D32

32 Port; 32 Amp
Protection: PTC
DC 12V

DV-AC2408A-D07

9 Port; 8 Amp
Protection: PTC
AC 24V

DV-AC2412A-D10

18 Port; 12 Amp
Protection: PTC
AC 24V

DV-AT1205A-D07

4 Port; 5 Amp
Protection: Fuse
DC 12V

DV-AT1209A-D9

9 Port; 9 Amp
Protection: Fuse
DC 12V



DV-AT1212A-D18

18 Port; 12 Amp
Protection: Fuse
DC 12V

DV-AT1210A-D07

9 Port; 10 Amp
Protection: Fuse
DC 12V

DV-AT1210A-D10

18 Port; 10 Amp
Protection: Fuse
DC 12V

DV-AT1215A-D10

18 Port; 18 Amp
Protection: Fuse
DC 12V

DV-AT1232A-D18

18 Port; 32 Amp
Protection: Fuse
DC 12V

DV-AT1232A-D27

27 Port; 32 Amp
Protection: Fuse
DC 12V

Passive Video Balun Transceivers



NEW

NEW

LTAB3010T1-ch HD passive video balun
support HDTV up to 2MP**LTAB3020T**1-ch HD passive video balun
support HDTV up to 2MP**LTAB4020T**1-ch HD passive video balun Support
3/4/5MP HD-TVI, CVI, AHD and CVBS**LTAB4030TP**1-ch HD video & power balun for 3/4/5MP
HD-TVI, CVI, AHD and CVBS**LTAB1015**

I type Video Balun

LTAB1016


L type Video Balun

LTA1011

Video Balun

LTA1010Video Balun
BNC/RJ45 DC Power**LTAB1017DC**Video Balun
BNC/RJ45 DC Power**LTA2009A**4 CH UTP Video Transceiver
4 x BNC Female To 1 x RJ45

Warning Signs

**LTSTICKER**Warning Sticker Decal
Weather-Resistant**LTSIGNB**

9" (W) x 11"(H)

LTSIGNA

11" (W) x 18"(H)

ACS-801Solar Power (No Battery Needed)
Actively Flashing LCD

Brackets and Camera Housing

**LTB303W**Bracket for Camera White
Indoor Camera Bracket
Swivel 360°, Tilt 90°Aluminum**LTB303S**Bracket for Camera Silver
Indoor Camera Bracket
Swivel 360°, Tilt 90°Aluminum**WM-LCD**Bracket for Monitor
LCD Monitor Wall Mount 2.2"-14.4" Ext. Max
Ld. 33lbs , Vesa 70/100**WM-CEILING-LCD**Bracket for Monitor
LCD Monitor Ceiling Mount 15.5"-22.8" Ext.
Max Ld. 44lbs,Support 10-30" Monitor

Connectors



NEW

LTA1001BNC Twist-On
RG59 Male**LTA1002**BNC Male to
RCA Female**LTA1003**BNC Female to
RCA Male**LTA1004**BNC Male to
RCA Male**LTA1005**BNC Coupler
Female to
Female**LTA1006**BNC Compression
for RG59**LTA1007**BNC Male
Crimp-on**LTA1013**BNC Male to 2
BNC Female**LTA1014**RJ45 8P8C
Cat5e Crimp
Connector**LTA1016**RJ45 8P8C
Cat6 Crimp
Connector**KY5E110**Enhanced
Cat5e Key-
stone Jack

Cables (CAT5, CAT6, Pre-Made Siamese, Coaxial Siamese)



NEW



NEW



LTAC2040
LTAC5350
LTAC5100W-CMR

CAT5e 1000ft Network Cable Commercial Grade LTAC5350-All Copper LTAC5100W-CMR -CMR rated OFC Copper

LTAC2046
LTAC5366
LTAC6250W-CMR

CAT6 1000ft Network Cable Commercial Grade LTAC5366-All Copper LTAC6250W-CMR -CMR Rated OFC Copper

LTAC2060W
LTAC2060B

Pre-made High Definition Siamese Cable B/W with BNC and Power HD-TVI 60ft / 100ft / 150ft

LTAC2100W
LTAC2100B

LTAC2150W
LTAC2150B

LTAC2031W
LTAC2031B

Coaxial Siamese Cable White/Black w/o Connectors 500ft- RG59 Coaxial 95% Braided +18/2; 18 AWG Copper Shield

LTAC2030W
LTAC2030B

LTAC2033W
LTAC2033B

Coaxial Siamese Cable White/Black w/o Connectors 1000ft- RG59 Coaxial 95% Braided +18/2; 18 AWG Copper Shield

LTAC2032W
LTAC2032B

Cables (HDMI, DC Power, RJ45 CAT5e Network, VGA, Microphone)



LTAC2042
LTAC2041

Pre-made RJ45 CAT5e Cable LTAC2042-50ft LTAC2041-100ft

LTAC3005/LTAC3010B
LTAC3025B/LTAC3050B

HDMI w/Ethernet 4.5/10/25/50ft Cable Hi-Speed 1080P/3D, 100% Triple Shield 24K Gold Plated w/Nylon Jacket

LTA2003

Terminal Connector 9 Terminal, DC & AC Connector/Splitter

LTAC3100

100ft HDMI Cable Hi-Speed 1080P with USB Booster 26AWG



LTA2017
LTA2013

DC Power Connector LTA2017-Male LTA2013-Female

LTA2004
LTA2014

DC Power Adapter Cable LTA2004-Male LTA2014-Female

LTA2010
LTA2008

Male/Female Pigtail LTA2010-Male LTA2008-Female

LTA2005

DC Power Splitter 1 Female to 2 Male

LTA2006

DC Power Splitter 1 Male to 2 Female

LTA2011

DC Power Splitter 1 Female to 4 Male

LTA2018

DC Power Splitter 1 Female to 8 Male



LTAS06

High Sensitivity Audio Monitor Mic Bug range: 30 sq. meters Frequency: 100-5500Hz

LTA2001

12" Microphone w/ Power Cable Microphone with Amplifier

LTA2002

45" Microphone w/Video & Power Microphone with Amplifier

LTAV3010

VGA Extension Cable 10ft

LTAV3025

VGA Extension Cable 25ft

LTAV3050

VGA Extension Cable 50ft

LTAV3100

VGA Extension Cable 100ft

Converters, Splitters, Switches, Extenders

**LTA1012**

RS-232 to RS-485 Converter
A Port Powered RS-232 to
RS-485 Converter

**LTAVB0VA6**

BNC to VGA Converter
Convert BNC Output to VGA
Display Monitor Support
1920x1080

**LTAH014L**

1 in/4 out HDMI Splitter
Support HDMI 1.3
Support 1080P
HDCP & 3D Support

**LTAH018L**

1 in/8 out HDMI Splitter
8 Identical HDMI Outputs
Up to 225MHz
Support 3D

**LTAH2100E**

USB RJ45 Extender
UBS2, USB A Female
Plug & Play
Cable Type: CAT5,5E,6, UTP
Extend Distance to 150ft

**LTAH103C**

POS IP Server

**LTAH3100E**

VGA/Audio RJ45 Extender
Video Type: VGA
Support 1920x1440
1x Stereo Audio (R/L)
Extend Distance to 900ft

**LTAH1050E**

HDMI Extender using 1xRJ45 Cable
Signal Rates up to 1.65Gbps
Supports 1080P Up to 100ft

**LTAH5100T**

HD-TVI To HDMI Converter
Input: 1xHD-TVI
Output: 1xHDMI, 1xHD-TVI loop out

**LTAH5300T**

HD-TVI Distributor
Input: 1xHD-TVI
Output: 3xHD-TVI

Tools

**T201WS**

Coaxial Cable Stripper
Cut & Strip Coaxial Cable
Durable Delrin Material
Rotating Ring

**T203MS**

Wire Stripper
Strip Wire (12 - 22 gauge) with
One Pull of Trigger
Built-in Ruler Splicer with
Auto Adjust

**T205CM**

Professional Crimping Tool
BNC Compression, F-Type,
RCA Connectors
For CATV, DSS sec. and Resi-
dential Cable Connection

**LTA-T206S**

4 in 1 Wire Cutter & Stripper
Easy to Strip & Cut Wire
One Lock Control
(open/close)
AWG 24.22.20.18.16.14.12

**LTA-T208CS**

Multi-Modular Plug Crimp,
Strip and Cut Tool
Pro Modular Crimp Tool with
Cut and Strip Crimp
types: 8P8C, 6P6C, 4P4C

**LTA-T207C**

Coaxial Crimping Tool
Hex Tool for BNC F-type
Crimp on Connector

Dummy Cameras

**DUM-301E****DUM-301EB****DUM-101E****DUM-501E****DUM-501EB****DUM-701E**

LTS Meets Industry Standards



A global standard for the
interface of IP based physical
security products



Global forum for development,
enhancement, storage, dissemination,
and implementation of security
standards for account data protection



American Worldwide safety
consulting and certification.
LTS complies with multiple
certification numbers.



Video Solutions for Security Professionals™

12 Locations Nationwide and more Coming Soon.



California - Los Angeles

18738 San Jose Ave.
City of Industry, CA 91748
Toll Free: 888-587-5871
Tel: 626-435-2838
Fax: 626-435-2801
Email: Support.LosAngeles@LTSecurityinc.com
Sales Office: 8:30am - 6pm (PST): MON - FRI
En LTS California hablamos español

Illinois

1459 Elmhurst Rd.
Elk Grove Village, IL 60007
Tel: 630-348-8088
Fax: 847-979-8385
Email: Support.Chicago@LTSecurityinc.com
Sales Office: 9am - 6pm (CST): MON - FRI
En LTS Illinois hablamos español

Maryland

4501 Forbes Blvd., Suite I
Lanham, MD 20706
Tel: 240-493-8988
Fax: 240-764-8685
Email: Support.Maryland@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI
En LTS Maryland hablamos español

Arizona

4141 S. 36th St, Suite 150
Phoenix, AZ 85040
Toll Free: 877-284-2890
Tel: 602-903-2220
Email: Support.AZ@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (MST): MON - FRI
En LTS Arizona hablamos español

New Jersey

109 West Park Dr., Suite C
Mount Laurel, NJ 08054
Toll Free: 855-835-8889
Tel: 856-780-9888
Fax: 856-222-0059
Email: Support.NewJersey@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI

California - San Francisco

38507 Cherry Street, Suite G
Newark CA 94560
Toll Free: 888-216-2812
Tel: 510-201-9868
Fax: 510-742-3251
Email: Support.SanFrancisco@LTSecurityinc.com
Sales Office: 9am - 6pm (PST): MON - FRI

Texas - Dallas

1100 Valwood Pkwy., Suite 112
Carrollton, TX 75006
Tel: 469-289-5780
Fax: 972-242-2228
Email: Support.Dallas@LTSecurityinc.com
Sales Office: 8am - 5pm (CST): MON - FRI
En LTS Dallas hablamos español

Georgia

5933 Peachtree Industrial Blvd, Suite B.
Norcross, GA 30092
Tel: 678-710-3788
Fax: 770-558-6806
Email: Support.GA@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI
GRAND OPENING

Texas - Houston

8634 Westpark Dr.
Houston, TX 77063
Tel: 713-587-1800
Fax: 713-587-1801
Email: Support.Houston@LTSecurityinc.com
Sales Office: 8:30am - 6pm (CST): MON - FRI
En LTS Houston hablamos español

New York


99 Seaview Blvd., Suite 1B
Port Washington, NY 11050
Toll Free: 888-517-3102
Tel: 646-558-3888
Fax: 718-366-2296
Email: Support.NewYork@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI
En LTS New York hablamos español

Florida

8400 NW 25th St., Suite 110
Miami, FL 33122
Tel: 786-693-1813
Fax: 786-631-3639
Email: Support.Florida@LTSecurityinc.com
Sales Office: 8:30am - 6pm (EST): MON - FRI
En LTS Florida hablamos español

Illinois - Chicago

2463 S Archer Ave
Chicago, IL 60616
Tel: 312-800-0766
Fax: 630-348-8158
Email: Support.Chicago@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
GRAND OPENING

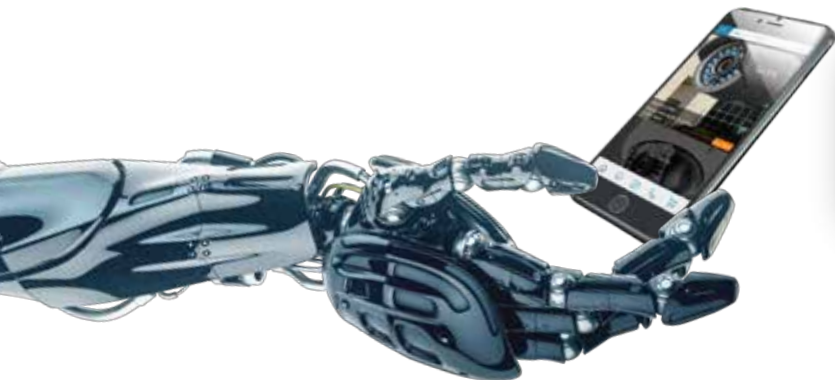


Shop & order
LTS APP
faster today!

Scan to Download



Platinum



www.LTSecurityinc.com