

Product Highlights

Performance

- 7060CX2-32S: 32x QSFP100 and 2x SFP+
- 7060SX2-48YC6: 48x SFP25 & 6x QSFP100
- 7060CX-32S: 32x QSFP100 and 2x SFP+
- 7260CX-64: 64x QSFP100 and 2 x SFP+
- 7260QX-64: 64x QSFP+ and 2x SFP+
- Flexible 40GbE and 100GbE support
- Quad 10GbE or 25GbE mode support
- Up to 12.8 terabits per second
- Up to 9.5 billion packets per second
- Wire speed L2 and L3 forwarding
- Latency from 450ns in 7060CX2-32S & 7060CX-32S

Data Center Optimized Design

- 32 QSFP100 ports in 1RU with typical power of under 7W per port
- Over 93% efficient power supplies
- 1+1 redundant & hot-swappable power
- N+1 redundant & hot-swappable fans
- Front-to-rear or rear-to-front cooling
- Tool less rails for simple installation

Cloud Networking Ready

- VXLAN and VM Tracer
- OpenFlow, DirectFlow and eAPI
- 136K MAC entries
- 128K IPv4 Routes
- 104K IPv4 Host Routes
- Up to 64MB Dynamic Buffer Allocation

Resilient Control Plane

- High Performance x86 CPU
- 4GB or 8GB DRAM
- User applications can run in a VM

Advanced Provisioning & Monitoring

- CloudVision
- Zero Touch Provisioning (ZTP)
- LANZ for microburst detection
- DANZ Advanced Mirroring for visibility
- sFlow
- Self-configure and recover from USB

Arista Extensible Operating System

- Single binary image for all products
- Fine-grained truly modular network OS
- Stateful Fault Containment (SFC)
- Stateful Fault Repair (SFR)
- Full Access to Linux shell and tools
- Extensible platform - bash, python, C++

Overview

Increased adoption of high performance servers coupled with applications using higher bandwidth is accelerating the need for dense 10/40 and 25/100 Gigabit Ethernet switching in both leaf and spine tiers of modern networks. The Arista 7060X and 7260X Series are purpose built high performance, high density, fixed configuration, data center switches with wire speed layer 2 and layer 3 features, combined with advanced features for software defined cloud networking and emerging requirements. The Arista 7060X and 7260X are key components of the Arista portfolio of data center switches delivering a rich choice of interface speed and density allowing customers to seamlessly evolve from existing 10GbE and 40GbE to 25GbE, 50GbE and 100GbE.

The 7060SX2-48YC6, 7060CX2-32S, 7060CX-32S and 7260CX-64 support a flexible combination of speeds including 10G, 25G, 40G and 100G in compact form factors that allows customers to design networks to accommodate the myriad different applications and east-west traffic patterns found in modern data centers whilst providing investment protection. In addition, the 7060CX2-32S and 7060SX2 enable seamless transition for 1/10/25G servers with IEEE 25G support.

The 7260QX Series are purpose built high density and low power 40GbE systems that enable cost effective solutions with flexible and scalable resources for layer 2 and layer 3 designs.

Combined with Arista EOS both the 7060X and 7260X Series deliver advanced features for cloud, big data, virtualized and traditional data centers.



Arista 7260CX-64: 64 x 40/100GbE QSFP100ports, 2 SFP+ ports



Arista 7060CX2-32S: 32 x 40/100GbE QSFP100ports, 2 SFP+ ports



Arista 7060SX2-48YC6: 48 x 10/25GbE SFP ports, 6 QSFP100 ports

Arista EOS


The Arista 7060X and 7260X run the same Arista EOS software as all Arista products, simplifying network administration. Arista EOS is a modular switch operating system with a unique state sharing architecture that cleanly separates switch state from protocol processing and application logic. Built on top of a standard Linux kernel, all EOS processes run in their own protected memory space and exchange state through an in-memory database. This multi-process state sharing architecture provides the foundation for in-service-software updates and self-healing resiliency.

With Arista EOS, advanced monitoring and automation capabilities such as Zero Touch Provisioning, VMTracer and Linux based tools can be run natively on the switch with the powerful x86 CPU subsystem.

Model Overview

The Arista 7260X and 7060X come in four different configurations. Each delivers high performance combined with feature rich layer 2 and layer 3 forwarding, suited for both top of rack leaf, or fixed configuration spines.


The **7260CX-64** is a 2RU system with 64 QSFP100 ports offering wire speed performance with an overall throughput of up to 12.8 Tbps, combined with latency of under 1500ns and 64MB of buffer that is shared between groups of interfaces. Each QSFP port supports a choice of 5 speeds with flexible configuration between 100GbE, 40GbE, 4x10GbE, 4x25GbE or 2x50GbE modes for up to 256 ports of 10GbE or 25GbE, and 128x 50GbE. All ports can operate in any supported mode without limitation, allowing easy transitions and maximum flexibility.

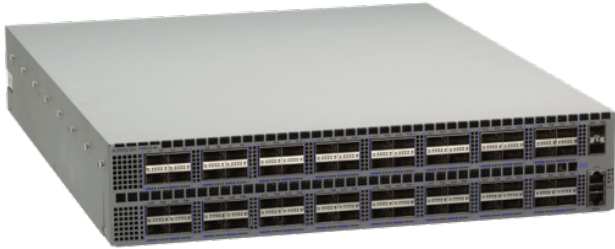

*Arista 7260CX-64:
64x 100GbE QSFP100 ports, 2 SFP+ ports*

The **7060CX2-32S** and **7060CX-32S** deliver 32 QSFP100 ports in a 1RU system with an overall throughput of 6.4Tbps. All ports allow for a choice of 5 speeds including 100GbE, 40GbE, 4x10GbE, 4x25GbE or 2x 50GbE with a wide choice of QSFP transceivers and cables. All QSFP ports can operate in any mode without limitation enabling a wide choice of combinations for both top of rack and spine deployment.

Arista 7060CX-32S supports latency as low as 450ns in cut-through mode, and a 16 MB shared packet buffer pool that is allocated dynamically to ports that are congested. Arista 7060CX2-32S introduces support for IEEE 25GbE and supports a larger shared packet buffer pool of 22 MB with the same low latency of 450ns.

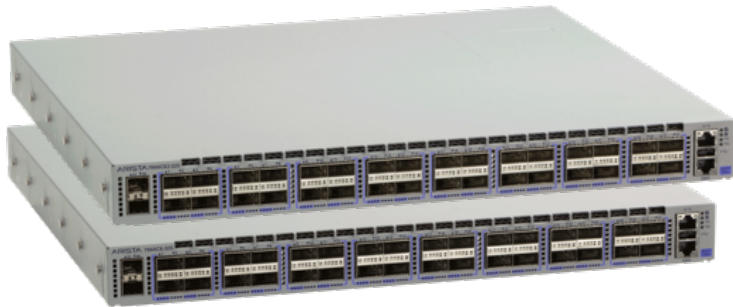

*Arista 7060CX2-32S & Arista 7060CX-32S:
32 x 100GbE QSFP100 ports, 2 SFP+ ports*

The **7260QX-64** is a 2RU system with 64 fixed ports of 40GbE QSFP+ in a power efficient system with overall throughput of 5.12Tbps and up to 3.3Bpps of forwarding at both layer 2 and layer 3.



*Arista 7260QX-64:
64 x 40GbE QSFP+ ports, 2 SFP+ ports*

The Arista 7260QX switches offer low latency from 550ns in cut-through mode, and a shared 16 MB packet buffer pool that is allocated dynamically to ports that are congested. Consistent features to the 7060CX and 7260CX combined with low power and high 40GbE density means the 7260QX is optimized for 40GbE top of rack and spine tiers, high density storage and financial trading systems. All members of the 7060X and 7260X Series provide 2 SFP+ ports that enhance the 40GbE and 100GbE capacity and allow direct 10GbE and 1GbE connections using a comprehensive range of transceivers and cables.

The **7060SX2-48YC6** delivers 48 ports of 25G SFP and 6 ports of 100G QSFP in a 1RU system with an overall throughput of 3.6Tbps with all ports active. The SFP ports can be configured in groups of 4 to run either at 25G or 10G/1G speeds, and QSFP ports allow for a choice of 5 speeds including 100GbE, 40GbE, 4x10GbE, 4x25GbE or 2x 50GbE and a wide choice of transceivers and cables. All QSFP ports can operate in any mode without limitation enabling a wide choice of combinations for both top of rack and spine deployment. Arista 7060SX2-48YC6 supports IEEE 25G and latency as low as 450ns in cut-through mode coupled with a 22 MB shared packet buffer pool that is allocated dynamically to ports that are congested.




Arista 7060SX2-48YC6:
48 x 25GbE SFP and 6 x 100G QSFP ports

Dynamic Buffer Allocation



In cut-through mode, the Arista 7060X and 7260X switches forward packets with a latency of 450 nanoseconds to 550 nanoseconds. Upon congestion, the packets are buffered in shared packet memory that has a total size of 16 MBytes to 22 MBytes per port group. Unlike other architectures that have fixed per-port packet memory, the 7060X and 7260X Series use Dynamic Buffer Allocation (DBA) to allocate packet memory to a single port for lossless forwarding.

Scaling Data Center Performance


The Arista 7060X and 7260X series deliver line rate switching at layer 2 and layer 3 to enable faster and simpler network designs for data centers that dramatically lowers the network capital and operational expenses. When used in conjunction with the Arista 7000 series of fixed and modular switches it allows networks to scale to over 27,000 10G/25G servers in low-latency two-tier networks that provide predictable and consistent application performance. The flexibility of the L2 and L3 multi-path design options combined with support for open standards provides architectural flexibility, scalability and network wide virtualization. Arista EOS advanced features provide control and visibility with single point of management.

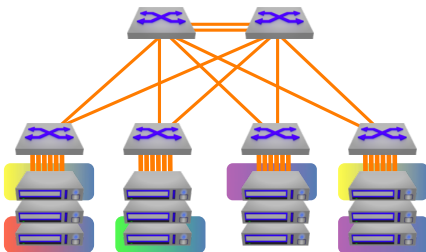

Arista Fixed System Leaf-Spine Designs
Scale to 6,144 10GbE/25GbE ports or 1,536 40GbE/100GbE port at 3:1 subscription

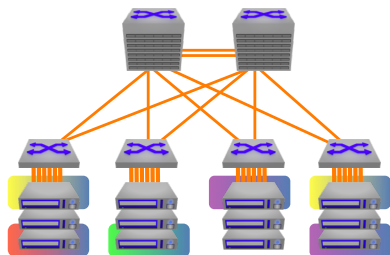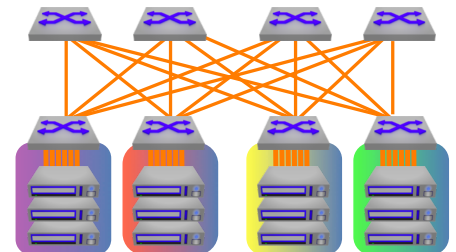

Arista Modular System Leaf-Spine Designs
Scale to 9,216 40GbE/100GbE ports or 27,648 10GbE/25GbE ports at 3:1 subscription

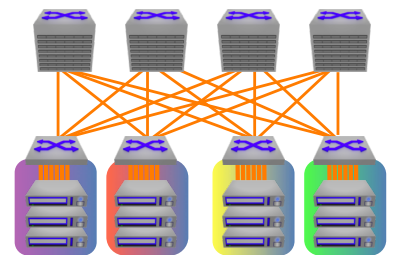

Arista Leaf-Spine Two-tier Network Architecture with 7060X and 7260X Series

Maximum Flexibility for Scale Out Network Designs

Scale out network designs enable solutions to start small and evolve over time. A simple two-way design can grow as far as 64-way without significant changes to the architecture. The Arista 7060X and 7260X include enhancements for flexible scale-out designs:

- 128-way ECMP and 64-way MLAG to provide scalable designs and balance traffic evenly across large scale 2 tier leaf-spine designs
- Custom hash algorithms for efficient hashing, persistent hashing and custom lookups for tunneled protocols.
- Flexible allocation of L2 and L3 forwarding table resources for more design choice
- Wide choice of dense 10G/25G/40G/100G interfaces for multi-speed flexibility
- Support for standards based IEEE 25GbE with mix and match support for both 10G and 25G for simple and cost effective migration
- VXLAN routing, bridging and gateway capability for physical to virtualization communication in next generation data center designs
- DANZ, sFlow and multi-port mirroring to detect micro-burst congestion and provide network wide visibility and monitoring

High Availability

The Arista 7260X and 7060X series switches were designed for high availability from both a software and hardware perspective. Key high availability features include:

- 1+1 hot-swappable power supplies and four N+1 hot-swap fans
- Color coded PSU's and fans
- Live software patching
- Self healing software with Stateful Fault Repair (SFR)
- Smart System Upgrade (SSU) and Accelerated Software Update (ASU)
- Up to 64 10/25/40/50/100GbE ports per link aggregation group
- Multi-chassis LAG for active/active L2 multi-pathing
- 128-way ECMP routing for load balancing and redundancy



Arista 7060X 1RU Rear View: Rear to Front airflow (blue)



Arista 7060X 1RU Rear View: Front to Rear airflow (red)



Arista 7260X 2RU Rear View: Rear to Front airflow (blue)

Software Driven Cloud Networking

Arista Software Driven Cloud Networking (SDCN), combines the principles that have made cloud computing the unstoppable force that it is: automation, self service provisioning, and linear scaling of both performance and economics coupled with the trend in Software Defined Networking that delivers: network virtualization, custom programmability, simplified architectures, and lower capital expenditure. This combination creates a best-in-class software foundation for maximizing the value of the network to both the enterprise and service provider data center.

Smart System Upgrade

Smart System Upgrade is a network application designed to address one of the most complicated and challenging tasks facing data center administrators - network infrastructure maintenance. Changes to the underlying network infrastructure can affect large numbers of devices and cause significant outages. SSU provides a fully customizable suite of features that tightly couples data center infrastructure to technology partners allowing for intelligent insertion and removal, programmable updates to software releases and open integration with application and infrastructure elements.

Advanced Event Management (AEM)

Simplifying the overall operations, AEM provides the tools to customize alerts and actions. AEM is a powerful and flexible set of tools to automate tasks and customize the behavior of EOS and the operation of the overall data center switching infrastructure. AEM allows operators to fully utilize the intelligence within EOS to respond to real-time events, automate routine tasks, and automate actions based on changing network conditions.

Precise Data Analysis

Arista Latency Analyzer (LANZ) is an integrated feature of EOS. LANZ provides precise real-time monitoring of micro-burst and congestion events before they impact applications, with the ability to identify the sources and capture affected traffic for analysis.

Virtualization

Supporting next-generation virtualized data centers requires tight integration with orchestration tools and emerging encapsulation technologies such as VXLAN. The 7060X & 7260X build on the valuable tools already provided by the Arista VM Tracer suite to integrate directly into encapsulated environments. Offering a wire-speed gateway between VXLAN and traditional L2/3 environments, they make integration of non-VXLAN aware devices including servers, firewalls and load-balancers seamless and provide the ability to leverage VXLAN as a standards based L2 extension technology for non-MPLS environments.

Unified Forwarding Table

Cloud network scalability is directly impacted by the size of a switches forwarding tables. In many systems a 'one size fits all' approach is adopted using discrete fixed size tables for each of the common types of forwarding entry. The Arista 7060X and 7260X leverage a common Unified Forwarding Table for the L2 MAC, L3 Routing, L3 Host and IP Multicast forwarding entries, which can be partitioned per entry type. The ideal size of each partition varies depending on the network deployment scenario. The flexibility of the UFT coupled with the range of pre-defined configuration profiles available on the 7060X and 7260X ensures optimal resource allocation for all network topologies and network virtualization technologies.

Layer 2 Features

- 802.1w Rapid Spanning Tree
- 802.1s Multiple Spanning Tree Protocol
- Rapid Per VLAN Spanning Tree (RPVST+)
- 4096 VLANs
- Q-in-Q
- 802.3ad Link Aggregation/LACP
 - 64 ports/channel
 - 64 groups per system
- Multi-Chassis Link Aggregation (MLAG)
 - 64 ports per MLAG
- Custom LAG Hashing
- Resilient LAG Hashing
- 802.1AB Link Layer Discovery Protocol
- 802.3x Flow Control
- Jumbo Frames (9216 Bytes)
- IGMP v1/v2/v3 snooping
- Storm Control
- Audio Video Bridging (AVB)

Layer 3 Features

- Routing Protocols: OSPF, OSPFv3, BGP, MP-BGP, IS-IS, and RIPv2
- 128-way Equal Cost Multipath Routing (ECMP)
- Resilient ECMP Routes
- VRF
- BFD
- Route Maps
- IGMP v2/v3
- PIM-SM / PIM-SSM
- Anycast RP (RFC 4610)
- VRRP
- Virtual ARP (VARP)
- Policy Based Routing (PBR)
 - uRPF
 - RAIL

Advanced Monitoring and Provisioning

- Zero Touch Provisioning (ZTP)
- Smart System Upgrade
- Latency Analyzer and Microburst Detection (LANZ)
 - Configurable Congestion Notification (CLI, Syslog)
 - Streaming Events (GPB Encoded)
 - Capture/Mirror of congested traffic
- Advanced Monitoring and Aggregation
 - Port Mirroring (4 active sessions)
 - L2/3/4 Filtering on Mirror Sessions
 - Port Channel source and destination
 - Mirror to CPU *
- Advanced Event Management suite (AEM)
 - CLI Scheduler
 - Event Manager
 - Event Monitor

- Linux tools
- Integrated packet capture/analysis with TCPDump
- RFC 3176 sFlow
- Restore & configure from USB
- Blue Beacon LED for system identification
- Software Defined Networking (SDN)
 - Openflow 1.0
 - Openflow 1.3
 - Arista DirectFlow
 - eAPI
 - OpenStack Neutron Support
- IEEE 1588 PTP (Transparent Clock and Boundary Clock)

Virtualization Support

- VXLAN Routing and Bridging
- VM Tracer VMware Integration
 - VMware vSphere support
 - VM Auto Discovery
 - VM Adaptive Segmentation
 - VM Host View

Security Features

- IPv4 / IPv6 Ingress & Egress ACLs using L2, L3, L4 fields
- MAC ACLs
- ACL Drop Logging and ACL Counters
- Control Plane Protection (CPP)
- PDP
- Service ACLs
- DHCP Relay / Snooping
- MAC Security
- TACACS+
- RADIUS

Quality of Service (QoS) Features

- Up to 8 queues per port
- 802.1p based classification
- DSCP based classification and remarking
- Explicit Congestion Notification (ECN) - 7060X only
- QoS interface trust (COS / DSCP)
- Strict priority queueing
- Weighted Round Robin (WRR) Scheduling
- Per-Priority Flow Control (PFC)
- Data Center Bridging Extensions (DCBX)
- 802.1Qaz Enhanced Transmissions Selection (ETS)
- ACL based DSCP Marking
- ACL based Policing
- Per port MMU Configuration
- Policing/Shaping
- Rate limiting

Network Management

- CloudVision
- 10/100/1000 Management Port
- RS-232 Serial Console Port
- USB Port
- SNMP v1, v2, v3
- Management over IPv6
- Telnet and SSHv2
- Syslog
- AAA
- Industry Standard CLI

Extensibility

- Linux Tools
 - Bash shell access and scripting
 - RPM support
 - Custom kernel modules
- Programmatic access to system state
 - Python
 - C++
- Native KVM/QEMU support

Standards Compliance

- 802.1D Bridging and Spanning Tree
- 802.1p QOS/COS
- 802.1Q VLAN Tagging
- 802.1w Rapid Spanning Tree
- 802.1s Multiple Spanning Tree Protocol
- 802.1AB Link Layer Discovery Protocol
- 802.3ad Link Aggregation with LACP
- 802.3ab 1000BASE-T
- 802.3z Gigabit Ethernet
- 802.3ae 10 Gigabit Ethernet
- 802.3by 25 Gigabit Ethernet ¹
- 802.3ba 40 and 100 Gigabit Ethernet
- RFC 2460 Internet Protocol, Version 6 (IPv6) Specification
- RFC 4861 Neighbor Discovery for IP Version 6 (IPv6)
- RFC 4862 IPv6 Stateless Address Autoconfiguration
- RFC 4443 Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification

SNMP MIBs

- RFC 3635 EtherLike-MIB
- RFC 3418 SNMPv2-MIB
- RFC 2863 IF-MIB
- RFC 2864 IF-INVERTED-STACK-MIB
- RFC 4292 IP-FORWARD-MIB
- RFC 4363 Q-BRIDGE-MIB
- RFC 4188 BRIDGE-MIB
- RFC 2013 UDP-MIB
- RFC 2012 TCP-MIB
- RFC 2011 IP-MIB
- RFC 2790 HOST-RESOURCES-MIB

- RFC 3636 MAU-MIB
 - RMON-MIB
 - RMON2-MIB
 - HC-RMON-MIB
 - LLDP-MIB
 - LLDP-EXT-DOT1-MIB
 - LLDP-EXT-DOT3-MIB
 - ENTITY-MIB
 - ENTITY-SENSOR-MIB
 - ENTITY-STATE-MIB
 - ARISTA-ACL-MIB
 - ARISTA-QUEUE-MIB
 - RFC 4273 BGP4-MIB
 - RFC 4750 OSPF-MIB
 - ARISTA-CONFIG-MAN-MIB
 - ARISTA-REDUNDANCY-MIB
 - RFC 2787 VRRPv2-MIB
 - MSDP-MIB
 - PIM-MIB
 - IGMP-MIB
 - IPMROUTE-STD-MIB
 - SNMP Authentication Failure trap
 - ENTITY-SENSOR-MIB support for DOM (Digital Optical Monitoring)
 - User configurable custom OIDs
- See EOS release notes for latest supported MIBs

Table Sizes

STP Instances	64 (MST)/510 (RPVST+)
IGMP Groups	136K, with 8K unique groups
ACLs	8K
Egress ACLs	1K
ECMP	128-way, 1K groups

UFT Mode - 2 is default	0	1	2	3	4
MAC Addresses	136K	104K	72K	40K	8K
IPv4 Host Routes	8K	40K	72K	104K	8K
IPv4 Multicast (S,G)	4K	20K	36K	52K	4K
IPv6 Host Routes	4K	20K	36K	52K	4K

LPM Table Mode	ALPM	1	2	3	4
IPv4 LPM Routes	128K	16K	16K	16K	16K
IPv6 LPM Routes - Unicast (prefix length <= 64)	84K	6K	4K	2K	-
IPv6 LPM Routes - Unicast (any prefix length)	20K	1K	2K	3K	4K

* Not currently supported in EOS

¹ Supported only on 7060CX2-32S and 7060SX2-48YC6

Specifications

Switch Model	7060CX2-32S	7060SX2-48YC6	7060CX-32S	7260CX-64	7260QX-64
Ports	32 x QSFP100 2x SFP+	48 x SFP25 6x QSFP100	32 x QSFP100 2x SFP+	64x QSFP100 2x SFP+	64x QSFP+ 2x SFP+
Max 100GbE Ports	32	6	32	64	0
Max 40GbE Ports	32	6	32	64	64
Max 25GbE Ports	128 (4x25G)	72 (48xSFP25 & 6 4x25G)	128 (4x25G)	256 (4x25G)	0
Max 10GbE Ports	130 (32 4x10G & 2xSFP+)	72 (48xSFP+ & 6 4x10G)	130 (32 4x10G & 2xSFP+)	258 (64 4x10 & 2xSFP+)	2
Max 1GbE Ports	2	48	2	2	2
Throughput	6.4 Tbps	3.6 Tbps	6.4 Tbps	12.8Tbps	5.12Tbps
Packets/Second	3.3 Bpps	2.7 Bpps	3.3 Bpps	9.52 Bpps	3.3 Bpps
Latency	450ns	450ns	450ns	550 to 1500ns	550ns
CPU	Multi-Core x86	Multi-Core x86	Multi-Core x86	Dual-Core i7 x86	Multi-Core x86
System Memory	8 Gigabytes	8 Gigabytes	4 Gigabytes	8 Gigabytes	4 Gigabytes
Flash Storage Memory	4 Gigabytes	4 Gigabytes	4 Gigabytes	4 Gigabytes	4 Gigabytes
Packet Buffer Memory	22MB (Dynamic Buffer Allocation)	22MB (Dynamic Buffer Allocation)	16MB (Dynamic Buffer Allocation)	64MB (Dynamic Buffer Allocation)	16MB (Dynamic Buffer Allocation)
100/1000 Mgmt Ports	1	1	1	1	1
RS-232 Serial Ports	1 (RJ-45)	1 (RJ-45)	1 (RJ-45)	1 (RJ-45)	1 (RJ-45)
USB Ports	1	1	1	1	1
Hot-swap Power Supplies	2 (1+1 redundant)	2 (1+1 redundant)	2 (1+1 redundant)	2 (1+1 redundant)	2 (1+1 redundant)
Hot-swappable Fans	4 (N+1 redundant)	4 (N+1 redundant)	4 (N+1 redundant)	4 (N+1 redundant)	4 (N+1 redundant)
Reversible Airflow	Yes	Yes	Yes	Yes	Yes
Typical/Max Power Draw*	187W / 333W	240W / 385W	187W / 333W	1672W / 2090W	315W / 800W
Size (WxHxD)	19 x 1.75 x 16 inches (48.3x 4.4x 40.64cm)	19 x 1.75 x 16 inches (48.3x 4.4x 40.64cm)	19 x 1.75 x 16 inches (48.3x 4.4x 40.64cm)	19 x 3.5 x 18 inches (48.3 x 8.8 x45.7 cm)	19 x 3.5 x 18 inches (48.3 x 8.8 x45.7 cm)
Weight	21lbs (9.5kg)	19.4lbs (8.8kg)	21lbs (9.5kg)	44.1lbs (20.0kg)	35.5 lbs (16.1kg)
Fan Tray	FAN-7000	FAN-7000H	FAN-7000	FAN-7002H	FAN-7002
Power Supplies	500W AC 500W DC	500W AC 500W DC	500W AC 500W DC	1900W AC 1900W DC	1100W AC 1900W DC
EOS Feature Licenses	Group 2	Group 2	Group 2	Group 3	Group 2

* Typical power consumption measured at 25C ambient with 50% load
Note: 1.Performance rated over operation with average packets larger than 200 bytes.

Supported Optics and Cables

Interface Type	QSFP+ ports
10GBASE-CR	0.5m-5m QSFP+ to 4x SFP+ (see note 1)
40GBASE-CR4	0.5m to 5m QSFP+ to QSFP+
40GBASE-AOC	3m to 100m
40GBASE-UNIV	150m (OM3) /150m (OM4) /500m (SM)
40GBASE-SRBD	100m (OM3) /150m (OM4)
40GBASE-SR4	100m (OM3) /150m (OM4)
40GBASE-XSR4	300m (OM3) /450m (OM4)
40GBASE-PLRL4	1km (1km 4x10G LR/LRL)
40GBASE-LRL4	1km
40GBASE-PLR4	10km (10km 4x10G LR/LRL)
40GBASE-LR4	10km
40GBASE-ER4	40km

Interface Type	QSFP100 ports
100GBASE-SR4	70m OM3 / 100m OM4 Parallel MMF
100GBASE-SWDM4	70m OM3 / 100m OM4 Duplex MMF
100GBASE-SRBD	70m OM3 / 100m OM4 Duplex MMF
100GBASE-LR4/LRL4	10km/2km SM Duplex
100GBASE-CWDM4	2km SM Duplex
100GBASE-PSM4	500m SM Parallel
100GBASE-AOC	1m to 30m
100GBASE-ERL4	40km SM Duplex
100GBASE-CR4	QSFP to QSFP: 1m to 5m
25GBASE-CR	QSFP to SFP25: 1m to 3m lengths

Environmental Characteristics

Operating Temperature	0 to 40°C (32 to 104°F)
Storage Temperature	-40 to 70°C (-40 to 158°F)
Relative Humidity	5 to 95%
Operating Altitude	0 to 10,000 ft, (0-3,000m)

Power Supply Specifications

Power Supply	PWR-500AC	PWR-500DC	PWR-745AC	PWR-1100AC	PWR-1900AC	PWR-1900DC
Input Voltage	100-240AC	40-72V DC	100-240VAC	200-240AC	200-240AC	40-72V DC
Typical Input Current	6.3 - 2.3A	13.1 - 7.3A 11A at -48V	10 - 4A	6.5 - 5.5A	11.2 - 9.5A	28 - 50A 46A at -48V
Input Frequency	50/60Hz	DC	50/60Hz	50/60Hz	50/60Hz	DC
Input Connector	IEC 320-C13	AWG #16-#12	IEC 320-C13	IEC 320-C13	IEC 60320 C20	AWG #6-3
Efficiency (Typical)	93% Platinum	90%	93% Platinum	93% Platinum	93% Platinum	90%
Compatibility	7060SX2-48YC6, 7060CX-32S, 7060CX2-32S		7060CX-32S	7260QX-64	7260CX-64	7260CX-64 7260QX-64

Note 1. Not supported on 7260QX-64 QSFP+ ports

Interface Type	SFP+ ports
10GBASE-CR	SFP+ to SFP+: 0.5m-5m
10GBASE-AOC	SFP+ to SFP+: 3m-30m
10GBASE-SRL	100m
10GBASE-SR	300m
10GBASE-LRL	1km
10GBASE-LR	10km
10GBASE-ER	40km
10GBASE-ZR	80km
10GBASE-DWDM	80km
100Mb TX, 1GbE SX/LX/TX	Yes

Interface Type	25G SFP Ports
25GBASE-CR	SFP25 to SFP25: 1m-5m
25GBASE-AOC	SFP+ to SFP+: 3m-30m
25GBASE-SR	70m
25GBASE-LR	10km

Standards Compliance

EMC	Emissions: FCC, EN55022, EN61000-3-2, EN61000-3-3 or EN61000-3-11, EN61000-3-12 (as applicable) Immunity: EN55024 Emissions and Immunity: EN300 386
Safety	UL/CSA 60950-1, EN 60950-1, IEC 60950-1 CB Scheme with all country differences
Certifications	North America (NRTL) European Union (EU) BSMI (Taiwan) C-Tick (Australia) CCC (PRC) MSIP (Korea) EAC (Customs Union) VCCI (Japan)
European Union Directives	2006/95/EC Low Voltage Directive 2004/108/EC EMC Directive 2011/65/EU RoHS Directive 2012/19/EU WEEE Directive

Product Number	Product Description
DCS-7260CX-64-F	Arista 7260X, 64x100GbE QSFP & 2xSFP+ switch, front-to-rear air, 2xAC, 2xC19-C20 cords
DCS-7260CX-64-R	Arista 7260X, 64x100GbE QSFP & 2xSFP+ switch, rear-to-front air, 2xAC, 2xC19-C20 cords
DCS-7260CX-64#	Arista 7260X, 64x100GbE QSFP & 2xSFP+ switch, no fans, no psu, 2 x C19-C20 cords
DCS-7260QX-64-F	Arista 7260X, 64x40GbE QSFP+ & 2xSFP+ switch, front-to-rear air, 2xAC, 2xC13-C14 cords
DCS-7260QX-64-R	Arista 7260X, 64x40GbE QSFP+ & 2xSFP+ switch, rear-to-front air, 2xAC, 2xC13-C14 cords
DCS-7260QX-64#	Arista 7260X, 64x40GbE QSFP+ & 2xSFP+ switch, no fans, no psu, 2 x C13-C14 cords
DCS-7060CX2-32S-F	Arista 7060X2, 32x100GbE QSFP & 2xSFP+ switch, front-to-rear air, 2xAC, 2xC13-C14 cords
DCS-7060CX2-32S-R	Arista 7060X2, 32x100GbE QSFP & 2xSFP+ switch, rear-to-front air, 2xAC, 2xC13-C14 cords
DCS-7060CX2-32S#	Arista 7060X2, 32x100GbE QSFP & 2xSFP+ switch, configurable fans and psu, 2 x C13-C14 cords
DCS-7060CX-32S-F	Arista 7060X, 32x100GbE QSFP & 2xSFP+ switch, front-to-rear air, 2xAC, 2xC13-C14 cords
DCS-7060CX-32S-R	Arista 7060X, 32x100GbE QSFP & 2xSFP+ switch, rear-to-front air, 2xAC, 2xC13-C14 cords
DCS-7060CX-32S#	Arista 7060X, 32x100GbE QSFP & 2xSFP+ switch, configurable fans and psu, 2 x C13-C14 cords
DCS-7060SX2-48YC6-F	Arista 7060X2, 48x25GbE SFP & 6x100GbE QSFP switch, front-to-rear air, 2xAC, 2xC13-C14 cords
DCS-7060SX2-48YC6-R	Arista 7060X2, 48x25GbE SFP & 6x100GbE QSFP switch, rear-to-front air, 2xAC, 2xC13-C14 cords
DCS-7060SX2-48YC6#	Arista 7060X2, 48x25GbE SFP & 6x100GbE QSFP switch, configurable fans and psu 2xC13-C14 cords
LIC-FIX-2-E	Enhanced L3 License for Arista Group 2 Fixed switches, (BGP, OSPF, ISIS, PIM, NAT)
LIC-FIX-2-V	Virtualization license for Group 2 Arista Fixed switches (VMTracer and VXLAN)
LIC-FIX-2-V2	EOS Extensions, Security and Partner Integration license for Arista Group 2 Fixed switches
LIC-FIX-2-Z	Monitoring & Automation license for Arista Group 2 Fixed switches (ZTP, LANZ, TapAgg, API, Time-stamping, OpenFlow)
LIC-FIX-2-FLX-L	FLX-Lite License for Arista Fixed switches Group 2 - Full Routing Up to 256K Routes, EVPN, VXLAN, SR, base MPLS LSR (no TE or link/node protection)
LIC-FIX-3-E	Enhanced L3 License for Arista Group 3 Fixed switches, (BGP, OSPF, ISIS, PIM, NAT)
LIC-FIX-3-V	Virtualization license for Group 3 Arista Fixed switches (VMTracer and VXLAN)
LIC-FIX-3-V2	EOS Extensions, Security and Partner Integration license for Arista Group 3 Fixed switches
LIC-FIX-3-Z	Monitoring & Automation license for Arista Group 3 Fixed switches (ZTP, LANZ, TapAgg, API, Time-stamping, OpenFlow)
LIC-FIX-3-FLX-L	FLX-Lite License for Arista Fixed switches Group 3 - Full Routing Up to 256K Routes, EVPN, VXLAN, SR, base MPLS LSR (no TE or link/node protection)

Optional Components and Spares

FAN-7002H-F	Spare fan module for Arista 7260CX-64 and 7320X switches (front-to-rear airflow)
FAN-7002H-R	Spare fan module for Arista 7260CX-64 switches (rear-to-front airflow)
FAN-7002-F	Spare fan module for Arista 7050X/7250X, 7260QX 2RU and 7300 switches (front-to-rear airflow)
FAN-7002-R	Spare fan module for Arista 7050X/7250X, 7260QX 2RU and 7300 switches (rear-to-front airflow)
FAN-7000-F	Spare fan module for Arista 7150, 7124SX(FX), 7050, 7060CX & 7048-A switches (front-to-rear airflow)
FAN-7000-R	Spare fan module for Arista 7150, 7124SX(FX), 7050, 7060CX & 7048-A switches (rear-to-front airflow)

Optional Components and Spares

FAN-7000H-F	Spare fan module for Arista 7060X, 7160 and 7280R Series 1RU switches (front-to-rear airflow)
FAN-7000H-R	Spare fan module for Arista 7060X, 7160 and 7280R Series 1RU switches (rear-to-front airflow)
PWR-500AC-F	Spare 500 Watt AC power supply for Arista 7050X, 7280 and 7060CX 1RU Switches (front-to-rear airflow)
PWR-500AC-R	Spare 500 Watt AC power supply for Arista 7050X, 7280 and 7060CX 1RU Switches (rear-to-front airflow)
PWR-500-DC-F	Spare 500 Watt DC power supply for Arista 7050X, 7280 and 7060CX 1RU Switches (front-to-rear airflow)
PWR-500-DC-R	Spare 500 Watt DC power supply for Arista 7050X, 7280 and 7060CX 1RU Switches (rear-to-front airflow)
PWR-745AC-F	Spare 750 Watt AC power supply for Arista 7060X Series Switches (front-to-rear airflow)
PWR-745AC-R	Spare 750 Watt AC power supply for Arista 7060X Series Switches (rear-to-front airflow)
PWR-1100AC-F	Spare 1100 Watt AC power supply for Arista 7260QX Series Switches (front-to-rear airflow)
PWR-1100AC-R	Spare 1100 Watt AC power supply for Arista 7260QX Series Switches (rear-to-front airflow)
PWR-1900AC-F	Spare 1900 Watt AC power supply for Arista 7260CX Series Switches (front-to-rear airflow)
PWR-1900AC-R	Spare 1900 Watt AC power supply for Arista 7260CX Series Switches (rear-to-front airflow)
PWR-1900-DC-F	Spare 1900W DC Power Supply for 7260X Series Series Switches (front to rear airflow switch)
PWR-1900-DC-R	Spare 1900W DC Power Supply for 7260X Series Switches (rear to front airflow switch)
KIT-7003	Spare accessory kit for Arista 7260CX-64 2RU switches
KIT-7002	Spare accessory kit for Arista 7250 / 7050 and 7260QX 2RU switches
KIT-7001	Spare accessory kit for Arista 7060X 1RU switches with tool-less rails
KIT-2POST	Spare 2RU 2 post rack mount installation kit for Arista 7250 / 7050 and 7260X switches
KIT-2POST-1U-NT	Spare 1RU 2 post rail kit for 1RU tool less systems (7050QX-32S, 7050SX/TX, 7060X and 7280)
KIT-4POST-NT	Spare 1RU/2RU tool-less rail kits for 4-post installation (7050QX-32S, 7050SX/TX, 7060X, 7260X, 7280, 7250X)

Warranty

The Arista 7060X and 7260X switches comes with a one-year limited hardware warranty, which covers parts, repair, or replacement with a 10 business day turn-around after the unit is received.

Service and Support

Support services including next business day and 4-hour advance hardware replacement are available. For service depot locations, please see: <http://www.arista.com/en/service>

Headquarters

5453 Great America Parkway
Santa Clara, California 95054
408-547-5500

Support

support@arista.com
408-547-5502
866-476-0000

Sales

sales@arista.com
408-547-5501
866-497-0000