



# 2015 DIGITAL SIGNAGE

## INFORMATION DISPLAY AND SOLUTIONS



\* All images used are for illustrative purposes only.



<https://lg-b2b.com.ua/displays>  
[www.youtube.com/channel/UCYTFtyk3YVcZuFVuufhxvUg](https://www.youtube.com/channel/UCYTFtyk3YVcZuFVuufhxvUg)  
[www.facebook.com/LGB2BUkraine](https://www.facebook.com/LGB2BUkraine)  
[www.linkedin.com/company/lg-b2b-ukraine](https://www.linkedin.com/company/lg-b2b-ukraine)

LG may make changes to specifications and product descriptions without notice.  
Copyright © 2015 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.  
The names of products and brands mentioned here may be the trademarks of their respective owners.



# Contents



1. 2015 HIGHLIGHTS	04
2. LG STRENGTH IN DIGITAL SIGNAGE	06
3. LG SIGNAGE INTRODUCTIONS	
• ULTRA HD	08
• STANDARD SIGNAGE	10
• VIDEO WALL	14
• HIGH BRIGHTNESS	18
• INTERACTIVE	20
• SMALL SIGNAGE	22
• MIRROR	23
• TRANSPARENT	24
• CONTENT PLAYER	26
• SIGNAGE SOFTWARE	27
4. LG SIGNAGE LINE UP	28
5. SPECIFICATIONS	32



## 2015 HIGHLIGHTS

### WORLD'S NARROWEST BEZEL VIDEO WALL

World's narrowest bezel display delivering stunning high picture quality in a seamless video wall.




### EXPANDING UHD LINE-UP 98"/84"/65"/55"/49"

**New 49", 55" Ultra HD display line-up in addition to Ultra HD Large Screen (98", 84")**

Produce resolution and picture quality far beyond any other regular displays. Ultra HD resolution has four times the resolution and pixel density of Full HD display delivering superior clarity and details of life-like images that appear sharp even at close viewing distances.



### SMART PLATFORM WITH webOS 2.0

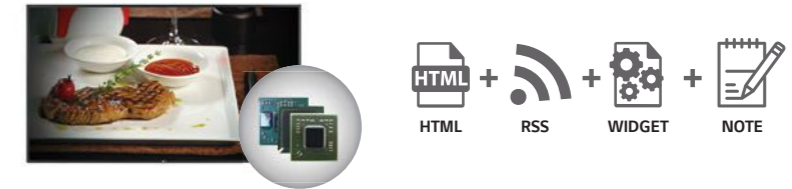

#### High Performance SoC\*

Eliminating the need of an external media player reduces TCO and simplifies the installation and maintenance.

#### Simple Customization

Allows to build apps by LG's SDK\*\* and able to apply customizable logo during idle-times, such as booting and no signal periods.

#### Web Centric Platform

Supports HTML5 for building apps working on any platforms or devices in an easy manner.

#### Simple Management

Enables self-diagnostics and remote monitoring from PCs or mobile devices.

#### Intuitive UX


Improved user experience through an intuitive Quick Launcher.

\*SoC : System-on-Chip

\*\*SDK : Software Development Kit

### A WIDE RANGE OF COMPETITIVE DISPLAYS LINE UP

As cost effective solution, a wide range of screen sizes from 10" to 65" Full HD Standard Signage with webOS are available, which suit the needs of information and advertisement displays for corporate communications, retail, QSR/food service, and for other vertical markets as well.




\*10" will be available in September.

### ENHANCED DESIGN CONFIGURATION

#### Slim Design with Edge LED

Slimmer depth is enabled to save installation space by Edge LED. In addition to, energy efficiency is enhanced with lower power consumption.

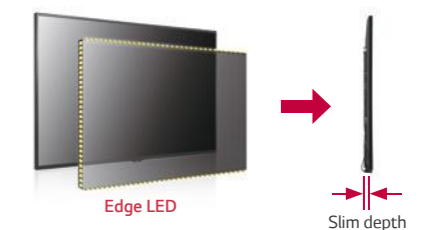

#### Detachable Logo

Portrait mode allows the logo to be positioned in the desired setting.



#### Cable Management

The well-organized cable terminals in the back optimize available space.



# REVOLUTIONARY IPS TECHNOLOGY

## SUPERIOR PICTURE QUALITY

### Consistent Response Time for Reduced Eye Strain & Original Image Exact Color Matching


IPS\* panel has an extremely low standard of deviation for response time. This allows for the smooth viewing of action scenes, sports with greater clarity and vivid quality. Now, you can enjoy the same colors as the actual product. IPS panel displays the color tone of the original image, along with a consistent color temperature.



\*In-Plane Switching


### You Can Enjoy the Same Colors as the Actual Product in the Display.

IPS Technology has the better control of liquid crystal and in consequence, it allows you to watch the screen virtually at any angle.

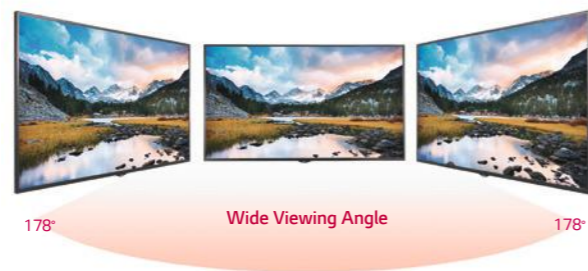

### Clear Viewing Angle

LG Video Wall display ensures clear picture quality even when installed in stacks of more than four. This is very favorable for the quantity of video walls installed in large spaces.

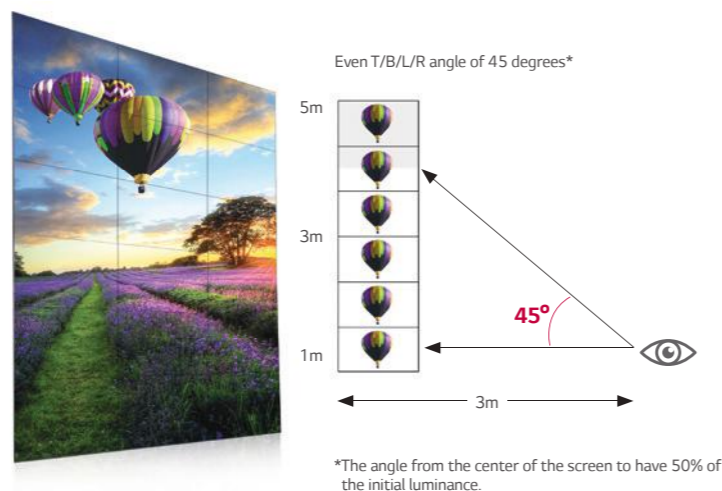

## ADVANCED RELIABILITY

### High Brightness Reliability


Over time, the brightness decreases depending on operating time. LG's high brightness display sustains the level of brightness for a long time. Even under direct sunlight exposure, IPS Panel remains free of blackening defects and provides superior quality for outdoor usage. This means you can save on costs related to purchasing IR blockers or extra cooling systems, in addition to saving power. What's more, you can save on space since no glass covers are needed for the monitors.



## COST EFFECTIVENESS

### Low Power Consumption Using by the M+ panel

The M+ panel offers excellent energy-efficiency and cost-savings and decreases power consumption by 31% compared to conventional RGB panels.

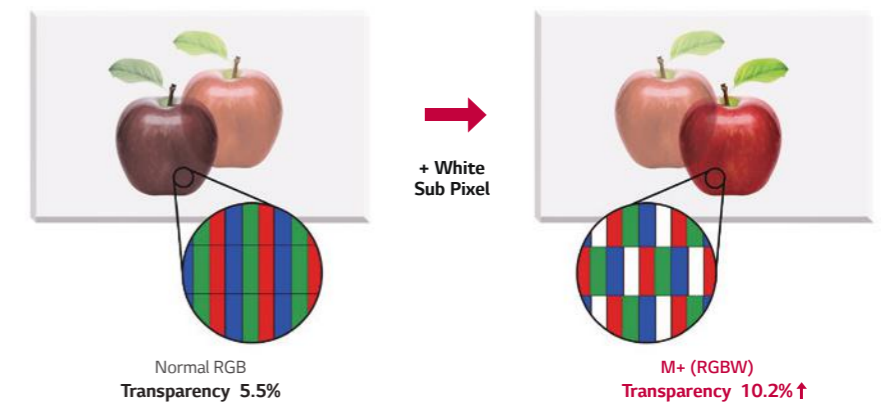


\*Due to its 60% enhanced transmittance.

# Ultra HD Large Screen (98", 84") Ultra HD Smart Display




## Seamless Content Delivery in a Large Screen

Providing an immersive viewing with high quality in a seamless 84" and 98" Ultra large screen.

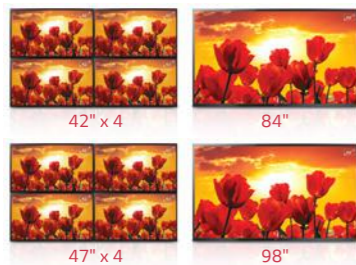

## Super High Resolution 3,840 x 2,160 (Ultra HD)


Ultra HD Resolution presents a whole new level of picture quality, boasting a picture definition of four times higher than that of Full HD.

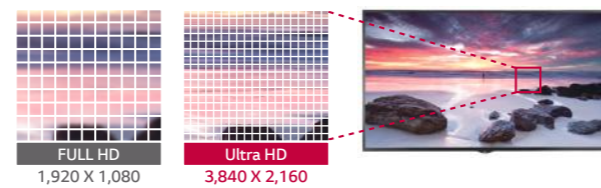

## Docking - Type Player MP700 Ready

Signage Display with a docking-type player looks slimmer and helps maintain the system far more conveniently on account of less cabling.

- Display with High Bit Rate (HBR) Bandwidth 3,840 x 2,160 pixels with excellent performance
- Ultra HD Dual Cloning Feature  
2 DP ports with HBR dedicated for Ultra HD display  
→ Offers 2 same contents at Ultra HD resolution

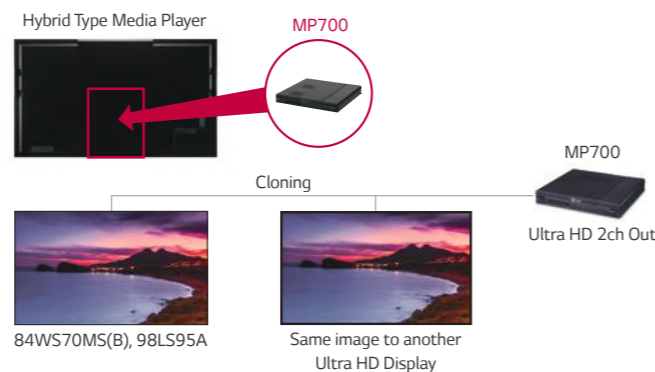

## 98" ULTRA HD PREMIUM LARGE DISPLAY 98LS95A

- webOS
- Ultra HD (3,840 x 2,160)
- Brightness : 500cd/m<sup>2</sup>
- 24/7 Operation
- Landscape & Portrait mode
- DP1.2 Daisy-Chain
- Wi-Fi Dongle Ready
- Up-scaling (Full HD to UHD)
- HEVC



## 84" ULTRA HD PREMIUM LARGE DISPLAY 84WS70MS/70BS

- Ultra HD (3,840 x 2,160)
- Brightness : 500cd/m<sup>2</sup> (WS70MS), 350cd/m<sup>2</sup> (WS70BS)
- 24/7 Operation (WS70MS)
- Landscape & Portrait mode (WS70MS)
- Compatible with MP700 Docking-type Player

## 65"/ 55"/ 49" ULTRA HD SMART DISPLAY with webOS 2.0 UH5B

- webOS 2.0
- Quad Core SoC built-in
- Ultra HD (3,840 x 2,160)
- Brightness : 500cd/m<sup>2</sup>
- 24/7 Operation
- Landscape & Portrait mode
- Built-in Wi-Fi
- Low Power Consumption by M+
- Up-scaling (Full HD to UHD)
- HEVC



# A Wide Range of Standard Signage (32"~65")

More potential buyers and visitors can be reached through LG's versatile types of displays.



## STANDARD PREMIUM DISPLAY

### 55"/49"/42" STANDARD PREMIUM DISPLAY SH7DB

- Brightness : 700cd/m<sup>2</sup>
- Narrow Even Bezel (7.4mm) and Slim Depth (31.7mm)
- Detachable logo
- Screen Fault Detection
- OPS Compatible
- Advanced Fail-over
- DP1.2 Daisy-Chain
- Wi-Fi Dongle Ready
- 24/7 Operation
- Landscape & Portrait mode



### webOS 2.0

The webOS 2.0 platform provides easy and convenient tools to create contents. LG's SDK\* and technical supports make content development and management easier.




<http://developer.lge.com/webOSSignage>

\*Software Development Kit

### Screen Fault Detection

Pixel Sensor checks screen status and alerts screen failure, such as screen hang and freeze. An e-mail notification is sent using SuperSign™ C or SI software.

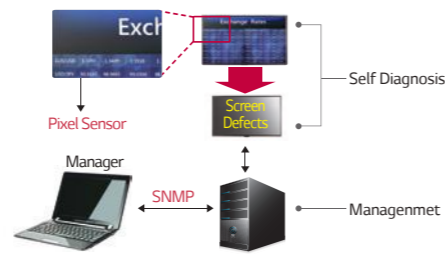

### OPS\* & HDBaseT Compatibility


The OPS Compatible signage provides an OPS Kit to connect a third-party OPS player or HDBaseT box. Users have the flexibility to choose any media player as long as it complies with the OPS.



\*OPS : Open Pluggable Specification

### Quad Core SoC

The High Performance SoC can execute several tasks at the same time and provide smooth content playback.

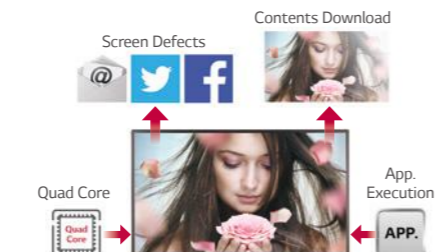

\*Applied to Standard Signage with webOS.



### 55"/49"/42" STANDARD PREMIUM DISPLAY with webOS LS75A/LS73B

- webOS
- Brightness : 700cd/m<sup>2</sup> (LS75A), 500cd/m<sup>2</sup> (LS73B)
- Narrow Even Bezel (7.4mm) and Slim Depth (31.7mm)
- Detachable logo
- Screen Fault Detection
- OPS Compatible
- Advanced Fail-over
- DP1.2 Daisy-Chain
- Wi-Fi Dongle Ready
- 24/7 Operation
- Landscape & Portrait mode

# A Wide Range of Standard Signage (32"~65")

More potential buyers and visitors can be reached through LG's versatile types of displays.

## STANDARD PERFORMANCE DISPLAY

### 65"/ 55"/ 49"/ 43"/ 32" STANDARD PERFORMANCE DISPLAY with webOS 2.0 **SM5B/SM5KB**

- webOS 2.0 / Quad Core SoC Built-in
- Brightness : 450cd/m<sup>2</sup> (65", 55", 49", 43"), 400cd/m<sup>2</sup> (32")
- Slimmer Depth (38.6mm) \*except 65", 32"
- Built-in Wi-Fi
- Detachable Logo
- Screen Fault Detection
- OPS/HDBaseT Compatible
- Advanced Fail-over
- Beacon Support
- 24/7 Operation
- Landscape & Portrait mode

\*SM5KB : Built-in Speaker (10W x 10W)



### 55"/ 49"/ 43" STANDARD PERFORMANCE DISPLAY **SL5B**

- Brightness : 450cd/m<sup>2</sup>
- Slimmer Depth (38.6mm)
- Wi-Fi Dongle Ready / SNMP
- Detachable Logo
- USB Content Scheduling
- Local Time Auto Setting
- 18/7 Operation
- Landscape & Portrait mode

### 32" STANDARD PERFORMANCE DISPLAY **32SL5B**

- Brightness : 450cd/m<sup>2</sup>
- Slimmer Depth (35.6mm)
- Advanced Fail-over
- OPS Compatible
- Wi-Fi Dongle Ready / SNMP
- 24/7 Operation
- Landscape & Portrait mode



## STANDARD ESSENTIAL DISPLAY

### 65"/ 55"/ 49"/ 43"/ 32" STANDARD ESSENTIAL DISPLAY **SE3B/SE3KB**

- Brightness : 400cd/m<sup>2</sup> (65"), 350cd/m<sup>2</sup> (55", 49", 43", 32")
- Slimmer Depth (38.6mm) \*except 65", 32"
- Wi-Fi Dongle Ready / SNMP
- Detachable Logo
- USB Content Scheduling
- Local Time Auto Setting
- 18/7 Operation
- Landscape & Portrait mode

\*SE3KB : Built-in Speaker (10W x 10W)



### 55"/ 49"/ 43" STANDARD ESSENTIAL DISPLAY with webOS 2.0 **SM3B**

- webOS 2.0
- Quad Core SoC built-in
- Brightness : 350cd/m<sup>2</sup>
- Slimmer Depth (38.6mm)
- Detachable Logo
- Built-in Wi-Fi / SNMP
- USB Content Scheduling
- Local Time Auto Setting
- 18/7 Operation
- Landscape & Portrait mode

### 65"/55"/47"/42"/32" STANDARD ESSENTIAL DISPLAY **LS33A**

- Brightness : 350cd/m<sup>2</sup> (65"), 330cd/m<sup>2</sup> (55"), 300cd/m<sup>2</sup> (47", 42", 32")
- Wi-Fi Dongle Ready
- 16/7 Operation
- Remote Control (RS232C, RJ45)
- Embedded Media Player
- Landscape & Portrait mode



# Ultra Narrow Bezel Video Wall

LG's near-seamless video wall solutions make various formats of display possible. It can be extended easily, allowing you to generate effective attraction.



## ULTRA NARROW BEZEL VIDEO WALL

### 55" WORLD'S NARROWEST BEZEL VIDEO WALL VH7B

- webOS 2.0
- Quad Core SoC built-in
- Brightness : 700cd/m<sup>2</sup>
- Bezel : Less than 2.0mm (B-to-B)
- Clear Viewing Angle
- SoC Based Sync-Playback
- Image Gap Reduction
- LAN Daisy-Chain
- OPS Compatible
- 24/7 Operation
- Landscape & Portrait mode
- SuperSign Lite/W/C

\* Available in Sept.



#### Narrowest Bezel\*

The narrowest bezel enables the overall video wall image to resemble a single screen.



Bezel to Bezel **under 2.0mm**

\*VH7B

#### Uniform Brightness

LG's LED backlight technology guarantees high uniformity in brightness to ensure a clear picture. On other screens, certain spots may appear darker than others, but the new VH7B generates high visibility and a consistent brightness across the whole screen.



General (80%)

LG (90%)

#### Image Gap Reduction

The VH7B includes an image improvement algorithm that can adjust to objects located in the boundary of bezel for a seamless viewing experience.



Conventional

LG

#### Shine Out

The VH7B is the perfect fit for window displays because it reflects sunlight for better visibility and a clearer image than conventional panels.




Conventional Video Wall

LG


#### SuperSign™ W for Content Management

Flexible content editing in various layouts including regular matrix and non-formal irregular video-wall is possible to your preference in a timely and cost effective manner without unnecessary expensive video wall console.

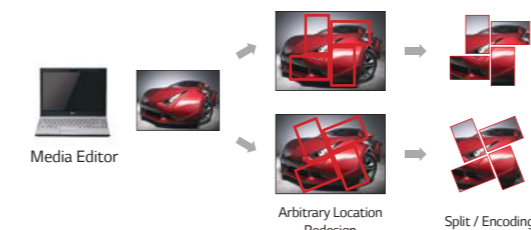

#### LAN Daisy Chain Performance

A LAN daisy chain allows you to execute commands to control and monitor the screens and even update their firmware.

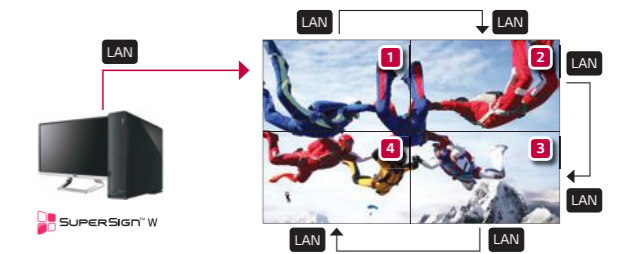



# Ultra Narrow Bezel Video Wall

LG's near-seamless video wall solutions make various formats of display possible. It can be extended easily, allowing you to generate effective attraction.

## SUPER NARROW BEZEL VIDEO WALL

### 55" SUPER NARROW 3.5mm BEZEL VIDEO WALL

#### LV77A

- Brightness : 700cd/m<sup>2</sup>
- Bezel : 3.5mm (B-to-B)
- Clear Viewing Angle
- DP 1.2 Daisy-Chain
- 24/7 Operation
- Shine-Out/Anti-Glare
- Landscape & Portrait mode
- SuperSign Lite/W/C



### 55" SUPER NARROW 3.5mm BEZEL VIDEO WALL

#### LV75A

- Brightness : 500cd/m<sup>2</sup>
- Bezel : 3.5mm (B-to-B)
- Clear Viewing Angle
- DP 1.2 Daisy-Chain
- 24/7 Operation
- Anti-Glare
- Landscape & Portrait mode
- SuperSign Lite/W/C



### 55" SUPER NARROW 3.5mm BEZEL VIDEO WALL

#### LV35A

- Brightness : 500cd/m<sup>2</sup>
- Bezel : 3.5mm (B-to-B)
- Clear Viewing Angle
- 24/7 Operation
- Landscape & Portrait mode
- SuperSign Lite/W/C



### 47" 4.9mm BEZEL VIDEO WALL

#### LV35A

- Brightness : 450cd/m<sup>2</sup>
- Bezel : 4.9mm (B-to-B)
- Clear Viewing Angle
- 24/7 Operation
- Landscape & Portrait mode
- SuperSign Lite/W/C



# Open Frame & Window-Facing

With the excellent readability and wonderful color expression LG's outdoor signage is perfectly fit for advertising in outdoor space influenced easily by the temperature and weather.



## 55" FAN-LESS WINDOW-FACING DISPLAY XS2B

- webOS
- High Brightness : 2,500cd/m<sup>2</sup> (Typ.)
- Low Power Consumption by M+
- Slimmer Depth (89mm)
- Fan-less Noise Reduction : Under 25dB
- Operating Temperature : 0°C ~ 45°C
- System Log File Saving
- Screen Fault Detection
- 24/7 Operation
- SuperSign Lite/W/C



## 55" ENHANCED BRIGHTNESS OPEN FRAME DISPLAY XF2B

- webOS
- High Brightness : 2,500cd/m<sup>2</sup> (Typ.)
- Low Power Consumption by M+
- Slimmer Depth (106mm)
- Operating Temperature : 0°C ~ 50°C
- System Log File Saving
- Screen Fault Detection
- 24/7 Operation
- SuperSign Lite/W/C


### High Brightness

The high visibility of super high brightness display maintains high picture quality and the image's readability even under direct sunlight.



### Shine-out

Perfect fit for window display by reflecting away the sunlight providing better image visibility and clearer display even under direct sunlight.

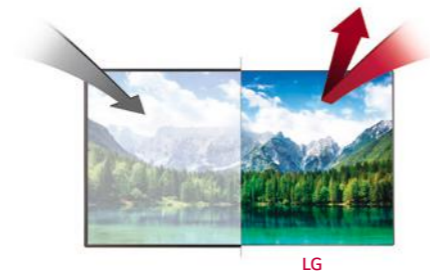

### High Operating Temperature

The panel offers superb reliability under high operating temperatures and reduces cooling fan usage.



\*XF2B's specification

### Dust & Humidity Protection

The conformal coating enhances circuit board reliability by protecting it from dust, iron shavings, humidity and other harsh conditions.



## 72" LARGE SCREEN OPEN FRAME DISPLAY 72WX70MF

- High Brightness : 1,600cd/m<sup>2</sup> (Min) ~ 2,000cd/m<sup>2</sup> (Max)
- Operating Temperature : 0°C ~ 50°C
- SNMP Support
- 24/7 Operation
- Landscape & Portrait mode
- SuperSign Lite/W/C



## 47" OPEN FRAME DISPLAY 47WX50MF

- High Brightness : 1,600cd/m<sup>2</sup> (Min) ~ 2,000cd/m<sup>2</sup> (Max)
- Operating Temperature : 0°C ~ 40°C
- 24/7 Operation
- Shine-out
- Landscape & Portrait mode
- SuperSign Lite/W/C

# Overlay Touch & Multi-Touch Experience

LG's touch technology provides smooth and accurate 10-points multi-touch with precision for your interactive needs.



## 84" Ultra HD Multi Touch Signage

The only Ultra HD-based (3,840 x 2,160) touch screen displaying clear & sharp resolution contents in real life picture quality.



## Ghost Free Multi-Touch Experience

When touching the screen, it is possible to express your writing or drawing with 'No Ghosting' for clean & seamless navigation.



## 10-Point Multi-Touch Experience

It provides a more realistic sense of touch since it can recognize up to 10 simultaneous touches at once with no need of a separate pen.



## Highly Reliable Touch Experience

- Protection Glass with Anti Fog / Anti-Glare
- Ghost Free Multi-touch
- \* IR Spread : LG's own multi-touch technology



## LG'S IR-SPREAD BASED 10-POINT MULTI-TOUCH DISPLAY



### 84" ULTRA HD INTERACTIVE WHITE BOARD DISPLAY 84WT70PS

- Ultra HD (3,840 x 2,160)
- IR Spread Touch
- 10 point multi-touch
- Protection Glass
- Anti-Fog / Anti-Glare
- Landscape Mode
- Compatible with MP700 Player in 84WT70MS(PS)
- IWB Software, Pen and Pen Tray bundled



### 47"/42" ADVANCED 10 POINT MULTI-TOUCH DISPLAY LT55A

- Brightness : 450cd/m<sup>2</sup>
- IR Spread based
- 10 point multi-touch
- Protection Glass
- Anti-Fog / Anti-Glare
- 24/7 Operation
- Landscape & Portrait mode
- SuperSign Lite/W/C



### 55"/47"/42" 10 POINT MULTI-TOUCH DISPLAY WT30

- Brightness: 350cd/m<sup>2</sup> (55")  
400cd/m<sup>2</sup> (47", 42")
- IR Spread based
- 10 point multi-touch
- Protection Glass
- Anti-Fog / Anti-Glare
- 16/7 Operation
- Landscape & Portrait mode
- SuperSign Lite/W/C




### 65"/55"/49"/43"/32" PERFECT FIT OVERLAY TOUCH KT-T Series

- Compatible Base Models
- KT-T650 (65") : 65LS33A
- KT-T550 (55") : 55SE3B, 55SM3B, 55SL5B, 55SM5B
- KT-T490 (49") : 49SE3B, 49SM3B, 49SL5B, 49SM5B
- KT-T430 (43") : 43SE3B, 43SM3B, 43SL5B, 43SM5B
- KT-T320 (32") : 32SE3B, 32SM5B
- \* 32SL5B not compatible with touch overlay


# Intuitive Information Delivery

Small Signage is suitable for small spaces to deliver promotional message and event information at in-store promotion rack, meeting rooms, and a conference hall, etc.

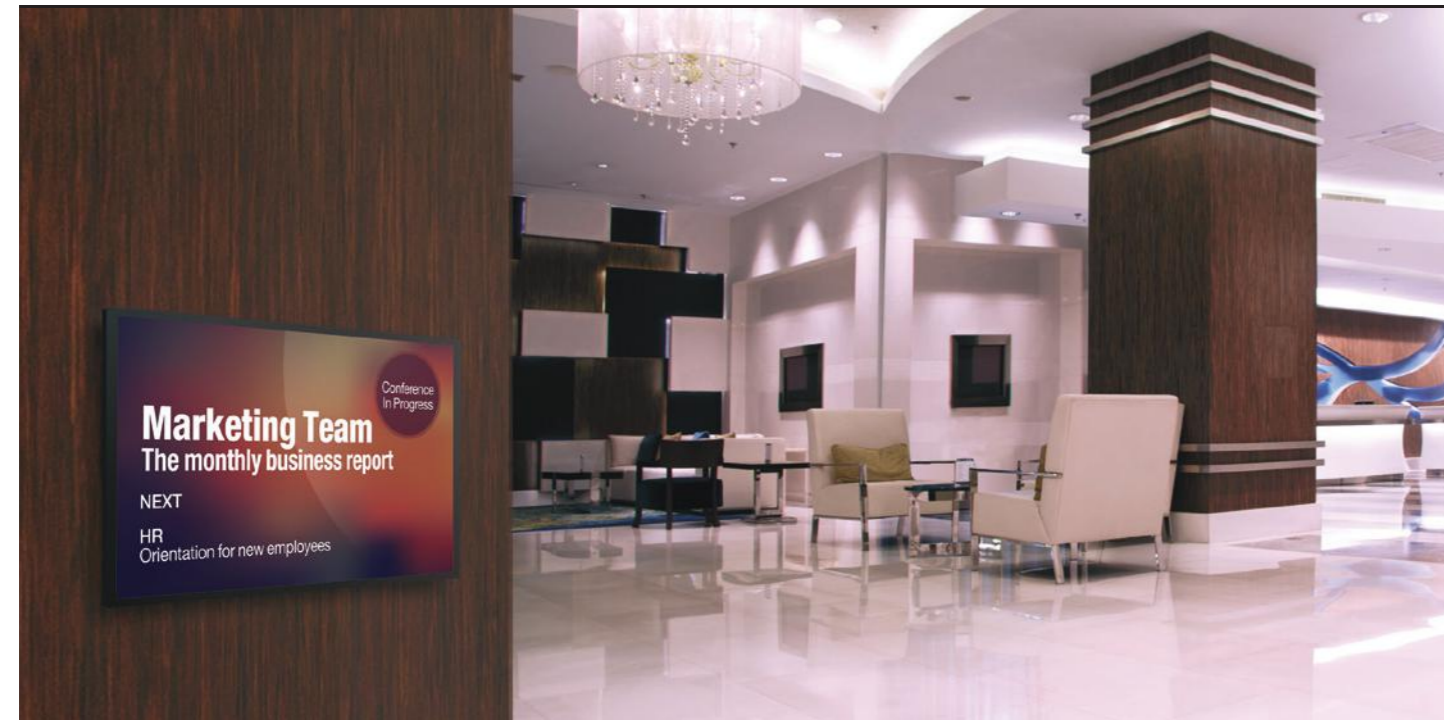

# Specialized Promotion Display

Mirror Signage is very useful and effective in hotels, gyms, beauty salons and shopping malls by exposing information to customers when they look at the mirror.

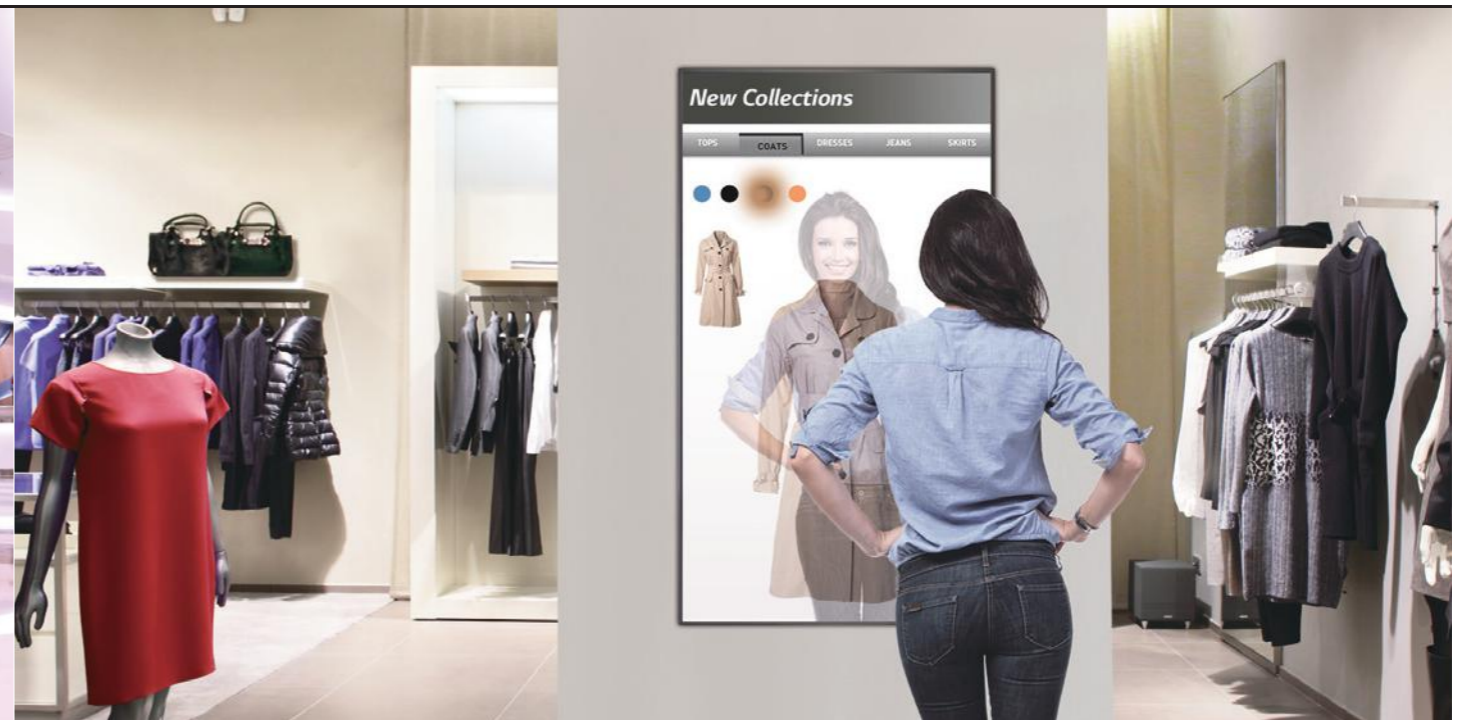

### Simple Installation

Installation has been simplified by removing the external media player and Ethernet/RS232C cables.



Built-in Wi-Fi : (removing Ethernet or RS232C cables)  
802.11n (2.4GHz/5GHz)


### BEACON

With Beacon and Bluetooth Low Energy (BLE) supported by 22SM3B, retail stores can provide coupons and information in real-time.



### Installation Convenience

No need for additional installations.

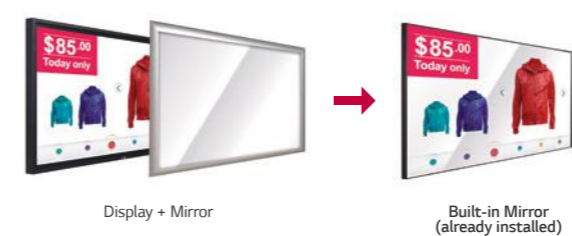

### Add Creative Options

Use sensors and contents for maximum exposure. Multi-touch, proximity sensors, gestures can be added by integrator/contents provider.

- increase contents exposure
- customizes according to shop environments

## 22" SMALL SIGNAGE with webOS 2.0 22SM3B

- webOS 2.0
- Brightness : 250cd/m<sup>2</sup>
- Depth : 53.8mm
- 18/7 Operation
- Landscape & Portrait mode
- Quad Core SoC built-in
- Bezel : 16.3mm (Even Bezel)
- Fail Over
- BEACON



## 49" MIRROR DISPLAY MS75A

- webOS
- Built-in Mirror
- Wi-Fi Dongle Ready / SNMP
- 24/7 Operation
- SuperSign Lite/W/C
- Brightness : 300cd/m<sup>2</sup>
- OPS Compatible
- Enhanced Fail-over
- Landscape & Portrait mode



# Clear Transparent & True Color Expression

With an IPS panel transparent display provides a superb wide viewing angle and accurate color while creating better clarity for an effective advertising showcase.



## 32" TRANSPARENT DISPLAY LW55A

- Transparency 5.9%
- Landscape & Portrait mode
- 24/7 Operation




## 47" TRANSPARENT DISPLAY TS50MF

- Narrow T-Con
- Transparency 6.4%
- Bezel width 39.95mm (T), 17.5mm (L/R/B)
- Compatible with AD board box TSP500
- Landscape & Portrait mode



### Full HD

High picture quality with 1,920 x 1,080 resolution

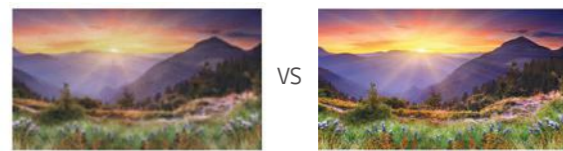


Conventional (HD)

LW55A (FHD)

### Low Power Consumption by M+

It has excellent energy-efficiency and cost-savings with the M+ panel, which decreases power consumption by 31% compared to the RGB panel.

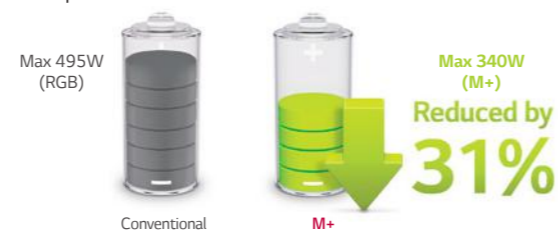

### True Color (IPS)

LG IPS technology provides true vivid color than conventional display.




Conventional

LW55A (FHD)


### Higher Transparency

Perfect fit for window display by reflecting away the light for best image visibility and clearer display in bright lightening environment.

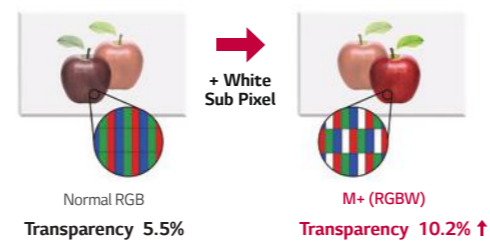


### Open Frame

Fits to any customer's needs and circumstances and with its open frame, it can be designed at an affordable price.

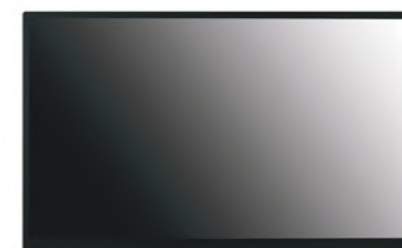

### Landscape & Portrait

Flexible usage in landscape or portrait orientation

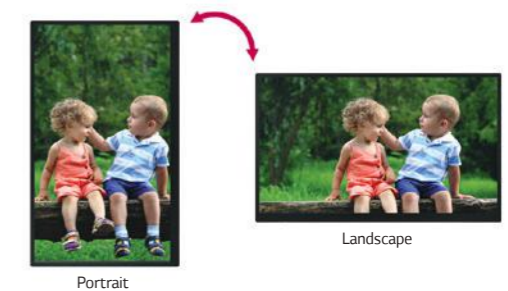

PREMIUM DOCKING-TYPE PLAYER

# MP700

- Intel® Core i5-3610ME 2.7 GHz (Dual Core)
- Intel® Core i7-3610QE 2.3 GHz (Quad Core)
- Mobile Intel® QM77
- Windows Embedded Standard 7 Professional (64bit)
- Full HD x 4 or Ultra HD x 1
- Maximum Resolution 3,840 x 2,160 @ 30 Hz (DP)
- Maximum Resolution 1,920 x 1,080 @ 75 Hz (RGB)



PREMIUM DOCKING-TYPE PLAYER

# MP500-B

- Intel® Core i5-520M Processor 2.40 GHz (Dual Core)
- Windows Embedded Standard, Windows7 Embedded
- Full HD x 2
- Maximum Resolution 2,560 x 1,600 @ 60 Hz (DP)
- Maximum Resolution 1,920 x 1,200 @ 60 Hz (HDMI)



EXTERNAL FANLESS COMPETITIVE PLAYER

# MP500-F


- Intel® Celeron Processor N2930 1.83GHz/ 2.16GHz (Burst) (Quad Core)
- Windows Embedded Standard 7 Professional (32bit)
- Full HD x 2
- Maximum Resolution 1,920 x 1,080 @ 60 Hz (DP)



WEB-BASED CONTENT AUTHORIZING AND OPERATION SOLUTION PLAYER

# SuperSign™ Lite

- Offered as a bundle with LG's external player and SuperSign embedded player
- Connections up to 50 clients
- Solution suitable for SMB
- Supports dual content editor in both PC app and web

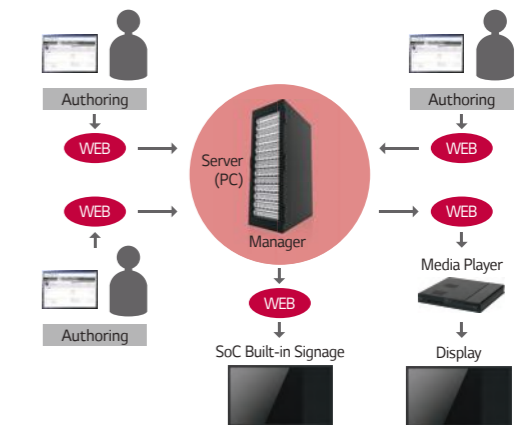

You can easily create, schedule and distribute the contents you want with various templates provided by SuperSign™ Lite and SuperSign™ W.

# SuperSign™ W


- Licensed version
- Connections up to 1,000 clients
- Solution suitable for Enterprise
- Multi-User Account Management
- Supports dual content editor in both PC app and web

MONITOR CONTROL & WHITE BALANCE CALIBRATION

# SuperSign™ C

- Remote Monitor Control Solution
- Enhanced White Balance Calibration
  - Manual controls
  - Intuitive UX for efficient workflow
  - Fast calibration and gamma table creation

SuperSign C allows to control one or more monitors remotely via network and RS232 serial. To ensure the best optimized wall solution, Auto White Balance feature makes video wall be adjusted easily and intelligently.

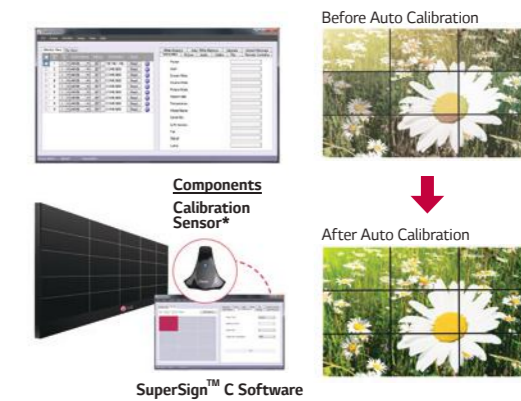


CONTENT MANAGEMENT SOFTWARE BY MOBILE DEVICE

# SuperSign™ M

- SuperSign™ M works by the server connection method
- Edits and makes content scheduling and distributes it via mobile

Connection Method

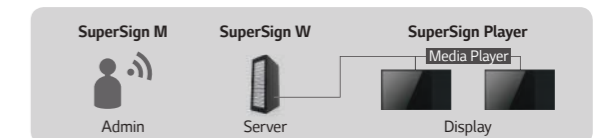


Supporting Mobile Spec.

ANDROID	iOS
• Version : Android 4.1 (Jellybean) ↑	• Version : iOS 7 ↑
• Resolution : HD (1,280 x 720), FHD (1,920 x 1,080)	• Model : iPhone 5S/5C, 6/6 Plus
*Portrait UI only, Landscape will be supported '16.	*iPad not Supported

WEB BASED EXTERNAL DATA CONNECTION

# SuperSign™ N

- Web based application
- Pull the external data source to SuperSign™ content

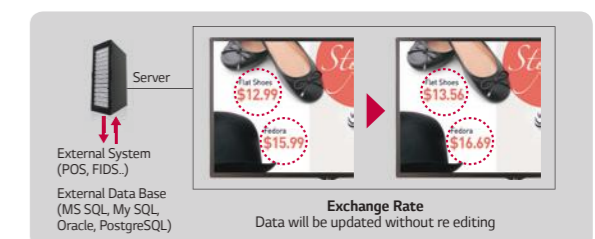

22" 32" 42" 43" 47" 49" 55" 65" 84" 98"

**ULTRA HD**  
 98LS95A  
 84WS70MS/70BS  
 UH5B



**STANDARD**  
 SH7DB  
 LS75A/LS73B  
 SM5B/SM5KB  
 SE3B/SE3KB  
 SM3B  
 SL5B  
 LS33A



	29"	32"	42"	43"	47"	49"	55"	65"	72"	84"
<b>VIDEO WALL</b> VH7B/LV SERIES					47LV35A		55VH7B 55LV77A/55LV75A/55LV35A			
<b>HIGH BRIGHTNESS</b> XS2B/XF2B WX SERIES					47WX50MF	*Available from Oct 2015 49XS2B	55XS2B		72WX70MF	
						*Available from Oct 2015 49XF2B	55XF2B			
<b>INTERACTIVE</b> WT SERIES/LT SERIES KT-T SERIES			42LT55A 42WT30		47LT55A 47WT30					84WT70PS
		KT-T320		KT-T430			KT-T490 KT-T550		KT-T650	
<b>MIRROR</b>							49MS75A			
<b>STRETCHED</b>	29WR30MR									
<b>TRANSPARENT</b> 32LW55A/47TS50MF		32LW55A				47TS50MF				



SPECIFICATIONS

		ULTRA HD				STANDARD SIGNAGE			
		98LS95A	84WS70MS/70BS	UH5B	SH7DB	LS75A/LS73B	SMSB/SM5KB	SL5B	
PANEL	Screen Size	98"	84"	65" / 55" / 49"	55" / 49" / 42"	55" / 49" / 42"	65" / 55" / 49" / 43" / 32"	55" / 49" / 43"	
	Panel Technology	IPS	IPS	IPS	IPS	IPS	IPS	IPS	
	Aspect Ratio	16.9	16.9	16.9	16.9	16.9	16.9	16.9	
	Native Resolution	3,840 x 2,160 (UHD)	3,840 x 2,160 (UHD)	3,840 x 2,160 (UHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	
	Brightness	500cd/m <sup>2</sup>	84WS70MS : 500cd/m <sup>2</sup> 84WS70BS : 350cd/m <sup>2</sup>	500cd/m <sup>2</sup>	700cd/m <sup>2</sup>	LS75A : 700cd/m <sup>2</sup> , LS73B : 500cd/m <sup>2</sup>	450cd/m <sup>2</sup> (32" : 400cd/m <sup>2</sup> )	450cd/m <sup>2</sup>	
	Contrast Ratio	1,300:1	1,400:1	65" : 1,000:1, 55", 49" : 1,100:1	1,300:1	1,300:1	1,100:1 (65" : 1,300:1)	1,100:1	
	Dynamic CR	500,000:1	500,000:1	4,000,000:1	500,000:1	500,000:1	4,000,000:1 (32" : 2,000,000:1)	500,000:1	
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	178 x 178	178 x 178	178 x 178	178 x 178	
	Guaranteed Operating Hour	24 Hours	24 Hours	24 Hours	24 Hours	24 Hours	24 Hours	18 Hours	
CONNECTIVITY	Input	Digital	HDMI(2), DP(1), DVI-D(1)	HDMI(2), DVI-D(1), Display Port(1) with HDCP for all input	HDMI(1), DP(1), DVI-D(1)	HDMI(1), DP(1), DVI-D(1)	HDMI(1), DP(1), DVI-D(1)	HDMI(1), DP(1), DVI-D(1)	
		Analog	No	RGB(1), Composite(1)	RGB(1)	RGB(1)	RGB	RGB	
		Audio	DVI-D, Component	RGB/DVI-AV	RGB/DVI	Yes	RGB/DVI	Yes	
		External Control	RS232C, RJ45, IR/Light Sensor	RS232C(1), RJ45(1), IR(1, Internal)	RS232C, RJ45, IR Receiver, Pixel Sensor	RS232C, RJ45, IR Receiver, Pixel Sensor(Optional)	RS232C, RJ45, IR Receiver, Pixel Sensor	RS232C, RJ45, IR Receiver, Pixel Sensor	RS232C, RJ45, IR Receiver
		USB	USB 3.0(1), USB 2.0(2)	USB 2.0(2)	USB 3.0(1)	USB(1)	USB(1)	USB 3.0(1)	USB(2)
		SD Card	-	-	Yes(1)	-	-	Yes(1)	-
	Output	Digital	DP(1)	DVI-D(1)	DP	DP	DP	DP	No
		Analog	-	RGB(1)	No	No	No	No	No
		Audio	SPDIF(1), External Speaker Out	Yes, External Speaker Out	Yes, External Speaker Out	Yes, External Speaker Out	Yes, External Speaker Out	[SM5B] Yes, External Speaker Out, [SM5KB] No	Yes, External Speaker Out
		External Control	RS232C(1)	RS232C(1), IR(1, Internal)	RS232C(1)	RS232C(1)	RS232C(1)	RS232C(1)	RS232C(1)
AUDIO	Auto Volume	No	No	No	No	No	No	No	
	Balance	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Audio Power	20W(10W x 2) for External Speaker	20W(10W x 2)	20W(10W x 2) for External Speaker	20W(10W x 2) for External Speaker	20W(10W x 2) for External Speaker	[SM5B] 20W(10W x 2) for External Speaker, [SM5KB] 20W(10W x 2) for Internal Speaker	20W(10W x 2) for External Speaker	
	Speaker On/Off	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
PHYSICAL SPECIFICATION	Bezel Width	14.9mm (Even bezel)	27.9mm (Even bezel)	65": 12.1mm(T), 12.6mm(R/L), 15.7mm(B) 55": 12.1mm(T), 12.6mm(R/L), 15.7mm(B) 49": 11.9mm(T), 12.4mm(R/L), 15.5mm(B)	7.4mm (Even bezel)	55": 1230 x 714 x 32mm 49": 1095 x 637 x 32mm 42": 949 x 555 x 32mm	65": 1456.9 x 838 x 41.1mm (SM5KB : 56.5mm) 55": 1238 x 714.9 x 38.6mm (SM5KB : 54mm) 49": 1102.2 x 638.5 x 38.6mm (SM5KB : 54mm) 43": 969.6 x 563.9 x 38.6mm (SM5KB : 54mm) 32": 729.4 x 428.9 x 55.5mm (SM5KB : 55.5mm)	55": 1238 x 714.9 x 38.6mm 49": 1102.2 x 638.5 x 38.6mm 43": 969.6 x 563.9 x 38.6mm	
	Monitor Dimension (W x H x D)	2191.8 x 1246.8 x 69.4mm	1923 x 1109 x 51mm (Including Handle : 101mm)	65": 1458.6 x 848.9 x 40.1mm 55": 1239.8 x 725.2 x 38.6mm 49": 1103.2 x 648.0 x 38.6mm	55": 1230 x 714 x 32mm 49": 1095 x 637 x 32mm 42": 949 x 555 x 32mm	65": 1561 x 977 x 190mm 55": 1330 x 807 x 170mm 49": 1197 x 760 x 166mm 43": 1052 x 650 x 123mm 32": 810 x 510 x 132mm	55": 1330 x 807 x 170mm 49": 1197 x 760 x 166mm 43": 1052 x 650 x 123mm		
	Weight (head)	88kg	84WS70MS : 72.9kg / 84WS70BS : 72.8kg	65": 26kg, 55": 16.6kg, 49": 13.3kg	55": 20.7kg, 49": 15.6kg, 42": 12.5kg	55": 20.7kg, 49": 15.6kg, 42": 12.5kg	[SM5B] 65": 27.7kg, 55": 17.3kg, 49": 14.1kg, 43": 9.8kg, 32": 5.2kg [SM5KB] 65": 27.9kg, 55": 17.5kg, 49": 14.3kg, 43": 10kg, 32": 5.4kg	55": 17.3kg, 49": 14.1kg, 43": 9.8kg	
	Carton Dimensions (W x H x D)	2342 x 1386 x 402mm	2034 x 1213 x 314mm	65": 1561 x 971 x 190mm 55": 1330 x 807 x 170mm 49": 1197 x 760 x 166mm	55": 1330 x 815 x 174mm 49": 1197 x 760 x 134mm 42": 1045 x 645 x 127mm	55": 1330 x 815 x 174mm 49": 1197 x 760 x 134mm 42": 1045 x 645 x 127mm	65": 1561 x 977 x 190mm 55": 1330 x 807 x 170mm 49": 1197 x 760 x 166mm 43": 1052 x 650 x 123mm 32": 810 x 510 x 132mm	55": 1330 x 807 x 170mm 49": 1197 x 760 x 166mm 43": 1052 x 650 x 123mm	
	Packed Weight	123kg	84WS70MS : 87.2kg / 84WS70BS : 87.1kg	65": TBD, 55": 20.5kg, 49": 16.6kg	55": 25.2kg, 49": 18.7kg, 42": 14.8kg	55": 25.2kg, 49": 18.7kg, 42": 14.8kg	[SM5B] 65": 33.6kg, 55": 21.5kg, 49": 17.2kg, 43": 12.4kg, 32": 6.5kg [SM5KB] 65": 33.8kg, 55": 21.7kg, 49": 17.4kg, 43": 12.6kg, 32": 6.7kg	55": 21.5kg, 49": 17.2kg, 43": 12.4kg	
	VESA™ Standard Mount Interface	800 x 400mm	600 x 400mm	300 x 300mm	400 x 400mm	400 x 400mm	400 x 400mm	300 x 300mm (43", 32" : 200 x 200mm)	
	ENVIRONMENT	Operation Temperature Range	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	
	Operation Humidity Range	10% to 80%	10% to 80%	10% to 80%	10% to 80%	10% to 80%	10% to 80%		
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	
	Power Consumption	Typical / Smart Energy Saving	400W / 280W	350W / 200W	65" : 130W / 90W, 55" : 116W / 80W, 49" : 100W / 70W	55" : 140W / 95W, 49" : 125W / 80W, 42" : 110W / 60W	55" : 140W / 100W, 49" : 125W / 90W, 42" : 110W / 80W	65" : 120W / 85W, 55" : 100W / 70W, 49" : 85W / 60W, 43" : 75W / 55W, 32" : 60W / 45W	55" : 85W / 60W, 49" : 75W / 55W, 43" : 65W / 50W
		DPM	2.0W(DVI-D, HDMI, DP)	1.5W	0.5W	0.7W(DP)	0.7W(DP)	0.5W	0.7W
		Power Off	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W
STANDARD (Certification)	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB scheme / TUV	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / VCCI / C-tick / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	
	ErP / Energy Star	NA / NA	Yes / NA	Yes / NA	Yes / Yes (Energy Star 6.0)	Yes / Yes (Energy Star 6.0)	Yes / Yes (Energy Star 6.0)	Yes / Yes (Energy Star 6.0)	
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No	No	Yes	Yes	Yes	Yes	No	
	External Media Player Attachable	Yes (MP500/MP700)	No	Yes (MP500/MP700)	Yes (MP500/MP700)	Yes (MP500/MP700)	Yes (MP500/MP700), (32" : No)	Yes (MP500/MP700)	
SOFTWARE COMPATIBILITY	SuperSign W/C	No / Yes	No / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	
ACCESSORY	Basic	Remote Controller(include battery 2ea), Power Cord, IR/Light Sensor Receiver, CD(Owner's Manual, SuperSign Program / Manual), HDMI 2.0 Cable, DP cable,Phone jack to BNC cable, RS-232C, Wi-Fi Dongle, EYE-BOLT	Power Cord, Remote Controller (include battery 2ea), CD(Manual/Elite-C/ESG), Eye Bolt (2ea), DP Cable	Remote Controller(include battery 2ea), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, Memory Cover	Remote Controller(include battery 2ea), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver	Remote Controller(include battery 2ea), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, Memory Cover	Remote Controller(include battery 2ea), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, Memory Cover	Remote Controller(include battery 2ea), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver	
	Optional	SP-2200(External Speaker)	Media Player: MP700/MP500, SP-2100, LSW630	Speaker(SP-5200), Stand(65" : ST-651T/ 55", 49" : ST-201T), Pixel Sensor(KT-SPO), Media Player, Wall Bracket(LSW350B), VESA Adapter(AM-B330S), OPS Kit(KT-OPSA), HDBaseT(EB-B100)	SP-2100(External Speaker), ST-200T, LSW440S, AN-WF500(Wi-Fi USB Dongle), KT-OPSA(OPS Kits), KT-SPO(Pixel Sensor)	SP-2100(External Speaker), ST-200T, LSW440S, AN-WF500(Wi-Fi USB Dongle), KT-OPSA(OPS Kits), KT-SPO(Pixel Sensor)	Speaker(SP-5000), Stand(55", 49" : ST-492T/ 43" : ST-432T), Media Player, Wall Bracket(55", 49" : LSW350B/ 43" : LSW230B), VESA Adapter(55", 49" : AM-B330S/ 43" : AM-B220S)		

SPECIFICATIONS

STANDARD SIGNAGE

VIDEO WALL

		32SL5B	SE3B/SE3BK	SM3B	
PANEL	Screen Size	32"	65" / 55" / 49" / 43" / 32"	55" / 49" / 43"	
	Panel Technology	IPS	IPS	IPS	
	Aspect Ratio	16:9	16:9	16:9	
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	
	Brightness	450cd/m <sup>2</sup>	350cd/m <sup>2</sup> (65" : 400cd/m <sup>2</sup> )	350cd/m <sup>2</sup>	
	Contrast Ratio	1,300:1	1,100:1 (65" : 1,300:1)	1,100:1	
	Dynamic CR	500,000:1	500,000:1	2,000,000:1	
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	
Guaranteed Operating Hour	24 Hours	18 Hours	18 Hours		
CONNECTIVITY	Input	Digital	HDMI(1), DVI(1), DP(1)	HDMI(1), DP(1), DVI-D(1)	
		Analog	RGB	RGB	
		Audio	Yes	Yes	
		External Control	RS232C, RJ45, Pixel Sensor	RS232C, RJ45, IR Receiver	RS232C, RJ45, IR Receiver, Pixel Sensor
		USB	USB (2)	USB(2)	USB 3.0(1)
	Output	Digital	DVI	No	DP
		Analog	No	No	No
		Audio	Yes, External Speaker Out	Yes, External Speaker Out	Yes, External Speaker Out
		External Control	RS232C(1)	RS232C(1)	RS232C(1)
AUDIO	Auto Volume	No	No	No	
	Balance	Yes	Yes	Yes	
	Audio Power	20W(10W x 2) for External Speaker	[SE3B] 20W(10x2) for External Speaker [SE3KB] 20W(10x2) for Internal Speaker(6 ohm)	20W(10W x 2) for External Speaker	
	Speaker On/Off	Yes	Yes	Yes	
PHYSICAL SPECIFICATION	Bezel Width	18.9mm(T/R/L), 26mm(B)	11.9mm(T/R/L), 18mm(B) (32" : 13mm(T/R/L), 18mm(B))	11.9mm(T/R/L), 18mm(B)	
	Monitor Dimension (W x H x D)	740.4 x 442 x 35.6mm	65" : 1456.9 x 838 x 41.1mm (SE3KB : 56.5mm) 55" : 1238 x 714.9 x 38.6mm (SE3KB : 54mm) 49" : 1102.2 x 638.5 x 38.6mm (SE3KB : 54mm) 43" : 969.6 x 563.9 x 38.6mm (SE3KB : 54mm) 32" : 729.4 x 428.9 x 55.5mm (SE3KB : 55.5mm)	55" : 1238 x 714.9 x 38.6mm 49" : 1102.2 x 638.5 x 38.6mm 43" : 969.6 x 563.9 x 38.6mm	
	Weight (head)	8kg	[SE3B] 65" : 27.7kg, 55" : 17.3kg, 49" : 14.1kg, 43" : 9.8kg, 32" : 5.2kg [SE3KB] 65" : 27.9kg, 55" : 17.5kg, 49" : 14.3kg, 43" : 10kg, 32" : 5.4kg	55" : 17.3kg, 49" : 14.1kg, 43" : 9.8kg	
	Carton Dimensions (W x H x D)	850 x 585 x 121mm	65" : 1561 x 977 x 190mm 55" : 1330 x 807 x 170mm 49" : 1197 x 760 x 166mm 43" : 1052 x 650 x 123mm 32" : 810 x 510 x 132mm	55" : 1330 x 807 x 170mm 49" : 1197 x 760 x 166mm 43" : 1052 x 650 x 123mm	
	Packed Weight	9.9kg	[SE3B] 65" : 33.6kg, 55" : 21.5kg, 49" : 17.2kg, 43" : 12.4kg, 32" : 6.5kg [SE3KB] 65" : 33.8kg, 55" : 21.7kg, 49" : 17.3kg, 43" : 12.6kg, 32" : 6.7kg	55" : 21.5kg, 49" : 17.2kg, 43" : 12.4kg	
	VESA™ Standard Mount Interface	200 x 200mm	300 x 300mm (43", 32" : 200 x 200mm)	300 x 300mm (43" : 200 x 200mm)	
ENVIRONMENT	Operation Temperature Range	0°C - 40°C	0°C - 40°C	0°C - 40°C	
	Operation Humidity Range	10% to 80%	10% to 80%	10% to 80%	
POWER	Power Supply	100-240V-, 50/60Hz	100-240V-, 50/60Hz	100-240V-, 50/60Hz	
	Power Consumption	Typical / Smart Energy Saving	65W / 42W	65" : 95W / 70W, 55" : 70W / 55W, 49" : 65W / 50W, 43" : 60W / 45W, 32" : 50W / 35W	55" : 80W / 55W, 49" : 70W / 50W, 43" : 60W / 45W
		DPM	0.7W	0.7W	0.5W
		Power Off	0.5W	0.5W	0.5W
STANDARD (Certification)	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	
	ErP / Energy Star	Yes / Yes (Energy Star 6.0)	Yes / Yes (Energy Star 6.0), (65" : Yes / NA)	Yes / Yes (Energy Star 6.0)	
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes	No	Yes	
	External Media Player Attachable	No	Yes (MP500/MP700), (32" : No)	Yes (MP500/MP700)	
SOFTWARE COMPATIBILITY	SuperSign W/C	Yes / Yes	Yes / Yes	Yes / Yes	
ACCESSORY	Basic	Remote Controller(include battery 2ea), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver	Remote Controller(include battery 2ea), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, IR Receiver	Remote Controller(include battery 2ea), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender, Memory Cover	
	Optional	Speaker(SP-2100), Stand(ST-320T), Wall Bracket(LSW200), OPS Kit(KT-OPSA)	Speaker(SP-5000)(SE3B only), Stand(65" : ST-652T/55" : 49" : ST-492T/43" : ST-432T/32" : ST-322T), Media Player(except 32"), Wall Bracket(65" : 55" : 49" : LSW350B/43" : LSW230B/32" : LSW230B), VESA Adapter(65" : 55" : 49" : AM-B330S/43" : AM-B220S)(except 32")	Speaker(SP-5000), Stand(55" : 49" : ST-492T/43" : ST-432T), Pixel Sensor(KT-SP0), Media Player, Wall Bracket(55" : 49" : LSW350B/43" : LSW230B), VESA Adapter(55" : 49" : AM-B330S/43" : AM-B220S), OPS Kit(KT-OPSA), HDBaseT(EB-B100)	

		LS33A	VH7B	LV77A/LV75A	LV35A	
PANEL	Screen Size	65" / 55" / 47" / 42" / 32"	55"	55"	55" / 47"	
	Panel Technology	IPS	IPS	IPS	IPS	
	Aspect Ratio	16:9	16:9	16:9	16:9	
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	
	Brightness	65" : 350cd/m <sup>2</sup> , 55" : 330cd/m <sup>2</sup> , 47", 42", 32" : 300cd/m <sup>2</sup>	700cd/m <sup>2</sup>	LV77A : 700cd/m <sup>2</sup> , LV75A : 500cd/m <sup>2</sup>	55" : 500cd/m <sup>2</sup> 47" : 450cd/m <sup>2</sup>	
	Contrast Ratio	1,200:1 (65" : 1,400:1)	1,400:1	1,400:1	55" : 1,400:1 47" : 1,200:1	
	Dynamic CR	500,000:1	500,000:1	500,000:1	500,000 : 1	
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	178 x 178	
Guaranteed Operating Hour	16 Hours	24 Hours	24 Hours	24 Hours		
CONNECTIVITY	Input	Digital	HDMI(1)	HDMI(1), DP(1), DVI-D(1), OPS(1)	HDMI(1), DP(1), DVI-D(1)	HDMI(1), DVI-D(1)
		Analog	RGB	RGB	RGB(B), AV(1)	RGB
		Audio	Yes	Yes	Yes	Yes
		External Control	RS232C, RJ45, IR Receiver	RS232C, RJ45, IR Receiver	RS232C(1), RJ45(1), IR Receiver(1)	RS232C, RJ45, IR Receiver
		USB	Yes	USB 3.0(1), USB 2.0(1)	Yes(1)	USB (1)
	Output	Digital	No	DP	DP	DVI-D(1)
		Analog	No	No	Yes	No
		Audio	Yes, External Speaker Out	Yes	Yes	Yes
		External Control	RS232C(1)	RS232C(1), RJ45(1)	RS232C(1)	RS232C(1)
AUDIO	Auto Volume	No	-	No	No	
	Balance	Yes	-	No	No	
	Audio Power	20W(10W x 2) for External Speaker	-	No	-	
	Speaker On/Off	Yes	-	No	No	
PHYSICAL SPECIFICATION	Bezel Width	65" : 14.1mm(L/R/T), 20.0mm(B), 55" : 13.2mm(L/R/T), 18.7mm(B), 47" : 13.2mm(L/R/T), 18.7mm(B), 42" : 13.3mm(L/R/T), 18.8mm(B), 32" : 15.1mm(L/R), 14.6mm(T), 18.6mm(B)	Under 2mm	2.25mm(L/T), 1.25mm(R/B)	55" : 2.25mm(L/T) / 1.25mm(R/B) 47" : 3.2mm(L/T) / 1.7mm(R/B)	
	Monitor Dimension (W x H x D)	65" : 1462 x 843 x 58mm, 55" : 1240.9 x 717.2 x 56.8mm, 47" : 1071 x 621.6 x 55.8mm, 42" : 959.5 x 559 x 55.5mm, 32" : 730.9 x 430.1 x 55.5mm	1211.4 x 682.2 x 86.5mm	1213.4 x 684.2 x 88.5mm	55" : 1213.4 x 684.2 x 88.5mm 47" : 1044.9 x 590 x 89.9mm	
	Weight (head)	65" : 30.9kg, 55" : 17.8kg, 47" : 12.2kg, 42" : 9.1kg, 32" : 5.6kg	19.8kg	[LV77A] 23.2kg [LV75A] 23kg	55" : 23kg 47" : 16.5kg	
	Carton Dimensions (W x H x D)	65" : 1548 x 942 x 176mm, 55" : 1330 x 810 x 174mm, 47" : 1150 x 710 x 152mm, 42" : 1060 x 660 x 152mm, 32" : 812 x 505 x 139mm	1353 x 855 x 263mm	1337 x 828 x 239mm	55" : 1337 x 828 x 239mm 47" : 1164 x 765 x 239mm	
	Packed Weight	65" : 36.8kg, 55" : 22.8kg, 47" : 15.9kg, 42" : 11.8kg, 32" : 7.1kg	25.0kg (TBD)	[LV77A] 30.5kg [LV75A] 30.3kg	55" : 30kg 47" : 21.5kg	
	VESA™ Standard Mount Interface	400 x 400mm (32" : 200 x 200mm)	600 x 400mm	600 x 400mm	600 x 400mm	
ENVIRONMENT	Operation Temperature Range	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C	
	Operation Humidity Range	10% to 80%	10% to 90%	10% to 80%	10% to 80%	
POWER	Power Supply	100-240V-, 50/60Hz	100-240V-, 50/60Hz	100-240V-, 50/60Hz	100-240V-, 50/60Hz	
	Power Consumption	Typical / Smart Energy Saving	65" : 145W / 95W, 55" : 92W / 60W, 47" : 73W / 50W, 42" : 70W / 45W, 32" : 45W / 30W	220W / 110W	[LV77A] 230W / 130W [LV75A] 160W / 130W	55" : 160W / 90W 47" : 130W / 85W
		DPM	0.5W(RGB), 0.7W(HDMI)	0.7W	0.7W	0.7W
		Power Off	0.5W	0.5W	0.5W	0.5W
STANDARD (Certification)	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "B" / CE / KCC	FCC Class "A" / CE / KCC	
	ErP / Energy Star	Yes / Yes (Energy Star 6.0)	Yes / Yes (Energy Star 6.0)	Yes / Yes (Energy Star 6.0)	NA / Yes (Energy Star 6.0)	
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No	Yes	No	No	
	External Media Player Attachable	Yes (MP500/MP700)	Yes (MP500/MP700)	Yes	Yes	
SOFTWARE COMPATIBILITY	SuperSign W/C	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	
ACCESSORY	Basic	Remote Controller(include battery 2ea), Power Cord, IR Receiver, CD(Owner's Manual, SuperSign Program / Manual), RGB Cable	Remote Controller, Power cable, DP Cable, Manual, IR Receiver, RS-232C Cable, LAN Cable, Guide Bracket, Screw	Remote Controller, Power Cable, DP Cable, Manual, IR Receiver, RS-232C Cable, Tiling Guide, Screw	Remote Controller, Power Cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Guide Bracket, Screw	
	Optional	Speaker(SP-2100), Stand(65" : ST-652T/55" : 49" : ST-492T/43" : ST-432T/32" : ST-322T), Wall Bracket(65" : LSW440S/47" : LSW430B/42" : LSW440S/32" : LSW230B), AN-WF500(Wi-Fi USB Dongle)	Wall Mount(Landscape : WM-L640V, Portrait : WM-P640V)	WM-L640V(Landscape), WM-P640V(Portrait), Frame Kit(Horizontal : FK-55V10, Vertical : FK-55V20)	WM-L640V(Landscape), WM-P640V(Portrait), Frame Kit(Horizontal : 55" : FK-55V10 / 47" : FK-47V10), (Vertical : 55" : FK-55V20 / 47" : FK-47V20)	

SPECIFICATIONS

HIGH BRIGHTNESS

		XS2B	XF2B	72WX70MF	47WX50MF	
PANEL	Screen Size	55"	55"	72"	47"	
	Panel Technology	IPS	IPS	IPS	IPS	
	Aspect Ratio	16:9	16:9	16:9	16:9	
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	
	Brightness	2,500cd/m <sup>2</sup> (Typ.)	2,500cd/m <sup>2</sup> (Typ.)	Max : 2,000cd/m <sup>2</sup> , Min :1,600cd/m <sup>2</sup>	Max : 2,000cd/m <sup>2</sup> , Min :1,600cd/m <sup>2</sup>	
	Contrast Ratio	1,000:1 (Typ.)	1,000:1	1,200:1	1,300:1	
	Dynamic CR	500,000:1 (Typ.)	500,000:1	500,000:1	500,000:1	
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	178 x 178	
	Guaranteed Operating Hour	24 Hours	24 Hours	24 Hours	24 Hours	
CONNECTIVITY	Input	Digital	HDMI(2), DP(1), DVI-D(1)	HDMI(2), DP(1), DVI-D(1)	HDMI(1), DP(1), DVI-D(1)	HDMI(1), DP(1), DVI-D(1)
		Analog	No	No	RGB(1)	RGB(1) (Shared Component & AV)
		Audio	Yes	Yes	Yes	Yes
		External Control	RS232C, RJ45, IR Receiver	RS232C, RJ45, IR Receiver, Pixel Sensor	RS232C(1), RJ45(1), IR Receiver(1)	RS232C(1), RJ45(1)
		USB	USB(1)	USB(1)	USB(1)	USB(1)
		SD Card	-	-	-	-
	Output	Digital	DP(1)	DP(1)	DVI-D(1)	DVI-D(1)
		Analog	No	No	No	RGB(1)
		Audio	Yes, External Speaker Out	Yes, External Speaker Out	Yes, External Speaker Out	Yes, External Speaker Out
External Control	RS232C(1)	RS232C(1)	RS232C(1)	RS232C(1)		
AUDIO	Auto Volume	No	No	No	No	
	Balance	Yes	Yes	Yes	Yes	
	Audio Power	20W(10W x 2) for External Speaker	20W(10W x 2) for External Speaker	20W(10W x 2)	20W(10W x 2)	
	Speaker On/Off	Yes	Yes	Yes	Yes	
PHYSICAL SPECIFICATION	Bezel Width	11.4mm(L/R),13.5mm(T/B)	9.9mm(L/R),12mm(T/B)	29.7mm (Even bezel)	11mm (Even bezel)	
	Monitor Dimension (W x H x D)	1238.4 x 712.4 x 89mm	1235.4 x 709.4 x 106mm	1654.5 x 956.5 x 139.5mm	1078.8 x 665.5 x 157mm	
	Weight (head)	25.6kg	27kg	54.5kg	23.9kg	
	Carton Dimensions (W x H x D)	1366 x 228 x 800mm	1336 x 241 x 810mm	1770 x 285 x 1120mm	1198 x 765 x 285mm	
	Packed Weight	30.7kg	32kg	64.5kg	29.1kg	
	VESA™ Standard Mount Interface	600 x 400mm	600 x 400mm	NA	NA	
	ENVIRONMENT	Operation Temperature Range	0°C - 45°C (w/o Direct Sunlight), 0°C - 35°C (Direct Sunlight )	0°C - 50°C (w/o Direct Sunlight), 0°C - 40°C (Direct Sunlight )	0°C - 50°C	0°C - 40°C
Operation Humidity Range	10% to 80%	10% to 80%	10% to 80%	10% to 80%		
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	
	Power Consumption	Typical / Smart Energy Saving	220W(Max 260) / 40% - 50% down of typical	230W(Max 310W) / 100 W	1000W(Max 1300W) / 400W	Max 300W / 170W
		DPM	0.7W(DP), 1.0W(DVI-D, HDMI)	0.7W(DP), 1.0W(DVI-D, HDMI)	2.0W	0.7W
		Power Off	0.5W	0.5W	1.0W	0.5W
STANDARD (Certification)	Safety	UL / CB scheme	RU / CB scheme	RU / CB scheme	RU / CB Scheme / TUV	
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC / C-Tick / VCCI	FCC Class "A" / CE / KCC	
	ErP / Energy Star	NA / NA	NA / NA	NA / NA	NA / NA	
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible	No	No	No	No	
	External Media Player Attachable	No	No	No	No	
SOFTWARE COMPATIBILITY	SuperSign W/C	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	
ACCESSORY	Basic	Remote Controller(including battery 2ea), Power Cord, HDMI Cable, Manual	Remote Controller(including battery 2ea), Power Cord, IR Extension Cable/PCB, HDMI Cable, Manual	Remote Controller, Power Cable, RGB Cable, Manual ESG, IR Extension Cable/PCB, Enclosure Installation Guide	Remote Controller, Power Cable, RGB Cable, Manual	
	Optional	LSW630, AN-WF500, KT-SP0 ** Stand is not available	KT-SP0 ** Stand is not available	No	No	

INTERACTIVE

		84WT70PS	LT55A	WT30	KT-T SERIES	
PANEL	Screen Size	84"	47" / 42"	55" / 47" / 42"	65" / 55" / 49" / 43" / 32"	
	Panel Technology	IPS	IPS	IPS		
	Aspect Ratio	16:9	16:9	16:9		
	Native Resolution	3,840 x 2,160 (UHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)		
	Brightness	350cd/m <sup>2</sup> (300cd/m <sup>2</sup> With Glass Haze 5%)	450cd/m <sup>2</sup> (380cd/m <sup>2</sup> With Glass Haze 5%)	42"/47" : 400cd/m <sup>2</sup> (Typ.) 55" : 350cd/m <sup>2</sup> (Typ.)	N/A (20% brightness reduction with protection glass)	
	Contrast Ratio	1,400:1	1,300:1	1,000:1		
	Dynamic CR	500,000:1	500,000:1	500,000:1		
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178		
	Operation	Landscape	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	
CONNECTIVITY	Input	Digital	HDMI(2), DP(1), DVI(1)	HDMI(2), DP(1), DVI(1)	HDMI(1), DVI-D(1), DP(1)	
		Analog	RGB(1), AV(1)	RGB(1)	RGB(1)	
		Audio	Yes	Yes	Yes	
		External Control	RS232C(1), RJ45(1), IR Receiver(1, Internal)	RS232C(1), RJ45(1), IR Receiver(1)	RS232C(1), RJ45(1), IR Receiver(1)	
		USB	USB(2)	USB(1)	USB(1)	USB
		SD Card	-	-	-	
	Output	Digital	DVI-D(1)	No	No	
		Analog	RGB(1)	No	No	
		Audio	Yes, External Speaker Out	Yes, External Speaker Out	Yes, External Speaker Out	
External Control	RS232C(1)	RS232C(1)	RS232C(1)			
AUDIO	Auto Volume	No	No	No		
	Balance	Yes	Yes	Yes		
	Audio Power	20W(10W x 2)	20W(10Wx2)	20W(10W x 2)		
	Speaker On/Off	Yes	Yes	Yes		
PHYSICAL SPECIFICATION	Bezel Width	34mm (Even bezel)	15mm (Even bezel)	15mm (Even bezel)	27mm (Even bezel)	
	Monitor Dimension (W x H x D)	1951 x 1137 x 112mm	47": 1102.7 x 647.8 x 71.2mm(Head Only) 47": 1102.7 x 647.8 x 84.2mm(with MP500) 42": 990.9 x 585 x 72mm(Head Only) 42": 990.9 x 585 x 85mm(with MP500)	55": 1273 x 743 x 100mm 47": 1103 x 648 x 101mm 42": 991 x 585 x 950mm	65": 1485.5 x 859.5 x 23.5mm(Max 62.1mm) 55": 1265 x 739 x 23.5mm(Max 60mm) 49": 1132 x 660 x 23.5mm(Max 60mm) 43": 997 x 586 x 23.5mm(Max 60mm) 32": 756 x 449 x 23.5mm(Max 75.7mm)	
	Weight (head)	102.6kg	47": 23.8kg, 42": 20.5kg	55": 28kg, 47": 20.5kg, 42": 15.9kg	65": 18.5kg, 55": 9.7kg, 49": 8kg, 43": 6.5kg, 32": 4.1kg	
	Carton Dimensions (W x H x D)	2050 x 1261 x 330mm	47": 1203 x 790 x 190mm 42": 1074 x 720 x 190mm	55": 1369 x 890 x 210mm 47": 1203 x 790 x 190mm 42": 1074 x 720 x 190mm	65": 1548 x 942 x 176mm 55": 1420 x 980 x 185mm 49": 1285 x 810 x 185mm 43": 1150 x 735 x 185mm 32": 900 x 600 x 185mm	
	Packed Weight	118.0kg	47": 28.3kg, 42": 24.6kg	55": 32.7kg, 47": 24.3kg, 42": 19.6kg	65": 21.9kg, 55": 15.4kg, 49": 13.6kg, 43": 11.4kg, 32": 7.6kg	
	VESA™ Standard Mount Interface	600 x 400mm, M8	400 x 400mm	400 x 400mm (42": 200 x 200mm)		
	ENVIRONMENT	Operation Temperature Range	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C
Operation Humidity Range	10% to 80%	10% to 80%	10% to 80%	10% to 80%		
POWER	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	USB	
	Power Consumption	Typical / Smart Energy Saving	350W / 200W	47": 125W / 90W 42": 120W / 80W	55": 140W / No 47": 100W / No 42": 90W / No	1.31W (65" : 2.5W)
		DPM	1.5W	0.7W	0.5W(RGB), 0.7W(DVI-D, HDMI, DP)	
		Power Off	0.5W	0.5W	0.5W	
STANDARD (Certification)	Safety	UL, cUL, CB scheme, TUV	UL / cUL / CB Scheme / TUV	UL / cUL / CB Scheme		
	EMC	FCC Class "A", VCCI, C-tick, CE, KCC	FCC Class "A" / VCCI / C-tick / CE / KCC	FCC Class "A" / VCCI / CE / KCC		
	ErP / Energy Star	NA / No	NA / Yes (Energy Star 6.0)	NA / Yes (Energy Star 6.0)		
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible	Yes (MP500, MP700)	Yes	No		
	External Media Player Attachable	No	No	Yes (NC1100 / NA1100 / NA1000)		
SOFTWARE COMPATIBILITY	SuperSign W/C	No / Yes	Yes / Yes	Yes / Yes		
ACCESSORY	Basic	Power Cord, Remote Controller(include battery 2ea), CD(Manual/Touch Screen SW/ESG), Eye Bolt(2ea), USB Cable, Pen Tray, Cable Tie(2ea), Screws(Gea, to fix Eye-Bolt Bracket & Pentray), DP Cable	Power Cord, RGB Cable, Wired IR Receiver, USB Cable, Remote Controller, Manual, ESG	IR Dongle, USB Cable, RGB Cable, CD(Manual&SW), Remote Controller(with Battery)	65" : Manual(Overlay), CD(Writing S/W), Pen(2ea), Tray, Install Accessories 55", 49", 43", 32" : Manual (Overlay), Install Accessories	
	Optional	Media Player : MP700/MP500, SP-2100(External Speaker), LSW630	AP-WX60 / AP-WX70 (Wall Mount), SP-2100(Speaker), MP500(Media Player) ** Stand is not available	No		

SPECIFICATIONS

		SMALL SIGNAGE	MIRROR	TRANSPARENT		
		22SM3B	49MS75A	32LW55A	47TS50MF	
PANEL	Screen Size	21.5"	48.5"	31.55"	46.96"	
	Panel Technology	IPS	IPS	IPS	IPS	
	Aspect Ratio	16:9	16:9	16:9	16:9	
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	
	Brightness	250cd/m <sup>2</sup>	300cd/m <sup>2</sup> (700cd/m <sup>2</sup> without mirror glass)	5.9% (Typ.)	6.4% (Typ.)	
	Contrast Ratio	1,000:1	1,000:1	1,200:1	1,200:1	
	Dynamic CR	4,000,000:1	150,000:1			
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	178 x 178	
Guaranteed Operating Hour	18 Hours	24 Hours	24 Hours			
CONNECTIVITY	Input	Digital	HDMI(1)	HDMI(2), OPS, DP(1), DVI(1)	LVDS(1)	
		Analog	RGB	No		
		Audio	Audio In(RGB)	Yes(1)		
		External Control	RS232C(1), IR(Built-In), Pixel Sensor(1)	RS232C(1), RJ45(1), IR/Light Sensor(1), Pixel Sensor(1)		
		USB	USB 3.0(1)	USB 2.0(1)		
	SD Card					
	Output	Digital	No	DP(1)		
		Analog	No	No		
		Audio	Yes, External Speaker Out(Built-In)	Yes, External Speaker Out		
		External Control	No	RS232C(1)		
AUDIO	Auto Volume	Yes	No			
	Balance	No	Yes			
	Audio Power	2W(1W x 2) for Internal Speaker	20W(10W x 2)			
	Speaker On/Off	No	Yes			
PHYSICAL SPECIFICATION	Bezel Width	16.3mm (Even bezel)	8.4mm (Even bezel)	83.05mm(T), 17.5mm(B/L/R)	39.95mm(T), 17.5mm(B/L/R)	
	Monitor Dimension (W x H x D)	510.3 x 302.1 x 53.8mm	1095 x 625.2 x 37.3mm	743.2 x 504.2 x 11.2mm	1084.48 x 653.02 x 11.2mm	
	Weight (head)	3.6kg	22kg	2.6kg	2.9kg	
	Carton Dimensions (W x H x D)	565 x 357 x 103mm	1330 x 810 x 174mm	834 x 570 x 114mm	1109 x 760 x 125mm	
	Packed Weight	4.7kg	25.3kg	3.8kg	6.3kg	
	VESA™ Standard Mount Interface	100 x 100mm	400 x 400mm			
ENVIRONMENT	Operation Temperature Range	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C	
	Operation Humidity Range	10% to 80%	10% to 80%	10% to 80%	10% to 80%	
POWER	Power Supply	100-240V-, 50/60Hz	100-240V-, 50/60Hz			
	Power Consumption	Typical / Smart Energy Saving	35W / On 25.13W, Off 29.76W	125W / 95W	7.2 W(Typ.)(12V Input)	6.1W(Typ.)(12V Input)
		DPM	0.7W	0.7W (DVI-D, HDMI, DP)		
		Power Off	0.5W	0.5W		
STANDARD (Certification)	Safety	UL / cUL / CB / TUV	UL / cUL / CB / TUV / KC			
	EMC	FCC Class "B" / CE	FCC Class "A" / CE / KCC			
	ErP / Energy Star	NA / NA	NA / Yes (Energy Star 6.0)			
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible	No	No			
	External Media Player Attachable	No	Yes (MP500/MP700), KT-OPSA			
SOFTWARE COMPATIBILITY	SuperSign W/C	Yes / Yes	Yes / Yes			
ACCESSORY	Basic	Remote Controller (include 2ea batteries), Power Cord, QSG, RGB Cable, Phone to RS232C Gender	Remote Controller(include battery 2ea), Power Cord, IR/Light Sensor Receiver, CD(Owner's Manual), HDMI Cable	CD Manual(1), Book Manual(1)	CD Manual(1), Book Manual(1)	
	Optional	Pixel Sensor (KT-SP0)	SP-2100, ST-200T, LSW440S, AN-WF500(Wi-Fi USB Dongle), KT-OPSA(OPS Kits), KT-SP0	-	-	

		MP700	MP500-B	MP500-F	
GENERAL SPECIFICATION	Dimensions (W x H x D)	260 x 40.1 x 275.9mm	260 x 40.1 x 275.9mm	260 x 40.1 x 275.9mm	
	Weight	Only Set 2.3kg (SSD Suffix), 2.4kg (HDD Suffix)	2.08kg (Only Set)	2kg (Only Set)	
	Carton Dimension (W x H x D)	332 x 99 x 345mm (Set Box)	300 x 99 x 345mm (Set Box)	300 x 99 x 345mm (Set Box)	
	CPU	Intel® Core i5-3610ME 2.7GHz (Dual Core) Intel® Core i7-3610QE 2.3GHz (Quad Core)	Intel® Core i5-520M Processor 2.40GHz (Dual Core)	Intel® Celeron Processor N2093 1.83GHz / 2.16GHz (Burst) (Dual Core)	
	Chip Set	Mobile Intel® QM77	Mobile Intel® QM57 Express Chipset	Mobile Intel® Bay-Trail M Chipset	
	Main Memory	DDR3 1333 2 SODIMM	DDR3 1333 2,048 MB SODIMM Type	DDR3L 1066 2,048 MB SODIMM Type	
	Graphic	AMD Radeon™ E6760 with 1GB VRAM	N/A	N/A	
	Storage	SATA SSD 32G/64G, 2.5" 1TB HDD	N/A	N/A	
	Secondary Storage Device		SATA SSD 8G (Option : 16G, 32G, 64G)	SATA SSD 16G (Option : 32G)	
	O/S	Windows Embedded Standard7 Professional (64bit)	Windows Embedded Standard09, Windows Embedded Standard7 Professional (32bit)	Windows Embedded Standard7 Professional (32bit)	
Graphic Performance	Ultra HD Cloning (by DP with HBR2), Full HD Display (by DP port 4ea)	Full HD x 2	Full HD x 2		
MULTI I/O PORT	Connectivity	Intel® 82579LM Gigabit (10 / 100 / 1000 Mbps) Ethernet PHY	Intel® 82577LM Gigabit (10 / 100 / 1000 Mbps) Ethernet PHY	Realtek RTL8111F (10 / 100 / 1000 Mbps) Ethernet Controller	
	Input	USB Port	USB 2.0 x 2EA, USB 3.0 x 1EA	Hi-Speed USB 2.0 port 480 Mbps rate (x4)	Hi-Speed USB 2.0 port 480 Mbps rate (x3), Super Speed USB 3.0 port 5.0 Gbps rate (x1)
		4-in-1 Card	N/A	N/A	N/A
		PCI Express Card Slot	N/A	N/A	N/A
	Mini PCI Express Socket	Internally Ready	Supported	Supported	
	Output	Serial Port	RS232C Out x 1ea	Supported	Supported
		Display Out	DP with HBR2 x 2ea, DP1.1 x 2ea / RGB - out	DP / HDMI (DP does not support Digital Audio)	DP*For HDMI, need HDMI Kit(KT-H00)
		Line Out	1ea	Supported	Supported
		SPDIF (Digital Audio Out)	N/A	No	No
	OPERATIONAL SPECIFICATION	Resolution	Maximum Resolution : 3,840 x 2,160 @ 30 Hz (DP) Maximum Resolution : 1,920 x 1,080 @ 75 Hz (RGB)	Maximum Resolution : 2,560 x 1,600 @ 60 Hz (DP) 1,920 x 1,200 @ 60 Hz (HDMI) Recommended Resolution : 1,920 x 1,080 @ 60 Hz	Maximum Resolution : 1,920 x 1,080 @ 60 Hz (DP) Recommended Resolution : 1,920 x 1,080 @ 60Hz
Power		Rated Voltage AC 100-240V-, 50/60Hz, 1.8A	Rated Voltage AC 100-240V-, 50/60Hz, 1.8A	Rated Voltage AC 100-240V-, 50/60Hz, 1.8A	
Operation Temperature		5°C - 40°C	5°C - 40°C	5°C - 40°C	
Operation Humidity		10% to 80%	10% to 80%	10% to 80%	
Storage Temperature		-20°C - 60°C	-20°C - 60°C	-20°C - 60°C	
Storage Humidity		5% to 95%	5% to 95%	5% to 95%	
Etc.		UHD (AVC/H.264 30p, Avg. Bit Rate : 80(5) / 120(7)) Decoding / Play, Full HD 4ea Decoding / Playing, Ultra HD Cloning by DP with HBR2, Full HD 4ea Display by DP Port 4ea			



- SOUTH KOREA (HQ)
- WESTERN EUROPE
- CENTRAL EUROPE
- CIS
- NORTH & SOUTH AMERICA
- MIDDLE EAST & AFRICA
- ASIA

## GLOBAL NETWORK

<p><b>WESTERN EUROPE</b></p> <p><b>LG Electronics B2B Operation Europe</b> Krijgsman 1 1186 Dm Amstelveen Th E Netherlands</p> <p><b>LG Electronics Deutschland GMBH</b> Berliner Straße 93 D-40880 Ratingen, Germany Tel: 49-2154-492-181   Fax: 49-2154-492-214</p> <p><b>LG Electronics Italia S.P.A.</b> Via Aldo Rossi 4, 20149 Milano, Italy Tel: 39-02-5180-1124   Fax: 39-2-5776-0556</p> <p><b>LG Electronics Hellas S.A.</b> Ethnarhou Makariou St. Delta Paleo Faliro PO. Box 77331 GR17501 Paleo Faliro, Athens Greece Tel: 30-210-9490-709   Fax: 30-210-4800-510</p> <p><b>LG Electronics France S.A.R.L.</b> Paris Nord II 117, Avenue des Nations-B.P. 59372 Villepinte 95942 Roissy CDG CEDEX, France Tel: 33-1-49-89-89-41   Fax: 33-1-49-89-89-39</p> <p><b>LG Electronics Benelux</b> Krijgsman 1, 1186 DM Amstelveen, The Netherlands Tel: 31-20-456-3205</p> <p><b>LG Electronics U.K. Ltd.</b> Velocity 2, Brooklands Drive, Brooklands, Weybridge, KT13 0SL, United Kingdom Tel: 44-17-5349-1585   Fax: 44-17-5369-3061</p>	<p><b>LG Electronics Nordic AB</b> P.O. Box 83 Söbogatan 18 SE-164 94 Kista, Sweden Tel: 46-8-5664-1540   Fax: 46-8-5664-1599</p> <p><b>LG Electronics Norway</b> Lysaker Torg 15 Postboks 275 1326 Lysaker Norge Tel: 47-67-11-10-90   Fax: 47-67-11-10-99</p> <p><b>LG Electronics Denmark</b> Kalvebod Brygge 47 2 sal., 1560 Copenhagen V, Denmark Tel: 45-70-25-06-80   Fax: 45-70-25-06-81</p> <p><b>LG Electronics Finland</b> Ayrantie 12 A 01510 Vantaa Suom Tel: 358-4-249-0311   Fax: 358-9-222-77-20</p> <p><b>LG Electronics España</b> C/ Chile Nº 1, Km 24 - A6. Las Rozas. Madrid. CP 28290 Tel: 34-91-2112-261   Fax: 34-91-2112-257</p> <p><b>LG Electronics Portugal S.A</b> Quinta da Fonte - Edifício D. Amelia Rua Vitor Camara, 2 Piso 2, 2770-229 Paco de Arcos, Portugal Tel: 35-121-120-1069   Fax: 35-121-120-2241</p> <p><b>LG Electronics Austria GMBH</b> Office Campus Gasometer, Guglgasse 15, Bauwerk 4a/Stock 586, A-1110 Wien, Austria Tel: 43-1-74015-2006   Fax: 43-1-99460-5629</p> <p><b>LG Electronics U.K. Ltd.</b> Velocity 2, Brooklands Drive, Brooklands, Weybridge, KT13 0SL, United Kingdom Tel: 44-17-5349-1585   Fax: 44-17-5369-3061</p>	<p><b>CENTRAL EUROPE</b></p> <p><b>LG Electronics Polska SP Z.O.O</b> Ul. Woloska 22 02-675 Warszawa Tel: 48-22-481-7208   Fax: 48-22-606-1459</p> <p><b>LG Electronics Magyar Kft.</b> H-1097, Budapest, Konyves Kalman krt. 3/A, Hungary Tel: 36-1-455-8830   Fax: 36-1-216-3074</p> <p><b>LG Electronics Romania S.R.L.</b> 17-21 Bucuresti-Ploiesti Banasa Center, 5th Floor Bucharest, Romania Tel: 40-21-233-2491   Fax: 40-21-233-2478</p> <p><b>LG Electronics CZ, S.R.O</b> Českomoravská 2420/15, Praha 9, 190 93, Czech Republic Tel: 420-234-094-631</p> <p><b>CIS</b></p> <p><b>LG Electronics Moscow Office(LGERU)</b> Capital Plaza 6f, 4, 4th Lesnoy Per Eulok, Moscow, 125047, Russian Fede Ration Tel: 7-095-933-6522   Fax: 7-095-933-6567</p> <p><b>LG Electronics St. Petersburg Office</b> Business Center 'Neptun' 3rd Floor St. Petersburg, Russia Tel: 7-812-320-2610   Fax: 7-812-320-2611</p> <p><b>LG Electronics St. Petersburg Office</b> Business Center 'Neptun' 3rd Floor St. Petersburg, Russia Tel: 7-812-320-2610   Fax: 7-812-320-2611</p> <p><b>LG Electronics St. Petersburg Office</b> Business Center 'Neptun' 3rd Floor St. Petersburg, Russia Tel: 7-812-320-2610   Fax: 7-812-320-2611</p>	<p><b>LG Electronics Inc. Kiev Office</b> 4 Basseinaya Str. (Litera A), 01004, Kiev, Ukraine Tel: 38-044-201-4352   Fax: 38-044-210-4373</p> <p><b>LG Electronics Kazakhstan</b> Timiryazeva Str., 28 "B", Business Center "Grand Alatau", 4 Floor, Almaty Kazakhstan Tel: 7-32-7275-8031   Fax: 7-327-275-8290</p> <p><b>LG Electronics Inc. Tashkent Office</b> 3RD Floor, 89NUKUS STR, Tashkent, 700025, Uzbekistan. Tel: 998-71-120-6260   Fax: 998-71-120-6223</p> <p><b>LG Electronics Latvia SIA</b> Gredu Iela 4a, Riga, LV-1019 Tel: 371-731-1383   Fax: 371-731-1338</p> <p><b>LG Electronics Inc. Minsk Office</b> Kozlov Lane, 7, 9th Floor, 220037, Minsk, Belarus Tel: 375-17-2979456   Fax: 375-17-2351994</p> <p><b>LG Electronics Inc. Chisinau Office</b> 36a (2nd floor), Bukuresti street, Chisinau, Moldova Tel: 373-22-26-0535   Fax: 373-22-26-0537</p> <p><b>NORTH &amp; SOUTH AMERICA</b></p> <p><b>LG Electronics U.S.A., Inc. (www.lgusa.com)</b> 1000 Sylvan Avenue, Englewood Cliffs, NJ 07632, U.S.A. Tel: 1-201-816-2000   Fax: 1-201-816-2188</p> <p><b>LG Electronics de Sao Paulo, Ltda.</b> Market Place Tower 2, Av. Dr. Chucri Zaidan, 940- 3rd Floor, Vila Cordeira, Sao Paulo-SP, CEP04583-110 Tel: 55-11-2162-5454   Fax: 55-11-2162-5600</p>	<p><b>LG Electronics U.S.A., Inc. (www.lgcommercial.com)</b> 2000 Millbrook Drive, Lincolnshire, IL 60069, U.S.A. Tel: 1-847-941-8737   Fax: 1-847-941-8763</p> <p><b>LG Electronics Canada, Inc. (www.lge.ca)</b> 20 Norelco Drive. North York, ON M9L 2X6, Canada Tel: 1-647-253-5300</p> <p><b>LG Electronics Mexico S.A. De C.V.</b> Sor Juana Inés de la Cruz No. 555, Col. San Lorenzo, Tlalneantla, Estado de México, México Tel: 52-55-8000-5324   Fax: 52-555-321-1929</p> <p><b>LG Electronics Panama S.A.</b> Miami Office 8333 NW. 53rd Street, Suite 302. Doral, Florida 33166 USA Tel: 1-305-477-1882 (226)</p> <p><b>LG Electronics Colombia Ltda.</b> Carrera 11 No. 94 A-34, Piso 8 Bogota - Cundinamarca, Colombia Tel: 57-1-8964000   Fax: 57-1-4927221</p> <p><b>LG Electronics Peru S.A.</b> Av. Republica de Colombia 791 - Piso 12 San Isidro, Lima, Peru Tel: 511-415-0000</p> <p><b>LG Electronics de Sao Paulo, Ltda.</b> Market Place Tower 2, Av. Dr. Chucri Zaidan, 940- 3rd Floor, Vila Cordeira, Sao Paulo-SP, CEP04583-110 Tel: 55-11-2162-5454   Fax: 55-11-2162-5600</p>	<p><b>MIDDLE EAST &amp; AFRICA</b></p> <p><b>Tehran Office</b> Unit 23, 4th floor, No 7, Safari Dead end, Bidar St, Elahiyeh, Tehran, Iran Tel: 98-91-2812-5218</p> <p><b>Jeddah Office</b> 5th Fl, Jeddah 101 Bldg Sary St. - Al Salama Dist. PO. Box 10876, Jeddah 21443 Tel: 966-50-463-6783   Fax: 966-2-263-1739</p> <p><b>LG Electronics Morocco SaRL</b> 4th &amp; 5th Floor on BLDG No 384, Zenith Millenium, Sidi Maarouf, Lotissement Attaoufik, Casablanca, Morocco Tel: 212-2-297-3232   Fax: 212-2-297-3288</p> <p><b>LG Electronics Tunisia office (TU)</b> Immeuble LYS - Les Jardins du Lac, Lac 2, Les Berges Du lac 1053, Tunis Tel: 216-983-70-601</p> <p><b>LG Electronics Algeria SaRL</b> 98, Rue Mohamed Boudiaf, Chéraga, Algiers - Algeria Tel: 213-560-026-417</p> <p><b>LG Electronics Nigeria</b> 65, Opebi Road, Ikeja, Lagos, Nigeria Tel: 234-805-889-9922</p> <p><b>LG Electronics Ticaret, A.S.</b> Kaptanpasa Mah. Piyalepasa Bulvari No:14 Ortadogu Plaza Kat. 7 Okmeydani/Sisli Istanbul Turkey Tel: 90-533-706-9018</p> <p><b>LG Electronics Gulf FZE</b> PO.Box 502535 34th floor (3403), Shatha Towers, Media City, Dubai UAE</p> <p><b>LG Electronics Levent Ltd.</b> Jordan, Abdoun, Princess Basmah Street, Issam Al Khatib Complex, PO Box 930254, Amman- 11193, Jordan Tel: 962-6-568-4309   Fax: 962-6-565-2863</p> <p><b>LG Electronics Egypt</b> 67 Ninety St. The primary sector, The city center fifth avenue, land mark office building (1), Katameya, Cairo, Egypt Tel: 2-01011328258</p>	<p><b>ASIA</b></p> <p><b>LG Electronics Japan Inc.</b> Kyobashi Trust Tower 13F2-1-3 Kyobashi Chuo-Ku, Tokyo, 104-8301 Tel: 813-3588-1912   Fax: 813-3584-6855</p> <p><b>LG Electronics China</b> 20th Floor, West Tower, Twin Towers, B-12, Jianguomenwai Avenue, Chaoyang District, Beijing 100022, PRC Tel: +10 6563 1470</p> <p><b>LG Electronics Vietnam Co.Ltd</b> 14th Floor Hanoi Central office Building 448 LY Thuong Kiet, Hanoi, Vietnam Tel: 84-4-9345151   Fax: 84-4-9345153-2</p> <p><b>LG Electronics Hochiminh Office</b> 6th Floor, Central Park Office B/D 208 Nguyen Trai Str., Dist. 1 Hochiminh, Vietnam Tel: 84-8-925-886</p> <p><b>LG MTR Electronics Co. Ltd</b> 84 Moo 12 Phatkasem Road Samut Sakorn 74310, Thailand Tel: 662-260-8787   Fax: 662-260-8800</p> <p><b>LG Electronics Thailand</b> 75/80-83 Richmond Bldg., 22nd Floor, Sukhumvit 26, Klongtoey, Bangkok 10110 Tel: 66-81-684-5197</p> <p><b>LG Electronics Philippines, Inc.</b> No.15 FLegaspi St., Maybunga 1607 Pasig City, Philippines Tel: 63-2-641-41/81-5</p>	<p><b>LG Electronics Singapore Pte LTD</b> 8 Temasek Boulevard, #27-01 Suntec Tower 3 Singapore 038988</p> <p><b>LG Electronics Hong Kong</b> 6F, 633 Building, 633 King's Road North Point, Hong Kong</p> <p><b>LG Electronics Taiwan Taipei Co., Ltd</b> 7F, No. 47, Lane3, Jihu Road, NeiHu District, Taipei City, Taiwan, R.O.C</p> <p><b>LG Electronics Malaysia</b> A-08-01 Level 8, Block A, P18 No.23 Jalan Barat, Seksyen 8 46050 Petaling Jaya Selangor Darul Ehsan, Malaysia Tel: 60-3-7962-7777</p> <p><b>SOUTH KOREA (HQ)</b></p> <p><b>LG Electronics Inc.</b> LG Twin Towers, 20, Yeouido-dong, Yeongdeungpo-gu, Seoul S.KOREA Tel: 82-2-3777-1114</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------