



# Products and Solutions Guide

SUMMER 2019

# CONTENTS

3	<b>About Axis</b>	14	<b>Axis Modular Network Cameras</b>	21	<b>Axis Fixed Dome Network Cameras</b>
4	Solutions & Product Naming Structure	14	F Series	21	Q35 Series
5	Innovations and Analytics	15	<b>Axis Modula Network Cameras</b>	21	Q36 Series
6	Contact Us	15	F Series	22	<b>Axis Fixed Dome Network Cameras</b>
7	<b>Axis Network Servers</b>	15	FA Series	22	Q84 Series
8	<b>Axis Network Video Servers</b>	16	<b>Axis Modular Network Cameras</b>	22	P 39-R Series
8	<b>Axis Network Camera Accessories</b>	16	P12 Series	23	<b>Axis Onboard Network Cameras</b>
9	<b>Axis Network Audio Systems</b>	17	<b>Axis Fixed Dome Network Cameras</b>	23	P39-R Series
10	<b>Axis Fixed Network Cameras</b>	17	P12 Series	23	M50 Series
10	M10 Series	17	M30 Series	23	<b>Axis Pan/Tilt Zoom Network Cameras</b>
10	M11 Series	18	<b>Axis Fixed Dome Network Cameras</b>	23	P54 Series
10	M20 Series	18	M30 Series	24	<b>Axis Pan/Tilt Zoom Network Cameras</b>
11	<b>Axis Fixed Network Cameras</b>	19	<b>Axis Fixed Dome Network Cameras</b>	24	P56 Series
11	P14 Series	19	M30 Series	24	V59 Series
12	<b>Axis Fixed Network Cameras</b>	19	M31 Series	24	Q60 Series
12	P13 Series	19	M42 Series	25	<b>Axis Pan/Tilt Zoom Network Cameras</b>
13	<b>Axis Fixed Network Cameras</b>	20	<b>Axis Fixed Dome Network Cameras</b>	25	Q60 Series
13	Q16 Series	20	P32 Series		
13	Q17 Series	20	P33 Series		



# CONTENTS

- 26 **Axis Pan/Tilt  
Zoom Network  
Cameras**
- 26 Q61 Series
- 26 Q62 Series
- 27 **Axis Pan/Tilt  
Zoom Network  
Cameras**
- 27 P12 Series
- 27 **Axis Thermal  
Network Cameras**
- 27 Q19 Series
- 28 **Axis Thermal  
Network Cameras**
- 27 Q29 Series
- 28 **Axis Explosion  
Protected Cameras**
- 28 XF40 Series
- 28 XF60 Series
- 28 XP40 Series
- 28 D201-S XPT Q6055
- 29 **Axis Explosion  
Protected Cameras**
- 29 F101-A XF P1367
- 29 **Axis Positioning  
Cameras**
- 29 Q86 Series
- 29 Q87 Series
- 30 **Axis Video  
Encoders**
- 30 M70 Series
- 30 P72 Series
- 30 Q74 Series
- 31 **Axis Video  
Encoders**
- 31 A74 Series
- 31 **Axis Rack Solutions**
- 32 **Axis Common  
Accessories**
- 33 **Axis Common  
Accessories**
- 34 **Axis Companion**
- 35 **2N-An Axis Company**
- 36 **Canon Pan/Tilt/  
Zoom/Cameras**
- 37 **Canon Fixed  
Network Cameras/  
Canon Fixed Dome  
Cameras**



# ABOUT AXIS COMMUNICATIONS

Axis is the global leader in network video, driving the industry by continually launching innovative network products. Axis offers innovative video surveillance and access control solutions, supported by high quality training and customer service. Axis has long-term relationships with partners and provides them with knowledge and ground-breaking network products in existing and new markets.



- United States**
  - > Boston, MA
  - > Chicago, IL
  - > Los Angeles, CA
  - > Dallas, TX
  - > Ft. Lauderdale, FL
  - > Washington, DC

- Canada**
  - > Mississauga, ON
  - > Toronto, ON
- Mexico**
  - > Mexico City, MX

- 410+** Employees in North America
- 15+** years average industry experience
- Specialized training facilities

## TECHNICAL SERVICES

**40+** locally-based Technical Support Engineers  
**3** years average experience



Less than **1** minute average wait time for Tier 1 support, and **2** minutes for Tier 2  
**3** different languages spoken  
**13,000+** calls taken per quarter



**24/7** online helpdesk  
**10,000+** online cases per quarter



**24/5** online chat  
**5000+** online chat sessions per quarter



Wide variety of video surveillance expertise



Advanced replacement program available

## ACADEMY



Course Offerings: Network Video Fundamentals & Certification, Building End-to-End Solutions with AXIS Camera Station Integrator Suite, and Essentials of Axis Network Audio Systems  
Additional Resources: Webinars, E-learning, and Private Training



Become an Axis Certified Professional and keep your credentials and competitive advantage by renewing every 36 months

For more information, visit [www.axis.com/learning](http://www.axis.com/learning)

## SEGMENTS

A focus on the unique needs to your type of business, including but not limited to...



Transportation



Banking



Government



Healthcare



Retail



Education



Critical Infrastructure

## PARTNER PROGRAMS



- Axis Channel Partner Program
- Architectural and Engineering Partner Program
- Application Development Partner Program
- Technology Partner Program




- Demo Units Program
- Fast Track Program
- Project Pricing Program

## ECOSYSTEM PARTNERS



- Architecture and Engineers Consultants
- Application Development Partners
- Technology Partners

## SUSTAINABILITY

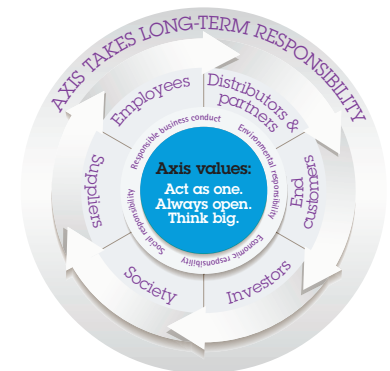

To view our full Sustainability Report, visit us at [www.axis.com/sustainability](http://www.axis.com/sustainability)

# SOLUTIONS & AXIS PRODUCT NAMING STRUCTURE

Secure and improve your business operations with an end-to-end Axis solution. We provide a complete range of solutions, whether you need a smart system for basic surveillance or a more advanced security system on a larger scale. With open IP standards that easily connect with your existing IT infrastructure, our systems offer quality and service you deserve and a team ready to help you build your own solution.

## AXIS Companion

Axis Companion Line is a complete end-to-end solution designed to meet the requirements of small businesses. With AXIS Companion, business owners can control their surveillance while away from their business, giving them one less thing to worry about.

Learn more at [www.axiscompanion.com](http://www.axiscompanion.com)



## AXIS Camera Station

AXIS Camera Station is an ideal video management system for active security monitoring. With AXIS Camera Station being the core of your surveillance solution, you have the flexibility to build a fully integrated system with network video, recorders, access control and audio.

For more information visit [www.axis.com/products/axis-camera-station](http://www.axis.com/products/axis-camera-station)



## AXIS Camera Station Integrator Suite

AXIS Camera Station is an all-in-one toolkit that gives customers complete control over their whole surveillance and security system. With tools like AXIS Site Designer Axis Installation Verifier, AXIS Camera Station Health Monitoring and more, Integrator Suite keeps your system running smoothly.

For more information visit [www.axis.com/us/en/end-to-end-solutions/mid-size-systems/integrator-suite](http://www.axis.com/us/en/end-to-end-solutions/mid-size-systems/integrator-suite)

## AXIS Camera Station

AXIS Camera Station is a complete monitoring and recording system that is perfect for mid-sized installations. It offers easy installation and setup with automatic camera discovery, a powerful Configuration Wizard and efficient management of the Axis network video products in the system.


For more information, visit: [www.axis.com/products/axis-camera-station](http://www.axis.com/products/axis-camera-station)

Version 5	Axis Part # / eLicense Part #	MSRP
Core Device eLicense	0879-010	\$79
Universal Device eLicense	0879-020	\$149
V4 to Universal Upgrade eLicense <sup>(1)</sup>	0879-040	\$19
ACS Core to Universal UPG E-License	0879-030	\$79

## Axis product naming structure

Below is a quick guide to Axis product naming structure, which gives useful shorthand information on the product and product features.

### AXIS P3367-VE Mk II

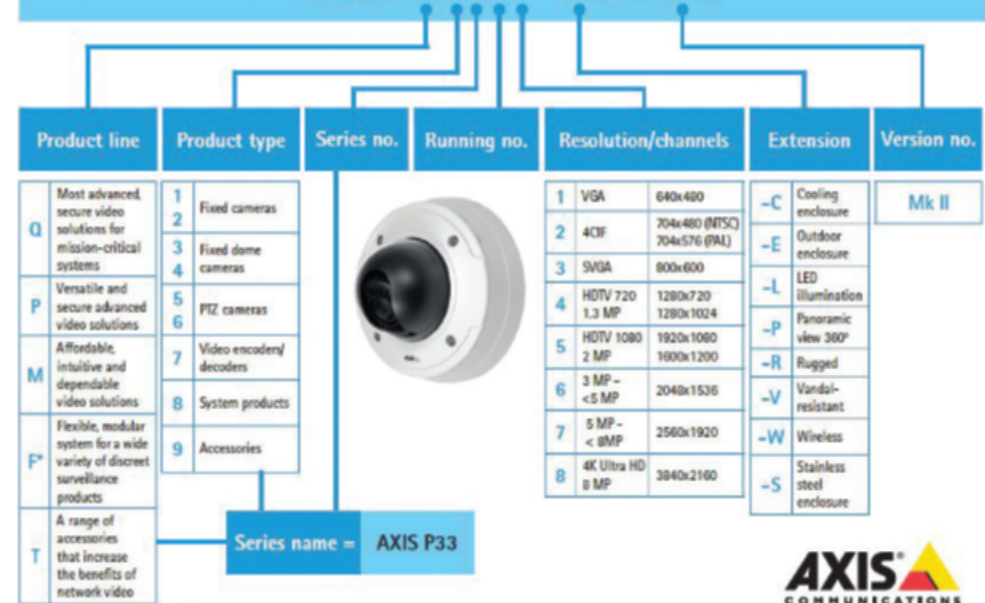

<sup>1</sup>Including AXIS F41/F44 Main Unit



















# INNOVATIONS & ANALYTICS

## Axis Firsts

1996	1998	1999	2003	2008	2009	2010	2011	2013	2015	2016
World's first network camera – the network video revolution begins	World's first video encoder	World's first network video chip	Launch of cameras with Power over Ethernet (PoE)	First H.264 compression standard for network cameras	World's first HDTV network camera	World's first thermal network camera	See color at night with Lightfinder technology	First non-proprietary, IP-based Physical access control system	Axis announces Zipstream technology and first Network Video Door Station	Axis announces first small business specific product line, the AXIS Companion Line

## A sample of our solutions from simple to complex

 <p><b>Video Encoders</b> Integrate your existing analog system with the latest IP technology</p>	 <p><b>Cloud Capabilities</b> Host your video through the cloud for easy access and upgrades</p>	 <p><b>Access Control</b> Complete your system with an open and future flexible IP-alternative</p>	 <p><b>Sound Detection</b> Alert by sound, verification by vision</p>
 <p><b>Phone Apps</b> Applications from remote viewing to wireless installation tools</p>	 <p><b>Modular Cameras</b> A divided camera for flexible, discreet surveillance</p>	 <p><b>AXIS Perimeter Defender</b> The application to act as your first layer of defense</p>	 <p><b>Business Analytics</b> Moving beyond surveillance to help count and track customers</p>
 <p><b>Edge Storage</b> For video recording directly to an onboard SD card</p>	 <p><b>Remote Viewing</b> Applications to allow you a live view of your system from anywhere, anytime</p>	 <p><b>ONVIF</b> Continuing a growing support of ONVIF profiles</p>	 <p><b>Thermal Cameras</b> A reliable, unique method of detection</p>
 <p><b>Panoramic Cameras</b> 360° overview to see everything you need</p>	 <p><b>AXIS S10 &amp; S20 Recorder Series</b> An out-of-the-box ready recording solution</p>	 <p><b>Cybersecurity</b> Additional security features installed to help you mitigate risks</p>	 <p><b>Electronic Image Stabilization</b> Protecting image quality from traffic and wind</p>

Axis has developed a broad solution offering for Loss Prevention and Store Optimization, based on a combination of network cameras, network audio solutions, video analytics and reporting tools.

Axis Store Optimization Solution		Axis Loss Prevention Solution		
<p><b>Reports</b></p> <p>AXIS Store Reporter</p>	<p><b>AXIS Store Optimization Suite</b></p> <p>AXIS People Counter AXIS 3D People Counter AXIS Demographic Identifier AXIS Occupancy Estimator AXIS Queue Monitor AXIS Store Data Manager</p>	<p><b>Axis Network Products</b></p> <p>AXIS M30 Network Camera Series AXIS P32 Network Camera Series AXIS P8804 Stereo Sensor Kit AXIS C1004-E Network Cabinet Speaker AXIS C2005 Network Ceiling Speaker</p>	<p>Select your network based products together with smart loss prevention analytics</p> <p><b>Axis Network Products</b></p> <p>AXIS M30 Network Camera Series AXIS P32 Network Camera Series AXIS A1001 Network Door Controller AXIS A8004-VE Network Video Door Station</p>	<p><b>AXIS Loss Prevention Suite</b></p> <p>AXIS Direction Detector AXIS Tailgating Detector AXIS Random Selector</p>

## The Axis Difference

### INNOVATIONS

**Axis Lightfinder Technology**—Get more life-like colors in low light conditions

**Wide Dynamic Range (WDR)**—Be able to maintain image visibility between the brightest and darkest areas

**Axis' Zipstream Technology**—Maintain high quality video at a fraction of the bandwidth and storage

**Audio in Surveillance**—New focuses on audio analytics

**ACAP**—An open application platform to develop applications that can be downloaded and installed on Axis network cameras and video encoders

**NEW! ARTPEC 7** our fastest, most powerful system-on-chip to date

## Contact Us – We're Here to Help You

### SALES SUPPORT

We're here to help you every step of the way. Whether you know exactly what you need or are just looking to get some questions answered, give us a call at **1-800-444-2947 option 1** to get started.

### TECHNICAL SUPPORT

Our US-based, award-winning technical support team offers two tiers of support for you, 5 days a week from 8 AM to 5 PM. With an average wait time of less than 60 seconds, our team is dedicated to helping you solve the problem and stays with you throughout the process. For assistance, contact us at **1-800-444-2947 option 2** or let's webchat!

### HAVE QUESTIONS OR WANT TO LEARN MORE?












**Support:** +1 800 444 2947

**Helpdesk:** [www.axis.com/support/helpdesk](http://www.axis.com/support/helpdesk)








**Chat:** [www.axis.com/support/chat](http://www.axis.com/support/chat)



## Physical Access Control Systems

<p><b>AXIS A8105-E Network Video Door Station</b></p>  <p>AXIS A8105-E is a small and powerful network video door station functioning as a communication device as well as full-fledge security camera with HDTV video, two-way communication, and remote entry control. ONVIF, SIP, Wide Dynamic Range, noise cancellation, and Axis' Digital Corridor Format are just the start.</p> <p>Axis Part # 0871-001 MSRP \$799</p>	<p><b>AXIS A8004-VE Network Video Door Station</b></p>  <p>AXIS A8004-VE Network Video Door Station is an open, non-proprietary IP-based door station for two-way communication, identification and remote entry control.</p> <p>Axis Part # 0673-001 MSRP \$1,249</p>	<p><b>AXIS A9801 Security Relay</b></p>  <p>AXIS A9801 Security Relaybox offers an easy and cost efficient way to improve security for doors controlled by an Axis network video door station featuring an auto-locking functionality when tampered with.</p> <p>Axis Part # 5801-141 MSRP \$99</p>	<p><b>AXIS A4011-E Reader</b></p>  <p>AXIS A4011-E Reader is a generic touch-free reader with keypad and illuminated symbols. It is a perfect match to the Network Door Controller A1001. The reader is intended for both indoor and outdoor use and it supports most smart card formats with 13.56 MHz.</p> <p>Axis Part # 0745-001 MSRP \$369</p>
<p><b>AXIS 8207-VE Door Controller</b></p>		<p><b>AXIS A9188 Network I/O &amp; Relay Board</b></p>	
 <p>AXIS 8207-VE Network Video Door Station combines a fully featured 6MP security camera with high-quality, two-way audio communication and remote entry control. It also has an integrated RFID access control reader.</p> <p>Axis Part #01436-001 MSRP \$1,399</p>		 <p>AXIS A9188 Network I/O Relay Module is an intelligent module with configurable I/Os and relays and supports supervised inputs. Now includes 1 core license</p> <p>Axis Part # 0820-001 MSRP \$499</p>	<p><b>AXIS Access Card</b></p>  <p>AXIS Access Card is a contactless Mifare 1K smart card that uses advanced radio frequency identification (RFID) technology to deliver secure and reliable physical access to premises. It is robust and IP68-rated, comes in a pack of 200 pcs.</p> <p>Axis Part # 5506-831 MSRP \$359</p>
<p><b>AXIS Entry Manager</b></p>  <p><b>NEW</b> - AXIS Visitor Access is a free software for AXIS Entry Manager that makes it easy for small sites to grant visitors access using a QR Code as a credential.</p> <p>Highlights:1-65 door solutions, Supports 1-33 controllers, User-friendly administration, Easy to add controllers to the system, Flexible and scalable configuration</p> <p>Credentials: Up to 400 Embedded on AXIS A1001</p>		<p><b>AXIS A1001 Network Door Controller</b></p>  <p>Highlights:Open API for software integration, scalable and future-proof, Support for most reader types (Wiegand, RS485,OSDP), Up to 2 readers per controller, comes embedded with AXIS Entry Manager software*, now includes 1 core license                  Credentials: Up to 15,000 with third-party access, management software depending on server capacity                  Power: Power over Ethernet IEEE 802.3af Class 3, Power out lock: 2x 12 V DC, max 500 mA                  *AXIS Entry Manager software controls who is allowed to enter or exit through which doors, at which times, and with ID of choice (pincode, card, mobile, fingerprint and more)</p> <p>Axis Part # 0540-001 MSRP \$599</p>	
<p><b>AXIS A4010-E READER NO KEYPAD UL</b></p>  <p>AXIS A4010-E Reader is a generic touch-free reader without keypad and 2 LED indicators. It is a perfect match to the Network Door Controller A1001. The reader is intended for both indoor and outdoor use and functions with most smart card formats with 13.56 MHz.</p> <p>Axis Part # 01023-001 MSRP \$199</p>		<p><b>AXIS A1601</b></p>  <p>AXIS A1601 Network Door Controller is ideal for advanced access management in mid-sized and large, multi-site installations using third-party software (no embedded Entry Manager software). It has a powerful processor, expanded storage and memory, relays, and I/O ports. AXIS A1601 is powered by PoE+ and can also power connected equipment.</p> <p>AXIS Part # 01507-001 MSRP \$699</p>	

## Axis Network Video Servers

	AXIS Camera Station S11 Recorder Series			AXIS Camera Station S22 Appliance Series			
	AXIS S1116 Racked <sup>(a)</sup> AXIS S1116 MT <sup>(b)</sup> 	AXIS S1132 	AXIS S1148 	AXIS S2208  <b>NEW</b>	AXIS S2212  <b>NEW</b>	AXIS S2216  <b>NEW</b>	AXIS S2224  <b>NEW</b>
Included Storage	8 TB	12 TB	24 TB (a) 64 TB (b) 140 TB (c)	4 TB	6 TB	8 TB	12 TB
ACS Licenses Included	16	32	48	8	12	16	24
Max Licenses Supported	32	48	64	8	12	16	24
Max Recording Bandwidth Supported	256 Mbps	384 Mbps	512 Mbps	192 Mbps	192 Mbps	384 Mbps	384 Mbps
RAID Support	No	Yes	Yes	No	No	No	No
Empty Bays for Flexible Storage	2 <sup>(a)</sup> 1 <sup>(b)</sup>	0	2 (a) 4(b) 0 (c)	1	1	2	2
Max Resolution Supported	Need Desktop terminals <sup>(a)</sup> Live view: Up to 25 camera split views or 1 x 4K camera view Playback: 4 x 1080p camera split views or 1 x 4K camera view Supports two monitors <sup>(b)</sup>	Need Desktop Terminals	Need Desktop Terminals	Supports two monitors, max one 4K monitor recommended 1 x 4K stream full screen 4 split x 1080p Up to 8 cameras split view	Supports two monitors, max one 4K monitor recommended 1 x 4K stream full screen Up to 12 cameras split view	Supports two monitors, max one 4K monitor recommended 1 x 4K stream full screen Up to 16 cameras split view	Supports two monitors, max one 4K monitor recommended 1 x 4K stream full screen Up to 24 cameras split view
Operating System	Microsoft Windows 10 Enterprise 256GB <sup>(a)</sup> 128GB <sup>(b)</sup>	Microsoft Windows 10 Enterprise 240GB	Microsoft Windows 10 Enterprise 240GB	Microsoft Windows 10 Enterprise 120 GB SSD	Microsoft Windows 10 Enterprise 120 GB SSD	Microsoft Windows 10 Enterprise 120 GB SSD	Microsoft Windows 10 Enterprise 120 GB SSD
Form Factor	Rack server <sup>(a)</sup> Desktop Work Station <sup>(b)</sup>	Rack Server	Rack Server	Standalone	Standalone	1U Rack server	1U Server
Integration of third-party cameras	Yes with purchase of Universal License	Yes with purchase of Universal License	Yes with purchase of Universal License	Yes with purchase of Universal License	Yes with purchase of Universal License	Yes with purchase of Universal License	Yes with purchase of Universal License
Built-In PoE Switch	No	No	No	Yes	Yes	Yes	Yes
PoE Power Budget	N/A	N/A	N/A	135 W (max 25W per port)	135 W (max 25W per port)	260 W (max 25W per port)	260 W (max 25W per port)
Warranty	Axis 3-year warranty; extended warranty available; Includes next-day onsite hardware repair	Axis 3-year warranty; extended warranty available; Includes next-day onsite hardware repair	Axis 3-year warranty; extended warranty available; Includes next-day onsite hardware repair	Axis 3-year warranty; extended warranty available	Axis 3-year warranty; extended warranty available	Axis 3-year warranty; extended warranty available	Axis 3-year warranty; extended warranty available
Axis Part #	01618-001 <sup>(a)</sup> 01617-001 <sup>(b)</sup>	01613-001	01614-001 <sup>(a)</sup> 01615-001 <sup>(b)</sup> 01616-001 <sup>(c)</sup>	01580-004	01581-004	01582-004	01583-004
MSRP	\$3,799 <sup>(a)</sup> \$3,299 <sup>(b)</sup>	\$7,499	\$9,599 <sup>(a)</sup> \$13,999 <sup>(b)</sup> \$20,999 <sup>(c)</sup>	\$2,299	\$2,999	\$3,799	\$4,499

\*Item is not pre-configured out of the box but is supported.



## Axis Network Video Servers

### AXIS Camera Station S90 Desktop Terminals

	AXIS S9101 Mk II	AXIS S9002 Mk II	AXIS S9201 Mk II
			
<b>AXIS Camera Station</b>	Yes (client only)	Yes (client only)	Yes
<b>Operating System</b>	Microsoft Windows 10 IoT	Microsoft Windows 10 IoT	Microsoft Windows 10 IoT 2016 LTSB
<b>Supported Monitors</b>	2	4	2
<b>4k Video Streaming</b>	Yes (one stream)	Yes (three streams)	Yes
<b>Compatibility</b>	S10 & S20	S10 & S20	S10 & S20
<b>Form Factor</b>	Desktop terminal for viewing	Desktop terminal for viewing	Desktop terminal for viewing
<b>Axis Part #</b>	01173-004	0202-860	01174-004
<b>MSRP</b>	\$1,399	\$3,199	\$1,899

### Axis Network Switches





AXIS T8516 PoE+ Network Switch	AXIS T8524 PoE+ Network Switch
PoE+ managed gigabit network switch, optimized for Axis network products. 2 SFP/RJ45 uplink ports and 16 PoE+ ports with 250W power supply. Built in DHCP server for plug-and-play camera setup. Easy system configuration for effective installation of Axis network products. 5801-694 MSRP: \$699	PoE+ managed gigabit network switch, optimized for Axis network products. 2 SFP/RJ45 uplink ports and 24 PoE+ ports with 370W power supply. Built in DHCP server for plug-and-play camera setup. Easy system configuration for effective installation of Axis network products. 01192-004 MSRP: \$899
AXIS T8508 PoE Network Switch	AXIS T8504-E Outdoor PoE Switch
PoE+ managed fanless gigabit network switch, optimized for Axis network products. 2 SFP/RJ45 uplink ports and 8 PoE+ ports with 130W power supply. Built in DHCP server for plug-and-play camera setup. Easy system configuration for effective installation of Axis network products 01191-004 MSRP: \$399	PoE compact outdoor switch enabling connection of four POE-powered devices. SFP port for fiber connectivity. the T8504-E has VAPIX support with up to 60W per port with a total power budget of 150W 01449-001 MSRP: \$1,199
AXIS T8504-R Industrial PoE Switch	
AXIS T8504-R Industrial PoE Switch is a 4-port managed industrial PoE+ Gigabit switch. In addition, the switch is equipped with 2 x RJ45 and 2x SFP data ports that allows for extra devices to be connected. The switch uses the same intuitive administrator interface as AXIS T85 PoE Network Switch Series, is ruggedized with a wide temperature range and NEMA TS2 compliant. 01449-001 MSRP \$1,199	

## Axis Network Camera Accessories

### AXIS Decoders

Enabling analog or digital monitors to connect to and display live video streaming

	AXIS P7701 Video Decoder	Axis Part # 0319-004 MSRP \$499
	AXIS T8705 Video Decoder	Axis Part # 01186-004 MSRP \$299

### AXIS A9161 Network I/O Relay Module



Has 6 configurable I/Os with supervised inputs  
Axis Part # 0821-001 MSRP \$249

### AXIS D2050-VE Radar Detector



Provides accurate and reliable detection no matter if it's day or night, rain or sun, thanks to its radar technology. The radar detector can deliver information such as distance to an object, angle of movement and velocity.

Axis Part # 01033-001 MSRP \$1299

### AXIS Surveillance microSDXC™ Card



AXIS Surveillance microSDXC™ Card is delivered with an SD™ card adapter.

64 GB Card (10 Pack) Axis Part # 5801-961	MSRP \$645
64GB Card Axis Part # 5801-951	MSRP \$69
128 GB Card Axis Part # 01491-001	MSRP \$109
128 GB Card (10 Pack) Axis Part # 01678-001	MSRP \$1,030
256 GB Card Axis Part #01609-001	MSRP \$249

### AXIS T8310 Video Surveillance Control Board



AXIS T8310 Control Board is a modular system comprising of AXIS T8311 Joystick, which gives accurate control of PTZ functions of network cameras; AXIS T8312 Keypad, used for navigating between workspaces, cameras, views and PTZ presets; AXIS T8313 Jog Dial, used for navigating through recorded video. Each unit can be purchased and used separately or together.










	Axis Part #	MSRP
AXIS T8310 Control Kit	5020-001	\$1,149
AXIS T8311 Joystick	5020-101	\$399
AXIS T8312 Keypad	5020-201	\$449
AXIS T8313 Jog Dial	5020-301	\$399

# Axis Network Audio Systems








## AXIS Speakers

Axis network audio systems are complete high-quality audio solutions you can use in various situations. A single PoE network cable provides simple installation for connectivity, power and communication.

- Improve security on your premises with event-triggered announcements and direct callouts
- Make live or scheduled announcements in different zones, at the right time and right place
- Create ambiance with easy and flexible scheduling of great-sounding background music





<p><b>AXIS C3003-E Network Horn Speaker</b></p>  <p>A simple-to-install outdoor loudspeaker that provides clear, long-range speech for remote speaking in video surveillance applications. In live video monitoring situations, AXIS C3003-E enables an operator to remotely address people and deter unwanted activity. The loudspeaker can also play a pre-recorded audio file when it is manually or automatically triggered in response to an alarm event.</p> <p>Axis Part #0767-001 MSRP \$499</p>	<p><b>AXIS C1004-E Network Cabinet Speaker</b></p>  <p>A complete high-quality audio system in a single unit. There's no need for an amplifier, mixer, digital signal processor, streaming functionality, microphone or power supply because they're all built-in. AXIS C1004-E connects to your existing IP network and it's powered over a single Power over Ethernet cable.</p> <p>Axis Part #0834-001 MSRP \$399</p>	<p><b>AXIS C2005 Network Ceiling Speaker</b></p>  <p>A network solution, it can be combined into a flexible and scalable system where it is easy to add or remove speakers in an instant. By creating zones to address a number of speakers at the same time, it is possible to direct different background music, or live or scheduled announcements, as well as control and change the volume for each unit individually and simultaneously.</p> <p>Axis Part #0923-001 (black) MSRP \$549 Axis Part #0833-001 (white) MSRP \$549</p>																
<p><b>AXIS C8033 Network Audio Bridge</b></p>  <p>With ports for both analog and digital connections, <b>AXIS C8033 Network Audio Bridge</b> lets legacy analog speaker systems act as one system with an Axis network audio system. Small and light, it takes up little space. And a single AXIS C8033 is all you need for hundreds of speakers, making it a truly cost-efficient solution.</p> <p>Axis Part #01025-001 MSRP \$199</p>	<p><b>AXIS Audio Manager C7050 Server</b></p>  <p>AXIS Audio Manager comes preinstalled and can handle more than 15000 audio devices. It includes licenses for up to 300 audio devices. More can be added with AXIS Audio Manager device packs.</p> <p>Axis Part # 01519-004 \$2,995</p>		<p><b>AXIS T83 Microphones</b></p>  <p>AXIS T83 Microphones are compact and discreet with high-performance in all scenarios. They are compatible with Axis network video products and offer great detail and resolution. They are suitable for indoor installation in both large and restricted areas.</p>															
<p><b>AXIS C8210 Network Audio Amplifier</b></p>  <p>AXIS C8210 Network Audio Amplifier is a compact and smart migration tool that transforms any passive speaker into a network speaker with all the benefits of network audio. AXIS C8210 has a built-in amplifier and Digital Signal Processor (DSP) that delivers a total power output of 15W and can transmit high-quality digital audio to one or multiple speakers</p> <p>Axis Part # 01558-001 MSRP \$399</p>	<p><b>AXIS Audio Manager eLicense pack</b></p> <p>AXIS Audio Manager C7050 comes with licenses for up to 300 audio devices. If you need even more licenses, you can add them to your system with AXIS Audio Manager eLicense packs, available in 10-licenses and 100-licenses versions.</p> <p>Axis Part # 01519-021 (10 pack) MSRP \$200 (10 pack) <b>NEW</b></p> <p>Axis Part # 01519-041 (100 pack) MSRP \$1,000 (100 pack) <b>NEW</b></p> <p><b>AXIS P8221 Network I/O Audio Module</b></p>  <p>Provides eight I/O ports and audio capabilities to a network video surveillance system without audio support</p> <p>Axis Part # 0321-004 \$349</p>		<table border="1"> <thead> <tr> <th></th> <th>Axis Part #</th> <th>MSRP</th> </tr> </thead> <tbody> <tr> <td>AXIS T8353A Microphone 3.5mm</td> <td>5032-531</td> <td>\$449</td> </tr> <tr> <td>AXIS T8353B Microphone Phantom Power</td> <td>5033-541</td> <td>\$449</td> </tr> <tr> <td>AXIS T8351 MK II Microphone 3.5mm</td> <td>5031-511</td> <td>\$139</td> </tr> <tr> <td>AXIS T8355 Digital Mic</td> <td>01561-001</td> <td>\$129</td> </tr> </tbody> </table>		Axis Part #	MSRP	AXIS T8353A Microphone 3.5mm	5032-531	\$449	AXIS T8353B Microphone Phantom Power	5033-541	\$449	AXIS T8351 MK II Microphone 3.5mm	5031-511	\$139	AXIS T8355 Digital Mic	01561-001	\$129
	Axis Part #	MSRP																
AXIS T8353A Microphone 3.5mm	5032-531	\$449																
AXIS T8353B Microphone Phantom Power	5033-541	\$449																
AXIS T8351 MK II Microphone 3.5mm	5031-511	\$139																
AXIS T8355 Digital Mic	01561-001	\$129																
<p><b>2N® SIP Mic</b></p>  <p>Two-way communication with built-in speaker, paging functions, pre-recorded message playback</p> <p>Axis Part # 01208-001 \$1,099</p>	<p><b>Axis Audio and I/O Interfaces</b></p> <p><b>AXIS T6101</b> Enables use of 2-way audio and I/O connectivity. Axis Part # 01160-001 \$99.00</p> <p><b>AXIS T6112</b> Add audio and I/O ports to Axis cameras Axis Part # 01230-001 \$149.00</p>																	

## Axis Fixed Network Cameras

	AXIS M10 Series		AXIS M11 Series			AXIS M20 Series	
	AXIS M1045-LW 	AXIS M1065-L <sup>(a)</sup> AXIS M1065-LW <sup>(b)</sup> 	AXIS M1124 <sup>(a)</sup> AXIS M1124-E <sup>(b)</sup> 	AXIS M1125 <sup>(a)</sup> AXIS M1125-E <sup>(b)</sup> 	AXIS M1145-L 	AXIS M2025-LE 	AXIS M2026-LE MK II AXIS M2026-LE MK II (black) 
Image sensor	1/3" progressive scan RGB CMOS	1/3" progressive scan RGB CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/2.9" progressive scan CMOS	1/2.8" progressive scan CMOS	1/3" progressive scan CMOS
Lens	2.8 mm/F2.0 fixed iris, IR corrected	2.8 mm/F2.0 fixed iris, IR corrected	Varifocal 3 - 10.5 mm/F1.4 DC-iris, IR-corrected, CS mount	Varifocal 3 - 10.5 mm/F1.4 DC-iris, IR-corrected, CS mount	Varifocal 3 - 10.5mm/F1.4 P-iris	2.8 mm/F2.0 fixed iris	2.4 mm/F2.2 fixed iris
Horizontal angle of view	110°	110°	91° - 32°	91° - 32°	95° - 34°	115°	130°
Day and night	Automatic		Automatic	Automatic	Automatic	Automatic	Automatic
Min illumination/ light sensitivity (lux)	0.25(color) 0.05(B/W) 0 with IR Illumination on	0.25(color) 0.05(B/W) 0 with IR Illumination on	0.25 (color) 0.05 (B/W)	0.25 (color) 0.05 (B/W)	0.4 (color) 0.08 (B/W) 0 (with IR illumination)	0.2 (color) 0.04 (B/W) 0 (with IR illumination)	0.3 (color) 0.06 (B/W) 0 (with IR illumination)
Video compression	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
Max video resolution (pixels)	1920x1080 (2 MP)	1920x1080 (2 MP)	1280x720	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	2688x1520 Quad HD/ 4MP
Frames per second	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 720p)	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (1920x1080)	30 (12688x1520)
Audio support		Two-way Built-in mic and speaker					
Alarm in-/outputs			1/1	1/1	1/1		
Intelligent video	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform Zipstream	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Power	DC	DC PoE IEEE 802.3af Class 2 <sup>(a)</sup>	DC PoE IEEE 802.3af Class 2 <sup>(a)</sup>	DC PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 3	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 3
Outdoor use			Outdoor ready <sup>(b)</sup> -20°C (-4°F) - 50°C (122°F)	Outdoor ready <sup>(b)</sup> -20°C (-4°F) - 50°C (122°F)		Outdoor ready -30°C (-22°F) - 50°C (122°F)	Outdoor ready -30°C (-22°F) - 50°C (122°F)
Other	illumination LED (32ft. Range), digital PTZ, ONVIF, Memory card slot, Wi-Fi Protected Setup	Built-in PIR sensor, illumination LED (32ft. Range), digital PTZ, AXIS Guardian, ONVIF, Memory card slot, Wi-Fi Protected Setup <sup>(b)</sup>	Digital PTZ, WDR-Forensic Capture, memory card slot, AXIS Guardian, ONVIF, Corridor Format <sup>(a)</sup>	Digital PTZ, WDR-Forensic Capture, memory card slot, AXIS Guardian, ONVIF, Corridor Format <sup>(a)</sup>	Digital PTZ, memory card slot, Built in IR LED with optimized IR, ONVIF, Corridor Format	Digital PTZ, WDR-Forensic Capture, Built in IR LED(50ft), memory card slot, AXIS Guardian, ONVIF, Corridor Format	Digital PTZ, Built in IR LED(50ft), memory card slot, AXIS Guardian, ONVIF, Corridor Format
Axis Part #	0812-004	0811-001 <sup>(a)</sup> , 0810-004 <sup>(b)</sup>	0747-001 <sup>(a)</sup> 0748-001 <sup>(b)</sup>	0749-001 <sup>(a)</sup> 0750-001 <sup>(b)</sup>	0591-001	0911-001(white) 0988-001(black)	01049-001 01050-001(black)
MSRP	\$229	\$279, \$299	\$349 <sup>(a)</sup> \$449 <sup>(b)</sup>	\$419 <sup>(a)</sup> \$519 <sup>(b)</sup>	\$499	\$329	\$399






(2) AXIS PoE Active Splitter 5v (Axis Part #: 5008-001)

## Axis Fixed Network Cameras








	AXIS P14 Series			
	 <b>AXIS P1435-LE</b>	 <b>AXIS P1445-LE</b>	 <b>AXIS P1447-LE</b>	 <b>AXIS P1448-LE</b>
<b>Image sensor</b>	1/2.8" progressive scan CMOS	1/2.8" progressive scan RGB CMOS	1/2.9" progressive scan RGB CMOS	1/2.5" progressive scan CMOS
<b>Lens</b>	Varifocal 3 - 10.5 mm/F1.4 10 - 22 mm/F1.85 P-Iris, IR-corrected, Autofocus, Remote focus and zoom	Varifocal 2.8 - 8.5 mm/F1.2 P-Iris, IR-corrected, Autofocus, Remote focus and zoom	Varifocal 2.8 - 8.5 mm/F1.2 P-Iris, IR-corrected, Autofocus, Remote focus and zoom	Varifocal 2.8 - 9.8 mm/F1.6 P-Iris, IR-corrected, Autofocus, Remote focus and zoom
<b>Horizontal angle of view</b>	10.5 mm: 3 - 10.5mm/F1.2 95° - 35° <sup>(a)(b)</sup> 22 mm: 10 - 22mm 34.5° - 18° <sup>(b)</sup>	110° - 38°	104°	109°
<b>Day and night</b>	Automatic	Automatic	Automatic	Automatic
<b>Min illumination/light sensitivity (lux)</b>	30 fps: 0.12 (color), 0.01 (B/W) (10.5mm) 60 fps: 0.24 (color), 0.02 (B/W) (10.5mm) 30 fps: 0.16 (color), 0.02 (B/W) (22mm) 60 fps: 0.32 (color), 0.03 (B/W) (22mm) 0 (with IR illumination) <sup>(b)</sup>	0.07 (color) 0.01(B/w) 0 (with IR illumination)	0.15 (color) 0.03 (B/W) 0 (with IR illumination)	0.18 (color) 0.04 (B/W)
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1920x1080 (2 MP)	1920x1080 (2MP)	3072x1728 (5MP)	3840x1260 (4K)
<b>Frames per second</b>	30 (HDTV 1080p) (WDR) 60 (HDTV 1080p) (no WDR)	30 (HDTV 1080p) (WDR) 60 (HDTV 1080p) (No WDR)	30	30
<b>Audio support</b>		Two-way		
<b>Alarm in-/outputs</b>	1/1	1/1	1/1	1/1
<b>Intelligent video</b>	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology AXIS Camera Application Platform AXIS Video Motion Detection Shock detection Tampering alarm Audio detection	Motion detection Tampering alarm Shock detection Zipstream Technology AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	PoE IEEE 802.3af/802.3at Type 1 Class 3	PoE IEEE 802.3af/802.3at Type 1 Class 3	PoE IEEE 802.3af Class 3 PoE+ IEEE 802.3at	PoE IEEE 802.3af Class 3 PoE+ IEEE 802.3at
<b>Outdoor use</b>	Outdoor ready -30 °C to 55 °C (-22 °F to 131 °F) -30 °C to 60 °C (-22 °F to 140 °F) when IR LEDs are off	Outdoor ready -40°C (-40°F) to 60°C (140°F)	Outdoor ready -40°C (-40°F) to 60°C (140°F)	Outdoor ready -40°C (-40°F) to 60°C (140°F)
<b>Other</b>	Built in IR LED with optimizedIR (100 ft range), WDR - Forensic Capture, memory card slot, IP66 and NEMA 4X rated casing, ONVIF, AXIS Guardian, Corridor Format, Lightfinder Technology	Built in IR LED with OptimizedIR (130 ft range), Lightfinder technology, WDR Forensic Capture, IP66/IP67, NEMA 4X, IK10, Corridor Format, ONVIF	Built in IR LED with optimizedIR (98 ft range), memory card slot, IP66/IP67 and NEMA 4X and IK10 rated casing, ONVIF, Corridor Format, ONVIF, Lightfinder technology, WDR ForensicCapture	Built in IR LED with optimizedIR (82 ft range), memory card slot, IP66/IP67 and NEMA 4X and IK10 rated casing, ONVIF, Corridor Format, ONVIF, Lightfinder technology, WDR ForensicCapture, 4K Ultra HD
<b>Axis Part #</b>	10.5 mm 0777-001 22 mm: 0890-001	01506-001	01054-001	01055-001
<b>MSRP</b>	10.5mm \$599 22mm \$649	\$699	\$749	\$949

Notations (a) and (b) refer to the corresponding product models for the column









## Axis Fixed Network Cameras

	AXIS P13 Series				
	AXIS P1364 <sup>(a)</sup> AXIS P1364-E <sup>(b)</sup> 	AXIS P1365 MK II <sup>(a)</sup> AXIS P1365-E MK II <sup>(b)</sup> 	AXIS P1367 <sup>(a)</sup> AXIS P1367-E <sup>(b)</sup> 	AXIS P1368-E 	AXIS P1375(A) AXIS P1375-E(B)  <span style="color: red; font-weight: bold;">NEW</span>
Image sensor	1/3" progressive scan CMOS	1/2.8" Progressive scan CMOS	1/2.9" progressive scan CMOS	1/2.5 progressive scan CMOS	1/2.8 progressive scan CMOS
Lens	Varifocal 2.8 - 8.5 mm/F1.2P-Iris, IR-corrected, CS mount, Remote back focus	Varifocal 2.8 - 8 mm/F1.3 P-Iris, IR-corrected, CS mount, Remote back focus	Varifocal 2.8-8.5 mm/F1.2 P-Iris, IR-Corrected, CS mount	Varifocal 2.8-8.5 mm/F1.3 P-Iris, IR-Corrected, CS mount	Varifocal 2.8-10 mm/F1.2 P-Iris, IR-Corrected, CS mount
Horizontal angle of view	92.3° - 33.3° <sup>(a)</sup> 83° - 33.3° <sup>(b)</sup>	112° - 39° <sup>(a)</sup> 84° - 39° <sup>(b)</sup>	104° <sup>(a)</sup> 72° <sup>(b)</sup>	72°	121° - 33°
Day and night	Automatic	Automatic	Automatic	Automatic	Automatic
Min illumination/ light sensitivity (lux)	0.1 (color) 0.01 (B/W)	0.11 (color) 0.01 (B/W)	0.15 (color) 0.03 (B/W)	0.16 (color) 0.03(B/W)	0.05 (color) 0.01 (B/W)
Video compression	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264, H.265
Max video resolution (pixels)	1280x960 (1.3 MP)	1920x1080 (2MP)	3072x1728 (5 MP)	3840x1260(8 MP)	1920x1080(2 MP)
Frames per second	60 (HDTV 720p) (no WDR) 30 (HDTV 720p) (WDR)	60 (HDTV 1080p) (no WDR) 30 (HDTV 1080p) (WDR)	30 (3072x1728)	30 (3840x2160)	30 (HDTV 1080p) (WDR) 60 (HDTV 1080p) (No WDR)
Audio support	Two-way Built-in mic <sup>(a)</sup>	Two-way Built-in mic <sup>(a)</sup>	Two-way	Two-way	Two-way
Alarm in-/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs
Intelligent video	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Zipstream technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Zipstream technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Power	DC <sup>(a)</sup> PoE IEEE 802.3af Class 3 <sup>(a,b)</sup> PoE+ IEEE 802.3at <sup>(b)(4)</sup>	DC <sup>(a)</sup> PoE IEEE 802.3af Class 3 <sup>(a,b)</sup> PoE+ IEEE 802.3at <sup>(b)(4)</sup>	PoE IEEE 802.3af Class 3	PoE IEEE 802.3af Class 3	DC <sup>(a)</sup> PoE IEEE 802.3af Class 3 <sup>(a,b)</sup> PoE+ IEEE 802.3at <sup>(b)(4)</sup>
Outdoor use	Outdoor ready <sup>(b)</sup> -40°C (-40°F) to 50°C (122°F) <sup>(d)</sup>	Outdoor ready <sup>(b)</sup> -40°C (-40°F) to 50°C (122°F) <sup>(d)</sup>	Outdoor Ready <sup>(b)</sup> -40°C (-40°F)-55°C (131°F)	Outdoor ready -40°C (-40°F) - 55°C (131°F)	Outdoor ready <sup>(b)</sup> -40°C (-40°F) - 55°C (131°F)
Other	Lightfinder technology, WDR-Forensic Capture, IP66, IP67 and NEMA 4X ratings <sup>(b)</sup> , memory card slot, digital PTZ, Corridor Format <sup>(a)</sup> , RS-422/RS-485, AXIS Guardian, ONVIF	WDR-Forensic Capture, IP66, IP67 and NEMA 4X ratings <sup>(b)</sup> , memory card slot, digital PTZ, Corridor Format, RS-422/RS-485, AXIS Guardian <sup>(b)</sup> , ONVIF, Lightfinder Technology	Lightfinder technology, WDR-Forensic Capture, IK10-, IP66-NEMA 4X ratings, ONVIF, multi-view streaming	Lightfinder technology, WDR-Forensic Capture, IK10-, IP66-NEMA 4X ratings, ONVIF, multi-view streaming	Lightfinder technology, WDR-Forensic Capture, IK10-, IP66-NEMA 4X ratings, ONVIF, multi-view streaming
Axis Part #	0689-001 <sup>(a)</sup> 0739-001 <sup>(b)</sup>	0897-001 <sup>(a)</sup> 0898-001 <sup>(b)</sup>	0762-001 <sup>(a)</sup> 0763-001 <sup>(b)</sup>	01109-001	01532-001 <sup>(a)</sup> 01533-001 <sup>(b)</sup>
MSRP	\$649 <sup>(a)</sup> \$899 <sup>(b)</sup>	\$749 <sup>(a)</sup> \$999 <sup>(b)</sup>	\$799 <sup>(a)</sup> \$999 <sup>(b)</sup>	\$1,099	\$649 <sup>(a)</sup> \$899 <sup>(b)</sup>

## Axis Fixed Network Cameras

	AXIS Q16 Series				AXIS Q17 Series		
	<b>AXIS Q1615 Mk II<sup>(a)</sup></b> <b>AXIS Q1615-E Mk II<sup>(b)</sup></b> 	<b>AXIS Q1645<sup>(a)</sup></b> <b>AXIS Q1645-LE<sup>(b)</sup></b> 	<b>AXIS Q1647<sup>(a)</sup></b> <b>AXIS Q1647-LE<sup>(b)</sup></b> 	<b>AXIS Q1659</b> 	<b>AXIS Q1765-LE<sup>(a)</sup></b> <b>AXIS Q1765-LE PT Mount<sup>(b)</sup></b> 	<b>AXIS Q1785-LE</b> 	<b>AXIS Q1786-LE</b> 
<b>Image sensor</b>	1/2.8" progressive scan CMOS	1/2" progressive scan CMOS	1/2" progressive scan CMOS	22.4 x 15.0 mm APS-C CMOS-sensor	1/2.9" progressive scan CMOS	1/2.8" progressive scan CMOS	1/1.8" progressive scan CMOS
<b>Lens</b>	Varifocal 2.8 - 8.5 mm/F1.2 IR-corrected, i-CS lens, CS-mount, Remote focus and zoom	Varifocal 3.9 - 10mm/F1.5 IR- corrected, i-CS lens, CS-mount, Remote focus and zoom	Varifocal 3.9 - 10mm/F1.5 IR- corrected, i-CS lens, CS-mount, Remote focus and zoom	Varifocal 10 - 22 mm/F3.5-4.5 <sup>(a)</sup> 24 mm/F2.8 <sup>(b)</sup> ; 35 mm/F2.0 <sup>(c)</sup> 50 mm/F1.4 <sup>(d)</sup> ; 85 mm/F1.2 <sup>(e)</sup> 100 mm/F2.8 <sup>(f)</sup> ; 70 - 200 mm/F2.8 <sup>(g)</sup> Canon EF/EF-S Mount, Remote focus	Varifocal 4.7 - 84.6 mm/F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom	4.3-137 mm/F1.4-4.0 autofocus 32x optical zoom	4.3-137 mm/F1.4-4.0 autofocus 32x optical zoom
<b>Horizontal angle of view</b>	115° - 39° 1080p <sup>(a)</sup> 72° - 39° 1080p <sup>(b)</sup>	109° - 42° <sup>(a)</sup> 92° - 42° <sup>(b)</sup>	110° - 44° <sup>(a)</sup> 92° - 44° <sup>(b)</sup>		59° - 4°	60° - 2.3°	60° - 2.3°
<b>Day and night</b>	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
<b>Min illumination/light sensitivity (lux)</b>	30 fps 1080p: 0.11 (color), 0.02 (B/W) 60 fps: 0.22 1080p (color), 0.04 (B/W) 120 fps 720p: 0.44 (color), 0.09 (B/W)	30 fps 1080p: 0.05 (color), 0.01 (B/W) 60 fps 1080p: 0.1 (color), 0.02 (B/W) 120 fps 1080p: 0.2 (color), 0.04 (B/W) 0 lux with IR illumination <sup>(a,b)</sup>	30 fps 5MP: 0.12 (color), 0.02 (B/W) 60 fps 4MP: 0.24 (color), 0.04 (B/W) 0 lux with IR illumination <sup>(a,b)</sup>	TBD	0.5 (color) 0.04 (B/W) 0 lux (with IR illumination)	0.16 (color) 0.03 (B/W) 0 lux with IR illumination	0.18 (color) 0.04 (B/W) 0 lux with IR illumination
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1920x1080 (2 MP)	1920x1080 (2MP)	3072x1728 (5.3MP)	5472x3648 (20 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	2560x1440 (4MP)
<b>Frames per second</b>	30 (1920x1200) (WDR) 60 (HDTV 1080p) (no WDR) 120 (HDTV 720p) (no WDR)	30 (1920x1080) 120 (1920x1080) (no WDR)	30 (3072x1728) 60 (2688x1512) (no WDR)	8 (5472x3648) 25 (Ultra HD 2160p)	30 (HDTV 1080p)	30 (HDTV 1080p) (with WDR) 60 (HDTV 1080p)(no WDR)	30 (Quad HD 1440p) (with WDR) 60 (Quad HD 1440p)(no WDR)
<b>Audio support</b>	Two-way Built-in mic <sup>(a)</sup>	Two-way Built-in mic <sup>(a)</sup>	Two-way Built-in mic <sup>(a)</sup>	Two-way	Two-way <sup>(a)</sup>	Two-way	Two-way
<b>Alarm in-/outputs</b>	2 configurable inputs/outputs	4 configurable inputs/outputs	4 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs
<b>Intelligent video</b>	Zipstream Technology Motion detection Audio detection Tampering alarm Shock detection Axis Camera Application Platform	Zipstream Technology Motion detection Audio detection Tamper Alarm Shock Detection Axis Camera Application Platform Axis Fence Guard Axis Motion Guard	Zipstream Technology Motion detection Audio detection Tamper Alarm Shock Detection Axis Camera Application Platform Axis Fence Guard Axis Motion Guard	Zipstream Technology Motion detection Audio detection Tampering alarm Axis Camera Application Platform	Motion detection Audio detection <sup>(a)</sup> Tampering alarm Gatekeeper Axis Camera Application Platform	Motion detection AXIS Fence Guard AXIS Motion Guard Tamper alarm Gatekeeper Axis Camera Application Platform	Motion detection AXIS Fence Guard AXIS Loitering Guard AXIS Motion Guard Tampering alarm Gatekeeper Axis Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Password protection IP filtering HTTPS encryption IEEE 802.1X	Password protection IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Password protection IP address filtering HTTPS encryption IEEE 802.1X	Password protection IP address filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	DC <sup>(a)</sup> PoE IEEE 802.3af Class 3 <sup>(a,b)</sup> PoE+ IEEE 802.3at <sup>(b)(2)</sup>	DC <sup>(a)</sup> PoE IEEE 802.3af Class 3 <sup>(a)</sup> PoE IEEE 802.3at Class 4 <sup>(b)</sup>	DC <sup>(a)</sup> PoE IEEE 802.3af Class 3 <sup>(a)</sup> PoE IEEE 802.3at Class 4 <sup>(b)</sup>	DC PoE+ IEEE 802.3at Type 2 Class 4	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3
<b>Outdoor use</b>	Outdoor ready <sup>(b)</sup> -40°C (-40°F) - 60°C (140°F)	Outdoor ready <sup>(b)</sup> -40°C (-40°F) - 60°C (140°F)	Outdoor ready <sup>(b)</sup> -40°C (-40°F) - 60°C (140°F)		Outdoor ready -40°C (-40°F) - 60°C (140°F)	Outdoor Ready -40°C (-40°F) - 60°C (140°F)	Outdoor Ready -40°C (-40°F) - 60°C (140°F)
<b>Other</b>	RS-422/RS-485, WDR-Forensic capture, Lightfinder technology, memory card slot, ONVIF, Electronic Image Stabilizer, Scene Profiles(Forensic,Live, Traffic)	RS-422/RS-485, Forensic WDR, Lightfinder technology, Corridor Format <sup>(a)</sup> , memory card slot, ONVIF, Leveling assistant, Electronic Image Stabilizer, Scene Profiles (Forensic, Live, Traffic)	RS-422/RS-485, Forensic WDR, Lightfinder technology, Corridor Format <sup>(a)</sup> , memory card slot, ONVIF, Electronic Image Stabilizer, Scene Profiles (Forensic, Live, Traffic)	RS-422/RS-485, Memory card slot, Digital PTZ, SFP port, ONVIF	Ready for use with Axis Pan Tilt Motor (YP3040)(b), RS-422/RS-485 <sup>(b)</sup> , Built-in IR (130 ft range), WDR, Memory card slot, IP66 and NEMA 4X ratings, Corridor Format <sup>(a)</sup> , ONVIF	Electronic Image Stabilizer AXIS Guard Suite IP66, IP670 and NEMA 4X ratings, ONVIF, Forensic WDR, Memory card slot, Corridor format, Zipstream technology, Lightfinder technology	Electronic Image Stabilizer AXIS Guard Suite IP66, IP670 and NEMA 4X ratings, ONVIF, Forensic WDR, Memory card slot, Corridor format, Zipstream technology, Lightfinder technology
<b>Axis Part #</b>	0883-001 <sup>(a)</sup> 0884-001 <sup>(b)</sup>	01222-001 <sup>(a)</sup> 01223-001 <sup>(b)</sup>	01051-001 <sup>(a)</sup> 01052-001 <sup>(b)</sup>	0967-001 <sup>(a)</sup> , 0962-001 <sup>(b)</sup> 0963-001 <sup>(c)</sup> , 0964-001 <sup>(d)</sup> 0965-001 <sup>(e)</sup> , 0966-001 <sup>(f)</sup> 0968-001 <sup>(g)</sup>	0509-001 <sup>(a)</sup> 0644-001 <sup>(b)</sup>	01161-001	01162-001
<b>MSRP</b>	\$999 <sup>(a)</sup> \$1,299 <sup>(b)</sup>	\$1,119 <sup>(a)</sup> \$1,499 <sup>(b)</sup>	\$1,399 <sup>(a)</sup> \$1,699 <sup>(b)</sup>	\$5,899 <sup>(a)</sup> , \$4,999 <sup>(b)</sup> \$5,899 <sup>(c)</sup> , \$5,399 <sup>(d)</sup> \$8,149 <sup>(e)</sup> , \$6,499 <sup>(f)</sup> \$8,399 <sup>(g)</sup>	\$1,399 <sup>(a)</sup> \$1,399 <sup>(b)</sup>	\$1,199	\$1,399

## Axis Modular Network Cameras

AXIS F Series								
	AXIS F34 Main Unit	AXIS F34 Surveillance System	AXIS F41 Main Unit	AXIS F44 Dual Audio Input Main Unit	AXIS F1004 <sup>(a)</sup> AXIS F1004 Bullet Sensor Unit <sup>(b)</sup>	AXIS F1004 Pinhole Sensor Unit	AXIS F4005 <sup>(a)</sup> AXIS F4005-E <sup>(b)</sup>	AXIS F1005-E
								
Image sensor		1/4" (effective) progressive scan RGB CMOS			1/4" (effective) progressive scan RGB CMOS	1/4" (effective) progressive scan CMOS	1/2.8" (effective) progressive scan RGB CMOS	1/2.8" (effective) progressive scan RGB CMOS
Lens		2.1 mm/F2.2 fixed iris			2.1 mm/F2.2 fixed iris	3.7 mm/F2.5 fixed iris, fixed focus, pinhole	2.8 mm/F2.0 fixed iris	2.8 mm/F2.0 fixed iris
Horizontal angle of view		102°			102° with F34/F41/F44	57° with F34/F41/F44	113° <sup>(a)</sup> 110° <sup>(b)</sup> with F34/F41/F44 1080P 73° <sup>(a)</sup> 71° <sup>(b)</sup> with F34/F44 720P	113° with F34/F41/F44 1080p 73° with F34/F44 in 720p
Day and night								
Min illumination/light sensitivity (lux)		0.4			0.4	0.5	0.3	0.3
Video compression	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264				
Max video resolution (pixels)	1920x1080 (2MP) (Sensor dependent)	1280x720	1920x1200 (Sensor dependent)	1920x1080 (2MP) (Sensor dependent)	1280x720	1280x720	1920x1200 (2MP)	1920x1200 (2MP)
Frames per second	15 (HDTV 720p) (four sensors) 30 (HDTV 720p) (one sensor)	15 (HDTV 720p)	30 (1920x1200) (no WDR) 30 (HDTV 1080p) (WDR) 60 (HDTV 1080p) (no WDR)	15 (HDTV 1080p) (no WDR) 15 (HDTV 720p) (WDR) 30 (HDTV 720p) (No WDR)				
Audio support			Two-way	Dual Audio				
Alarm in-/outputs			4 configurable inputs/outputs	4 configurable inputs/outputs				
Intelligent video	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform				
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X				
Power	DC PoE IEEE 802.3af Class 3	DC PoE IEEE 802.3af Class 3	DC PoE IEEE 802.3af Class 3	DC PoE IEEE 802.3af Class 3				
Outdoor use							Outdoor ready <sup>(b)</sup> -30°C (-22°F) - 55°C (131°F)	Outdoor ready -30°C (-22°F) - 55°C (131°F)
Other	Two Memory card slot, Four (4) Video Channels, Quad View, Corridor Format, ONVIF	Includes: 4x Axis F1004 sensors Units, 4x F8214 Dome Accessory, 4x F8224 Recessed Mount, 2x 64GB microSDXC card, Quad View, Corridor Format, ONVIF	Memory card slot, WDR--Forensic Capture (Sensor dependent), Corridor Format, ONVIF	Two Memory card slot, Four (4) Video Channels, Quad View, Corridor Format, WDR--Forensic Capture (Sensor dependent), ONVIF	WDR	WDR	Recessed Dome, IP66 and IK09 rated <sup>(b)</sup> , 120° tilt--WDR--Forensic Capture (with AXIS F41/F44 Main Unit)	IP66 / IP67 rated. WDR --Forensic Capture (with AXIS F41/F44 Main Unit)
Axis Part #	0778-001	0779-004	0658-001	0936-001	8 m (26 ft): 0765-001 <sup>(a)</sup> 8 m (26 ft): 0935-001 <sup>(b)</sup>	8 m (26 ft): 01003-001	12 m (39 ft): 0798-001 <sup>(a)</sup> 12 m (39 ft): 0775-001 <sup>(b)</sup>	3 m (10 ft): 0675-001 <sup>(a)</sup> 12 m (39 ft): 0676-001 <sup>(b)</sup>
MSRP	\$399	\$799	\$449	\$549	\$99 <sup>(a)</sup> \$119 <sup>(b)</sup>	\$119	\$279 <sup>(a)</sup> \$289 <sup>(b)</sup>	\$249 <sup>(a)</sup> \$269 <sup>(b)</sup>






Notations (a) and (b) refer to the corresponding product models for the column; (1) Compatible with DC-iris lens; (3) 1400x1050 (1.4 MP) scaled resolution available via VAPIX®; (4) Arctic Temperature Control requires 802.3at 30w PoE for -40°C (-40°F) - 50°C (122°F)

## Axis Modular Network Cameras








	AXIS F Series			AXIS FA Series				
	AXIS F1015	AXIS F1025	AXIS F1035-E	AXIS FA54 Main Unit	AXIS FA1105	AXIS FA1125	AXIS FA4115 Dome	AXIS FA3105-L Eyeball
<b>Image sensor</b>	1/2.8" (effective) progressive scan RGB CMOS	1/2.8" (effective) progressive scan RGB CMOS	1/2.8" (effective) progressive scan RGB CMOS		1/3"(effective) progressive scan RGB CMOS	1/3"(effective) progressive scan RGB CMOS	1/3"(effective) progressive scan RGB CMOS	1/3"(effective) progressive scan RGB CMOS
<b>Lens</b>	Varifocal 3 - 6 mm/F2.0 fixed iris	3.7 mm/F2.5 fixed iris, pinhole	1.3 mm/F2.8 fixed iris		2.8 mm/F2.0 fixed iris	3.7 mm /F2.5 fixed iris, fixed focus, pinhole	Varifocal 2.8-6.0 mm /F2.0 fixed iris	3.13mm/F2.0 fixed iris
<b>Horizontal angle of view</b>	97° - 52° with F34/F41/F44 in 1080p 62° - 35° with F34/F44 in 720p	92° with F34/F41/F44 in 1080p 56° with F34/F44 in 720p	194° with F34/F41/F44 in 1080p 112° with F34/F44 in 720p		111°	91°	99°-53°	103°
<b>Day and night</b>								
<b>Min illumination/light sensitivity (lux)</b>	0.3	0.3	0.3		0.2	0.25	0.2	0.2 (0 lux with IR illumination)
<b>Video compression</b>				Motion JPEG, H.264				
<b>Max video resolution (pixels)</b>	1920X1200 (2MP)	1920X1200 (2MP)	1920X1200 (2MP)	1920x1080 (2MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)
<b>Frames per second</b>				"30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 1080p)
<b>Audio support</b>				Two-way				
<b>Alarm in-/outputs</b>				4 configurable inputs/ outputs				
<b>Intelligent video</b>				Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform				
<b>Security</b>				Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X				
<b>Power</b>				DC				
<b>Outdoor use</b>			Outdoor ready -30°C (-22°F) - 55°C (131°F)					
<b>Other</b>	WDR - Forensic Capture (with AXIS F41/F44 Main Unit)	WDR - Forensic Capture (with AXIS F41/F44 Main Unit)	IP66 / IP67 rated. WDR - Forensic Capture (with AXIS F41/F44 Main Unit)	Two memory card slots, HDMI output, Four <sup>(a)</sup> Video Channels, Quad View, Corridor Format, ONVIF, Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR
<b>Axis Part #</b>	3 m (10 ft): 0677-001 <sup>(a)</sup> 12 m (39 ft): 0678-001 <sup>(b)</sup>	3 m (10 ft): 0735-001 <sup>(a)</sup> 12 m (39 ft): 0734-001 <sup>(b)</sup>	3 m (10 ft): 0737-001 <sup>(a)</sup> 12 m (39 ft): 0736-001 <sup>(b)</sup>	0878-004	0913-001	0914-001	01001-001	01026-001
<b>MSRP</b>	\$279 <sup>(a)</sup> \$299 <sup>(b)</sup>	\$249 <sup>(a)</sup> \$269 <sup>(b)</sup>	\$249 <sup>(a)</sup> \$269 <sup>(b)</sup>	\$449	\$139	\$149	\$179	\$149










## Axis Modular Network Cameras

	AXIS P12 Series				
	AXIS P1214 <sup>(a)</sup> AXIS P1214-E <sup>(b)</sup> 	AXIS P1224-E 	AXIS P1244 	AXIS P1254 	AXIS P1264 
<b>Image sensor</b>	1/4" progressive scan RGB CMOS	1/4" progressive scan RGB CMOS	1/4" (effective) progressive scan RGB CMOS	1/4" (effective) progressive scan RGB CMOS	1/4" (effective) progressive scan RGB CMOS
<b>Lens</b>	3.7 mm/F2.5 <sup>(a)</sup> 2.8mm/F2.0 <sup>(b)</sup> fixed iris, fixed focus, pinhole <sup>(a)</sup>	1.56 mm/F2.8 fixed iris, fixed focus	2.1 mm/F2.2 fixed iris	2.1 mm/F2.2 fixed iris, fixed focus	3.7 mm/F2.5 fixed iris, fixed focus, pinhole
<b>Horizontal angle of view</b>	57° <sup>(a)</sup> 81° <sup>(b)</sup>	145°	102°	102°	57°
<b>Day and night</b>					
<b>Min illumination/ light sensitivity (lux)</b>	1.2 (color) <sup>(a)</sup> 1.0 (color) <sup>(b)</sup>	1.8 (color)	0.4 (color)	0.4 (color)	0.5 (color)
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1280x720 (2MP)	1280x720 (2MP)	1280x720 (2MP)	1280x720 (2MP)	1280x720 (2MP)
<b>Frames per second</b>	30 (HDTV 720p)	30 (HDTV 720p)	30 (HDTV 720p)	30 (HDTV 720p)	30 (HDTV 720p)
<b>Audio support</b>					
<b>Alarm in-/outputs</b>	1/1	1/1			
<b>Intelligent video</b>	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	DC PoE IEEE 802.3af Class 2	DC PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2
<b>Outdoor use</b>	Outdoor ready for sensor only -20°C (-4°F) - 50°C (122°F) <sup>(a)</sup>	Outdoor ready for sensor only -20°C (-4°F) - 50°C (122°F)			
<b>Other</b>	IP66 rated and NEMA 4X sensor unit only <sup>(b)</sup> , Memory card slot, Corridor Format, ONVIF	IP66 rated and NEMA 4X sensor unit only, memory card slot, Corridor Format, ONVIF	Memory card slot, Corridor Format, ONVIF, WDR	Memory card slot, Corridor Format, ONVIF, WDR	Memory card slot, Corridor Format, ONVIF, WDR. Height strip available.
<b>Axis Part #</b>	0532-001 <sup>(a)</sup> 0533-001 <sup>(b)</sup>	0654-001	0896-001	0924-001	0925-001
<b>MSRP</b>	\$499 <sup>(a)</sup> \$499 <sup>(b)</sup>	\$499	\$299	\$299	\$299

## Axis Fixed Dome Network Cameras







	AXIS P12 Series			AXIS M30 Series			
	AXIS P1245	AXIS P1265	AXIS P1275	AXIS M3015	AXIS M3016	AXIS M3044-V <sup>(a)</sup> AXIS M3044-WV <sup>(b)</sup>	AXIS M3045-V <sup>(a)</sup> AXIS M3045-WV <sup>(b)</sup>
							
<b>Image sensor</b>	1/2.9" (effective) progressive scan CMOS	1/2.9" (effective) progressive scan CMOS	1/2.9" (effective) progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS
<b>Lens</b>	2.8 mm/F2.0 fixed iris, fixed focus	3.7 mm/F2.5 fixed iris, fixed focus, pinhole	2.8 - 6 mm/F2.0 fixed iris, varifocal	2.8 mm/F2.0 fixed Focus, fixed Iris	1.8 mm/F2.4 fixed Focus, fixed Iris	2.8 mm/F2.0 fixed iris, fixed focus, M12 mount	2.8 mm/F2.0 fixed iris, fixed focus, M12 mount
<b>Horizontal angle of view</b>	111°	91°	99° - 53°	106°	132° (4:3 aspect ratio) 152° (16:9 aspect ratio)	82°	106°
<b>Day and night</b>							
<b>Min illumination/light sensitivity (lux)</b>	0.22 (color)	.027 (color)	0.22 (color)	0.25 (color)	0.35 (color)	0.25 (color)	0.25 (color)
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264, H.265	Motion JPEG, H.264, H.265	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1920x1080 (2MP)	1920x1080 (2MP)	1920x1080 (2MP)	1920x1080 (2MP)	2016x1512 (4:3) 2304x1296 (16:9)	1280x720	1920x1080 (2 MP)
<b>Frames per second</b>	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 720p)	30 (HDTV 1080p) 30 (HDMI 1080p) 60 (HDMI 720p)
<b>Audio support</b>							
<b>Alarm in-/outputs</b>							
<b>Intelligent video</b>	Zipstream Technology Motion Detection Tampering Alarm Axis Camera Application Platform Axis Cross Line Detection	Zipstream Technology Motion Detection Tampering Alarm Axis Camera Application Platform Axis Cross Line Detection	Zipstream Technology Motion Detection Tampering Alarm Axis Camera Application Platform Axis Cross Line Detection	Zipstream Technology Motion Detection Tampering Alarm Axis Camera Application Platform	Zipstream Technology Motion Detection Tampering Alarm Axis Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1 <sup>(a)</sup> DC <sup>(b)</sup>	PoE IEEE 802.3af Class 1 <sup>(a)</sup> DC <sup>(b)</sup>
<b>Outdoor use</b>							
<b>Other</b>	Memory card slot, Corridor Format, ONVIF, WDR-Forensic Capture	Memory card slot, Corridor Format, ONVIF, WDR-Forensic Capture. Height strip available.	Memory card slot, Corridor Format, ONVIF, WDR-Forensic Capture	Memory card slot, Corridor Format, ONVIF, WDR	Memory card slot, Corridor Format, ONVIF, WDR	Vandal resistant, Digital PTZ, IP42 rating and IK08, WDR, Memory card slot, AXIS Guardian, ONVIF, Corridor Format Wi-Fi Protected Setup <sup>(b)</sup>	Vandal resistant, Digital PTZ, HDMI (micro) Output, IP42 rating and IK08, WDR, Memory card slot, AXIS Guardian, ONVIF, Corridor Format Wi-Fi Protected Setup <sup>(b)</sup>
<b>Axis Part #</b>	0926-001	0927-001	0928-001	01151-001	01152-001	0802-001 <sup>(a)</sup> 0803-004 <sup>(b)</sup>	0804-001 <sup>(a)</sup> 0805-004 <sup>(b)</sup>
<b>MSRP</b>	\$339	\$349	\$379	\$269	\$369	\$199 <sup>(a)</sup> \$229 <sup>(b)</sup>	\$269 <sup>(a)</sup> \$299 <sup>(b)</sup>

## Axis Fixed Dome Network Cameras

	AXIS M30 Series						
	AXIS M3046-V 2.4 <sup>(a)</sup> AXIS M3046-V 1.8 <sup>(b)</sup>	AXIS M3047-P	AXIS M3048-P	AXIS M3024-LVE	AXIS M3025-VE	AXIS M3026-VE	AXIS M3037-PVE
							
<b>Image sensor</b>	1/3" progressive scan CMOS	1/1.8" progressive scan CMOS	1/1.7" progressive scan CMOS	1/4" progressive scan CMOS	1/2.7" progressive scan CMOS	1/3.6" progressive scan CMOS	1/3.2" progressive scan CMOS
<b>Lens</b>	2.4 mm/F2.2 <sup>(a)</sup> 1.8 mm/F2.4 <sup>(b)</sup> fixed iris, adjustable focus, M12 mount	1.6 mm/F2.8 fixed iris, fixed focus	1.65 mm/F2.8 fixed iris, fixed focus	2.8 mm/F2.0 fixed iris, adjustable focus, IR corrected, M12 mount	3.6 mm/F2.0 fixed iris, adjustable focus, IR corrected, M12 mount	2.0 mm/F2.0 fixed iris, adjustable focus, IR corrected, M12 mount	1.27 mm/F2.0 fixed iris, adjustable focus, IR corrected, M12 mount
<b>Horizontal angle of view</b>	128° <sup>(a)</sup> 152° <sup>(b)</sup>	185°	185°	77°	91°	106°	187°
<b>Day and night</b>		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
<b>Min illumination/ light sensitivity (lux)</b>	0.3 (color) <sup>(a)</sup> 0.35 (color) <sup>(b)</sup>	0.3 (color)	"0.35 (color)	0.8 (color) 0.16 (B/W) 0 (with IR illumination)	0.8 (color) 0.16 (B/W)	0.3 (color) 0.06 (B/W)	0.3 (color) 0.06 (B/W)
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	2688x1520 (4 MP) (a) 2304x1296 (3 MP) (b)	2048x2048 (6 MP)	2880x2880 (12 MP)	1280x800 (1 MP)	1920x1080 (2 MP)	2048x1536 (3 MP)	2592x1944 (5 MP)
<b>Frames per second</b>	30 (2688x1520) 30 (2304x1296)	30 (2048x2048)	30 (2880x2880)	30 (1280x800) 30 (HDTV 720p)	30 (HDTV 1080p)	30 (1600x1200) 30 (HDTV 1080p) 20 (2048x1536)	12 (2592x1944)
<b>Audio support</b>							Two-way Built-in mic and speaker
<b>Alarm in-/outputs</b>				1/1	1/1	1/1	1/1
<b>Intelligent video</b>	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2
<b>Outdoor use</b>				Outdoor ready -30°C (-22°F) - 50°C (122°F)	Outdoor ready -30°C (-22°F) - 50°C (122°F)	Outdoor ready -30°C (-22°F) - 50°C (122°F)	Outdoor ready -30°C (-22°F) - 50°C (122°F)
<b>Other</b>	Vandal resistant, Digital PTZ, HDMI (micro) Output, IP42 rating and IK08, WDR, Memory card slot, ONVIF, Corridor Format	360°/180° Panoramic views, HDMI, Digital PTZ, WDR, Memory card slot, ONVIF	360°/180° Panoramic views, HDMI, Digital PTZ, WDR, Memory card slot, ONVIF	Vandal resistant, IP66 and NEMA 4X ratings, IK10 impact-resistant, WDR, Digital PTZ, built in adjustable IR (33 ft range), Memory card slot, ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings, IK10 impact-resistant, WDR, Digital PTZ, Memory card slot, ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings, IK10 impact-resistant, Multi-view streaming, WDR, Digital PTZ, Memory card slot, ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings, Session Initiation Protocol (SIP), Multi-view streaming, WDR, Digital PTZ, Memory card slot, ONVIF
<b>Axis Part #</b>	0806-001 <sup>(a)</sup> 01116-001 <sup>(b)</sup>	0808-001	01004-001	0535-001	0536-001	0547-001	0548-001
<b>MSRP</b>	\$369 <sup>(a)</sup> , <sup>(b)</sup>	\$469	\$669	\$549	\$549	\$649	\$799

Notations (a) and (b) refer to the corresponding product models for the column

## Axis Fixed Dome Network Cameras

	AXIS M30 Series		AXIS M31 Series			AXIS M42 Series
	AXIS M3057-PLVE 	AXIS M3058-PLVE 	AXIS M3104-L <sup>(a)</sup> AXIS M3104-LVE <sup>(b)</sup> 	AXIS M3105-L <sup>(a)</sup> AXIS M3105-LVE <sup>(b)</sup> 	AXIS M3106-L MK II <sup>(a)</sup> AXIS M3106-LVE MK II <sup>(b)</sup> 	AXIS M4206-V <sup>(a)</sup> AXIS M4206-LV <sup>(b)</sup>  <b>NEW</b>
Image sensor	1/1.8" progressive scan CMOS 6 MP (3072x2048)	1/1.7" progressive scan CMOS 12 MP (4000x3000)	1/2.8" progressive scan RGB CMOS	1/2.8" progressive scan RGB CMOS	1/3" progressive scan RGB CMOS	1/2.5 progressive scan RGB CMOS
Lens	1.6 mm/F2.0 Fixed Iris, Fixed Focus	1.2 mm/F2.2 Fixed Iris, Fixed Focus	2.8 mm, F2.0 M12 mount, Fixed iris, Fixed focus	2.8 mm, F2.0 M12 mount, Fixed iris, Fixed focus	2.4 mm, F2.2 M12 mount, Fixed iris, fixed focus	3-6 mm F2.0 M12 mount, Fixed iris, Remote Focus and Zoom
Horizontal angle of view	185°	181°	80°	115°	130°	100° - 45°
Day and night	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Min illumination/ light sensitivity (lux)	0.16 (color) 0.03 (B&W) 0 (with IR illumination)	0.19 (color) 0.04 (B&W) 0 (with IR illumination)	0.2 lux (color) 0.04 (B/W) 0 lux (with IR illumination)	0.2 lux (color) 0.04 (B/W) 0 lux (with IR illumination)	0.3 lux (color) 0.06 (B/W) 0 lux (with IR illumination)	0.26 lux (color) 0.05 (B/W) 0 lux (with IR illumination) <sup>(b)</sup>
Video compression	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264 H.265	Motion JPEG, H.264, H.265
Max video resolution (pixels)	2048x2048 (Overview)	2992x29923 (Overview)	1280x720	1920x1080 (2 MP)	2688x1520 (4 MP)	2048x1536 (3 MP)
Frames per second	60 (Overview only w/o WDR) 30 (Overview and Dewarped w/ WDR)	30 (Overview only w/o WDR) 15 (Overview and Dewarped w/ WDR)	30 (HDTV 720p)	30 (HDTV 1080p)	30 (HDTV 1080p)	30
Audio support						
Alarm in-/outputs	1/1	1/1				
Intelligent video	Zipstream Technology Motion Detection Tampering Alarm Axis Camera Application Platform	Zipstream Technology Motion Detection Tampering Alarm Axis Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Power	PoE IEEE 802.3af Class 3	PoE IEEE 802.3af Class 3	PoE IEEE 802.3af/802.3at Type 1 Class 2	PoE IEEE 802.3af/802.3at Type 1 Class 2	PoE IEEE 802.3af/802.3at Type 1 Class 3	PoE IEEE 802.3af/802.3at Type 1 Class 2 <sup>(a)</sup> Type 1 Class 3 <sup>(b)</sup>
Outdoor use	Outdoor ready -40°C (-40°F) - 50°C (122°F)	Outdoor ready -40°C (-40°F) - 50°C (122°F)	Outdoor ready <sup>(b)</sup> -30°C to 50°C (-22 °F to 122 °F)	Outdoor ready <sup>(b)</sup> -30°C to 50°C (-22 °F to 122 °F)	Outdoor Ready <sup>(b)</sup> -30 °C to 50 °C (-22 °F to 122 °F)	
Other	Vandal resistant, IP66 and NEMA 4X ratings, IK10 impact-resistant, Optimized IR (66 ft range) Multi-view streaming, Forensic WDR, Digital PTZ, HDMI, Memory card slot, ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings, IK10 impact-resistant, Optimized IR (66 ft range) Multi-view streaming, Forensic WDR, Digital PTZ, HDMI, Memory card slot, ONVIF, Corridor Format	Vandal resistant <sup>(b)</sup> , Built in IR LED (50ft range) <sup>(b)</sup> , WDR-Forensic capture, Digital PTZ, Memory card slot, IK08 rating <sup>(a)</sup> , IP66, IK10 and NEMA 4x rating <sup>(b)</sup> , AXIS Guardian, ONVIF, Corridor Format	Vandal resistant <sup>(b)</sup> , Built in IR LED (50ft range) <sup>(b)</sup> , WDR-Forensic capture, Digital PTZ, Memory card slot, IK08 rating <sup>(a)</sup> , IP66, IK10 and NEMA 4x rating <sup>(b)</sup> , AXIS Guardian, ONVIF, Corridor Format	Vandal resistant <sup>(b)</sup> , Built in IR LED (50ft range), WDR, Digital PTZ, Memory card slot, IK08 rating <sup>(a)</sup> , IP66, IK10 and NEMA 4x rating <sup>(b)</sup> , ONVIF, Corridor Format	Vandal resistant <sup>(b)</sup> , Built in IR LED (50ft range), WDR, Digital PTZ, Memory card slot, IK08 rating <sup>(a)</sup> , IP42, AVHS <sup>(1)</sup> , ONVIF, Corridor Format
Axis Part #	01177-001	01178-001	0865-001 <sup>(a)</sup> 0866-001 <sup>(b)</sup>	0867-001 <sup>(a)</sup> 0868-001 <sup>(b)</sup>	01036-001 <sup>(a)</sup> 01037-001 <sup>(b)</sup>	01240-001 <sup>(a)</sup> 01241-001 <sup>(b)</sup>
MSRP	\$649	\$849	\$249 <sup>(a)</sup> \$299 <sup>(b)</sup>	\$319 <sup>(a)</sup> \$369 <sup>(b)</sup>	\$419 <sup>(a)</sup> \$469 <sup>(b)</sup>	\$419 <sup>(a)</sup> \$469 <sup>(b)</sup>








Notations (a) and (b) refer to the corresponding product models for the column

## Axis Fixed Dome Network Cameras

	AXIS P32 Series					AXIS P33 Series		
	AXIS P3224-V MKII <sup>(a)</sup> AXIS P3224-LV MKII <sup>(b)</sup>	AXIS P3225-V <sup>(a)</sup> /VE <sup>(b)</sup> MK II AXIS P3225-LV <sup>(a)</sup> /LVE <sup>(b)</sup> MK II	AXIS P3227-LV <sup>(a)</sup> AXIS P3227-LVE <sup>(b)</sup>	AXIS P3228-LV <sup>(a)</sup> AXIS P3228-LVE <sup>(b)</sup>	AXIS P3235-LV <sup>(a)</sup> AXIS P3235-LVE <sup>(b)</sup>	AXIS P3367-V <sup>(a)</sup> AXIS P3367-VE <sup>(b)</sup>	AXIS P3374-V <sup>(a)</sup> AXIS P3374-LV <sup>(b)</sup>	AXIS P3375-V <sup>(a)</sup> -VE <sup>(b)</sup> AXIS P3375-LV <sup>(a)</sup> -LVE <sup>(b)</sup>
<b>Image sensor</b>	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/2.5" progressive scan CMOS	1/2.5" progressive scan CMOS	1/3" progressive scan RGB CMOS	1/3.2" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS
<b>Lens</b>	Varifocal 2.8-10 mm, F1.6 IR-corrected, P-Iris Remote focus and zoom	Varifocal 3 - 10.5 mm/F1.4 IR-corrected, P-Iris Remote focus and zoom	Varifocal 3.5 - 10 mm/F1.7 IR-corrected, P-Iris Remote focus and zoom	Varifocal 3.5 - 10 mm/F1.7 IR-corrected, P-Iris Remote focus and zoom	Varifocal 3 - 10 mm/F1.4 IR-corrected, P-Iris Remote focus and zoom	Varifocal 3 - 9 mm/F1.2 IR-corrected, P-Iris Remote focus and zoom	Varifocal 3 - 10 mm/F1.4 IR-corrected, P-Iris Remote focus and zoom	Varifocal 3 - 10 mm/F1.4 IR-corrected, P-Iris Remote focus and zoom
<b>Horizontal angle of view</b>	90° - 34°	92° - 34°	100° - 38°	100° - 38°	90° - 34°	84° - 30°	90° - 34°	90° - 34°
<b>Day and night</b>	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
<b>Min illumination/light sensitivity (lux)</b>	30 FPS with WDR & Lightfinder: 0.18 (color) <sup>(a)</sup> , 0.04 (B/W) <sup>(a)</sup> 0.19 (color) <sup>(b)</sup> , 0.04 (B/W) <sup>(b)</sup> 0 with IR illumination <sup>(d)</sup>	30 FPS with WDR & Lightfinder: 0.15 (color) <sup>(a,b)</sup> , 0.03 (B/W) <sup>(a,b)</sup> 0.16 (color) <sup>(c,d)</sup> , 0.03 (B/W) <sup>(c,d)</sup> 0 with IR illumination <sup>(c,d)</sup>	0.18 lux (color) 0.04 lux (B/W) 0 lux with IR illumination	0.19 lux (color) 0.04 lux (B/W) 0 lux with IR illumination	30 fps with WDR & Lightfinder: 0.16 (color) <sup>(a)</sup> 0.03 (B/W) <sup>(a)</sup> 0 lux with IR illumination on	0.2 (color) 0.04 (B/W)	30 FPS with WDR & Lightfinder: 0.15 (color) <sup>(a,b)</sup> , 0.03 (B/W) <sup>(a)</sup> 0.16 (color) <sup>(b)</sup> , 0.03 (B/W) 0 with IR illumination <sup>(b)</sup>	30 FPS with WDR & Lightfinder: 0.15 (color) <sup>(a,b)</sup> , 0.03 (B/W) <sup>(a,b)</sup> .16 (color) <sup>(c,d)</sup> , 0.03 (B/W) <sup>(c,d)</sup> 0 with IR illumination <sup>(c,d)</sup>
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1280x960 (1 MP)	1920x1080 (2 MP)	3072x1728 (5 MP)	3840x2160 (4K)	1920x1080 (2MP)	2592x1944 (5 MP)	1280x720	1920x1080 (2MP)
<b>Frames per second</b>	30 (1280x960) (WDR) 60 (1280x960) (no WDR)	30 (1920x1080) (WDR) 60 (1920x1080) (no WDR)	30 (5 MP)	30 (4K)	30 (1280x960) (WDR) 60 (1280x960) (no WDR)	12 (5 MP Capture, 2592x1944) 20 (3 MP Capture, 2048x1536) 30 (2 MP Capture, 1600x1200) 30 (HDTV 1080p)	30 (1280x720) (WDR) 60 (1280x720) (No WDR)	30 (1920x1080) (WDR) 60 (1920x1080) (No WDR)
<b>Audio support</b>					Two-way	Two-way Built-in mic <sup>(a)</sup>	Two-way Built-in mic	Two-way Built-in mic <sup>(a,c)</sup>
<b>Alarm in-/outputs</b>					1/1	1/1	1/1	1/1
<b>Intelligent video</b>	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion Detection Audio Detection Tampering Alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion Detection Audio Detection Tampering Alarm AXIS Camera Application Platform	Zipstream Technology Motion Detection Audio Detection Tampering Alarm AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	PoE IEEE 802.3af Class 2 <sup>(a)</sup> Class 3 <sup>(b)</sup>	PoE IEEE 802.3af Class 2 <sup>(a)</sup> Class 3 <sup>(b,c,d)</sup>	PoE IEEE 802.3af/802.3at Type 1 Class 3	PoE IEEE 802.3af/802.3at Type 1 Class 3	PoE IEEE 802.3af/802.3at Type 1 Class 3	PoE IEEE 802.3af Class 2 <sup>(a)</sup> , Class 3 <sup>(b)</sup>	PoE IEEE 802.3af Class 2 <sup>(a)</sup> Class 3 <sup>(b)</sup>	PoE IEEE 802.3af IP filtering Class 2 <sup>(a)</sup> Class 3 <sup>(b,c,d)</sup>
<b>Outdoor use</b>		Outdoor ready <sup>(b,d)</sup> -30°C (-22°F) - 50°C (122°F)	Outdoor ready <sup>(b)</sup> -40°C (-40°F) - 50°C (122°F)	Outdoor ready <sup>(b)</sup> -40°C (-40°F) - 50°C (122°F)	Outdoor ready <sup>(b)</sup> -40°C (-40°F) - 50°C (122°F)	Outdoor ready <sup>(b)</sup> -40°C (-40°F) - 55°C (131°F)	Outdoor ready <sup>(b)</sup> -40°C (-40°F) - 55°C (131°F)	Outdoor ready <sup>(b,d)</sup> -40°C (-40°F) - 55°C (131°F)
<b>Other</b>	Vandal resistant, Built in IR LED with Optimized IR (100ft range) <sup>(b)</sup> , WDR - Forensic capture, Lightfinder, Digital PTZ, Memory card slot, IP52 and IK08 rating, IP66, IK10 and NEMA 4x rating <sup>(b)</sup> , AXIS Guardian <sup>(b)</sup> , ONVIF, Corridor Format	Vandal resistant, built in IR LED with optimized IR (100ft range) <sup>(b,d)</sup> , WDR - Forensic capture, Lightfinder, Digital PTZ, Memory card slot, IP52 and IK08 rating <sup>(a)</sup> , IP66, IK10 and NEMA 4x rating <sup>(b)</sup> , AXIS Guardian <sup>(b,d)</sup> ONVIF, Corridor Format	Vandal resistant, Built in IR LED with Optimized IR (100ft range) <sup>(c,d)</sup> , WDR - Forensic capture, Lightfinder, Digital PTZ, Memory card slot, IP52 and IK08 rating <sup>(a)</sup> , IP66, IK10 and NEMA 4x rating <sup>(b)</sup> , ONVIF, Corridor Format	Vandal resistant, Built in IR LED with Optimized IR (100ft range) <sup>(c,d)</sup> , WDR - Forensic capture, Lightfinder, Digital PTZ, Memory card slot, IP52 and IK08 rating <sup>(a)</sup> , IP66, IK10 and NEMA 4x rating <sup>(b)</sup> , ONVIF, Corridor Format	Vandal resistant, Built in IR LED with Optimized IR (100ft range) <sup>(a)</sup> , WDR - Forensic capture, Lightfinder, Digital PTZ, Memory card slot, IP52 and IK08 rating <sup>(a)</sup> , IP66, IK10 and NEMA 4x rating <sup>(b)</sup> , ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4x ratings <sup>(b)</sup> , WDR, digital PTZ, memory card slot, ONVIF, Corridor Format, multi-view streaming	Vandal resistant, WDR - Forensic Capture, Digital PTZ, Memory Card Slot, Lightfinder technology, ONVIF, Corridor Format, Built-in IR LED with Optimized IR (100ft range) <sup>(b)</sup>	Vandal resistant, IP66 and NEMA 4x ratings <sup>(b,d)</sup> , WDR - Forensic Capture, Digital PTZ, Memory Card Slot, Lightfinder technology, ONVIF, Corridor Format, Built-in IR LED with Optimized IR (100ft range) <sup>(b)</sup>
<b>Axis Part #</b>	0950-001 <sup>(a)</sup> 0951-001 <sup>(b)</sup>	0952-001 <sup>(a)</sup> 0953-001 <sup>(b)</sup> 0954-001 <sup>(c)</sup> 0955-001 <sup>(d)</sup>	0885-001 <sup>(a)</sup> 0886-001 <sup>(b)</sup>	0887-001 <sup>(a)</sup> 0888-001 <sup>(b)</sup>	01443-001 <sup>(a)</sup> 01199-001 <sup>(b)</sup>	0406-001 <sup>(a)</sup> 0407-001 <sup>(b)</sup>	01056-001 <sup>(a)</sup> 01058-001 <sup>(b)</sup>	01060-001 <sup>(a)</sup> 01061-001 <sup>(b)</sup> 01062-001 <sup>(c)</sup> 01063-001 <sup>(d)</sup>
<b>MSRP</b>	\$419 <sup>(a)</sup> \$499 <sup>(b)</sup>	\$499 <sup>(a)</sup> \$619 <sup>(b)</sup> \$579 <sup>(c)</sup> \$699 <sup>(d)</sup>	\$779 <sup>(a)</sup> \$899 <sup>(b)</sup>	\$979 <sup>(a)</sup> \$1,099 <sup>(b)</sup>	\$629 <sup>(a)</sup> \$749 <sup>(b)</sup>	\$999 <sup>(a)</sup> \$1,199 <sup>(b)</sup>	\$599 <sup>(a)</sup> \$699 <sup>(b)</sup>	\$699 <sup>(a)</sup> \$899 <sup>(b)</sup> \$799 <sup>(c)</sup> \$999 <sup>(d)</sup>









Notations (a), (b), (c) and (d) refer to the corresponding product models for the column

## Axis Fixed Dome Network Cameras

	Q35 Series					Q36 Series	
	<b>AXIS P9106-V White<sup>(a)</sup></b> <b>AXIS P9106-V Brushed Steel<sup>(b)</sup></b> 	<b>AXIS Q3515-LV<sup>(a)</sup></b> <b>AXIS Q3515-LVE<sup>(b)</sup></b> 	<b>AXIS Q3517-LV<sup>(a)</sup></b> <b>AXIS Q3517-LVE<sup>(b)</sup></b> <b>AXIS Q3517-SLVE<sup>(c)</sup></b> 	<b>AXIS Q3518-LVE</b> 	<b>AXIS Q3527-LVE</b> 	<b>AXIS Q3615-VE</b> 	<b>AXIS Q3617-VE</b> 
<b>Image sensor</b>	1/3" progressive scan RGB CMOS	1/2.8" progressive scan RGB CMOS	1/1.8" progressive scan RGB CMOS	1/1.7" progressive scan RGB CMOS	1/1.8" progressive scan CMOS	1/1.9 progressive scan CMOS	1/1.8 progressive scan CMOS
<b>Lens</b>	M12 mount, fixed focus, fixed iris 1.8 mm, F2.4	Varifocal 9 mm: 3-9 mm/F1.3 22 mm: 9-22 mm/F1.6 IR corrected, P-Iris control Remote focus and zoom	Varifocal 4.3-8.6 mm/F1.5 IR corrected, P-Iris Remote focus and zoom	Varifocal 4.3-8.6 mm/F1.5 IR-corrected, P-Iris Remote focus and zoom	Varifocal 4.2-8.6 mm/F1.5 Remote focus and zoom P-iris, IR-corrected	Varifocal 4.1 - 9 mm/F1.6 P-Iris, Remote focus and zoom, IR-corrected	Varifocal 4.1 - 9 mm/F1.6 P-Iris, Remote focus and zoom, IR - corrected
<b>Horizontal angle of view</b>	130°	9 mm: 105°-36° 22 mm: 36°-15°	96° - 50°	93° - 48°	96°-50°	100° - 46°	6 MP mode: 101° - 46° 4 MP 16:9 mode: 90° - 41°
<b>Day and night</b>		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
<b>Min illumination/light sensitivity (lux)</b>	0.35 lux at 50 IRE F2.4 (color)	9 mm: HDTV 1080p 25/30 fps with Forensic WDR and Lightfinder: Color: 0.11 lux, F1.3; B/W: 0.02 lux, F1.3 22 mm: HDTV 1080p 25/30 fps with Forensic WDR and Lightfinder: Color: 0.17 lux, F1.6; B/W: 0.03 lux, F1.6 <sup>(d)</sup> 0 lux with IR	WDR and Lightfinder: 0.12 (Color) 0.02 (B/W) 0 lux with IR	0.15 (color) 0.03 (B/W)	0.12 (color) 0.02 (b/w) 0 lux with IR illumination	1080p 25/30 fps Lightfinder & WDR Capture: 0.1 (color), 0.02 (B/W) 1080p 50/60 fps 0.2 (color), 0.03 (B/W)	0.18 (color) 0.03 (B/W)
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	2016x1512 to 320x240 (4:3) 1920x1080 to 640x360 (16:9)	1920x1080	3072x1728 (5MP)	3840x2160 (4K)	3072x1728 to 160x120	1920x1200(2.3 MP)	3072x2048(6 MP)
<b>Frames per second</b>	Up to 25/30 fps (50/60 Hz) in all resolutions	60 (HDTV 1080p w WDR On) 120 (HDTV 1080p w WDR Off)	30 (5MP) 60 (4MP) (no WDR)	30	25 to 30 fps (5 MP w/ WDR) 50/60 fps (4 MP w/out WDR)	25/30 (HDTV 1080p) (WDR) 50/60 (HDTV 1080p) (no WDR)	25/30 (4MP 2720X1536) (WDR) 20 (6MP 3072X2048) (no WDR)
<b>Audio support</b>		Two-way	Two-way	Two-way			
<b>Alarm in-/outputs</b>		2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs			
<b>Intelligent video</b>	Zipstream Technology Motion Detection Motion and Fence Guard Active Tampering Alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Loitering Guard AXIS Fence Guard AXIS Motion Guard AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Loitering Guard AXIS Fence Guard AXIS Motion Guard AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Loitering Guard AXIS Fence Guard AXIS Motion Guard AXIS Camera Application Platform	Zipstream technology AXIS Video Motion Detection AXIS Motion Guard AXIS Fence Guard AXIS Loitering Guard active tampering alarm audio detection	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X Certificate Management Digest Authentication Brute force delay protection	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Password protection IP address filtering IEEE 802.1X HTTPSa encryption secure boot	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	PoE IEEE 802.3af/802.3at Type 1 Class 1	PoE IEEE 802.3af/802.3at Type 1 Class 3	PoE IEEE 802.3af Class 3	PoE IEEE 802.3af Class 3	PoE IEEE 802.3af Class 3	PoE IEEE 802.3af/802.3at Type 1 Class 3	PoE IEEE 802.3af/802.3at Type 1 Class 3
<b>Outdoor use</b>	Blank	Outdoor ready <sup>(b)</sup> -50°C (-58°F) - 60°C (140°F)	Outdoor ready <sup>(b)(c)</sup> -50 °C to 60 °C (-58 °F to 140 °F) -50 °C to 55°C (-58 °F to 131 °F <sup>(c)</sup> )	Outdoor ready -50 °C to 60 °C (-58 °F to 140 °F)	Outdoor ready -50 °C to 60 °C (-58 °F to 140 °F)	Outdoor ready -40 °C to 60 °C (-40 °F to 140 °F)	Outdoor ready -40 °C to 60 °C (-40 °F to 140 °F)
<b>Other</b>	Vandal Resistant (IK10) <sup>(a)</sup> , waterproof casing (IP66), support for portcast devices, no blind spots, anti-ligature, wall ceiling or corner mounted, open API integration, PTZ presets, works with 2N 2-wire, SD card slot brushed stainless steel cover <sup>(b)</sup>	Vandal resistant, IP52 and IK10 <sup>(a)</sup> , IP66, IP67, IP6K9K, IK10+ and NEMA 4x ratings <sup>(b)</sup> , Forensic WDR, Lightfinder technology, AXIS Guardian, ONVIF, Leveling assistant, Auto rotation, Electronic Image Stabilizer, memory card slot, Corridor Format	Vandal resistant, IP52 and IK10 <sup>(a)</sup> , IP66, IP67, IP6K9K, IK10+ and NEMA 4x ratings <sup>(b)</sup> , WDR-Forensic capture, Lightfinder technology, Optimized IR (130 ft range), ONVIF, Leveling assistant, Auto rotation, Electronic Image Stabilizer, memory card slot, Corridor Format stainless steel casing with polycarbonate hard-coated dome and dehumidifying membranes Coated <sup>(c)</sup>	Vandal resistant, IP52 and IK10 <sup>(a)</sup> , IP66, IP67, IP6K9K, IK10+ and NEMA 4x ratings <sup>(b)</sup> , WDR-Forensic capture, Lightfinder technology, Optimized IR (130 ft range), ONVIF, Leveling assistant, Auto rotation, Electronic Image Stabilizer, memory card slot, Corridor Format	Vandal resistant, Lightfinder technology, WDR, Optimized IR, IP66-, IP67-, IP6K9K- and NEMA 4X-rated, IK10+ (50 joules) impact-resistant casing with polycarbonate hard-coated dome, ONVIF	IP66 / 67, NEMA 4X-ratings, IK10, WDR - Forensic Capture, Lightfinder technology, memory card slot, Pixel counter, PTRZ, ONVIF, AVHS	IP66 / 67, NEMA 4X-ratings, IK10, WDR - Forensic Capture, Lightfinder technology, memory card slot, Pixel counter, PTRZ, ONVIF, AVHS
<b>Axis Part #</b>	01620-001 <sup>(a)</sup> 01553-001 <sup>(b)</sup>	9 mm: 01039-001 <sup>(a)</sup> 9 mm: 01041-001 <sup>(b)</sup> 22 mm: 01044-001 <sup>(a)</sup> 22 mm: 01046-001 <sup>(b)</sup>	01021-001 <sup>(a)</sup> 01022-001 <sup>(b)</sup> 01237-001 <sup>(c)</sup>	01493-001	01565-001	0743-001	0744-001
<b>MSRP</b>	\$599 <sup>(a)</sup> \$649 <sup>(b)</sup>	9 mm: \$849 <sup>(a)</sup> 9 mm: \$999 <sup>(b)</sup> 22 mm: \$899 <sup>(a)</sup> 22 mm: \$1,049 <sup>(b)</sup>	\$1,099 <sup>(a)</sup> \$1,249 <sup>(b)</sup> \$1,349 <sup>(c)</sup>	\$1,349	\$1,349	\$1349	\$1,549

Notations (a), (b), (c) and (d) refer to the corresponding product models for the column (2) for additional minimum illumination specs please reference the datasheet








## Axis Fixed Dome Network Cameras

	AXIS Q84 Series	AXIS Multi-sensor Network Cameras					AXIS P39-R Series	
	 AXIS Q8414-LVS	 AXIS P3717-PLE	 P3719-PLE <b>NEW</b>	 AXIS P3807-PVE	 AXIS Q3709-PVE	 AXIS Q3708-PVE	 AXIS P3904-R Mk II	 AXIS P3905-R Mk II
<b>Image sensor</b>	1/3" progressive scan CMOS	4x 1/2.8" progressive scan CMOS	4 x 1/2.5" progressive scan RGB CMOS	4 x 1/2.9" progressive scan RGB CMOS	3x 1/2.3" progressive scan CMOS	3 x 1/1.8" progressive scan CMOS	1/2.9" progressive scan CMOS	1/2.9" progressive scan CMOS
<b>Lens</b>	Varifocal 2.5 - 6 mm/F1.2 P-Iris, Remote focus and zoom	Varifocal 3-6mm/F1.8 Motorized focus and zoom	Varifocal 3-6mm/F1.8-2.6 Motorized focus and zoom	4 x lenses, fixed iris 3.2 mm, F2.0 Combined horizontal angle of view: 180°	3 x lenses, fixed iris 5.0 mm, F2.8 Combined horizontal angle of view: 180°	3 x lenses, fixed iris 5.0 mm, F2.8 Combined horizontal angle of view: 180°	3.6 mm/F2.0 fixed iris, adjustable focus, M12 mount	3.6 mm/F2.0 fixed iris, adjustable focus, M12 mount
<b>Horizontal angle of view</b>	105° - 49°	(4 x 1080p) 96° - 49°	(4 x 1440p capture mode) 101° - 49°	180degree (seamless)	180° (combined)	180° (combined)	87°	87°
<b>Day and night</b>	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic		
<b>Min illumination/light sensitivity (lux)</b>	0.1 (color) 0.02 (B/W) 0 (with IR illumination)	0.17(color) 0 (with IR illumination)	0.20 (color) 0.04 (B/W) 0 (with IR illumination)	0.17 (color) 0.05 (B/W)	2 (color) 0.4 (B/W)	0.3 (color) 0.06 (B/W)	Color: 0.15 lux @ 50 IRE F2.0 Color: 0.06 lux @ 30 IRE F2.0	Color: 0.15 lux @ 50 IRE Color: 0.06 lux @ 30 IRE
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264, H.265	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1280 x 960	4x 1920x1080	4 x 2560x1440 Quad view: (4 x QHD 1440p) to 80x60	4320x1920	UltraHD 3 x 3840x2880	3x 2560x1920 3 x Quad HD (2560x1440)	1280x720	1920x1080 (2 MP)
<b>Frames per second</b>	30 (1280x960) 30 (HDTV 720p)	30	Up to 25/30 fps (50/60 Hz)	30 (8MP)	30 (3 x 4K 3840x2160 ) 20 (3 x 11 MP 3840x2880)	20 (3 x 5 MP) 30 (3x Quad HD (2560x1440))	30 (HDTV 720p)	30 (HDTV 1080p)
<b>Pan/Tilt/Zoom</b>								
<b>Audio support</b>	Two-way Built-in mic							
<b>Alarm in-/outputs</b>	1/1							
<b>Intelligent video</b>	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Active tampering alarm AXIS Camera Application Platform AXIS Perimeter Defender	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	ZipStream Technology Motion detection Tampering alarm AXIS Camera Application Platform	ZipStream Technology Motion detection Tampering alarm AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords Signed Firmware IP address filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	PoE IEEE 802.3af Class 3	PoE IEEE 802.3at Class 4	PoE IEEE 802.3at Type 2 Class 4	PoE IEEE 802.3at Class 3	PoE+ IEEE 802.3at Class 4	PoE IEEE 802.3at Class 4	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2
<b>Outdoor use</b>		Outdoor ready -30 °C to 50 °C (-22 °F to 112 °F)	Outdoor ready -30 °C to 50 °C (-22 °F to 112 °F)	Outdoor ready -30 °C to 50 °C (-22 °F to 122 °F)	Outdoor ready -40°C (-40°F) - 55°C (131°F)	Outdoor ready -40 °C to 55 °C (-40 °F to 131 °F)		
<b>Other</b>	Anti-ligature corners, memory card slot, IK10+, IP66 and NEMA 4X ratings, Corridor Format, Built in IR LED (33 ft range), ONVIF	360° multisensor camera, Flexible positioning of four varifocal cameras, IP66-, IP67-, NEMA 4X-rated, IK09 impact-resistant, lightfinder, Forensic WDR, IR illumination (49.2 ft range), memory card slot, ONVIF	15MP, 360° multisensor camera, IP66-, IP67-, NEMA 4X-rated, IK09 impact-resistant, WDR, ONVIF	4 x 5MP, 180° seamless multisensor camera, IP66/ IP67, IK10 and NEMA 4x ratings, WDR-Forensic Capture, Lightfinder Technology, ONVIF, memory card slot	3 x 11 MP 180° combined multisensor camera, Vandal resistant, IP66, IK10 and NEMA 4x ratings, WDR, ONVIF	3 x 5MP, 180° multisensor camera, IP66, IK10 and NEMA 4x ratings, WDR-Forensic Capture, ONVIF	IP67 and NEMA 4x ratings, WDR-Forensic Capture, Lightfinder Technology, digital PTZ, ONVIF, Traffic Light mode, memory card slot, Corridor Format, Rugged connectors for mobile surveillance <sup>(a)</sup>	IP67 and NEMA 4x ratings, WDR-Forensic Capture, Lightfinder Technology, digital PTZ, ONVIF, Traffic Light mode, memory card slot, Corridor Format, Rugged connectors for mobile surveillance <sup>(a)</sup>
<b>Axis Part #</b>	Stainless: 0709-001 <sup>(a)</sup> White: 0710-001 <sup>(b)</sup>	01504-001	01500-001	01048-001	0664-001	0801-001	RJ-45: 01078-001 <sup>(a)</sup> M12: 01071-001 <sup>(b)</sup>	RJ-45: 01072-001 <sup>(a)</sup> M12: 01073-001 <sup>(b)</sup>
<b>MSRP</b>	\$1,299	\$1,349	\$1,599	\$1,349	\$2,399	\$1,999	\$449 <sup>(a)</sup> \$449 <sup>(b)</sup>	\$549 <sup>(a)</sup> \$549 <sup>(b)</sup>

Notations (a) and (b) refer to the corresponding product models for the column; (1) With multi-connector cable - sold separately







## Axis Onboard Network Cameras

## Axis Pan/Tilt/Zoom Network Cameras






	AXIS P39-R Series		AXIS M50 Series			AXIS P54 Series	
							
<b>Image sensor</b>	1/2.8" progressive scan CMOS	1/2.9" progressive scan CMOS	1/4.85" progressive scan CMOS	1/4.85" progressive scan CMOS	1/2.8" progressive scan CMOS	1/2.8" progressive scan CMOS	1/2.8" progressive scan CMOS
<b>Lens</b>	6 mm/F1.6 fixed iris, adjustable focus, M12 mount	3.6 mm/F2.0 fixed iris, adjustable focus, M12 mount	2.2 - 11.0 mm/F1.4 - 2.5 autofocus 5x optical zoom 10x digital zoom	2.2 - 11.0 mm/F1.4 - 2.5 autofocus 5x optical zoom 10x digital zoom	4.7 - 47 mm/F1.6 - 2.8 auto iris and autofocus 10x optical zoom 12x digital zoom	4.7 - 84.6 mm/F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom	4.7 - 84.6 mm/F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom
<b>Horizontal angle of view</b>	56°	87°	14° - 71°	14° - 71°	61.8° - 6.7°	59° - 4°	59° - 4°
<b>Day and night</b>					Automatic	Automatic	Automatic
<b>Min illumination/light sensitivity (lux)</b>	0.2 (color)	Color: 0.15 lux @ 50 IRE Color: 0.06 lux @ 30 IRE	Color: 0.9 lux @ 30 IRE F1.4	Color: 1.2 lux @ 30 IRE F1.4	Color: 0.55 lux @ 50 IRE F1.6 B/W: 0.01 lux @ 50 IRE F1.6 Color: 0.45 lux @ 30 IRE F1.6 B/W: 0.01 lux @ 30 IRE F1.6	0.4 (color) 0.04 (B/W)	0.5 (color) 0.04 (B/W)
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1920x1080 (2 MP)	1920x1080 (2 MP)	1280x720	1920x1080 (2 MP)	1920x1080(2 MP)	1280x720	1920x1080(2 MP)
<b>Frames per second</b>	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 720p)	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 720p)	30 (HDTV 1080p)
<b>Pan/Tilt/Zoom</b>			"25 presets ± 179° pan 0° - 90° tilt Control queue, On-screen directional indicator"	25 presets ± 179° pan 0° - 90° tilt Control queue, On-screen directional indicator	"100 presets, 360° endless pan, 90° tilt, Nadir flip, Limited Guard tour, Control queue, On-screen directional indicator"	100 presets ± 135° pan 0° - 90° tilt Limited guard tour	100 presets ± 135° pan 0° - 90° tilt Limited guard tour
<b>Audio support</b>		One-way	One-way Built-in mic	One-way Built-in mic	Two-way	Two-way	Two-way
<b>Alarm in-/outputs</b>		1/1			4 configurable inputs/outputs	4 configurable inputs/outputs	4 configurable inputs/outputs
<b>Intelligent video</b>	Motion detection Tampering alarm AXIS Camera Application Platform	ZipStream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	ZipStream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	ZipStream Technology Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Advanced Gatekeeper AXIS Camera Application Platform	Motion detection Audio detection AXIS Camera Application Platform	Motion detection Audio detection AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 3	PoE IEEE 802.3af Class 3	DC PoE IEEE 802.3af Class 3 (Midspan and power supply not supplied)	DC PoE+ IEEE 802.3at (Midspan not supplied)	DC PoE+ IEEE 802.3at (Midspan not supplied)
<b>Outdoor use</b>	Outdoor ready -30°C (-22°F) - 55°C (131°F)				Outdoor ready -20°C (-4°F) - 50°C (122°F)	Outdoor ready -20°C (-4°F) - 50°C (122°F)	Outdoor ready -20°C (-4°F) - 50°C (122°F)
<b>Other</b>	IP66 and NEMA 4x ratings, IP6K9K, WDR, digital PTZ, ONVIF, Traffic Light mode, memory card slot, Corridor Format, Rugged connectors for mobile surveillance <sup>(a)</sup>	IP67 and NEMA 4x ratings, WDR- Forensic Capture, Lightfinder Technology, digital PTZ, ONVIF, Traffic Light mode, memory card slot, Corridor Format, Rugged connectors for mobile surveillance <sup>(a)</sup>	IP51 rating, Memory card slot, ONVIF	IP51 rating, Memory card slot, ONVIF, Z-Wave Technology	IP66 and NEMA 4X, WDR-Forensic Capture, Memory card slot, AXIS Guardian, ONVIF	For wall-mount installations only, IP66 and NEMA 4X ratings, built-in wall bracket, direct drive pan/tilt system, memory card slot, ONVIF	For wall-mount installations only, IP66 and NEMA 4X ratings, built-in wall bracket, direct drive pan/tilt system, memory card slot, ONVIF
<b>Axis Part #</b>	RJ-45: 0662-001 <sup>(a)</sup> M12: 0663-001 <sup>(b)</sup>	RJ-45: 01074-001 <sup>(a)</sup> M12: 01075-001 <sup>(b)</sup>	01079-001	01107-004	01146-001	0588-001	0589-001
<b>MSRP</b>	\$649 <sup>(a)</sup> \$649 <sup>(b)</sup>	\$599 <sup>(a)</sup> \$599 <sup>(b)</sup>	\$499	\$599	\$999	\$1,599	\$1,999








## Axis Pan/Tilt/Zoom Network Cameras

	AXIS P56 Series		AXIS V59 Series		Axis Q60 Series	
	AXIS P5624-E Mk II	AXIS P5635-E Mk II	AXIS V5914	AXIS V5915	Q6054 Mk III	Q6054-E Mk III
						
<b>Image sensor</b>	1/2.8" progressive scan CMOS	1/2.8" progressive scan CMOS	1/3" progressive scan CMOS	1/2.8" progressive scan CMOS	1/2.8" progressive scan RGB CMOS	1/2.8" progressive scan RGB CMOS
<b>Lens</b>	4.3-98.9 mm, F1.6-F4.2 auto iris and autofocus 23x optical zoom 12x digital zoom, focus recall	4.3 - 129 mm/F1.6 - 4.7 auto iris and autofocus 30x optical zoom 12x digital zoom, focus recall	4.3 - 129 mm/F1.6 - 4.7 auto iris and autofocus 30x optical zoom 12x digital zoom	4.3 - 129 mm/F1.6 - 4.7 auto iris and autofocus 30x optical zoom 12x digital zoom,	4.3 - 129 mm/F1.6 - 4.7 auto iris and autofocus 30x optical zoom 12x digital zoom, focus recall	4.3 - 129 mm/F1.6 - 4.7 auto iris and autofocus 30x optical zoom 12x digital zoom, focus recall
<b>Horizontal angle of view</b>	57.9°-2.9°	65.6° - 2.0°	63.7° - 2.3°	63.7° - 2.3°	63.6°-2.5°	63.8°-2.6°
<b>Day and night</b>	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
<b>Min illumination/light sensitivity (lux)</b>	0.2 (color) 0.01 (B/W)	0.2 (color) 0.01 (B/W)	0.6 (color) 0.03 (B/W)	1.0 (color) 0.03 (B/W)	0.1 (color) 0.008 (B/W)	0.1 (color) 0.008 (B/W)
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1280x720 (HDTV 720)	1080p 720p	1280x720 HDMI & 3G-SDI 720p	1920x1280 (2.4 MP) HDMI & 3G-SDI 1080p	HDTV 720p 1280x720	HDTV 720p 1280x720
<b>Frames per second</b>	50/60 fps in all resolutions	25/30 fps 1080p 50/60 fps 720p	60 (HDTV 720p)	60 (HDTV 1080p)	60 (HDTV 720p)	60 (HDTV 720p)
<b>Pan/Tilt/Zoom</b>	256 presets, 360° endless pan, 180° tilt, Limited guard tour	256 presets, 360° endless pan, 180° tilt, Limited guard tour	256 presets ±170° pan 90° tilt	256 presets ±170° pan 90° tilt	256 presets, 360° endless pan, 180° tilt, E-Flip, Guard tour, Tour recording	256 presets, 360° endless pan, 180° tilt, E-Flip, Guard tour, Tour recording
<b>Audio support</b>		Two-way <sup>(1)</sup>	Two-way	Two-way	Two-way <sup>(1)</sup>	
<b>Alarm in-/outputs</b>		4 configurable inputs/outputs <sup>(1)</sup>	2 configurable inputs/outputs	2 configurable inputs/outputs	4 configurable inputs/outputs <sup>(1)</sup>	
<b>Intelligent video</b>	Zipstream Technology Motion detection Advanced Gatekeeper AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection <sup>(1)</sup> Advanced Gatekeeper AXIS Camera Application Platform	Audio detection AXIS Camera Application Platform	Audio detection AXIS Camera Application Platform	Zipstream Motion detection Audio detection <sup>(1)</sup> Autotracking Active Gatekeeper Automatic defog AXIS Camera Application Platform	Zipstream Motion detection Autotracking Active Gatekeeper Automatic defog AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	PoE+ IEEE 802.3at Class 4 (Midspan not supplied)	AC/DC (1) PoE+ IEEE 802.3at Class 4 (Midspan not supplied)	DC (Power Supply Included)	DC (Power Supply Included)	AC/DC <sup>(a,1)</sup> PoE+ IEEE 802.3at Class 4 (Midspan supplied)	PoE+ IEEE 802.3at Class 4 High PoE (Midspan supplied)
<b>Outdoor use</b>	Outdoor ready -30 °C to 55 °C (-22 °F to 131 °F)	Outdoor ready -30 °C to 55 °C (-22 °F to 131 °F)				Outdoor ready -50 °C to 50 °C (-58 °F to 122 °F)
<b>Other</b>	Paintable skin cover, IK10, IP66 and NEMA 4X ratings, memory card slot, WDR-Forensic capture, ONVIF	Paintable skin cover, IK10, IP66 and NEMA 4X ratings, memory card slot, WDR-Forensic capture, Electronic Image Stabilizer, AXIS Guardian , ONVIF	SDI and HDMI Type A 720p output, XLR-3 (left + right) microphone/line input, memory card slot, WDR-Dynamic Capture, 48KHz CD Quality Audio, ONVIF	SDI and HDMI Type A 1080p output, XLR-3 (left + right) microphone/line input, memory card slot, WDR-Dynamic Capture, 48KHz CD Quality Audio, ONVIF	Continuous motion 24/7, memory card slot, IP52 rating, Electronic Image Stabilizer, WDR, ONVIF, Lightfinder Technology	Continuous motion 24/7, memory card slot, vandal resistant, IP66 and NEMA 4X ratings, Electronic Image Stabilizer, WDR, , ONVIF, Arctic Temperature Control, Lightfinder Technology
<b>Axis Part #</b>	0932-001	0929-001	0632-004	0634-004	01482-004	01484-004
<b>MSRP</b>	\$1,599	\$1,999	\$1,999	\$2,599	\$2,099	\$2,599

## Axis Pan/Tilt/Zoom Network Cameras







	AXIS Q60 Series				
	 <b>AXIS Q6055</b>	 <b>AXIS Q6055-E</b>	 <b>AXIS Q6055-C Mk II</b>	 <b>AXIS Q6055-S</b>	 <b>AXIS Q6000-E Mk II</b>
<b>Image sensor</b>	1/2.8" progressive scan CMOS	1/2.8" progressive scan CMOS	1/2.8" progressive scan CMOS	1/2.8" progressive scan CMOS	4 x 1/2.8" progressive scan CMOS
<b>Lens</b>	4.44 - 142.6 mm/F1.6 auto iris and autofocus 32x optical zoom 12x digital zoom	4.44 - 142.6 mm/F1.6 auto iris and autofocus 32x optical zoom 12x digital zoom	4.44 - 142.6 mm/F1.6 auto iris and autofocus 32x optical zoom 12x digital zoom	4.44 - 142.6 mm/F1.6 auto iris and autofocus 32x optical zoom 12x digital zoom	1.37 mm/F2.0 fixed iris, fixed focus
<b>Horizontal angle of view</b>	62.8° - 2.23°	62.8° - 2.23°	62.8° - 2.23°	62.8° - 2.23°	360°
<b>Day and night</b>	Automatic	Automatic	Automatic	Automatic	
<b>Min illumination/light sensitivity (lux)</b>	Color: 0.3 lux B/W: 0.03 lux	Color: 0.3 lux B/W: 0.03 lux	0.3 (color) 0.03 (B/W)	0.3 (color) 0.03 (B/W)	0.3 (color)
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	4x 1280x720 (2 MP) Quad view: 1920x1440 (4:3)
<b>Frames per second</b>	30 (HDTV 1080p) 60 (HDTV 720p)	30 (HDTV 1080p) 60 (HDTV 720p)	30 (HDTV 1080p) 60 (HDTV 720p)	30 (HDTV 1080p) 60 (HDTV 720p)	30 (HDTV 720p) 30 (Quad view)
<b>Pan/Tilt/Zoom</b>	256 presets, 360° endless pan, 180° tilt, E-flip, Guard tour, Tour recording	256 presets, 360° endless pan, 220° tilt, E-Flip, Guard tour, Tour recording	256 presets, 360° endless pan, 220° tilt, E-Flip, Guard tour, Tour recording	256 presets, 360° endless pan, 220° tilt, E-Flip, Guard tour, Tour recording	
<b>Audio support</b>	Two-way <sup>(1)</sup>				
<b>Alarm in-/outputs</b>	4 configurable inputs/outputs <sup>(1)</sup>			2 configurable inputs/outputs	
<b>Intelligent video</b>	Zipstream technology Motion detection Audio Detection Autotracking Active Gatekeeper Highlight compensation Object removed Enter/exit detection Fence detector Object counter AXIS Camera Application Platform	Zipstream technology Motion detection Autotracking Active Gatekeeper Highlight compensation Object removed Enter/exit detection Fence detector Object counter AXIS Camera Application Platform	Zipstream technology Motion detection Autotracking Active Gatekeeper Highlight compensation Object removed Enter/exit detection Fence detector Object counter Automatic defog AXIS Camera Application Platform	Zipstream technology Motion detection, Autotracking, Active Gatekeeper, Highlight compensation, Object removed, Enter/exit detection, Fence detector, Object counter, AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm Shock detection AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	AC/DC <sup>(1)</sup> PoE+ IEEE 802.3at Class 4 (Midspan supplied)	High PoE (Midspan supplied)	24 V DC	24 V DC	High PoE <sup>(a)</sup> PoE+ IEEE 802.3at <sup>(b)</sup>
<b>Outdoor use</b>		Outdoor ready -50°C (-58°F) - 50°C (122°F)	Outdoor ready with active cooling -20°C (-4°F) - 75°C (167°F)	Outdoor ready -30 °C (- 67°F) - 50°C (122°F)	Outdoor ready -30°C (-22°F) - 50°C (122°F)
<b>Other</b>	Continuous motion 24/7, memory card slot, IP52 rating, WDR, ONVIF	Continuous motion 24/7, memory card slot, vandal resistant IK10, IP66 and NEMA 4X ratings, WDR, ONVIF, Arctic Temperature Control	Memory card slot, IK10, IP66 and NEMA 4X ratings, WDR, ONVIF	Pressurized, stainless steel casing, continuous motion 24/7, 2xSFP slots for fiber, memory card slot, IP6K9K, IP66 and NEMA 4X ratings, MIL-STD-810G 509.5, WDR, ONVIF	Option of replacing lens in one or more sensor, Compatible with any Q60-E model, Full 360° overview with One-click PTZ control, memory card slot, IP66 and NEMA 4X ratings, WDR, ONVIF
<b>Axis Part #</b>	0908-004	0910-004	0943-001	0945-001	01006-001
<b>MSRP</b>	\$2,549	\$3,099	\$4,099	\$4,499	\$1,599

## Axis Pan/Tilt/Zoom Network Cameras

	AXIS Q61 Series				AXIS Q62 Series
					 <b>NEW</b>
<b>Image sensor</b>	1/3" progressive scan CMOS	1/2.8" progressive scan CMOS	1/2.3" progressive scan CMOS	1/2.8" Progressive scan CMOS	1/1.9" progressive scan CMOS
<b>Lens</b>	4.3 - 129 mm/F1.6 auto iris and autofocus 30x optical zoom 12x digital zoom	4.3 - 129 mm/F1.6 - 4.7 auto iris and autofocus 30x optical zoom 12x digital zoom	3.9 - 46.8 mm/F1.8 auto iris and autofocus 12x optical zoom 12x digital zoom	4.3 - 129 mm/F1.6 - 4.7 auto iris and Laser focus 30x optical zoom 12x digital zoom	Varifocal, 6.7-201mm/F1.6-5.3 Autofocus, automatic day/night
<b>Horizontal angle of view</b>	58.3° - 2.1°	63.5° - 2.3°	70.7° - 6.2°	66.7° - 2.36°	58.6° - 2.2°
<b>Day and night</b>	Automatic	Automatic	Automatic	Automatic	Automatically removable infrared-cut filter
<b>Min illumination/ light sensitivity (lux)</b>	0.15 (color) 0.008 (B/W)	0.1 (color) 0.008 (B/W) 0 lux with IR illumination	0.45 (color) 0.03 (B/W)	0.15 (Color) 0.01 (B/W)	0.07 (Color) 0.008 (B/W) 0 lux with IR illumination
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264, H.265	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	1280x720	1920x1080 (2 MP)	UltraHD 3840x2160 (4K)	1920x1080	1920x1080
<b>Frames per second</b>	60 (HDTV 720p)	60 (HDTV 1080p)	30 (4K 3840x2160) 60 (HDTV 1080p)	30 fps(1080p) 60 fps (720p)	Up to 60/50 fps in all resolutions
<b>Pan/Tilt/Zoom</b>	256 presets, 360° endless pan,+20 to -90° tilt, Guard tour, Tour recording	256 presets, 360° endless pan,+20 to -90° tilt, Guard tour, Tour recording	256 presets, 360° endless pan,+20 to -90° tilt, Guard tour, Tour recording	256 presets, 360° endless pan,+20 to -90°, Guard tour, Tour recording	256 presets, 360 endless pan, -90 to +90 title, 30x optical zoom, 21x digital zoom, tour regarding, guard tour, control queue
<b>Audio support</b>					
<b>Alarm in-/outputs</b>					
<b>Intelligent video</b>	Zipstream Technology Motion detection Autotracking Active Gatekeeper Highlight compensation Tampering alarm Shock detection AXIS Camera Application Platform	Zipstream Technology Motion detection Autotracking Shock detection AXIS Camera Application Platform Axis Fence Guard Axis Motion Guard AXIS Camera Application Platform	Motion detection Autotracking Active Gatekeeper Tampering alarm Shock detection Highlight compensation AXIS Camera Application Platform	Zipstream Technology Motion detection Autotracking Shock detection AXIS Camera Application Platform Axis Fence Guard Axis Motion Guard AXIS Camera Application Platform	Zipstream technology Motion detection Autotracking AXIS Guard Suite AXIS Motion Guard AXIS Fence Guard AXIS Loitering Guard Active tampering alarm AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Password protection IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	High PoE PoE+ IEEE 802.3at Class 4 (Midspan supplied)	High PoE PoE+ IEEE 802.3at Class 4 (Midspan supplied)	High PoE PoE+ IEEE 802.3at Class 4 (Midspan supplied)	High PoE PoE+ IEEE 802.3at Class 4 (Midspan supplied)	High PoE 1 midspan-port: 100-240 V AC
<b>Outdoor use</b>	Outdoor ready -55°C (-67°F) - 50°C (122°F)	Outdoor ready -50°C (-58°F) - 50°C (122°F)	Outdoor ready -50°C (-58°F) - 50°C (122°F)	Outdoor Ready -55 °C to 50 °C (-67 °F to 122 °F)	Outdoor ready -50°C-50°C (-58 °F to 122° F)
<b>Other</b>	Axis Sharpdome technology with Speed Dry, Continuous motion 24/7, memory card slot, Electronic Image Stabilizer, Lightfinder technology, vandal resistant, IK08 IP66 and NEMA 4X ratings, Defogging, WDR-Dynamic Capture, ONVIF, Arctic Temperature Control	Axis Sharpdome technology with Speed Dry, Continuous motion 24/7, memory card slot, Electronic Image Stabilizer, Lightfinder, vandal resistant, IK08, IP66 and NEMA 4X ratings, Defogging, WDR-Forensic Capture, ONVIF,Arctic Temperature Control Optimized IR (656 ft range)	Axis Sharpdome technology with Speed Dry, Continuous motion 24/7, memory card slot, Electronic Image Stabilizer, IK08, IP66 and NEMA 4X ratings, Defogging, ONVIF	Axis Sharpdome technology with Speed Dry, Continuous motion 24/7, memory card slot, Electronic Image Stabilizer,Lightfinder Technology, WDR-Forensic Capture, IK08, IP66 and NEMA 4X ratings, ONVIF Laser Focus (250ft)	IP66, IP68, NEMA 4X and IK10 ratings, Lightfinder, WDR, Long-range OptimizedIR, ONVIF, Arctic temperature control, wipers
<b>Axis Part #</b>	01070-004	01234-004	0799-004	0934-004	01442-001
<b>MSRP</b>	\$2,699	\$2,999	\$3,199	\$2,999	\$3,499







## Axis Pan/Tilt/Zoom Network Cameras

## Axis Thermal Network Cameras

	AXIS P12 Series		AXIS Q19 Series			
	AXIS P1280-E 	AXIS P1290 	AXIS Q1941-E 	AXIS Q1941-E PT 	AXIS Q1942-E 	AXIS Q1942-E PT 
Image sensor	Uncooled Micro bolometer	Uncooled Micro bolometer	Uncooled Micro bolometer	Uncooled Micro bolometer	Uncooled Micro bolometer	Uncooled Micro bolometer
Lens	4 mm, F1.2	4 mm, F1.2	7 mm/F1.2, 13 mm/F1.0 19 mm/F1.23, 35 mm/F1.2 60 mm/F1.25	7 mm/F1.2, 13 mm/F1.0 19 mm/F1.23, 35 mm/F1.2 60 mm/F1.25	10 mm/ F1.25 19 mm/F1.23 35 mm/F1.20 60 mm/F1.25	10 mm/ F1.25 19 mm/F1.23 35 mm/F1.20 60 mm/F1.25
Horizontal angle of view	35.4°	35.4°	7 mm: 55° 13 mm: 28° 19 mm: 19.4° 35 mm: 10.7° 60 mm: 6.2°	7 mm: 55° 13 mm: 28° 19 mm: 19.4° 35 mm: 10.7° 60 mm: 6.2°	10 mm: 63° 19 mm: 32° 35 mm: 17° 60 mm: 10°	10 mm: 63° 19 mm: 32° 35 mm: 17° 60 mm: 10°
Day and night						
Detection range (m/yd.)	166/182 <sup>(a)</sup> 511/599 <sup>(a)</sup>	166/182 <sup>(a)</sup> 511/599 <sup>(a)</sup>	7 mm: 200/219 <sup>(c)</sup> 613/671 <sup>(d)</sup> 13 mm: 393/430 <sup>(c)</sup> 1205/1318 <sup>(d)</sup> 19 mm: 567/620 <sup>(c)</sup> 1739/1902 <sup>(d)</sup> 35 mm: 1028/1124 <sup>(c)</sup> 3153/3448 <sup>(d)</sup> 60 mm: 1774/1940 <sup>(c)</sup> 5441/5951 <sup>(d)</sup>	7 mm: 200/219 <sup>(c)</sup> 613/671 <sup>(d)</sup> 13 mm: 393/430 <sup>(c)</sup> 1205/1318 <sup>(d)</sup> 19 mm: 567/620 <sup>(c)</sup> 1739/1902 <sup>(d)</sup> 35 mm: 1028/1124 <sup>(c)</sup> 3153/3448 <sup>(d)</sup> 60 mm: 1774/1940 <sup>(c)</sup> 5441/5951 <sup>(d)</sup>	10 mm: 291/318 <sup>(c)</sup> 892/978 <sup>(d)</sup> 19 mm: 573/627 <sup>(c)</sup> 1757/1921 <sup>(d)</sup> 35 mm: 1079/1179 <sup>(c)</sup> 3307/3617 <sup>(d)</sup> 60 mm: 1833/2005 <sup>(c)</sup> 5623/6149 <sup>(d)</sup>	10 mm: 291/318 <sup>(c)</sup> 892/978 <sup>(d)</sup> 19 mm: 573/627 <sup>(c)</sup> 1757/1921 <sup>(d)</sup> 35 mm: 1079/1179 <sup>(c)</sup> 3307/3617 <sup>(d)</sup> 60 mm: 1833/2005 <sup>(c)</sup> 5623/6149 <sup>(d)</sup>
Sensitivity	NETD < 100 mK	NETD < 100 mK	NETD < 70 mK	NETD < 70 mK	NETD < 50 mK	NETD < 50 mK
Min illumination/light sensitivity (lux)						
Video compression	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
Max video resolution (pixels)	208 x 156	208 x 156	384x288	384x288	640x480	640x480
Frames per second	8.3	8.3	8.3/30 <sup>(1)</sup>	8.3/30 <sup>(1)</sup>	8.3/30 <sup>(1)</sup>	8.3/30 <sup>(1)</sup>
Pan/Tilt/Zoom						
Audio support			Two-way		Two-way	
Alarm in-/outputs			2 configurable inputs/outputs		2 configurable inputs/outputs	
Intelligent video	Zipstream Technology Motion detection AXIS Camera Application Platform	Zipstream Technology Motion detection AXIS Camera Application Platform	Zipstream Technology Motion detection Shock detection Audio detection AXIS Camera Application Platform	Zipstream Technology Motion detection Shock detection AXIS Camera Application Platform	Zipstream Technology Motion detection Audio detection Shock detection AXIS Camera Application Platform	Zipstream Technology Motion detection Shock detection AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Power	PoE IEEE 802.3af Class 2	AC/DC PoE IEEE 802.3af Class 2	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3
Outdoor use	Outdoor ready Main unit: -4 °F to 122 °F Thermal sensor unit: -22 °F to 131 °F	Main unit: -4 °F to 122 °F Thermal sensor unit: -22 °F to 131 °F	Outdoor ready -40°C (-40°F) - 60°C (142°F)	Outdoor ready -40°C (32°F) - 60°C (142°F)	Outdoor ready -40°C (-40°F) - 60°C (140°F)	Outdoor ready -40°C (-40°F) - 60°C (142°F)
Other	IP66, IP67 and NEMA 4x ratings, palette setting, Corridor Format, AXIS Guardian, ONVIF	discreet fixed dome design, IP66, IP67 and NEMA 4x ratings, palette setting, Corridor Format, AXIS Guardian, ONVIF	Electronic Image Stabilizer, Memory card slot, IP66 and NEMA 4X ratings, palette setting, Corridor Format, AXIS Guardian, ONVIF	Electronic Image Stabilizer, Memory card slot, IP66 and NEMA 4X ratings, palette setting, Corridor Format, ONVIF, RS485/RS422	Electronic Image Stabilization, IP66, IP67 and NEMA 4x ratings, palette setting, Corridor Format, ONVIF	Electronic Image Stabilization, Memory card slot, IP66 and NEMA 4x ratings, palette setting, Corridor Format, ONVIF, RS485/RS422
Axis Part #	0940-001	01168-001	7 mm: 0786-001 13 mm: 0787-001 19 mm: 0877-001 35 mm: 0788-001 60 mm: 0789-001	7 mm 0973-001 13 mm 0974-001 19 mm: 0979-001 35 mm: 0975-001 60 mm: 0977-001	10 mm: 0916-001 19 mm: 0918-001 35 mm: 0920-001 60 mm: 0922-001	10 mm: 0981-001 19 mm: 0983-001 35 mm: 0985-001 60 mm: 0987-001
MSRP	\$799	\$849	7 mm: \$2,799 13 mm: \$2,799 19 mm: \$2,799 35 mm: \$3,799 60 mm: \$5,299	7 mm: \$2799 13 mm: \$2799 19 mm: \$2799 35 mm: \$3799 60 mm: \$5299	10 mm: \$4,999 19 mm: \$4,999 35 mm: \$5,999 60 mm: \$7,499	10 mm: \$4,999 19 mm: \$4,999 35 mm: \$5,999 60 mm: \$7,499

## Axis Thermal Network Cameras

## Axis Explosion Protected Cameras







	AXIS Q29 Series		Axis Explosion Protected Cameras			
	AXIS Q2901-E <sup>(a)</sup> AXIS Q2901-E PT <sup>(b)</sup> 	AXIS XF40-Q1765 	AXIS XF60-Q1765 	AXIS XP40-Q1765 PTZ 	AXIS XF40-Q2901 (a) AXIS XF60-Q2901 (b) 	AXIS D201-S XPT Q6055 
<b>Image sensor</b>	Uncooled Micro bolometer	1/2.9" progressive scan CMOS	1/2.9" progressive scan CMOS	1/2.9" progressive scan CMOS	Uncooled Micro bolometer	1/2.8" progressive scan RGB CMOS
<b>Lens</b>	9 mm/F1.25 19 mm/F1.25	4.7 - 84.6 mm/F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom	4.7 - 84.6 mm/F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom	4.7 - 84.6 mm/F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom	19 mm/F1.25	4.44-142.6 mm
<b>Horizontal angle of view</b>	9 mm: 35° 19 mm: 17°	59° - 4°	59° - 4°	59° - 4°	17°	62.8°-2.23°
<b>Day and night</b>		Automatic	Automatic	Automatic		Automatic
<b>Detection range (m/yd.)</b>	Thermography: <sup>(3)</sup> -40°C (-40°F) to 550°C (1022 °F)				10x10 pixels in 336x256	
<b>Sensitivity</b>	NETD < 50 mK				NETD < 50 mK	
<b>Min illumination/light sensitivity (lux)</b>		0.5 (color) 0.04 (B/W)	0.5 (color) 0.04 (B/W)	0.5 (color) 0.04 (B/W)		0.3 (color) 0.03 (B/W)
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	336x256	1920x1080 (2 MP)	1920x1080 (2 MP)	1920x1080 (2 MP)	336x256	1920x1080 (2 MP)
<b>Frames per second</b>	8.3	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 1080p)	8.3	30 (HDTV 1080p)
<b>Pan/Tilt/Zoom</b>				360° endless pan, +/-90° tilt		Pan: 360° endless, 0.05°-400°/s Tilt: 220°, 0.05°-450°/s Visual camera: 32x optical zoom and 12x digital zoom
<b>Audio support</b>	Two-way <sup>(4)</sup>					
<b>Alarm in-/outputs</b>	2 configurable inputs/outputs <sup>(4)</sup>					
<b>Intelligent video</b>	Motion detection Temperature detection Tampering alarm Shock detection Audio Detection <sup>(4)</sup> AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm Guard Tour AXIS Camera Application Platform	Motion detection Shock detection AXIS Camera Application Platform	Zipstream technology; Motion detection Audio Detection; Autotracking Active Gatekeeper; Highlight compensation Object removed; Enter/exit detection Fence detector; Object counter Automatic defog AXIS Camera Application Platform
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering, HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	AC/DC PoE IEEE 802.3af Class 3	24 V AC (Power Supply not Included)	110 V AC (Power Supply not Included)	24 V AC <sup>(a)(c)(d)</sup> 110 V AC <sup>(b)</sup> (Power Supply not Included)	24 V AC <sup>(a)</sup> 110 V AC <sup>(b)</sup> (Power Supply not Included)	AXIS T8154 60 W SFP Midspan: 100-240 V AC,
<b>Outdoor use</b>	Outdoor ready -40°C (-40°F) - 60°C (142°F)	Outdoor ready UL: -50 °C to 70 °C (-58 °F to 158 °F) -40°C (-40°F) - 60°C (140°F) <sup>(a)</sup> -60°C (-76°F) - 40°C (104°F) <sup>(b)</sup>	Outdoor ready -50 °C to 70 °C (-58 °F to 158 °F)	Outdoor ready -50 °C to 70 °C (-58 °F to 158 °F) <sup>(a)(b)</sup> -40°C (-40°F) - 60°C (140°F) <sup>(c)</sup> -60°C (-76°F) - 40°C (104°F) <sup>(d)</sup>	Outdoor ready -50°C (-58°F) - 55°C (131°F)	Outdoor ready -50°C (-58°F) - 50°C (122°F)
<b>Other</b>	Memory card slot, IP66 and NEMA 4X ratings, palette setting, Corridor Format, ONVIF, Ready for use with Axis Pan Tilt Motor (YP3040), RS-422/RS-485 <sup>(b)</sup>	IP66 and NEMA 4X ratings, 316L stainless steel, UL, CSA,UL models: Three 3/4" NPT conduit entries	IP66 and NEMA 4X ratings, 316L stainless steel, UL, Three 3/4" NPT conduit entries	IP66 and NEMA 4X ratings, 316L stainless steel, UL, CSA, UL models: Two 3/4" NPT conduit entries	IP66 rating, 316L stainless steel, Spot Temperature reading, Temperature alarm and isothermal palettes, memory card slot, Three 3/4" NPT conduit entries	Memory card slot, IP66 and NEMA 4X ratings, 316L stainless steel, WDR
<b>Axis Part #</b>	9 mm: 0645-001 <sup>(a)</sup> 19 mm: 0647-001 <sup>(a)</sup> 9 mm: 0646-001 <sup>(b)</sup> 19 mm: 0648-001 <sup>(b)</sup>	(USA) 01111-001 <sup>(a)(c)</sup> (CAN) 0835-041 <sup>(a)</sup> (CAN) 0835-051 <sup>(b)</sup>	01124-001	(USA) 01113-001 <sup>(a)(c)</sup> <sup>(a)</sup> (USA) 01126-001 <sup>(UL 110V)</sup> <sup>(b)</sup> (CAN) 0836-041 <sup>(c)</sup> (CAN) 0836-051 <sup>(d)</sup>	01133-001 <sup>(a)</sup> 01135-001 <sup>(b)</sup>	01480-001
<b>MSRP</b>	9 mm \$5,199 19 mm \$5,199 <sup>(a)</sup> 9 mm \$5,199 19 mm \$5,199 <sup>(b)</sup>	UL: \$7,899.00 \$6,999 <sup>(a)</sup> \$7,599 <sup>(b)</sup>	\$8,399.00	\$20,699.00 <sup>(a)</sup> , \$20,999.00 <sup>(b)</sup> \$17,499 <sup>(c)</sup> \$18,499 <sup>(d)</sup>	\$20999 <sup>(a)</sup> \$21,799 <sup>(b)</sup>	\$14,999

Notations (a) and (b) refer to the corresponding product models for the column; Notifications (c) and (d) refer to detection range measured for (c) humans 1.8 m x 0.5 m and (d) vehicles 2.3 x 2.3 m, calculated with Johnson's criteria; (1) 30 fps available for EU001 compliant countries such as U.S. and Canada; (3) Review datasheets for more details (4) With multi-connector cable - sold separately;









## Axis Explosion Protected Cameras

## Axis Positioning Cameras




30

		AXIS Q86 Series			AXIS Q87 Series	
	F101-A XF P1367 	AXIS Q8641-E PT Thermal 	AXIS Q8642-E PT Thermal 	AXIS Q8685-E <sup>(a)</sup> AXIS Q8685-LE <sup>(b)</sup> 	AXIS Q8741-E <sup>(a)</sup> AXIS Q8741-LE <sup>(b)</sup> 	AXIS Q8742-E <sup>(a)</sup> AXIS Q8742-LE <sup>(b)</sup> AXIS Q8742-E Zoom <sup>(c)</sup> AXIS Q8742-LE Zoom <sup>(f)</sup> 
Image sensor	1/2.9" progressive scan RGB CMOS	Uncooled Micro bolometer	Uncooled Micro bolometer	1/2.8" progressive scan CMOS	Visual: 1/2.8" progressive scan CMOS Thermal: Uncooled micro bolometer	Visual: 1/2.8" progressive scan CMOS Thermal: Uncooled micro bolometer
Lens	2.8 - 8.5 mm	35 mm/F1.2	60 mm/F1.25	4.3-129 mm, F1.6-4.7 mm auto iris and autofocus 30x optical zoom 12x digital zoom	Visual: 4.3-129 mm 30x optical zoom and 12x digital zoom Thermal: Athermalized 35 mm	Visual: 4.3-129 mm 30x optical zoom and 12x digital zoom Thermal: Athermalized 35 mm <sup>(a,b)</sup> Zoom: Athermalized 35-105 mm <sup>(c,f)</sup>
Horizontal angle of view	104°-36°	10.7°	10°	65.6°-2.0°	Visual: 65.6° Thermal: 10.5°	Visual: 65.6°-2° Thermal: 17° (a,b) Zoom: 18°-6° (c,f)
Day and night	Automatic			Automatic	Automatic	Automatic
Detection range (m/yd.)		1028/1124 <sup>(c)</sup> 3153/3448 <sup>(d)</sup>	1833/2005 <sup>(c)</sup> 5623/6149 <sup>(d)</sup>		1028/1124 <sup>(c)</sup> 3153/3448 <sup>(d)</sup>	1079/1179 <sup>(c)</sup> 3307/3617 <sup>(d)</sup>
Sensitivity		NETD < 70 mK	NETD < 50 mK		NETD < 70 mK	NETD < 50 mK
Min illumination/light sensitivity (lux)	0.15 (color) 0.03 (B/W)			0.2 (color) 0.01 (B/W) 0 (with IR illumination) <sup>(b)</sup>	0.2 (color) 0.01 (B/W) 0 (with IR illumination) <sup>(b)</sup>	0.2 (color) 0.01 (B/W) 0 (with IR illumination) <sup>(b)</sup>
Video compression	Motion JPEG, H.264 3072x1728 (5 MP) 30 FPS	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
Max video resolution (pixels)	3072x1728 (5 MP)	384x288	640x480	1920x1080 (2 MP)	Visual: 1920x1080 Thermal: 384x288	Visual: 1920x1080 Thermal: 640x480
Frames per second	30 FPS	8.3/30 <sup>(1)</sup>	8.3/30 <sup>(1)</sup>	30 (HDTV 1080p) 60 (HDTV 720p)	Visual: 30 fps Thermal: 8.3/30 fps <sup>(1)</sup>	Visual: 30 fps Thermal: 8.3/30 fps <sup>(1)</sup>
Pan/Tilt/Zoom		360° endless pan, 90° to -40° tilt, Guard tour	360° endless pan, 90° to -45° tilt, Guard tour	360° endless pan, 90° to -45° tilt Guard tour	360° endless pan, 90° to -45° tilt	360° endless pan, 90° to -45° tilt
Audio support						
Alarm in-/outputs		4 configurable inputs/outputs	4 configurable inputs/outputs	4 configurable inputs/outputs	4 configurable inputs/outputs	4 configurable inputs/outputs
Intelligent video	Zipstream technology Motion detection Autotracking Fence detector AXIS Camera Application Platform	Zipstream Technology Motion detection Shock detection AXIS Camera Application Platform	Zipstream Technology Motion detection Shock detection AXIS Camera Application Platform	Zipstream Technology Motion detection Tampering alarm AXIS Camera Application Platform	Zipstream Technology Motion detection AXIS Camera Application Platform	Zipstream Technology Motion detection AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Power	PoE IEEE 802.3af Class 3	24 V AC/DC	24 V AC/DC	24 V AC/DC	24 V AC/DC	24 V AC/DC
Outdoor use	Outdoor ready -50°C (-58°F) - 50°C (122°F)	Outdoor ready -40°C (-40°F) - 60°C (140°F)	Outdoor ready -40°C (-40°F) - 60°C (140°F)	Outdoor ready -50°C (-58°F) - 55°C (131°F)	Outdoor ready -50°C (-58°F) - 55°C (131°F)	Outdoor ready -50°C (-58°F) - 55°C (131°F)
Other	IP66 and NEMA 250 4X ratings, WDR-Forensic Capture, Lightfinder Technology, Class I/II/III Div 1 and Zone 1 certifications	IP66 and NEMA 4X rating, High speed precision PT-head, memory card, palette setting, ONVIF, SFP slot	IP66 and NEMA 4X rating, High speed precision PT-head, memory card, palette setting, ONVIF, SFP slot	IR LED (up to 500 meters) <sup>(b)</sup> , WDR-Forensic Capture, Electronic Image Stabilization, Memory card slot, IP66 and NEMA 4X ratings, Wiper included, ONVIF, SFP slot	IR LED (up to 500 meters) <sup>(b)</sup> , IP66 and NEMA 4X rating, High speed precision PT-head, memory card, ONVIF, SFP slot, WDR-Forensic Capture	IR LED (up to 500 meters) <sup>(b)</sup> , IP66 and NEMA 4X rating, High speed precision PT-head, memory card, ONVIF, SFP slot, WDR-Forensic Capture
Axis Part #	01703-001	30 FPS:01119-001 <sup>(a)</sup>	30 FPS: 01121-001	0862-001 <sup>(a)</sup> 0864-001 <sup>(b)</sup>	0824-001 <sup>(a)</sup> 01013-001 <sup>(b)</sup>	0828-001 <sup>(a)</sup> 01017-001 <sup>(b)</sup> 0830-001 <sup>(a)</sup> 01019-001 <sup>(b)</sup>
MSRP	\$3,999	\$5,799	\$9,499	\$ 3,599 <sup>(a)</sup> \$5,199 <sup>(b)</sup>	\$ 9,999 <sup>(a)</sup> \$11,599 <sup>(b)</sup>	\$ 12,999 <sup>(a)</sup> \$14,599 <sup>(b)</sup> \$21,999 <sup>(a)</sup> \$23,599 <sup>(b)</sup>

## Axis Video Encoders

	AXIS M70 Series			AXIS P72 Series			AXIS Q74 Series	
	AXIS M7011 	AXIS M7014 	AXIS M7016 	AXIS P7214 	AXIS P7216 	AXIS P7224 	AXIS Q7401 	AXIS Q7411 
Video compression	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
Max video resolution (pixels)	D1: 720x480 (NTSC)	D1: 720x480 (NTSC)	D1: 720x480 (NTSC)	D1: 720x480 (NTSC)	D1: 720x480 (NTSC)	D1: 720x480 (NTSC)	D1: 720x480 (NTSC)	D1: 720x480 (NTSC)
Frames per second H.264 (NTSC) in maximum resolution	30 (D1)	15 (D1) per channel	30 (D1) per channel	30 (D1) per channel	30 (D1) per channel	30 (D1) per channel	30 (D1)	60 (D1)
Frames per second Motion JPEG (NTSC) in maximum resolution	30 (D1)	15 (D1) per channel	30 (D1) per channel	30 (D1) per channel	30 (D1) per channel	30 (D1) per channel	30 (D1)	60 (D1)
Video source	1 BNC composite input	4 BNC composite inputs	16 BNC composite inputs	4 BNC composite inputs	16 BNC composite inputs	4 BNC composite inputs	1 BNC composite input	1 BNC composite input
Audio support				Two-way	Two-way	Two-way	Two-way	Two-way
Alarm in-/outputs				4 configurable inputs/outputs	4 configurable inputs/outputs	4 configurable inputs/outputs	4 configurable inputs/outputs	4 configurable inputs/outputs
Intelligent video	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm	Motion detection Tampering alarm	Motion detection Audio detection Tampering alarm	Motion detection Audio detection Tampering alarm	Motion detection Audio detection Tampering alarm	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform
Pan/tilt/zoom support	●	●	●	●	●	●	●	●
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Power	PoE IEEE 802.3af Class 1	DC PoE IEEE 802.3af Class 3	DC	DC PoE IEEE 802.3af Class 3	DC	DC	DC PoE IEEE 802.3af Class 2	DC PoE IEEE 802.3af Class 2
Serial connectors	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485
Version: Standalone/Blade	Standalone	Standalone	Standalone	Standalone	Standalone	Blade	Standalone	Standalone
Other	1 IP address, Memory card slot, ONVIF	1 IP address, Memory card slot, Quad-view, ONVIF	4 IP addresses, 4X Memory card slots Quad-view, ONVIF	1 IP address, Memory card slot, Quad-view, ONVIF	4 IP addresses, 4X Memory card slots Quad-view, ONVIF	1 IP address, Quad-view, ONVIF	1 IP address, Memory card slot, ONVIF	1 IP address, Coaxitron® PTZ Control, memory card slot, ONVIF
Axis Part #	0764-001	0415-004	0541-004	0417-004	0542-004	0418-001	0288-004	0518-004
MSRP	\$199	\$299	\$999	\$399	\$1,299	\$399	\$399	\$399

## Axis Video Encoders

	AXIS Q74 Series		
	AXIS Q7414	AXIS Q7424-R Mk II	AXIS Q7436
			
<b>Video compression</b>	Motion JPEG, H.264	Motion JPEG, H.264	Motion JPEG, H.264
<b>Max video resolution (pixels)</b>	D1: 720x480 (NTSC)	D1: 720x480 (NTSC)	D1: 720x480 (NTSC)
<b>Frames per second H.264 (NTSC) in maximum resolution</b>	30 (D1) per channel	30 (D1) per channel	60 (D1) per channel
<b>Frames per second Motion JPEG (NTSC) in maximum resolution</b>	30 (D1) per channel	30 (D1) per channel	60 (D1) per channel
<b>Video source</b>	4 BNC composite inputs	4 BNC composite inputs	6 BNC composite inputs
<b>Audio support</b>	Two-way	Two-way	
<b>Alarm in-/outputs</b>	2 configurable inputs/outputs per channel	4 configurable inputs/outputs	2 configurable inputs/outputs per channel
<b>Intelligent video</b>	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection, Audio detection Tampering alarm. AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform
<b>Pan/tilt/zoom support</b>	●	●	●
<b>Security</b>	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
<b>Power</b>	DC	AC/DC PoE IEEE 802.3af Class 3	DC
<b>Serial connectors</b>	RS-422/RS-485	RS-422/RS-485	RS-485
<b>Version: Standalone/ Blade</b>	Blade	Standalone	Blade
<b>Other</b>	4 IP addresses, ONVIF	1 IP address, Rugged, operates in temperatures from -40°C (-40°F) to 75°C (167°F), memory card slot, Quad-view, ONVIF	6 IP addresses, Coaxitron® PTZ control, ONVIF
<b>Axis Part #</b>	0354-001	0742-001	0584-001
<b>MSRP</b>	\$999	\$899	\$1,199

## Axis Rack Solutions

Designed for high-density installations, Axis video encoder rack solutions accommodate multiple video encoder blades in the same rack.



	AXIS 291 1U Video Server Rack	AXIS Q7920
		
<b>Number of slots</b>	3	14
<b>Blades supported</b>	AXIS Q7414, AXIS P7224, AXIS Q7436	AXIS Q7414, AXIS P7224, AXIS Q7436
<b>Maximum number of channels</b>	18	84
<b>Rack size</b>	1U	5U
<b>Rack width</b>	19"	19"
<b>Built-in power supply</b>	Power supply	Two redundant power supplies
<b>Network</b>	One Ethernet 10BASE-T/100BASE-TX/1000BASE-T (Gigabit Ethernet) port	Four Ethernet 10BASE-T/100BASE-TX/1000BASE-T (Gigabit Ethernet) ports / Four 1 Gbps SFP slots
<b>Axis Part #</b>	0267-004	0575-004
<b>MSRP</b>	\$399	\$2,599

For more information, visit [www.axis.com/products/video/video\\_server/](http://www.axis.com/products/video/video_server/)













## Axis Common Accessories\*





### Corner Mounts

Axis Part #	Product	Compatible with:	MSRP
 5017-641	AXIS T91A64 Corner Bracket	Works with T91B61 and T91D61	\$79
 5504-711	AXIS T94P01B Corner Bracket	Works with P14, Q17 and Q19 Series	\$79

### Recessed Mounts

Axis Part #	Product	Compatible with:	MSRP
 5503-901	AXIS T94F01L (Indoor Only)	M3024,25,26,27,M3037-LVE/VE/PVE	\$89
 01155-001	AXIS T94K02L (Indoor Only)	P32XX-V/-LV, P33XX-V/-LV, Q3505-V	\$79
 01156-001	AXIS T94M02L Recessed Mount	Outdoor recessed mount for mid-size outdoor dome cameras such as: AXIS P32-VE/-LVE, P33-VE/-LVE and Q35-VE/-LVE series	\$109
 5801-441	AXIS T94V01L RECESSED MOUNT	Indoor and outdoor use for the AXIS Q36-VE and AXIS P38 Series	\$109
 5506-171	AXIS T94A02L (Outdoor)	P5624-E, P5635-E	\$139
 5505-721	AXIS T94A01L (Outdoor)	Q60XX-E (Only -E PTZ Models)	\$249
 5507-671	AXIS T94S01L	P32XX-V/LV	\$42
 5801-611	AXIS T94A04L (Indoor/outdoor)	Q61XX-E	\$139
 5801-441	T94V01L (Outdoor)	Q36XX-VE	\$109
 5801-861	AXIS T94B03L Recessed Mount	M2025/26-LE and Axis Companion Bullet (Indoor Mount)	\$69






### Pole Mounts

Axis Part #	Product	Compatible with:	MSRP
 01470-001	AXIS T91B57 POLE MOUNT 100-410MM	AXIS T91G61, T91H61, and AXIS T98A Surveillance Cabinet series	\$115
 5010-671	T95A67 Pole Bracket (3.1 - 5.9" diameter pole)	T98A Surveillance Cabinets, Q86 and Q87 series	\$129
 01164-001 <sup>(a)</sup> 01165-001 <sup>(b)</sup>	AXIS T91B47 Pole Mount 4"-16" diameter pole <sup>(a)</sup> 2"-6" diameter pole <sup>(b)</sup>	Fits most domes and outdoor bullet series camera	\$85 <sup>(a)</sup> \$75 <sup>(b)</sup>
 01473-001	AXIS T91B67 POLE MOUNT 65-165MM	Mount with 1.5" NPS thread for fixed dome pendant kits	\$95






### Pendant Kits

Axis Part #	Product	Compatible with:	MSRP
 5507-361	AXIS T94B02D Pendant Kit	M3044/45/46-V	\$29
 5503-881	AXIS T94F01D Pendant Kit (Indoor)	AXIS M3006-V, M3007-P/-PV, M3024, 25, 26, 27, 37-LVE/-VE/-PVE, P14	\$39
 5900-021	AXIS T94F02D Pendant Kit (Outdoor)	AXIS M3024, 25, 26, 27, 37-LVE/-VE/-PVE	\$39
 5505-081	AXIS T94K01D Pendant Kit (Indoor)	AXIS P32XX-V/-LV, P33XX-V/-LV, Q3505-V	\$39
 5502-321	P33-VE Pendant kit	AXIS P33XX-VE/-LVE	\$49
 5502-431	AXIS T94A01D Pendant Kit	AXIS Q37XX-PVE, P55, P56, Q60, Q6000, Q61	\$49
 5505-871	AXIS T94T01D Pendant Kit	AXIS P32XX-VE/-LVE	\$49
 5505-091	AXIS T94M01D Pendant Kit	AXIS Q3505-VE	\$59
 5801-431	AXIS T94V01D Pedant Kit	AXIS Q36XX-VE	\$89
 01457-001	AXIS T94V01C Dual Camera Mount	Compatible with Axis dome cameras, box cameras, and bullet cameras.	\$99
 01513-001	AXIS T94N01D PENDANT KIT	AXIS P3717-PLE	\$89



### Wall Mounts

Axis Part #	Product	Compatible with:	MSRP
 5504-821	AXIS T91D61 Wall Bracket	Requires correct pendant kit for camera	\$84
 5506-481	AXIS T91E61 Wall Bracket	Requires correct pendant kit for camera	\$39
 5506-951	AXIS T91G61 Wall Bracket	Includes integrated T94A01D pendant kit and pre-mounted Ethernet cable with IP66 RJ45 connector	\$175
 5801-721	AXIS T91L61 Wall-and-Pole Mount	Built in IP66 RJ45 connector, allow for RJ45 or IDC connector. Integrated T94A01D pendant kit	\$99
 01516-001	AXIS T91R61 Wall Mount	Compatible with Axis network radar detectors, water and dust protection, tilt angle up to 90 degrees	\$129

### Additional Mounts that Must be Used with the Appropriate Pendant Kit

Axis Part #	Product	Compatible with:	MSRP
 5504-641	AXIS T91B63	Ceiling Mount 29.5in, Ships with T94A01D Pendant Kit	\$119
 5504-631	AXIS T91B62	Parapet Mount, Ships with T94A01D Pendant Kit	\$189
 5507-451	AXIS T91B50	Telescoping Mount 1 - 5 meters (outdoor)	\$199
 5507-271	AXIS T91D62	Telescoping Parapet and Wall Mount	\$349
 5507-641	AXIS T91H61 Wall Mount	For fixed dome camera. Pre-mounted Ethernet cable with IP66 RJ45 connector and room for injector	\$175

### Q6000-E Accessories

Axis Part #	Product	Compatible with:	MSRP
 5801-321	Axis Q6000-E SOLO KIT	Kit for making a stand-alone AXIS Q6000-E MkII installation without PTZ camera inside.	\$119
 5901-301	AXIS T94A01C Attachment Kit	For attaching Axis Q61 PTZ Network Cameras to Axis Q6000-E/ Axis Q6000-E MKII	\$99






(\* Please check our website for a complete list of compatible mounts and accessories <http://www.axis.com/products/accessories>

## Axis Common Accessories\*







### Midspans

Axis Part #	Product	Compatible with:	MSRP
 5026-204	AXIS T8120	15 watt midspan	\$59
 5900-294	AXIS T8133	30 watt midspan	\$79
 5900-334	AXIS T8134	60 watt midspan	\$149
 5030-234	AXIS T8123-E	30 watt Outdoor midspan	\$249
 5031-244	AXIS T8124-E	60 watt Outdoor midspan	\$319
 5023-121	AXIS T81B22	30 watt DC midspan 12 / 24 v DC Input	\$99
 5900-251	AXIS T8125	60 watt midspan 24v AC Input	\$159
 5008-001	AXIS PoE Active Splitter 5v AF	PoE input, 5 V DC output	\$59
 5500-001	AXIS T8127 60w Splitter 12/24 v DC	PoE input, 12 / 24v DC output up to 54w	\$159
 5801-641	AXIS T8061 Ethernet Surge Protector	Surge Handling Capability: 10 kV, 5 kA to ground in 8/20 μs 800 V, 100 A POE	\$99

### Media Converters

Axis Part #	Product	Compatible with:	MSRP
 5025-281	AXIS T8129	POE Extender	\$199
 01148-001	AXIS T8219-E	Outdoor POE Extender	\$299
 5026-401	AXIS T8640	POE over coax adapters kit	\$414
 5026-471	AXIS T8646	POE over coax blade kit	\$1,699
 5027-041	AXIS T8604	Fiber media converter switch	\$399

### Multi-Connector Cables

Axis Part #	Product	Compatible with:	MSRP
 5502-491 (5 meter)	Multi-Connector Cable	P55 and Q60 Indoor series only	\$109
 5506-201 (1 meter)	Multi-Connector Cable	P5635-E Only	\$109
 5506-191 (3 meter)			\$139
 5502-731 (5 meter)	STP Outdoor rated RJ45 Cable with Push Pull Connector	P56-E, P55-E, Q60-E, Q61-E and Q3709-PVE series only	\$79
 5504-731 (15 meter)			\$149
 5700-371	Push Pull IP66 RJ-45 connector only	P56-E, P55-E, Q60-E, Q61-E and Q3709-PVE series only	\$49

### AXIS T8415 Wireless Installation Tool








AXIS T8415 Wireless Installation Tool is a battery-powered handheld device able to directly power up network cameras during installation. It includes a free-of-charge app. From the live video, easy access to basic key features to set the cameras optimal viewing angle, focus and IP settings

AXIS Part # 5506-231 \$599

AXIS T8415 WIRELESS INST TOOL KIT





AXIS Part # 5506-881 \$699

### AXIS T98A-VE Surveillance Cabinets



Axis Part #	Product	Compatible with:	MSRP
 5900-151	AXIS T98A15-VE Surveillance Cabinet	Blank Door	\$269
 5900-161	AXIS T98A16-VE Surveillance Cabinet	P13-E and Q16-E Series	\$269
 5900-171	AXIS T98A17-VE Surveillance Cabinet	Outdoor P32, P33, Q35, P14, Q1765-LE, Q19, Q29, Q36	\$269
 5900-181	AXIS T98A18-VE Surveillance Cabinet	T91D61 and, T91B61, T91L61 and T91D61 Wall Mounts	\$269
 5900-321	AXIS T98A19-VE Surveillance Cabinet	P54-E Series	\$269

(Cabinets do not ship with cameras. They only ship with the correct door to match the camera being mounted.)

### Axis Z-Wave Accessories (Compatible with the Axis M5065 only)

Axis Part #	Product	Compatible with:	MSRP
 01202-004	Axis T8341 PIR Motion Sensor	Wireless Motion Detector	\$49
 01203-004	Axis T8342 Door/ Window Sensor	Wireless door/window sensor	\$49
 01204-004	Axis T8343 Alert Button	Wireless alert button	\$49
 01205-004	Axis T8344 Power on/ off Plug	Wireless on/off plug	\$49

### Miscellaneous Accessories

Axis Part #	Product	Compatible with:	MSRP
 5801-121	AXIS Bird Control Spikes	10 Pack	\$24
 01765-001	AXS I/O Indication LED	AXIS Connector A 4-pin 2.5 straight, AXIS Connector A 6P2.5 straight, Cable gasket M20 3MM	\$69

(\* Please check our website for a complete list of compatible mounts and accessories <http://www.axis.com/products/accessories>

## AXIS Companion VMS

Video management software with PC-client and mobile app, remote access, quick system set-up.



	AXIS Companion 360	AXIS Companion Dome		AXIS Companion Dome Mini	AXIS Companion Cube		AXIS Companion Eye		AXIS Companion Eye Mini	AXIS Companion Bullet	AXIS Companion Bullet Mini
		-V	-WV	LE	-L	-LW	-L	-LVE	-L	-LE	-LE

## AXIS Companion Recorders



Network video recorder with PoE switch and surveillance-grade hard disk.

- AXIS Companion Recorder 4CH 1TB 01035-004 \$399
- AXIS Companion Recorder 8CH 2TB 0832-004 \$499
- AXIS Companion Recorder 8CH 4TB 0893-004 \$599

## AXIS Companion System accessories



System accessories to expand the solution.

- AXIS Companion Card 64GB 5801-941 \$59
- AXIS Companion Switch 4CH 5801-354 \$79

Max. video resolution	2048x2048	1920x1080		1920x1080	1920x1080		1920x1080		1920x1080 (2.1 MP)	1920x1080	1920x1080 (2.1 MP)
Horizontal field of view	185°	106°		103°	110°		115°		103°	115°	103°
Day and night	-	-		✓	✓		✓		✓	✓	✓
Min. illumination (lux)Color/B&W	0.3/-	0.25/-		0 with IR on	0.25/0.05		0.2/0.04		0 with IR on	0.2/0.04	0 with IR on
Audio support/ Built-in Mic	-/-	-/-		-/-	✓ / ✓		-/-		-/-	-/-	-/-
Power	PoE	PoE	USB	PoE	PoE	USB	PoE		PoE	PoE	PoE
Outdoor ready	-	-		✓	-		-	IP66/ NEMA 4X	-	IP66/NEMA 4X	✓
WDR	✓	✓		✓	✓		✓		✓	✓	✓
Zipstream	✓	✓		-	✓		✓		-	✓	-
Built-in IR	-	-		✓	✓		✓		✓	✓	✓
Wireless	-	-	✓	-	-	✓	-		-	-	-
Special features	Digital PTZ, HDMI, Panoramic	HDMI™, IK08/IP42 SD card included (-WV only)		IP66	Built-in PIR, Built-in speaker SD card included (-LW only)		IP42	IK08	IP66	IK08	IP66
Axis Part Number	01024-001	0894-001 0895-004		01665-001	0891-001 0892-004		0881-001 0880-001		01064-001	0959-001	01115-001
AXIS Companion Recorder required	Optional	Optional		Yes	Optional		Optional		Yes	Optional	Yes
MSRP	\$299	\$169 \$249		\$159	\$199 \$279		\$229 \$249		\$119	\$229	\$149

AXIS Companion IP cameras are supported only by AXIS Companion video management software and mobile apps for iOS and Android devices.

## 2N - An Axis company

36

### About 2N

Founded in 1991, 2N is a leading company in the development and manufacturing of IP Intercoms and Access Control solutions. 2N is compliant with the most stringent international standards (ISO, TÜV, UL, CE) and products are compatible with many third party systems. As of January 1st, 2018, 2N North America operations is integrated into Axis Communications.

#### 2N® IP Verso



The 2N® IP Verso security intercom is configurable to your needs thanks to its modularity. It provides reliable access control and allows you to easily interface with other systems.

**Key Features:** More than 14 different modules; Discrete HD camera; Voice communication in HD; Integration with security systems

**Extending modules:** Bluetooth, Touch Display, Touch Keypad, Fingerprint reader, Keypad, RFID card reader (125 kHz; 13.56MHz), Induction loop and many more

Axis Part #	Description	MSRP
01253-001	2N IP Verso - Keypad	\$239.00
01266-001	2N IP Verso - Bluetooth	\$310.00
01271-001	2N IP Verso - Main wo camera	\$528
01272-001	2N IP Verso - Main wo camera black	\$528
01273-001	2N IP Verso - Main w camera	\$995
01274-001	2N IP Verso - Main w camera black	\$995
01275-001	2N IP Verso - Touch display	\$770.00
01276-001	2N IP Verso - Fingerprint	\$531.30
01277-001	2N IP Verso - Touch keypad	\$210.00

#### 2N® IP Solo



A compact IP intercom that would be a great addition to your smart home entrance with features such as a hidden HD camera, calls to your smart phone, and easy integration into an existing home automation system.

**Key Features:** Entrance to your Smart Home; Sharp video day and night; Stylish and durable; Tailored for residential market

Axis Part #	Description	MSRP
01300-001	2N IPSolo - flush mount	\$1031
01301-001	2N IPSolo - surface mount	\$1010
01302-001	2N IPSolo - surface mount, black	\$1 010
01303-001	2N IPSolo - flush mount, black	\$1031

#### 2N® Indoor Touch



The stylish multifunctional communicator 2N® Indoor Touch fits elegantly into any interior. The display panel will let you know who is standing outside your door, let you start a dialogue or open the door lock. In combination with 2N IP intercoms, you'll obtain a comprehensive system for door communication.

**Key Features:** Door control; Do-not-Disturb mode; 4mm glass with capacitive touch; Integrate home automation

Axis Part #	Description	MSRP
01416-001	2N IDT - PoE, black	\$755
01417-001	2N IDT - PoE, white	\$755
01419-001	2N IDT - PoE, WiFi, black	\$820
01420-001	2N IDT - PoE, WiFi, white	\$820

#### 2N® IP Force



2N® IP Force is an extremely durable IP intercom that can withstand even the most demanding conditions. It provides for visitor communication monitoring and access control. Take advantage of its superior features for maximum site security.

**Key Features:** Built for extreme conditions; Professional night vision; Clear sound in noisy environments; Durable access control solution

Axis Part #.	Description	MSRP
01334-001	2N IP Force - 1 btn, HD cam, pict.	\$1335
01335-001	2N IP Force - 1 btn, pict.	\$990
01336-001	2N IP Force - 1 btn	\$940
01337-001	2N IP Force - 1 btn + HD cam	\$1300
01338-001	2N IP Force - 1 btn + keypad	\$1050
01339-001	2N IP Force - 1 btn + HD cam + kpd	\$1310
01340-001	2N IP Force - 2 btn + HD cam	\$1315
01341-001	2N IP Force - 2 btn	\$960
01342-001	2N IP Force - 4 btn	\$1040
01343-001	2N IP Force - 4 btn + HD cam	\$1325







#### 2N® Access Unit 2.0 Bluetooth & RFID



The 2N® Access Unit 2.0 is a door controller and reader in one. Available in 3 modular versions (Bluetooth & RFID reader, RDIF reader & keypad, or RFID reader) and easily installed with a single ethernet cable. Thanks to IP technology, the units can be remotely administration via a web interface, 2N® Access Commander software or the 2N® Remote Configuration. The Bluetooth feature offers use of a smart phone as an alternative to RFID cards.

Product name	Pricelist name	Part #	MSRP
2N® ACCESS UNIT 2.0 BLUETOOTH & RFID	2N AU 2.0 Combi Bluetooth RFID NFC SEC	01851-001	\$811
2N® ACCESS UNIT 2.0 RFID	2N AU 2.0 Combi RFID 125kHz 13MHz NFC SEC	01850-001	\$582
2N® ACCESS UNIT 2.0 TOUCH KEYPAD & RFID	2N AU 2.0 Combi Keypad RFID NFC SEC	01852-001	\$696

## Canon Pan/Tilt/Zoom Cameras








	Indoor			Outdoor		
	VB-H45 <sup>(a)</sup> VB-H45B <sup>(b)</sup> 	VB-M44 <sup>(a)</sup> VB-M44B <sup>(b)</sup> 	VB-M50B 	VB-S30D Mk II 	VB-R13VE 	VB-S30VE 
Max video resolution (pixels)	1920x1080 (2.1 mp)	128-x960 (1.3 MP)	1920x1080 (1.3 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Horizontal field of view	60.4(degrees)-3.2(degrees)	60.4(degrees)-3.2(degrees)	15.6 degrees-3.2 degrees	77.7(degrees) -20.7(degrees)	62.6(degrees)-2.2(degrees)	77.1(degrees)-20.6(degrees)
Image Sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3" F1.4	Progressive scan CMOS 1/4.85 (degrees)	Progressive scan CMOS 1/3" F1.4	Progressive scan CMOS 1/4.85
Lens	4.7-94 mm (0.19"-3.7") F1.6-F3.5 Autofocus 20x optical, 12x digital zoom	4.7-94 mm (0.19"-3.7") F1.6-F3.5 Autofocus 20x optical, 12x digital zoom	17.7-88.5 mm (0.7"-3.48") F1.8-F2.4 Autofocus 5x optical, 20x digital zoom	2.25-7.88 mm (0.1"-0.3") F1.4-F2.6 Autofocus 3.5x optical, 4x digital zoom	4.4-132 mm (0.17"-5.2") F1.4-F4.6 Autofocus 30x optical, 20x digital zoom	2.25-7.88 mm F1.4-F2.6 Autofocus 3.5x optical, 4x digital zoom
Day/Night						
Min. Illumination (lux)	0.05 (Color) 0.003 (B/W)	0.05 (Color) 0.003 (B/W)	0.4 (color) 0.002 (B/W)	0.95 (Color) 0.5 (B/W)	0.05 (Color) 0.002(B/W)	1.0 (color) 0.55 (B/W)
Frames per second (50/60 Hz)	30	30	30	30	30	30
Pan/Tilt/Zoom	64 presets 340(degrees) pan 100 degrees (-90(degrees) to +10(degree) tilt	64 presets 340(degrees) pan 100 degrees (-90(degrees) to +10(degree) tilt	64 presets 360degree endless pan 180degree tilt	20 presets 350(degrees) pan -90(degrees) to 0 (degrees) tilt	256 presets 360 (degrees) endless pan 180(degrees) tilt	350 (degrees) pan 90(degrees) to 0(degrees) tilt
Audio support	Two-way	Two-way	Two-way	One-way	Two-way	Two-way
Alarm in-/outputs	2/2	2/2	2/2	1/1	2/2	2/2
Additional Analytics	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Volume Detection Intrusion Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Volume Detection Intrusion Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Volume Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Volume Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Volume Detection Intrusion Detection Volume Detection Scream Detection Autotracking	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection
Power	AC/DC PoE IEEE 802.3 at Type 1	AC/DC PoE IEEE 802.3 at Type 1	AC/DC PoE IEEE 802.3af Type 1/Type 2	PoE IEEE 802.3af	AC/DC PoE IEEE 802.3af Type 1/Type 2	PoE IEEE 802.3af
Outdoor use					Outdoor Ready down to -50(degrees)C/-58 degrees F	Outdoor Ready
Other	Silver <sup>(a)</sup> Black <sup>(b)</sup> Motion Adaptive Noise Reduction Area Specific Size Reduction (ADSR) Memory card slot, ONVIF Profile S	Silver <sup>(a)</sup> Black <sup>(b)</sup> Motion Adaptive Noise Reduction Area Specific Size Reduction (ADSR) Memory card slot, ONVIF Profile S	Large aperture telephoto lens Clear IR Mode Motion-Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) ONVIF Profile S & G Memory card slot	Memory card slot	Motion Adaptive Noise Reduction Area-specific Data Size Reduction (ADSR) ONVIF Profile S & G Memory card slot	Motion Adaptive Noise Reduction Area-specific Data Size Reduction (ADSR) ONVIF Profile S Memory card slot
Part #	2541C002 <sup>(a)</sup> 2541C001 <sup>(b)</sup>	2542C001 <sup>(a)</sup> 254C002 <sup>(b)</sup>	1064C001	8818B001	1381C001	1387C001
MSRP	\$2,349.35	\$1,509	\$3,399	\$598.78	\$3,678.61	\$736

Notations (a) and (b) refer to the corresponding product models for the column; (1) With multi-connector cable - sold separately; (3) Requires any AXIS Q60-E

## Canon Fixed Network Cameras

## Canon Fixed Dome Network Cameras

38

							
<b>Max video resolution (pixels)</b>	1920x1080 (2.1MP)	1920x1080(2.1 MP)	1920x1080(2.1 MP)	1920x1080(2.1 MP)	1920x1080(2.1 MP)	1920x1080(2.1 MP)	1920x1080(2.1 MP)
<b>Horizontal field of view</b>	60.4 degrees-3.2 degrees	60.4 degrees-3.2 degrees	78.6° - 20.8°	124.3 degrees-50.5 degrees	122.1 degrees - 50.1degrees	122.1 degrees - 50.1degrees	93.8°
<b>Image Sensor</b>	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/4.85	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"
<b>Lens</b>	4.7 - 9.4mm (0.19"-3.7") F1.6-F3.5 Autofocus 20x optical, 20x digital zoom	4.7 - 9.4mm (0.19"-3.7") F1.6-F3.5 Autofocus 20x optical, 20x digital zoom	2.25- 7.88 mm F1.4- F2.6 Autofocus 3.5x optical, 4x digital zoom	2.55-6.12 mm (0.1"-0.24") F1.2-F1.8 Autofocus 2.4x optical, 4x digital zoom	2.55-6.12 mm (0.1"-0.24") F1.2-F1.8 Autofocus 2.4x optical, 4x digital zoom	2.55-6.12 mm (0.1"-0.24") F1.2-F1.8 Autofocus 2.4x optical, 4x digital zoom	2.7 mm F1.6
<b>Day/Night</b>							
<b>Min. Illumination (lux)</b>	0.06 (Color) 0.04 (B/W)	0.06 (Color) 0.04 (B/W)	0.95 (color) 0.5 (B/W)	0.035 (Color) 0.002 (B/W)	0.035 (Color) 0.002 (B/W)	0.035 (Color) 0.002 (B/W)	0.5 (Color) 0.3 (B/W)
<b>Frames per second (50/60 Hz)</b>	30	30	30	30	30	30	30
<b>Pan/Tilt/Zoom</b>	Digital PTZ	Digital PTZ	20 presets	Digital PTZ	Digital PTZ	20 presets 350 degrees pan 150 degrees tilt	20 presets 350 degrees pan 90 degrees tilt
<b>Audio support</b>	Two-way		Two-way		Two-way	Two-way	Two-way
<b>Alarm in-/outputs</b>	2/2		2/2		2/2	2/2	2/2
<b>Additional Analytics</b>	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection
<b>Power</b>	AC/DC PoE IEEE802.3af Type 1/Type 2	PoE IEEE802.3af Type 1/Type 2	PoE IEEE802.3af Type 1/Type 2	AC/DC PoE IEEE802.3af Type 1/Type 2	AC/DC PoE IEEE802.3af Type 1/Type 2	AC/DC PoE IEEE802.3af Type 1	PoE IEEE802.3af
<b>Outdoor use</b>	Outdoor ready -50 degrees C/-58 degrees F	Outdoor ready	-	Outdoor ready	Outdoor ready	Outdoor ready	Outdoor ready
<b>Other</b>	Clear IR Mode and built-in infrared LEDs, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot	Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot	Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S, Memory card slot	Built-in infrared LEDs, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot	Ultra wide-angle lens, Built-in infrared LEDs, Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR), ONVIF Profile S&G, Memory card slot	Ultra wide-angle lens, Built-in infrared LEDs, Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR), ONVIF Profile S&G, Memory card slot	Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), ONVIF Profile S & G, Memory card slot
<b>Part #</b>	1062C001	1063C001	1389C001	1386C002	1061C001	1384C001	1388C001
<b>MSRP</b>	\$1,451	\$1,308	\$439	\$1,319	\$1,439	\$1,231	\$505

NOTES

# About Axis Communications

Axis enables a smarter and safer world by creating network solutions that provide insights for improving security and new ways of doing business. As the industry leader in network video, Axis offers products and services for video surveillance and analytics, access control, and audio systems.

Axis has more than 3,000 dedicated employees in over 50 countries and collaborates with partners worldwide to deliver customer solutions. Axis was founded in 1984 and has its headquarters in Lund, Sweden.

For more information about Axis, please visit our website [www.axis.com](http://www.axis.com).

Distributed by:



Axis Inside Sales Support:

US and Canada: 800-444-2947 option 1

Mexico: +52 55 5271 2222

Axis Technical Support:

US and Canada: 800-444-2947 option 2

Mexico: +52 55 5271 2222

