




**MULTI LUMEN
SELECTOR**

**EASY 5 COLORS
SELECCTOR**
2700K • 3000K • 3500K • 4000K • 5000K

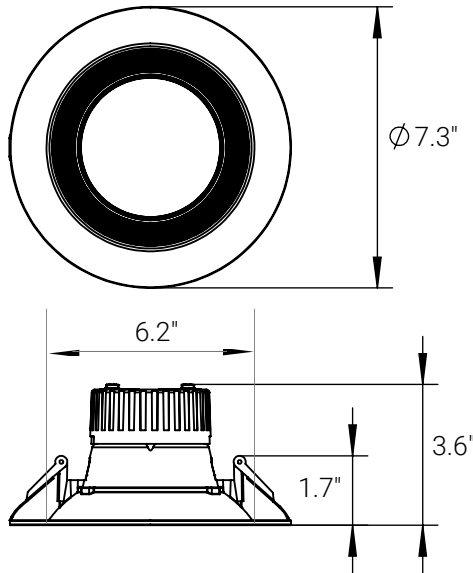

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1750	1750	22W
1200	1200	15W
800	800	10W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

INSTALLATION

Cut hole in ceiling. Insert luminaire into opening by squeezing spring clips on both sides of luminaire. You **MUST** seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

FEATURES


6" round baffle multi-CCT LED "Canless Downlight" engineered for new construction, remodel, or retrofit to accommodate insulated or dropped ceilings. Easily access field-adjustable 3 lumen output and 5-Color SeleCCTOR switch by lowering the luminaire from the opening. Recessed housing not required, especially with limited plenum applications. Remote driver allows easy installation and maintenance. Small aperture and shallow depth are ideal for unlimited applications.

LUMENS	800/1200/1750
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
CONSTRUCTION	Aluminum die-cast body and trim
TRIM OPTION	Round Baffle
TRIM COLORS	WH (White)
DIMMING	DIM10 (0-10V)
EMERGENCY	16W high voltage inverter (remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TEST	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

- IC-rated and Air-Tight ready and may be in direct contact with insulation.
- Can be installed in shallow plenum spaces.
- May be installed in drywall or suspended ceilings.
- The Elite LED Module is dimmable down to 10% of initial light output with compatible dimmers. Consult factory for complete list of compatible dimming systems.
- Even illumination achieved with patent-pending optics and edge-lit LED.
- Ideal where ceiling or top access is unavailable.
- The Elite LED lighting system carries a five-year carefree warranty for parts and components. (Labor not included)



TRIM

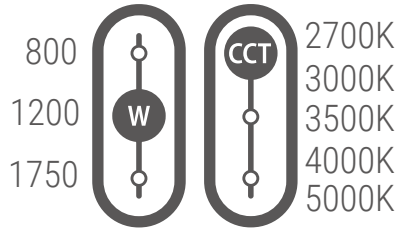


EXAMPLE:
RL641-800L/1200L/1750L-DIM10-MVOLT-27K/30K/35K/40K/50K-90-WH

TYPE	LUMEN	CCT	CRI	FINISH
RL641	<input type="checkbox"/> 800L/1200L/1750L-DIM10-MVOLT	<input type="checkbox"/> 27K/30K/35K/40K/50K	<input type="checkbox"/> 90+	<input type="checkbox"/> WH - White



ACCESSORIES



RL-UNV-4/5/6
For use with: 4", 5", 6"
Universal mounting plate

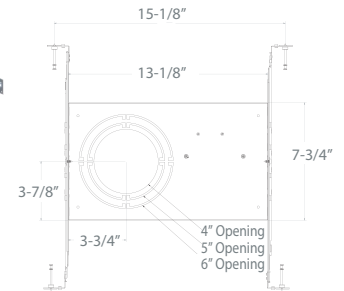

AL-ACC-SLIM-6-F-ROUGHPLATE
For use with: 6" downlights

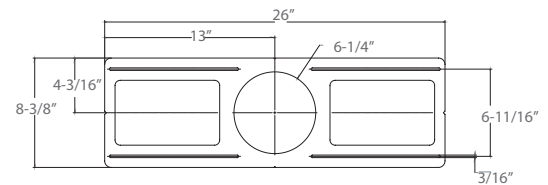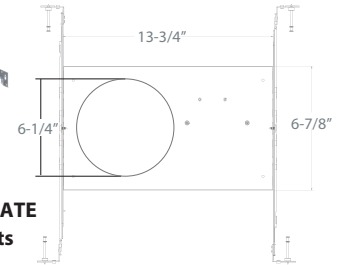

RL-ACC-SLIM-6-ROUGHPLATE
Rough-in plate for use with 6" downlights

RL-UNV-4/5/6

OPTIONS

- RL-UNV-4/5/6 - Universal Mounting Plate for 4", 5" and 6"
- RL-ACC-SLIM-6-ROUGHPLATE - 6" Mounting Plate
- AL-ACC-SLIM-6-F-ROUGHPLATE - 6" Flanged Roughplate
- UNVE-6-BP31 - Universal mounting plate