

Heat shrink hose, medium-walled

- Inside coated with hot-melt adhesive
- Good physical, chemical and thermal properties

Length	1000 mm
Dielectric strength	20 kV/mm
Min./max. temperature conditions	-55 to 110 °C
Min. shrinkage temperature	120 °C
Min./max. elongation (after shrinking in %)	0-10 %
Ultraviolet resistance	Yes
Material	Polyolefin
Halogen-free	Yes
Colour	Black





Illustration only

Type	Diameter (D)	Diameter (shrunk)	Sleeve-wall thickness when shrunk	Art. no.	P. Qty.
16/5	16 mm	5 mm	1.5 mm	0975 305 102	3
25/8	25 mm	8 mm	2 mm	0975 305 103	3
40/12	40 mm	12 mm	2 mm	0975 305 104	3
55/16	55 mm	16 mm	2 mm	0975 305 105	2

Technical Information

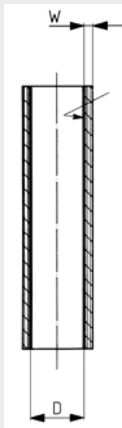

Details/Application

For moisture-proof insulation and to protect cable connections against high mechanical strain.