




U10/N

PVCCON 2LR/8 PG22 00/N AS

KA2PG2201

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	118.11in	3000mm
Total Thickness	0.09in	2.29mm
Mass	0.47lb/ft ²	2.3kg/m ²
Pull Per 1%	46lb/in	8N/mm
Working Temp.	+14/+158F°	-10/+70C°
Flexion (A)	1.18in 30mm	
Counter Flexion (B)	1.97in 50mm	

BEST USED FOR


GENERAL CHARACTERISTICS

2 ply green PVC with fabric impression top.
Antistatic


SPECIAL CHARACTERISTICS

Antistatic	YES	High Conductive	NO	Abrasion Resistant	NO
Food Approved	NO	Flame Retardant	NO	Tear Resistant	NO
ATEX Certified	NO	Pyrolysis Resistant	NO	Hydrolysis Resistant	NO
Antimicrobial Protection	NO	Low Noise	NO	Oil & Fat Resistant	NO

BELT CONSTRUCTION INFORMATION

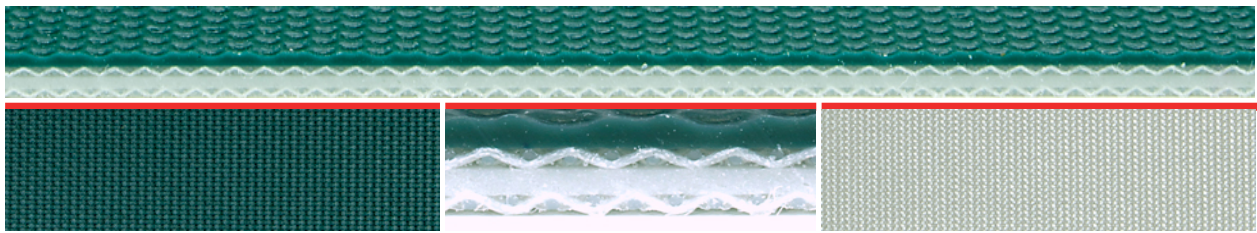

TOP SIDE (Carrying)		CARCASS	BOTTOM SIDE (Pulley)		
Material	PVC	Interply	PVC	Material	Fabric
Color	Petrol Green (PG)	Fabric	Light Rigid (LR)	Color	Fabric (FA)
Thickness	0.02in 0.5mm	Plies	2	Thickness	0in 0mm
Hardness	74 Shore A	Weft	Rigid (R)	Hardness	-
Surface	Fabric Impression (N)			Surface	Bare (00)

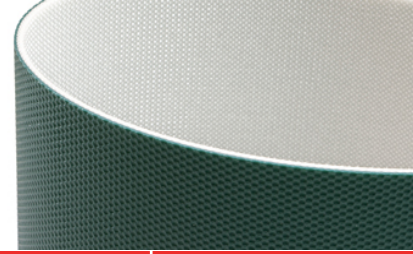


U10/N

PVCCON 2LR/8 PG22 00/N AS

KA2PG2201

SPLICE INSTRUCTIONS (Preferred)

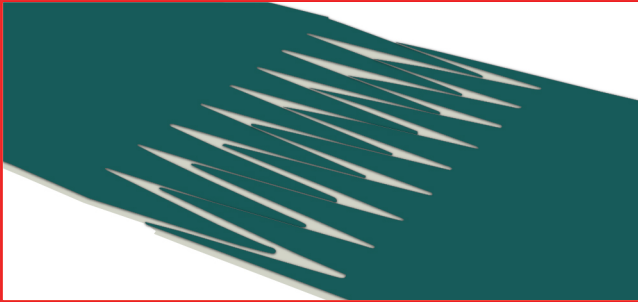

STRAIGHT FINGERS (SF)



	WATER COOL	AIR COOL
	Temperature: 180 C° 356 F° Pressure: 29 PSI 2 Bars	Temperature: 180 C° 356 F° Pressure: 7.3 PSI 0.5 Bars
<ul style="list-style-type: none"> Release Paper Foil Belt (Conveying Side Up) Release Paper 		
	Temperature: 180 C° 356 F° Pressure: 29 PSI 2 Bars Dwell Time: 0 Min	Temperature: 180 C° 356 F° Pressure: 7.3 PSI 0.5 Bars Dwell Time: 2 Min
<p>Note: Foil is optional for air cooled.</p>		

MECHANICAL JOINING METHOD

	Recessed Lacing	YES
	Hidden Lacing	YES
	Staple Lacing	RS62
	Plastic Spiral Lacing	YES
	Spiral Finger	YES
	APF Fasteners	APF-100, APF-150
	Alligator	1
	Clipper Lacing	UCM36SL SP, 25LP, 30, UCM36 SP, 36 SP, 1 XSP, 30P, UX-1 SP

FRICITION COEFFICIENT (Bottom Side)

Stainless Steel, BA (Brilliant Surface)	0.28
Stainless Steel, 2B (Half-Brilliant Surface)	0.28
Stainless Steel, 2D (Hot-Laminated Surface)	0.33
Rolled Steel Plate	0.28
Plastic Sheet (Brilliant Surface)	0.28

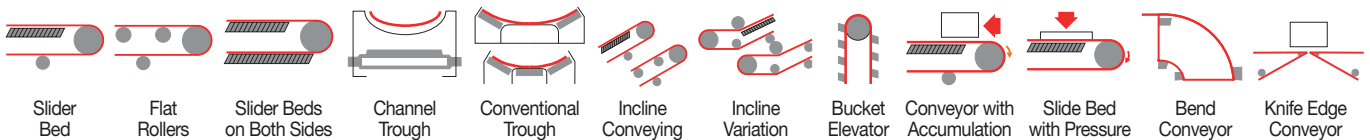

● Applicable ◐ Limited Use ○ Not Applicable

info@megadynegroup.com

www.megadynegroup.com