

Upgraded C6CN 1080p H.265

Smart Home Camera

Wherever you go, it follows.


Now armed with person detection, the upgraded C6CN Wi-Fi Pan-Tilt Camera is all the protection you need when you are away from home.



Motorized Pan and Tilt for 360° Visual Coverage



Night Vision up to 10 m (33 ft)



Advanced Al Person Detection



True Wide Dynamic Range (H.265)

H.265 Video Technology



Privacy Mode



Two-Way Talk 5 m (16 ft) Mic Pickup



Wi-Fi 2.4 GHz



Supports MicroSD Cards up to 256 GB



Effortless whole-room viewing.

Got a large space that's left unwatched? The new C6CN Pan-Tilt Camera rotates and tilts smoothly in any direction, giving you a complete view of your room anytime from anywhere using your phone.



Stand-Alone Stepper Motor



Pan/Tilt




360° Picture




Smart Tracking




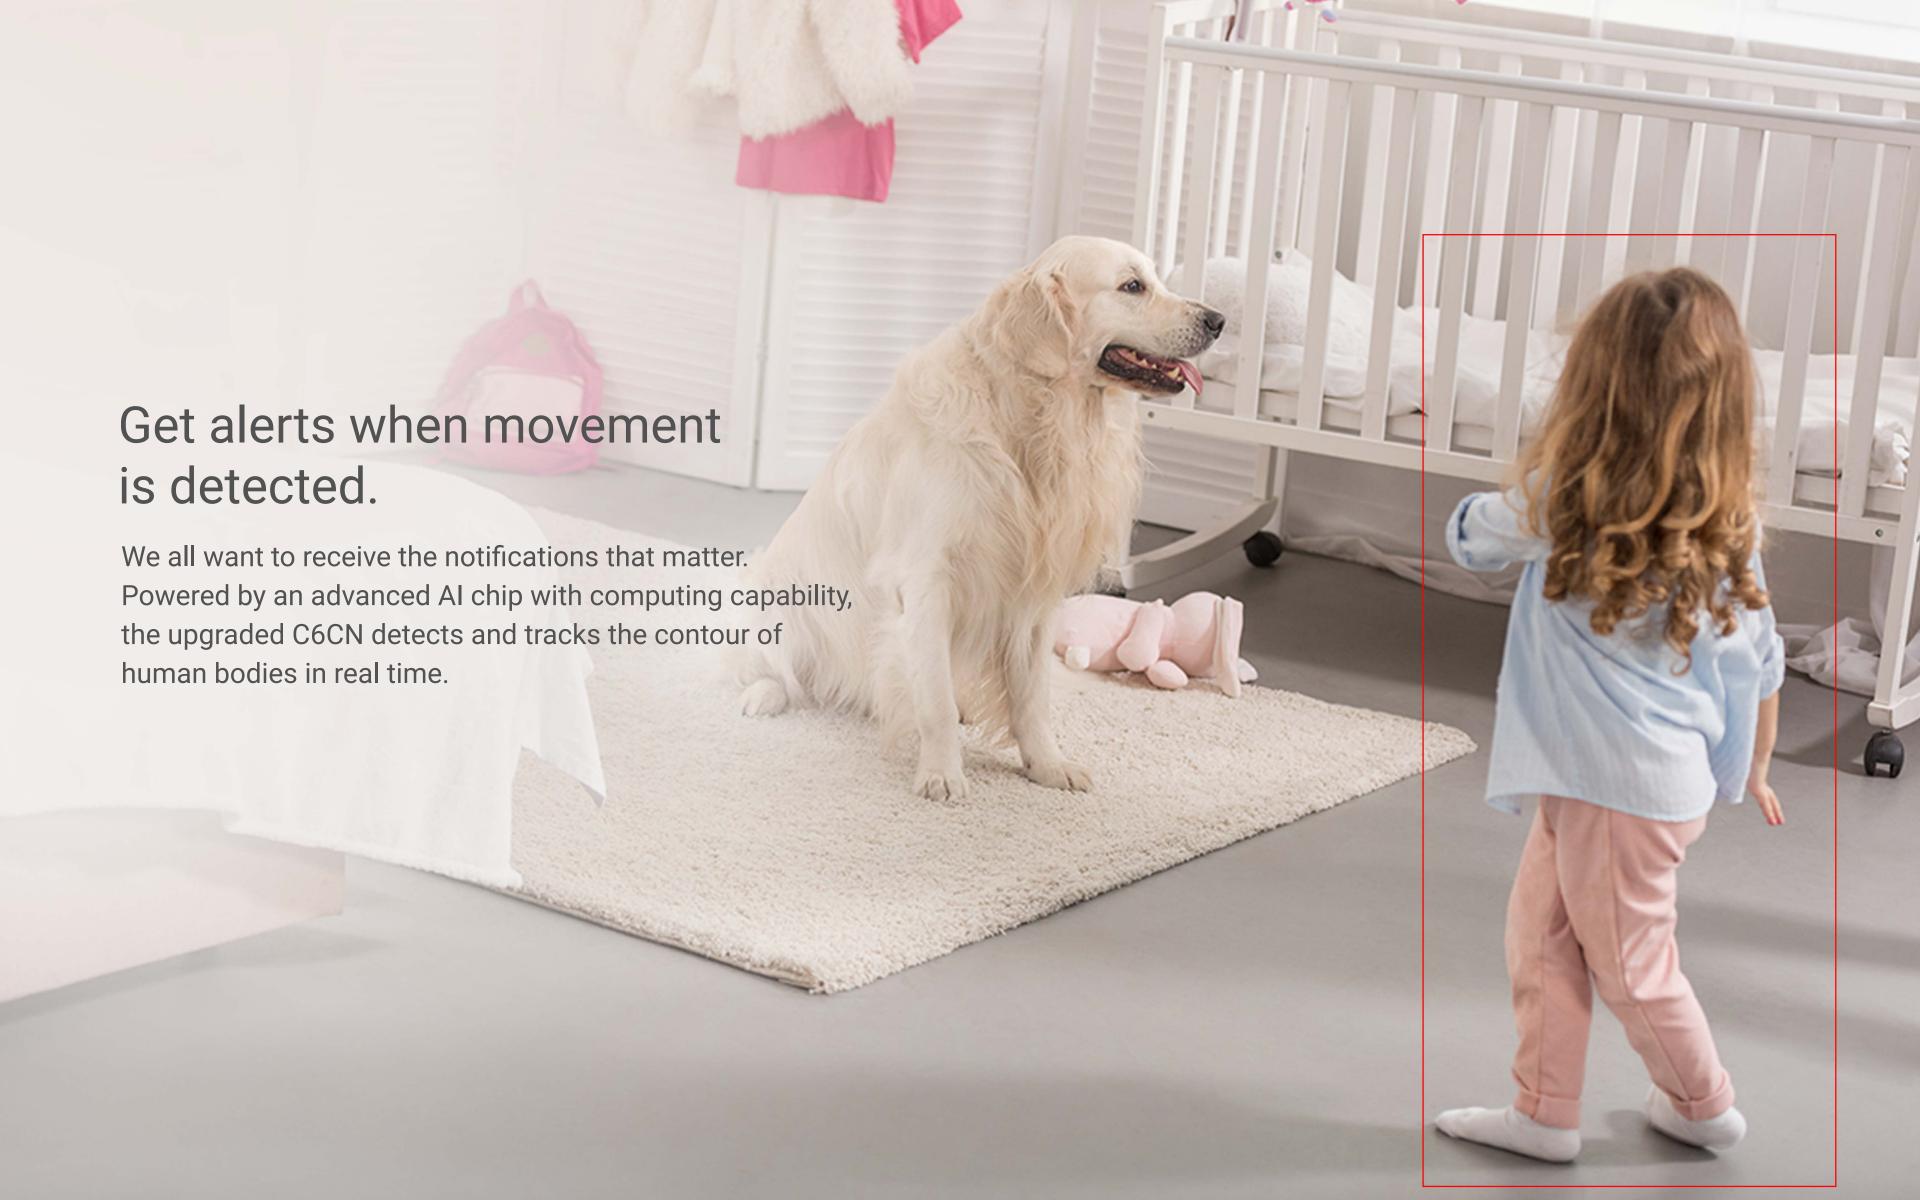

True-WDR for truly clear images.

The new C6CN Camera uses sensor-based True-WDR technology to eliminate overexposure or underexposure in high-contrast scenes. With a dynamic range of up to 65 dB, the camera delivers evenly bright images from dawn to dusk.

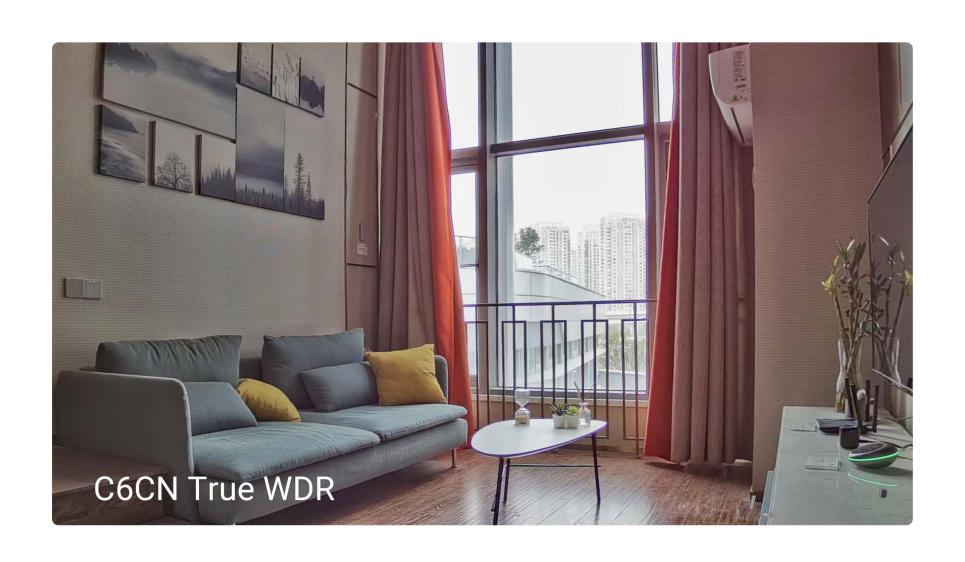

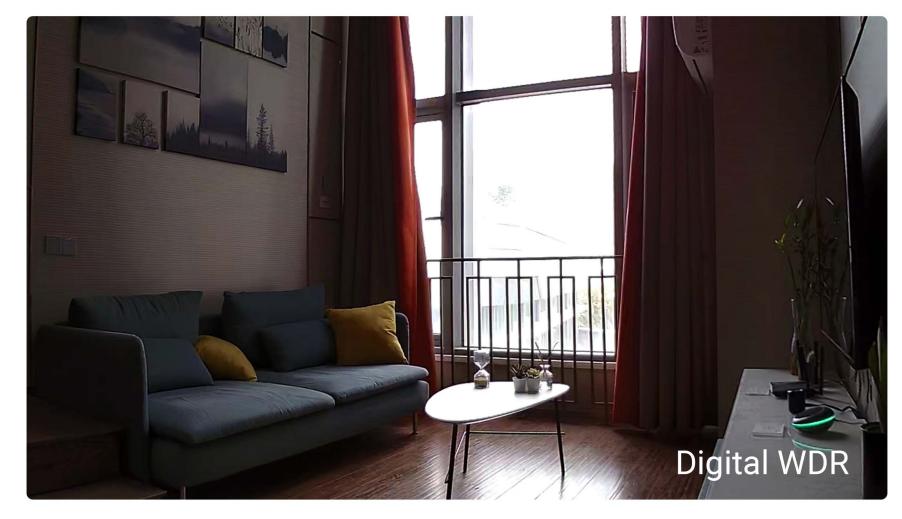


See every detail, even at night.

The new C6CN Camera's f/1.6 aperture is a game changer for a smart home camera. With more light filtering in the lens, the camera renders brilliant images with superb sharpness.




Save money on storage and bandwidth.


The camera features the advanced H.265 video compression technology, achieving better video quality with only half the bandwidth and half the storage space of the previous H.264 video compression standard.

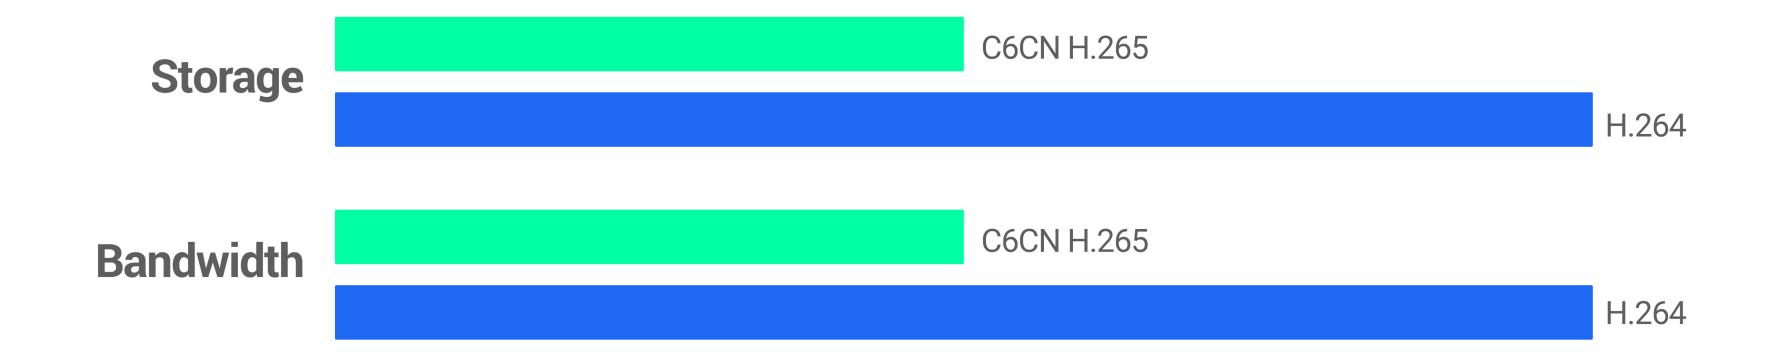

Two-way conversations.

Use the EZVIZ App on your mobile device to call home when you are away. Enjoy the opportunity to have a conversation now that both sides can speak to each other as with a normal phone call.

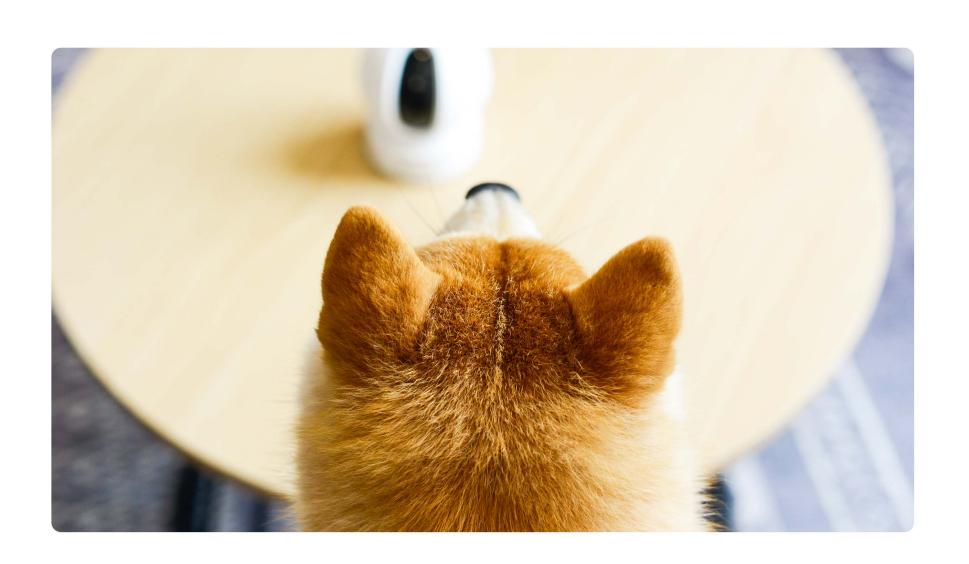

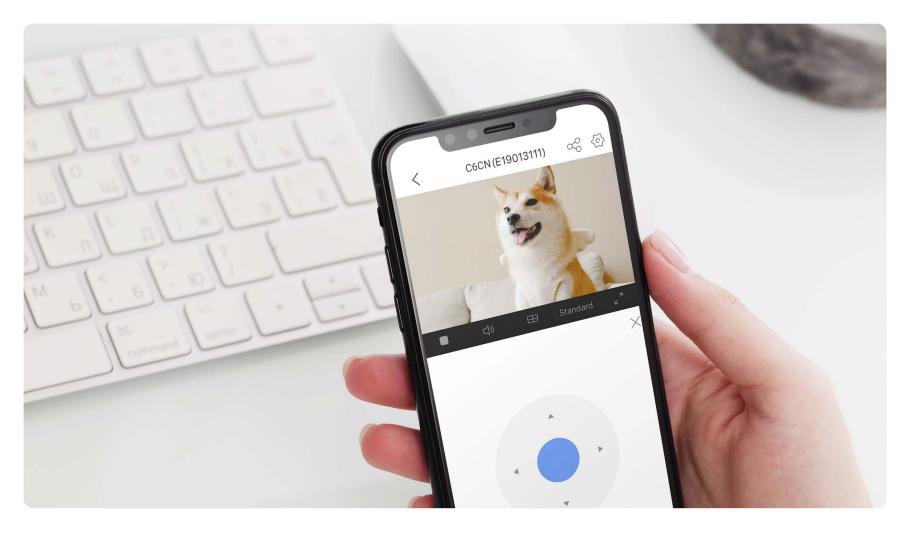



Specifications cs-c6CN-A0-3H2WFR

Camera

Image Sensor 1/3" Progressive Scan CMOS

Shutter Speed Self-adaptive shutter

Lens 4mm@ F1.6, view angle: 81° horizontal, 42° vertical, 94° diagonal

PT Angle Pan: 340°, Tilt: 120°

Minimum Illumination 0.5 lux @(F1.6, AGC ON), 0 lux with IR

Lens Mount M12

Day & Night IR-cut filter with auto switch

DNR 3D DNR

WDR True-WDR

BLC Supports

Night Vision 10 m (33 ft.)

Video & Audio

Max. Resolution 1920×1080

Frame Rate Max:25fps; Self-adaptive during network transmission

Video Compression H.265

H.264 Type Base Profile

Video Bit Rate Ultra-HD; HD; Standard. Adaptive bit rate.

Audio Bit Rate Self-adaptive

Max. Bitrate 2 Mbps

Network

Wi-Fi Standard IEEE802.11 b/ g/ n

Frequency Range 2.4 GHz ~ 2.4835 GHz

Channel Bandwidth Supports 20MHz

Security 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK

Transmission Rate 11b: 11Mbps, 11g:54Mbps, 11n:72Mbps

Wi-Fi Pairing AP pairing

Protocol EZVIZ Cloud proprietary protocol

Interface Protocol EZVIZ Cloud proprietary protocol

Wired Network RJ45 \times 1(10M/100M adaptive Ethernet port)

Features

Smart Alarm Al Person Detection

Customized Activity Zones Supports

Two-Way Talk Supports

General Features Anti-Flicker, Dual-Stream, Heart Beat, Mirror Image,

Password Protection, Watermark

Specifications cs-c6cn-a0-3H2WFR

Storage

Local Storage Micro SD card slot (Max. 256 GB)

Cloud Storage EZVIZ Cloud Storage

General

Operating Conditions $-10^{\circ}\text{C} \sim 45^{\circ}\text{C} \text{ (} 14^{\circ}\text{F to } 113^{\circ}\text{F)},$

Humidity 95% or less (non-condensing)

Power Supply DC 5V/1A

Power Consumption Max. 5W

Product Dimensions $88 \times 88 \times 111.9 \text{ mm} (3.46 \times 3.46 \times 4.41 \text{ inch})$

Packaging Dimensions $103 \times 103 \times 186$ mm $(4.06 \times 4.06 \times 7.32 inch)$

Product Weight 255 g (0.56 lbs) (9 oz)

Packaging Weight 513 g (1.13 lbs) (18 oz)

In the box:

- C6CN Camera
- Base
- Power Adapter
- 3 m (9.8 ft) Power Cable
- Screw Kit
- Drill Template
- Quick Start Guide

Certifications:

FCC / UL / CE / WEEE / REACH / ROHS