

NASA TM-81364



NASA-TM-81364 19810022273

NASA Technical Memorandum 81364

USER'S MANUAL FOR FSLIP-3,  
FLEXSTAB LOADS INTEGRATION PROGRAM

Robert L. Sims

August 1981

LIBRARY COPY

AUG 31 1981

LANGLEY RESEARCH CENTER  
LIBRARY, NASA  
HAMPTON, VIRGINIA

**NASA**

NASA Technical Memorandum 81364

USER'S MANUAL FOR FSLIP-3,  
FLEXSTAB LOADS INTEGRATION PROGRAM

Robert L. Sims  
Dryden Flight Research Center  
Edwards, California

**NASA**  
National Aeronautics and  
Space Administration

1981

*N81-30815 #*



## CONTENTS

	Page
1.0 INTRODUCTION . . . . .	1
2.0 SYMBOLS AND ABBREVIATIONS . . . . .	2
3.0 COMPUTATIONAL TASK DESCRIPTION . . . . .	5
3.1 Pressure Integrated Loads . . . . .	5
3.2 Additional Loads Option . . . . .	5
3.3 Wind Tunnel Loads Option . . . . .	6
3.3.1 Wing station . . . . .	6
3.3.2 Horizontal tail station . . . . .	8
3.3.3 Vertical tail station . . . . .	8
3.3.4 Forward fuselage station . . . . .	9
3.3.5 Aft fuselage station . . . . .	9
3.4 Sign Convention for Loads . . . . .	10
4.0 PROGRAM DESCRIPTION . . . . .	11
4.1 Main Program Organization . . . . .	11
4.2 Input/Output Data Flow . . . . .	11
4.2.1 Geometry option . . . . .	11
4.2.2 Pressure option . . . . .	14
4.2.3 Integration option . . . . .	14
4.2.4 Wind tunnel option . . . . .	15
4.3 Option Requirements . . . . .	15
4.4 Program Restrictions and Limitations . . . . .	16
4.4.1 FLEXSTAB dependent . . . . .	16
4.4.2 FSLIP dependent . . . . .	16
5.0 PROGRAM EXECUTION . . . . .	17
5.1 SCOPE JCL . . . . .	17
5.2 NOS JCL . . . . .	18
5.3 CM and CP Time Requirements . . . . .	19
6.0 DATA INPUT DESCRIPTION . . . . .	19
6.1 Program Control Data (CARDS 1-4). . . . .	20
6.2 Surface/Axis Data File (CARDS 5-11). . . . .	25
6.2.1 Thin body integrations . . . . .	25
6.2.2 Hinge moment integrations . . . . .	26
6.2.3 Slender body integrations . . . . .	27
6.2.4 Additional load definitions . . . . .	28
6.2.5 Card input for GOP = 2 . . . . .	29
6.2.6 Card input for GOP = 3 or 4 . . . . .	29
6.3 Wind Tunnel Data File (CARDS 12-15) . . . . .	37
6.4 Case Description Data (CARDS 16-18) . . . . .	42
6.5 Pressure Data Files (CARDS 19-24) . . . . .	46

	Page
7.0 OUTPUT DESCRIPTION . . . . .	51
7.1 Printed Output . . . . .	51
7.1.1 Geometry option . . . . .	51
7.1.2 Integration option . . . . .	51
7.1.3 Wind tunnel option . . . . .	51
7.1.4 Summary print option . . . . .	51
7.2 Punched Output . . . . .	52
7.3 Disk File Output . . . . .	52
8.0 EXAMPLE PROBLEMS . . . . .	52
8.1 Geometry Option Only . . . . .	52
8.2 Integration and Wind Tunnel Options . . . . .	72
8.3 Integration Option With Minimum I/O . . . . .	106
REFERENCES . . . . .	116
SOURCE CODE LISTING (Microfiche supplement) . . . . .	Inside back cover

USER'S MANUAL FOR FSLIP-3,  
FLEXSTAB LOADS INTEGRATION PROGRAM

Robert L. Sims  
Dryden Flight Research Center

1.0 INTRODUCTION

In the last decade, computer programs for theoretical aerodynamic analysis have evolved with increasing accuracy and sophistication. A most useful output from these panel method programs is the prediction of surface pressures on fairly arbitrary three dimensional configurations. These surface pressures can be integrated to obtain total forces and moments on complete configurations or airloads acting on individual vehicle components.

The FLEXSTAB computer program system (references 1-4) is being evaluated at NASA Dryden Flight Research Center for the prediction of airloads on rigid and aeroelastic configurations. Predicted airloads are being compared with wind tunnel and flight measured loads for a variety of vehicles including the B-1 and Space Shuttle Orbiter (reference 5). An existing FLEXSTAB module called ALOADS was written to integrate pressures to obtain airloads. However, certain restrictions in the ALOADS module make it ill-suited for predicting airloads which are comparable to many typical flight measured airloads. The most important restriction is that the pressures are summed at a user-specified point relative to the reference axis system which means the integration axis must be parallel to the model centerline with no sweep angle. The ALOADS model is also limited to symmetric flight conditions.

Because of these restrictions, a new follow-on integration program called FSLIP was written which has expanded capabilities and flexibility. FSLIP is generalized to work on any FLEXSTAB model with no restriction on the type of case or definition of the integration axis system. The effective area, bending arm, and torque arm for each panel can be individually defined. FSLIP also has a built-in interface with the FLEXSTAB GDTAPE data base to automatically generate the geometric integration data. Included in the program is an option for computing airloads derived from linearized wind tunnel coefficients for comparison to FLEXSTAB predicted loads.

This report constitutes the FSLIP program documentation and user's manual. An outline of the computational tasks is followed by sections describing the program's organization, execution, detailed data input, and output. Examples are included which illustrate the main program options. A microfiche supplement contains a listing of the source code and reference map.

## 2.0 SYMBOLS AND ABBREVIATIONS

The program assumes all variables are input in U.S. Customary Units as specified below.

B	bending moment airload, in-lbs
BP	butt plane, in.
b/2	reference semispan of a load station, in.
$C_{i1}, C_{i2}, C_{i3}$	shear, bending, and torque constants, respectively (eq. 7)
$C_V, C_B, C_T$	shear, bending, and torque airload coefficients (eq. 4, 5, and 6, respectively)
$C_{VBT}$	generalized airload coefficient (eq. 8-14)
c	reference chord of a load station, in.
FS	fuselage station, in.
$L_i$	generalized airload (eq. 7)
P	rolling velocity, deg/sec, positive left wing up
Q	pitching velocity, deg/sec, positive nose up
$\bar{q}$	free stream dynamic pressure, psf
R	yawing velocity, deg/sec, positive nose right
$R_i$	radius at a slender body aerocentroid, in.
S	reference area of a load station, ft <sup>2</sup>
$s_i$	effective area of a panel, in <sup>2</sup>
T	torque airload, in-lbs
V	shear airload, lbs
$V_t$	true velocity, ft/sec
WL	waterline, in.
$X_A, Y_A$	integration axis coordinate system

$X_{A_0}, Y_{A_0}$	coordinates defining the origin of a thin body integration axis system, in. (fig. 6)
$X_{C_i}$	effective centroid of a slender body panel, in.
$X_{FWD}, X_{AFT}, X_{MR}$	coordinates defining a slender body integration, in. (fig. 8)
$X_M, Y_M, Z_M$	slender body local coordinate system
$X_N, Y_N, Z_N$	thin body local coordinate system
$x_i$	effective torque arm of a panel, in.
$y_i$	effective bending arm of a panel, in.
$\alpha$	angle of attack, deg, positive nose up
$\dot{\alpha}$	angle of attack derivative, deg/sec, positive nose up
$\beta$	angle of sideslip, deg, positive nose left
$\delta_H$	symmetric horizontal tail deflection $(\delta_{H_L} + \delta_{H_R})/2$ , deg, positive trailing edge down
$\delta_{H'}$	asymmetric horizontal tail deflection $(\delta_{H_L} - \delta_{H_R})/2$ , deg, positive produces right roll
$\delta_{RL}$	lower rudder deflection, deg, positive trailing edge left
$\delta_{RU}$	upper rudder deflection, deg, positive trailing edge left
$\delta_{SP_L}$	left spoiler deflection, deg, negative trailing edge up
$\delta_{SP_R}$	right spoiler deflection, deg, positive trailing edge up
$\Delta CP_i$	differential pressure coefficient of a panel
$\Delta x_{HT}$	horizontal tail moment transfer arm, longitudinal, in., (eq. 16)
$\Delta x_i$	effective longitudinal width of a slender body panel, in.
$\Delta x_{VTR}$	vertical tail root moment transfer arm, longitudinal, in., (eq. 18)



$\Delta y_{HT}$	horizontal tail moment transfer arm, lateral, in., (eq. 19)
$\Delta z_{VTR}$	vertical tail root moment transfer arm, vertical, in., (eq. 19)
$\Lambda_A$	sweep angle of a thin body integration axis system, deg
Subscripts:	
AF	aft fuselage
A/S	asymmetric
c/o	carryover effect
FF	forward fuselage
LHT, RHT	left and right horizontal tail
LW, RW	left and right wing
SYM	symmetric
UVT	upper vertical tail
VT	vertical tail
VTR	vertical tail root

### 3.0 COMPUTATIONAL TASK DESCRIPTION

Sections 3.1, 3.2, and 3.3 outline the major computational tasks performed by the program. Section 3.4 discusses the sign convention for the loads.

#### 3.1 Pressure Integrated Loads

The primary program task is to integrate pressures on a finite number of panels making up a single thin or slender body. The pressures are summed relative to an integration axis system to produce shear, bending, and torque loads as follows:

$$V = \bar{q} \sum_i \Delta CP_i \cdot s_i \quad (1)$$

$$B = \bar{q} \sum_i \Delta CP_i \cdot s_i \cdot y_i \quad (2)$$

$$T = \bar{q} \sum_i \Delta CP_i \cdot s_i \cdot x_i \quad (3)$$

The integration geometry for each load station is stored on a data base for repeated use. The pressure coefficients are stored on a separate data base for each case to be processed. Each body may have a left and right hand side or be a single body on the vehicle centerline. Thin bodies have a single  $\Delta CP$  acting normal to each panel. Slender bodies may have both a vertical and lateral  $\Delta CP$ .

The total integrated loads at each station are reduced to standard non-dimensional form as follows:

$$C_V = V / (\bar{q} \cdot S) \quad (4)$$

$$C_B = B / (\bar{q} \cdot S \cdot b/2) \quad (5)$$

$$C_T = T / (\bar{q} \cdot S \cdot c) \quad (6)$$

#### 3.2 Additional Loads Option

Once the pressure integrated loads have been computed, a program option allows a new load station to be defined which is a linear combination of previously defined loads. An additional load definition takes the generalized form of a matrix equation:

$$\begin{bmatrix} V & B & T \end{bmatrix} = \begin{bmatrix} C_{01} & C_{02} & C_{03} \end{bmatrix} + \begin{bmatrix} L_1 & L_2 & \dots & L_i \end{bmatrix} \begin{bmatrix} C_{11} & C_{12} & C_{13} \\ C_{21} & C_{22} & C_{23} \\ \vdots & \vdots & \vdots \\ C_{i1} & C_{i2} & C_{i3} \end{bmatrix} \quad (7)$$

### 3.3 Wind Tunnel Loads Option

This program option computes airloads based on linearized coefficients derived from wind tunnel or other load surveys. Table 1 lists the aerodynamic effects applicable to 5 types of load stations. The overall format is based on the airload coefficients derived for the B-1 aircraft in reference 6. The total load coefficients at each station are built up from the components as listed in the generalized equations below. Particular attention should be paid to the units and sign conventions for each component.

#### 3.3.1 Wing station.-

Left side:

$$\begin{aligned}
 C_{VBT_{LW}} = & C_{VBT_{\alpha=0}} + C_{VBT_{\alpha}} + C_{VBT_{\alpha}} \left( \frac{\dot{\alpha} C_W}{2V_t} \right) - C_{VBT_{\delta_{SP}}} \delta_{SP_{LW}} \\
 & + C_{VBT_P} \left( \frac{Pb_W}{2V_t} \right) + C_{VBT_Q} \left( \frac{QC_W}{2V_t} \right) \\
 & + \left[ C_{VBT_{\beta\alpha=0}} + C_{VBT_{\beta\alpha=0}} + \left( C_{VBT_{\beta\alpha}} + C_{VBT_{\beta\alpha}} \right) \alpha \right] \beta
 \end{aligned} \tag{8L}$$

Right side:

$$\begin{aligned}
 C_{VBT_{RW}} = & C_{VBT_{\alpha=0}} + C_{VBT_{\alpha}} + C_{VBT_{\alpha}} \left( \frac{\dot{\alpha} C_W}{2V_t} \right) + C_{VBT_{\delta_{SP}}} \delta_{SP_{RW}} \\
 & - C_{VBT_P} \left( \frac{Pb_W}{2V_t} \right) + C_{VBT_Q} \left( \frac{QC_W}{2V_t} \right) \\
 & + \left[ C_{VBT_{\beta\alpha=0}} - C_{VBT_{\beta\alpha=0}} + \left( C_{VBT_{\beta\alpha}} - C_{VBT_{\beta\alpha}} \right) \alpha \right] \beta
 \end{aligned} \tag{8R}$$

TABLE I.- AERODYNAMIC EFFECTS APPLICABLE TO COMPONENT LOADS

Effect	Wing	Horiz tail	Vert tail	Fwd fus	Aft fus
$\alpha = 0$	X	X		X	X
$\alpha$	X	X		X	X
$\dot{\alpha}$	X	X			
$\beta$		X		X	X
$\delta_H$ (sym horiz tail defl)		X			
$\delta_H'$ (anti sym horiz tail defl)		X	X		X
$\delta_{Sp}$ (spoiler defl)	X	X	X		
$\delta_{Sp}$ c/o (horiz tail carryover)		X			
$\delta_{RU}$ (upper rudder defl)			X		
$\delta_{RL}$ (lower rudder defl)			X		X
P (damping in roll)	X	X	X	X	X
Q (damping in pitch)	X	X			
R (damping in yaw)			X		
$\beta \alpha = 0$ A/S (wing)	X				
$\beta \alpha = 0$ Sym (wing)	X				
$\beta \alpha$ A/S (wing)	X				
$\beta \alpha$ Sym (wing)	X				
$\beta \alpha = 0$ (vert tail)			X		
$\beta \alpha$ (vert tail)			X		
$\beta \alpha = 0$ c/o (aft fus carryover)					X
$\beta \alpha$ c/o (aft fus carryover)					X

X = Applicable aerodynamic effect

### 3.3.2 Horizontal tail station.-

Left side:

$$\begin{aligned}
 C_{VBT_{LHT}} = & C_{VBT_{\alpha=0}} + C_{VBT_{\alpha}}^{\alpha} + C_{VBT_{\delta_H}}^{\delta_H} + C_{VBT_{\alpha}}^{\left(\frac{\dot{\alpha} C_{HT}}{2V_t}\right)} \\
 & + C_{VBT_{\delta_{H'}}}^{\delta_{H'}} + C_{VBT_{\beta}}^{\beta} - C_{VBT_{\delta_{SP}}}^{\delta_{SP_L}} + C_{VBT_{\delta_{SP_{c/o}}}}^{\delta_{SP_R}} \\
 & + C_{VBT_P}^{\left(\frac{Pb_{HT}}{2V_t}\right)} + C_{VBT_Q}^{\left(\frac{QC_{HT}}{2V_t}\right)} \quad (9L)
 \end{aligned}$$

Right side:

$$\begin{aligned}
 C_{VBT_{RHT}} = & C_{VBT_{\alpha=0}} + C_{VBT_{\alpha}}^{\alpha} + C_{VBT_{\delta_H}}^{\delta_H} + C_{VBT_{\alpha}}^{\left(\frac{\dot{\alpha} C_{HT}}{2V_t}\right)} \\
 & - C_{VBT_{\delta_{H'}}}^{\delta_{H'}} - C_{VBT_{\beta}}^{\beta} + C_{VBT_{\delta_{SP}}}^{\delta_{SP_R}} - C_{VBT_{\delta_{SP_{c/o}}}}^{\delta_{SP_L}} \\
 & - C_{VBT_P}^{\left(\frac{Pb_{HT}}{2V_t}\right)} + C_{VBT_Q}^{\left(\frac{QC_{HT}}{2V_t}\right)} \quad (9R)
 \end{aligned}$$

### 3.3.3 Vertical tail station.-

$$\begin{aligned}
 C_{VBT_{VT}} = & \left[ C_{VBT_{\beta\alpha=0}} + C_{VBT_{\beta\alpha}}^{\alpha} \right] \beta + C_{VBT_{\delta_{H'}}}^{\delta_{H'}} \\
 & + C_{VBT_{\delta_{SP}}}^{\delta_{SP_R} + \delta_{SP_L}} + C_{VBT_{\delta_{RU}}}^{\delta_{RU}} \quad (10) \\
 & + C_{VBT_{\delta_{RL}}}^{\delta_{RL}} + C_{VBT_P}^{\left(\frac{Pb_{VT}}{2V_t}\right)} + C_{VBT_R}^{\left(\frac{Rb_{VT}}{2V_t}\right)}
 \end{aligned}$$

### 3.3.4 Forward fuselage station.-

Vertical :

$$C_{VBT_{FF}} = C_{VBT_{\alpha=0}} + C_{VBT_{\alpha}} \quad (11)$$

Lateral :

$$C_{VBT_{FF}} = C_{VBT_{\beta}} \beta + C_{VBT_P} \left( \frac{P_{b_{FF}}}{2V_t} \right) \quad (12)$$

### 3.3.5 Aft fuselage station.-

Vertical :

$$C_{VBT_{AF}} = C_{VBT_{\alpha=0}} + C_{VBT_{\alpha}} \quad (13)$$

Lateral :

$$C_{VBT_{AF}} = \left( C_{VBT_{\beta\alpha=0_{C/O}}} + C_{VBT_{\beta\alpha_{C/O}}} \alpha \right) \beta + C_{VBT_{\delta_H}} \delta_H + C_{VBT_{\delta_{RL}}} \delta_{RL} + C_{VBT_P} \left( \frac{P_{b_{AF}}}{2V_t} \right) + C_{VBT_{\beta}} \beta \quad (14)$$

The TOTAL vertical and lateral airloads at the aft fuselage station can be computed by adding the tail induced components to the airloads on the aft fuselage itself :

Vertical :

$$V_{AF} = (C_{V_{AF}} \bar{q} S_{AF}) + (V_{LHT} + V_{RHT}) \quad (15)$$

$$B_{AF} = (C_{B_{AF}} \bar{q} S_{AF} b_{AF}/2) + (V_{LHT} + V_{RHT}) \Delta x_{HT} - (T_{LHT} + T_{RHT}) \quad (16)$$

Lateral :

$$V_{AF} = (C_{V_{AF}} \bar{q} S_{AF}) + V_{VTR} \quad (17)$$

$$B_{AF} = (C_{B_{AF}} \bar{q} S_{AF} b_{AF}/2) + V_{VTR} \Delta x_{VTR} - T_{VTR} \quad (18)$$

$$T_{AF} = (C_{TAF} \bar{q} S_{AF} c_{AF}) + V_{VTR} \Delta z_{VTR} + B_{VTR} \\ + (V_{LHT} - V_{RHT}) \Delta y_{HT} + (B_{LHT} - B_{RHT}) \quad (19)$$

### 3.4 Sign Convention for Loads

Figure 1 shows the sign convention for positive shear loads. Note that for thin bodies off the centerline, positive shear load is always in the direction of the LOCAL  $Z_N$  axis normal to the surface. For slender bodies off the centerline, positive shears are always in the direction of the LOCAL  $Y_M$  and  $Z_M$  axes. For all bodies on the centerline, positive shear is always to the right.

Positive bending and torque loads for the right side thin bodies obey the right hand rule about the local  $X$  and  $Y$  axes respectively (positive tip and leading edge up). The left side axes are a mirror image of the right side. For slender bodies, a program option allows the user to define the convention for positive bending moments (either nose up, nose right, tail up, or tail right).

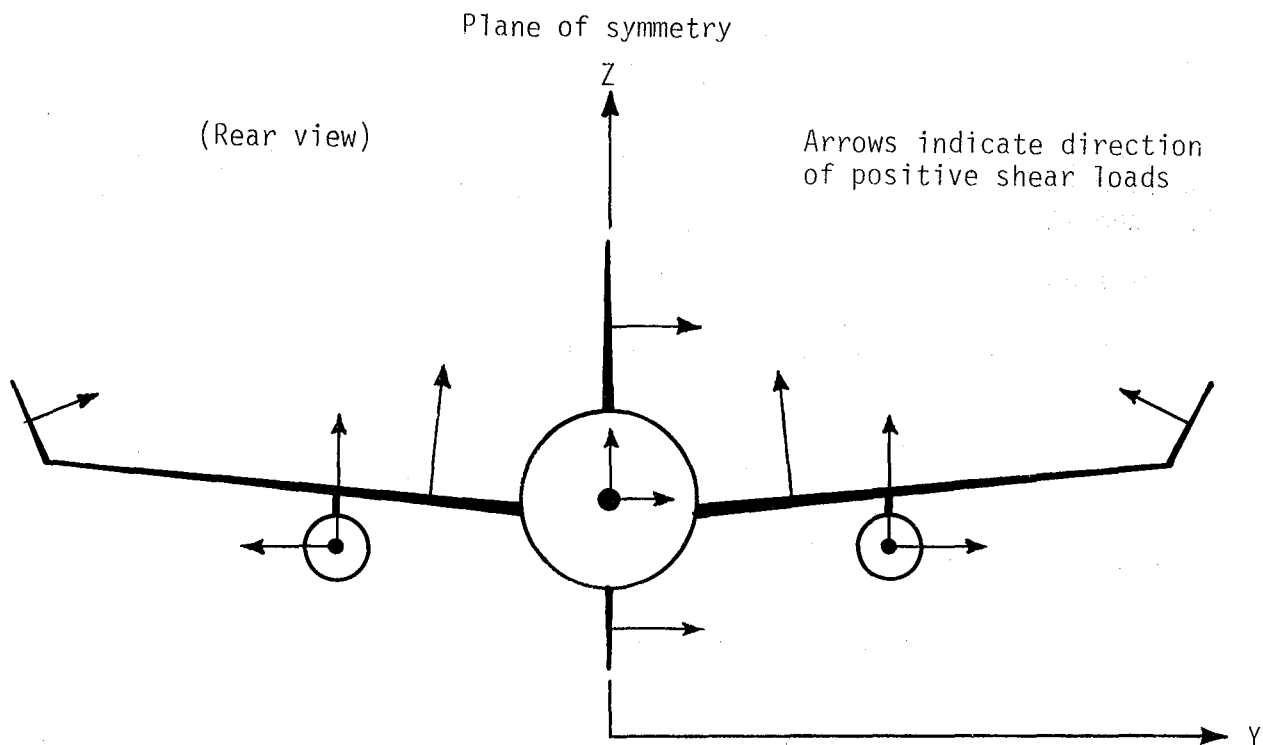


Figure 1. Sign convention for positive shear loads.

## 4.0 PROGRAM DESCRIPTION

The FSLIP-3 program is written in FORTRAN Extended Version 4 (reference 7). Current length is 1535 statements including comments. A complete listing of the source code with reference maps is included in a microfiche supplement attached to the inside back cover.

### 4.1 Main Program Organization

The primary function of the main program is to control the execution of subroutines which create or use various mini data bases. A simplified flowchart of the main program is shown in figure 2. The program first reads execution control information. If requested, an integration geometry data base is next created by a call to the geometry option subroutine (GOPSR). If no other options are requested, execution stops at this point. A call to the wind tunnel option subroutine (WOPSR) creates a data base containing wind tunnel load coefficients. Next, data describing each case (e.g.  $\alpha$ ,  $\beta$ ,  $\bar{q}$ ,  $\delta_e$ , etc.) are read in. If the pressure data is input on cards, the pressure option subroutine (POPSR) is called to create this data base.

At this point (labeled A) all data input is complete and the program proceeds with the computational options. A call to the integration option subroutine (IOPSR) generates the pressure integrated loads. If specified on the geometry data base, this subroutine also computes any additional loads defined as a linear combination of previously computed loads. If wind tunnel derived loads are desired, the wind tunnel option subroutine (WOPSR) is called again. At this point, all loads have been computed and the only remaining task is an option to print a summary of specified results in a very concise format.

### 4.2 Input/Output Data Flow

As just discussed, a set of subroutines creates or uses a number of discrete disk files containing data required by the computational options. Table 2 describes the function of each disk file allocated for data input or output. The overall data flow between the subroutines is shown in figure 3 and is discussed below in terms of the primary program options. Specific details of the unformatted disk files are provided in the DATA INPUT DESCRIPTION (sections 6.2, 6.3, and 6.5).

4.2.1 Geometry Option. - The surface/axis data file (Tape 20) provides the foundation for the integration process. For each integration, this data base contains the effective area, bending arm, and torque arm for each panel on the specified body. The user has several means of creating the surface/axis data file via subroutine GOPSR which is controlled by the geometry option parameter (GOP). If  $GOP = 1$ , the file is assumed to exist and the subroutine is not called.  $GOP = 2$  indicates that the file is copied from card input.  $GOP = 0$  means the file is not input.

An initial run is usually made with  $GOP = 3$  or  $4$  which uses the FLEXSTAB GDTAPE. The user simply specifies the FLEXSTAB body along with the integration



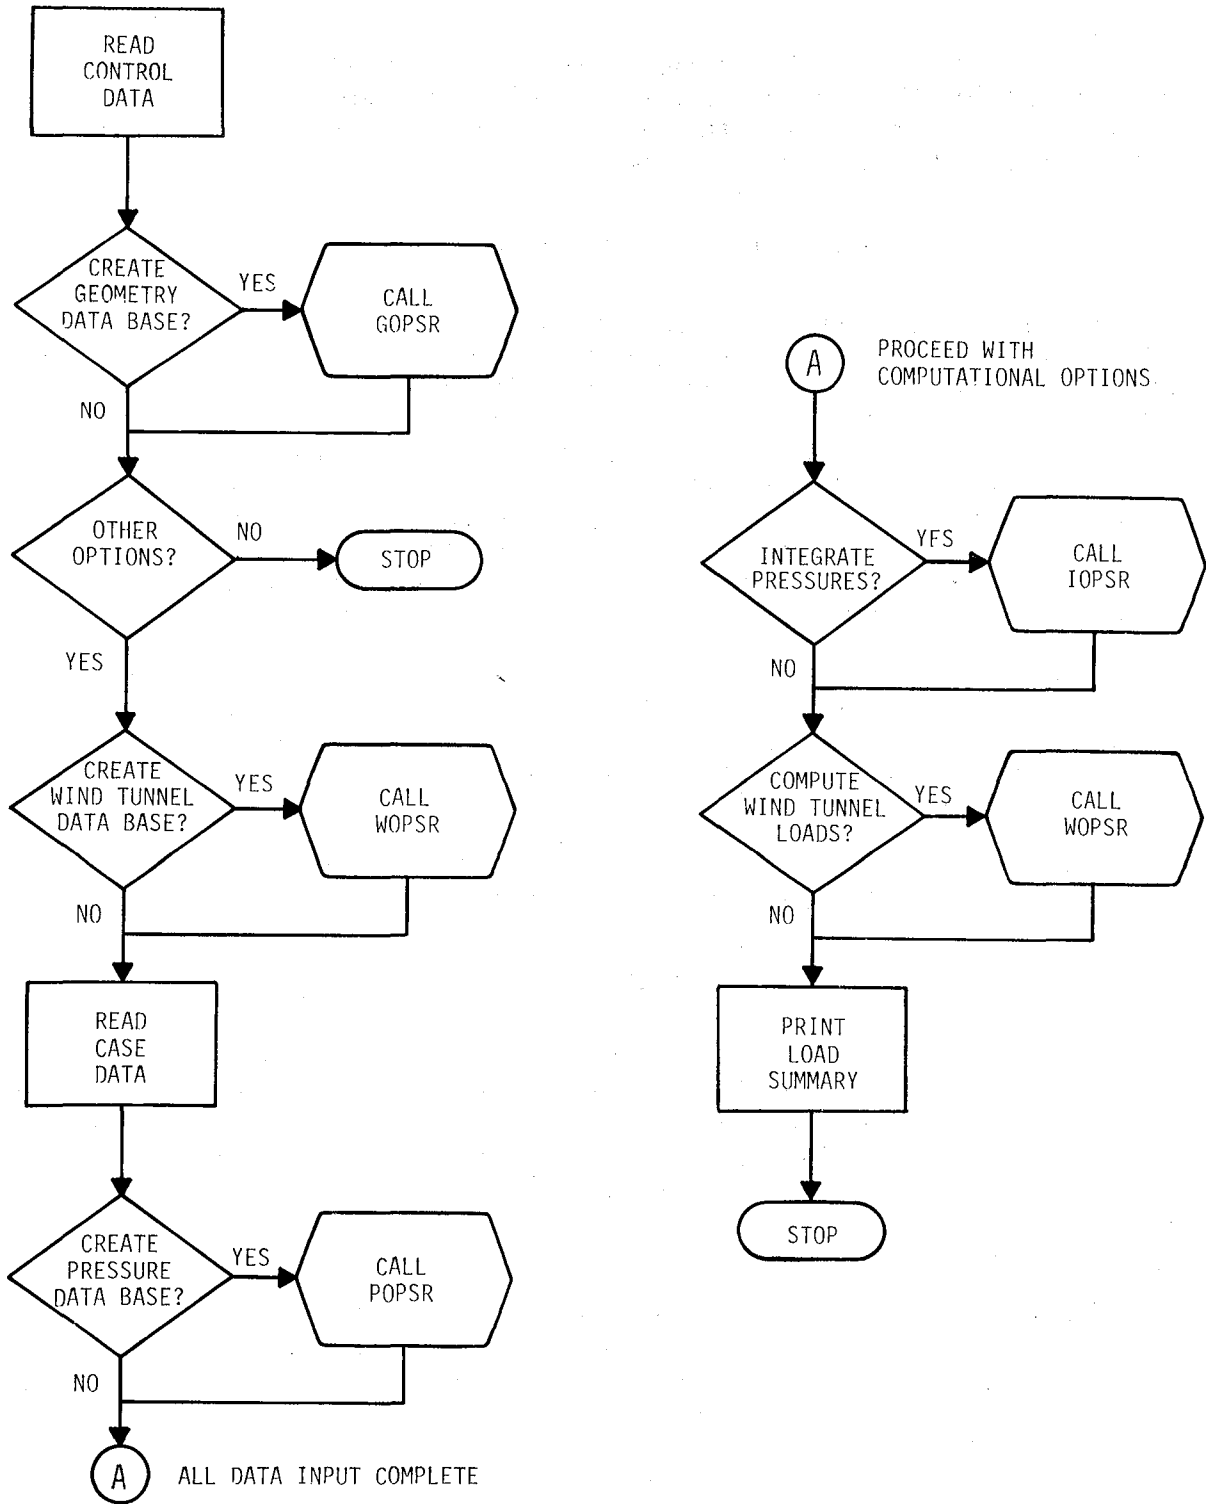


Figure 2. Main program simplified flowchart.

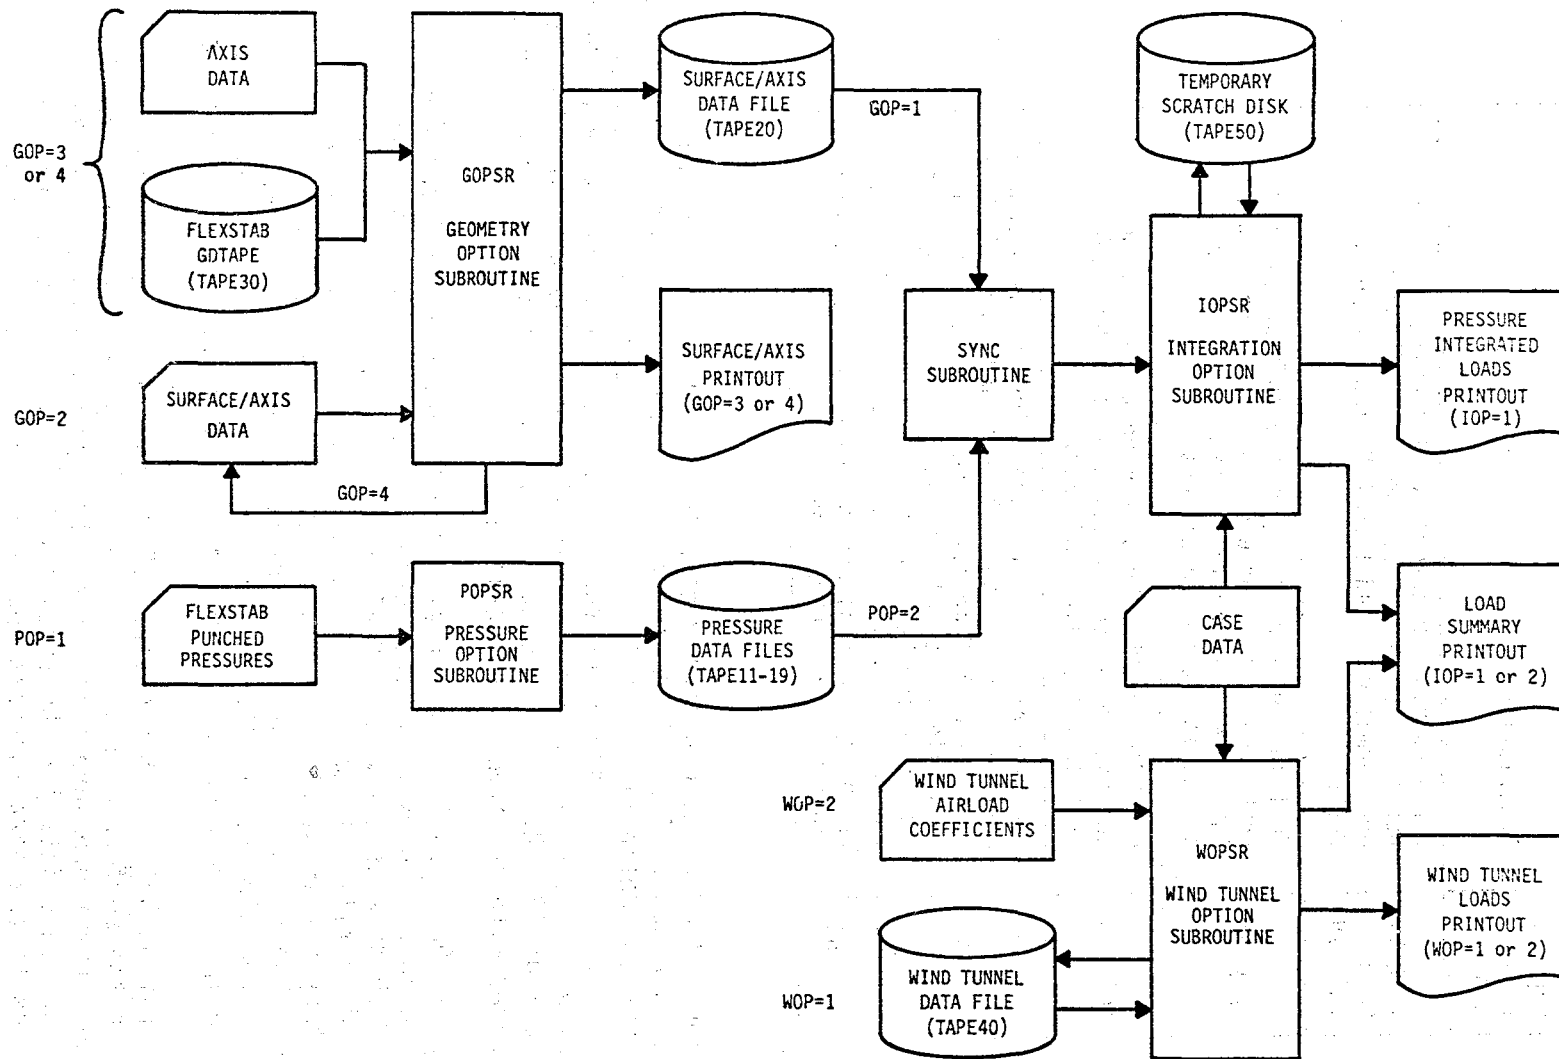


Figure 3. Input/output data flow.

TABLE 2. INPUT/OUTPUT DISK FILES

Logical File Name	Description
TAPE 11 thru TAPE 19	Contains panel pressure coefficients, one file per case, up to 9 cases per job. These files are normally copied from FLEXSTAB punched card decks.
TAPE 20	Contains surface/axis geometry information for each load station on each thin or slender body. This file is normally created from card input and cataloged for later runs.
TAPE 30	FLEXSTAB GDTAPE - This permanent file can be accessed to automatically generate the surface/axis geometry file (TAPE 20).
TAPE 40	Contains airload coefficients for the wind tunnel derived loads option. There is usually a different file for each Mach number/vehicle configuration. This file is normally created from card input and cataloged for later runs.
TAPE 50	Temporary internal scratch disk used by the integration option subroutine.

axis location and GOPSR automatically computes the data for each panel and creates the data base. A printout is generated which lists complete details of the integration definition. If  $GOP = 4$ , the surface/axis file is also punched on cards. This option gives the user a means to manually override the computed values on selected panels for special cases. The modified deck is then rerun using  $GOP = 2$ . This procedure is fully discussed in section 6.2 and illustrated with an example in section 8.

4.2.2 Pressure Option.- The panel pressure data are usually input from FLEXSTAB punched card decks. In this case, the pressure option parameter (POP) = 1 which directs subroutine POPSR to copy each case to a separate unformatted disk file. If desired, these files can be cataloged for later runs where they are input directly using POP = 2. Pressure data from a source other than FLEXSTAB could be processed if input in the same card format or written directly to the disk files by the generating aerodynamic program or an interface program. If no pressure data are to be input, POP = 0.

4.2.3 Integration Option.- Subroutine IOPSR processes each integration definition on the surface/axis data file by calling subroutine SYNC which searches the current pressure file for matching pressure data. If SYNC cannot find pressure data for the specified body, a message is printed and IOPSR proceeds to the next integration. The user can also individually suppress any particular integration definition residing on the surface/

axis file. Any additional load definitions are processed after all integrations have been completed for the first case. IOPSR then recycles to repeat the process for any succeeding cases.

The user has two options when executing IOPSR which controls the printed output. For IOP = 1, a detailed listing is generated for each integration which shows the area, arms, pressure coefficient, and loads for each panel on the body. If IOP = 2, this detailed listing is suppressed and the loads summary printout option must be used to printout the total integrated loads. The case data (read from cards by the main program) are passed to IOPSR via common and is optional. Its only function in IOPSR is to provide case descriptive data printed in the page header for each integration. If IOP = 0, IOPSR is not called and no integrations are performed.

4.2.4 Wind Tunnel Option.- To compute wind tunnel derived airloads, subroutine WOPSR is initially executed with WOP = 2, which copies the load coefficients from card input to the unformatted disk file. Future runs are then made by using the file directly with WOP = 1. For either option, the load coefficient data file is combined with the case describing data to compute the airloads for each case. The wind tunnel loads printout produces a listing of the coefficients and component loads for each aerodynamic effect.

For comparison purposes, a summary of the wind tunnel loads can be printed out along with the pressure integrated load only if the integration option is executed. The wind tunnel option can also be executed by itself by setting GOP, POP, and IOP to zero. In this mode, only the standard wind tunnel loads printout is generated. If WOP = 0, WOPSR is not called. Creation of the wind tunnel data file is described in detail in section 6.3 and illustrated with an example in section 8.2.

### 4.3 Option Requirements

The input and computational options discussed above are listed in detail in the input description for CARD 1 (section 6.1). The user can individually select the form by which the data input files are created or accessed and the computational options performed on these files. In general, any combination of program options are allowed through proper system control cards (see JCL section 5.1 and 5.2). The only requirements are listed below.

1. Execution of the geometry option with GOP = 3 or 4 requires access to a FLEXSTAB GDTAPE (TAPE 30).
2. Execution of the integration option requires access to both a surface/axis data file (TAPE 20) and a pressure data file for each case (TAPE 11-19). Thus if either GOP or POP = 0, IOP must = 0.
3. Execution of the wind tunnel option requires access only to a airload coefficient file (TAPE 40).

## 4.4 Program Restrictions and Limitations

4.4.1 FLEXSTAB Dependent.- The FSLIP program was written to be compatible with any FLEXSTAB GD model. Thus any restrictions in the GD module (ref. 2-4) also apply to FSLIP. While there is no limit on the number of bodies defining a GD model, each slender body is limited to 100 control points and each thin body is limited to 200 panels.

The most important restriction affecting FLEXSTAB jobs involves the use of units. FSLIP assumes the aerodynamic model is defined in inches, thus the units option in the GD module must be INCHES. FSLIP also assumes that dynamic pressure is in PSF, thus the units option in the SDSS module must be IN/FT or FT.

When interfacing with the GDTAPE (GOP = 3 or 4), FSLIP is compatible with any GDTAPE except those produced by Level 3.02 FLEXSTAB. The GDTAPE file structure for Level 3.02 was changed (reference 8) which affects the read statements in GOPSR. There are two ways to circumvent this problem for the user of Level 3.02 FLEXSTAB. The read statements in GOPSR can be changed to be compatible with Level 3.02 or the user can maintain access to an earlier level GD module for creating a FSLIP compatible GDTAPE. Under the FLEXSTAB system, the GDTAPE may contain multiple files with each file defining a different GD model. FSLIP reads the currently positioned file, thus if the user wishes to process other than the first file, appropriate SKIP or COPY utilities should be used to position the desired file after attaching the GDTAPE.

4.4.2 FSLIP Dependent.- Result arrays in FSLIP are currently sized to handle up to 9 different pressure cases per run. The surface/axis data file can contain up to 50 load stations to be processed for each case. The pressure data is usually input from card decks punched by the SD & SS module in FLEXSTAB. However, SD & SS is limited to punching thin body pressures only. If the user wishes to compute loads on slender bodies (such as fuselage loads), FSLIP has provisions for manually adding the slender body force coefficients (computed by SD & SS) to the thin body pressure decks. This procedure is described in section 6.5.

A very general restriction in FSLIP relates to the printed output which makes extensive use of fixed field F formats. These fields have been sized to handle physically realistic problems, and thus should not present a practical limitation. Specific restrictions related to the detailed card input is discussed in the DATA INPUT DESCRIPTION (section 6).

## 5.0 PROGRAM EXECUTION

FSLIP is presently operational on DFRC's CDC Cyber 73 computer. The program has been executed using both the SCOPE and NOS operating systems. Section 5.1 describes the Job Control Language (JCL) required for the SCOPE 3.4 operating system (reference 9). Section 5.2 contains the JCL required for the NOS 1.4 operating system (reference 10).

### 5.1 SCOPE JCL

To execute the FSLIP program using SCOPE, the following system control cards are required:

1. Job Card.
2. XXXXX,T300,FTN,YYYY.
3. ATTACH(LGO,FSLIP3,ID=SIMS,MR=1)
4. REQUEST(TAPEXX,\*PF)
5. ATTACH(TAPEXX,YYYYYYYY,ID=ZZZZ,MR=1)
6. MAP(OFF)
7. LGO(PL=10000)
8. CATALOG(TAPEXX,YYYYYYYY,ID=ZZZZ)
9. 7/8/9 End of file card
10. Data Input Deck
11. 6/7/8/9 End of job card

#### NOTES:

Card 1 - Estimated wall clock time of 2 to 5 minutes should be sufficient for most jobs.

Card 2 - XXXXX = User's Job Name

YYYY = Subtask number

Card 4 - These two cards are included for each data file to be input on and 8 cards and cataloged for use in later runs.

XX = 11 For pressure data file, case 1  
12 " " " " , case 2  
13 " " " " , case 3  
14 " " " " , case 4  
15 " " " " , case 5  
16 " " " " , case 6  
17 " " " " , case 7  
18 " " " " , case 8  
19 " " " " , case 9  
20 For surface/axis data file  
40 For wind tunnel data file

YYYYYYY = Permanent File Name

ZZZZ = Owner I.D.

Card 5 - This card is included for each previously cataloged data file to be accessed for job execution. The parameters XX, YYYYYYY, and ZZZZ are the same as for CARD 8, with the addition:

XX = 30 for the FLEXSTAB GDTAPE

Card 7 - For large jobs, the print limit may have to be increased. See section 7.1 for estimating amount of printout.

## 5.2 NOS JCL

To execute the FSLIP program using NOS, the following system control cards are required:

1. Job Card
2. XXXXX,T300.
3. USER(XXXX,YY)
4. CHARGE(XX,YY,FTN)
5. ATTACH(LGO=FSLIP3/UN=SIMS)
6. DEFINE(TAPEXX=YYYYYYY/CT=SPRIV)
7. ATTACH(TAPEXX=YYYYYYY)
8. LDSET(PRESET=ZERO)
9. MAP(OFF)
10. LGO(PL=10000)
11. 7/8/9 End of file card
12. Data Input Deck
13. 6/7/8/9 End of job card

### NOTES:

Card 2 - XXXXX = User's Job Name

Card 3 - XXXX = User's name

YY = User's password

Card 4 - XX,YY = Subtask number

Card 6 - This card replaces cards 4 and 8 defined above for SCOPE with the same XX and YYYYYYY parameters.

Card 7 - This card replaces card 5 defined above for SCOPE with the same XX and YYYYYYY parameters.

### 5.3 CM and CP Time Requirements

FSLIP requires a maximum execution field length of approximately 115K octal words. Execution CP times are very problem size dependent but relatively quick. Most average size jobs run in 10 to 20 CP seconds. The largest size jobs may require approximately 100 CP seconds.

### 6.0 DATA INPUT DESCRIPTION

This section contains a detailed description of the card input deck required for execution. Figure 4 illustrates the overall card deck structure which is broken down into 5 major sections. Section 6.1 contains program control data defined with card types 1 through 4. Section 6.2 is the surface/axis data file (card types 5 through 11). Section 6.3 is the wind tunnel data file (card types 12 through 15). Card types 16 through 18 make up section 6.4 containing case description data. Section 6.5 is the pressure data file (card types 19 through 24) which is repeated for each case to be processed. Section

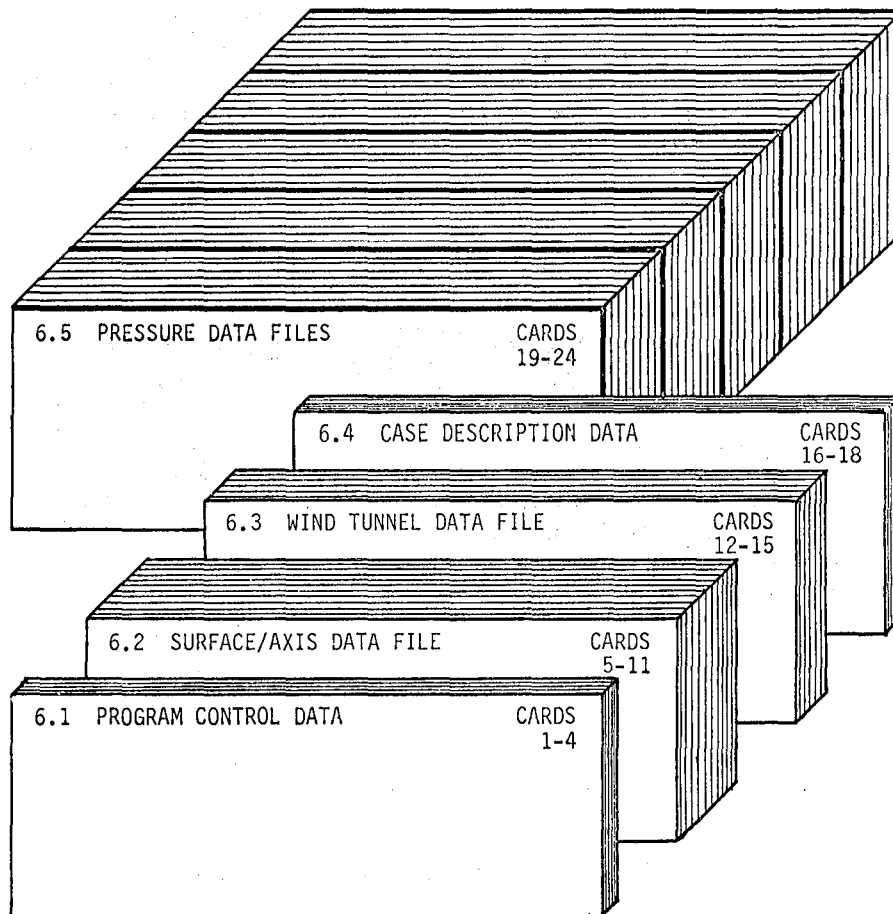


Figure 4. Overall card deck structure.



6.1 is always required for execution. Sections 6.2, 6.3, 6.4, and 6.5 are optional depending on the input options defined on CARD 1. Each of the five major sections are described separately.

### 6.1 Program Control Data (CARDS 1-4)

The card arrangement for the program control data is shown in figure 5. Particular attention should be paid to the option control parameters on CARD 1 as they affect most of the downstream cards. CARDS 2A and 2B control which integrated and wind tunnel loads are computed. CARD SET 3 controls the summary print option.

In the detailed card descriptions that follow, each data field is listed with its card columns, format, descriptor name, and explanation. In addition, 4 columns labeled R, S, I, and W denote the major computational options listed on CARD 1 as the Repunch option, Section data option, Integration option, and Wind tunnel option. The Repunch and Section data options are not currently incorporated in FSLIP but have been included for compatibility reasons because several input fields have been allocated for variables that apply only to the Repunch or Section data options. If an X appears in a particular column, it signifies that the variable applies to that option and should be defined. If the column is blank, the variable does not apply to that option and the field may be left blank. If an I appears in the column, it denotes a variable that is not used in any computation but provides information that will be printed as part of the page headers.

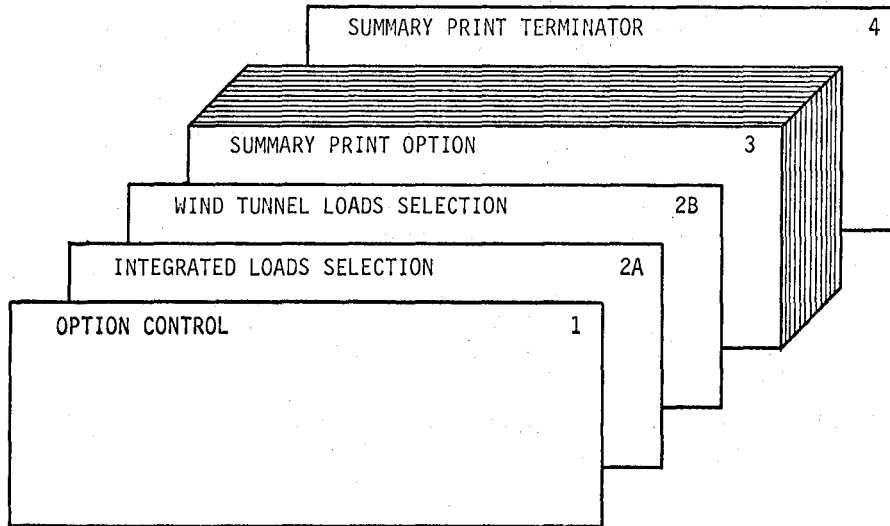


Figure 5. Card arrangement for the program control data.

CARD 1 - OPTION CONTROL.

Note: The following options are not currently available:  
 ROP=1, ROP=2  
 SOP=1

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
10	I1	GOP			X		Geometry input option. = 0 : Surface/axis data not input. = 1 : Data on disk (TAPE20). = 2 : Data read from cards, copied to disk. = 3 : Data computed from input and GDTAPE (TAPE30). = 4 : Data computed and punched from input and GDTAPE (TAPE30).
20	I1	POP			X		Pressure data input option. = 0 : Data not input. = 1 : Data on cards (punched by SD&SS) = 2 : Data on disk (TAPE11-19).
30	I1	ROP	X				Repunch pressure data option. = 0 : Not desired. = 1 : Repunch $\Delta$ CP data with new x/c's. = 2 : Punch non-FLEXSTAB $\Delta$ CP data.
40	I1	SOP		X			Section data option. = 0 : Not desired. = 1 : Section data computed.
50	I1	IOP			X		Integration option. = 0 : Not desired. = 1 : Integrate pressures and print panel by panel details. = 2 : Integrate pressures but suppress panel by panel details. Summary print option (CARD SET 3) must be used to print loads.
60	I1	WOP				X	Wind tunnel loads option. = 0 : Not desired. = 1 : Compute wind tunnel loads-coefficients on disk (TAPE40). = 2 : Compute wind tunnel loads-coefficients read from cards, copied to disk.

CARD 2A - INTEGRATED LOADS SELECTION.

OMIT this card if IOP=0 (CARD 1).

The card column number corresponds to the load station number defined on CARD 6 or 10. One column for each load station - up to 50 maximum.

Applies to all cases processed in this job.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-50	50L1	WGI			X		Load station selection. = T : Loads at this station will be computed. = F (or blank) : Loads at this station will NOT be computed.

CARD 2B - WIND TUNNEL LOADS SELECTION.

OMIT this card if WOP=0 (CARD 1).

The card column number corresponds to a particular load as listed in the table below. One column for each load - up to 14 maximum.

Applies to all cases processed in this job.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-14	14L1	WGW				X	Wind tunnel loads selection. = T : Loads at this station will be computed. = F (or blank) : Loads at this station will NOT be computed.

Load assignments:

Wind tunnel load number (WLN)	Surface number (WTN on CARD13)	Description
1	1	Wing loads - total.
2	1	Wing loads - without $\alpha=0$ term.
3	2	Horizontal tail loads - total.
4	2	Horizontal tail loads - without $\alpha=0$ term.
5	3	Vertical tail loads - upper.
6	4	Vertical tail loads - root.
7	5	Forward fuselage - vertical loads.
8	5	Forward fuselage - lateral loads.
9	6	Aft fuselage - vertical loads on fuselage itself.
10	6	Aft fuselage - tail induced vertical loads.
11	6	Aft fuselage - total vertical loads.
12	6	Aft fuselage - lateral loads on fuselage itself.
13	6	Aft fuselage - tail induced lateral loads.
14	6	Aft fuselage - total lateral loads.

CARD SET 3 - SUMMARY PRINT OPTION.

A one page summary is produced for each load station specified.

One card per load station - up to 50 maximum.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-2	I2	SPI			X		Load station number (SAN on CARD 6 or 10). Can be an integrated or additional load.
6-7	I2	SPW				X	Wind tunnel load number (WLN=1,14). If a wind tunnel load is computed that corresponds to the specified SPI, it can be printed along with the SPI load. SPW should not be specified unless SPI is non-zero.

CARD 4 - SUMMARY PRINT TERMINATOR.

This blank card signifies the end of program control data and is always included.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-2	I2	-	X	X	X	X	Leave columns blank or zero.
6-7	I2	-	X	X	X	X	Leave columns blank or zero.

## 6.2 Surface/Axis Data File (CARDS 5-11)

This card section is used to create the surface/axis data file when  $GOP = 2, 3,$  or  $4$ . Once the file has been created, this card section is omitted from the input deck if  $GOP = 0$  or  $1$ . Some general usage guidelines are presented here followed by the detailed card input descriptions.

Unlike the FLEXSTAB ALOADS module, FSLIP applies an integration specification to one thin or slender body at a time. More than one integration can be specified for a particular body. For each integration, the data file contains the effective area, bending arm, and torque arm for each panel on the specified body. Two methods are available for creating the data file which are discussed separately in sections 6.2.5 and 6.2.6.

**6.2.1 Thin body integrations.** - Figure 6 shows an example of the integration geometry for a typical thin body. The panel coordinates are originally defined in the local thin body coordinate system ( $X_N, Y_N$ ) as established in the FLEXSTAB GD module. An arbitrary load station is defined by the coordinates  $X_{A0}, Y_{A0}$  and sweep angle  $\Lambda_A$  which determines the bending ( $X_A$ ) and torque ( $Y_A$ ) axes. The bending axis may cut through certain panels with the effective area of each panel normally taken as that portion outboard of the bending axis. The effective bending and torque arms are measured normal to the axes from the effective panel centroid. Note that a panel centroid aft of the torque axis produces a negative torque arm.

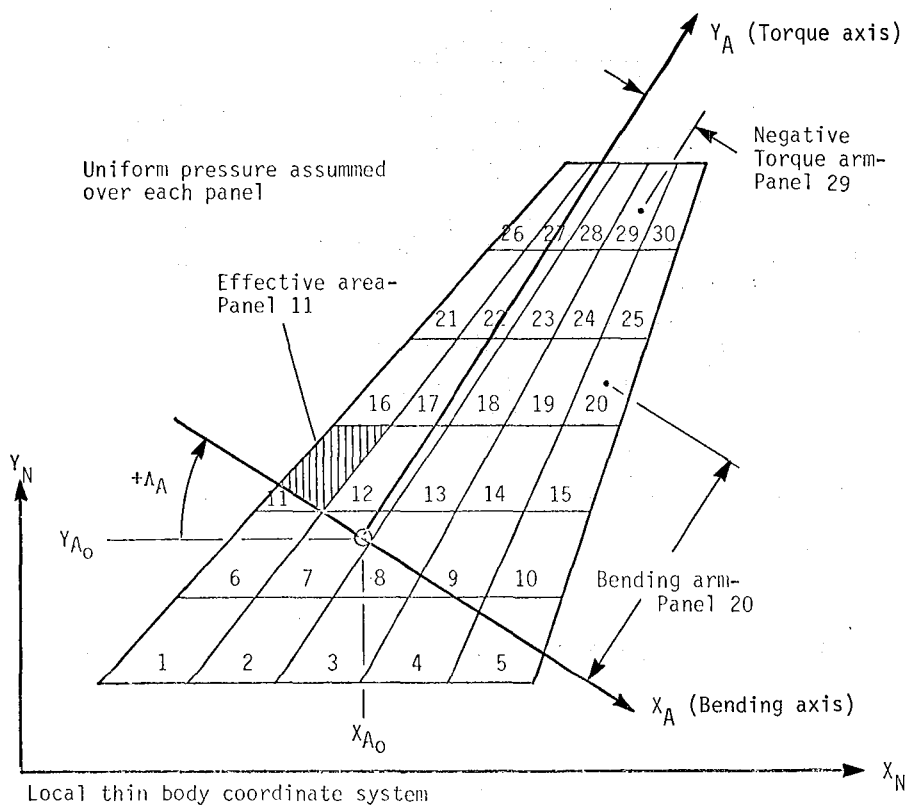


Figure 6. Integration geometry for thin body loads.

When executing  $GOP = 3$  or  $4$ , the geometry subroutine will automatically compute the effective panel geometry as described above. All panel areas inboard of the bending axis are set to zero. If the user wishes to override any computed values, the punched deck from  $GOP = 4$  should be modified and resubmitted using  $GOP = 2$ .

6.2.2 Hinge moment integrations.- Control surface hinge moments can be computed as a special class of thin body integrations as shown in figure 7. In this case, the torque axis is aligned with the hinge axis of an aileron made up of 9 panels. If the effective areas of all the non-aileron panels is set to zero, the torque integration is equivalent to the hinge moment.

When executing the automatic geometry option, the bending axis should be located inboard of the aileron panels so that the total area of the 9 panels is computed. Note, however, that the geometry subroutine will also compute a non-zero area for all panels outboard of the bending axis. The user should correct the punched deck (from  $GOP = 4$ ) by setting the areas of all non-aileron panels to zero. The modified deck is then input using  $GOP = 2$ .

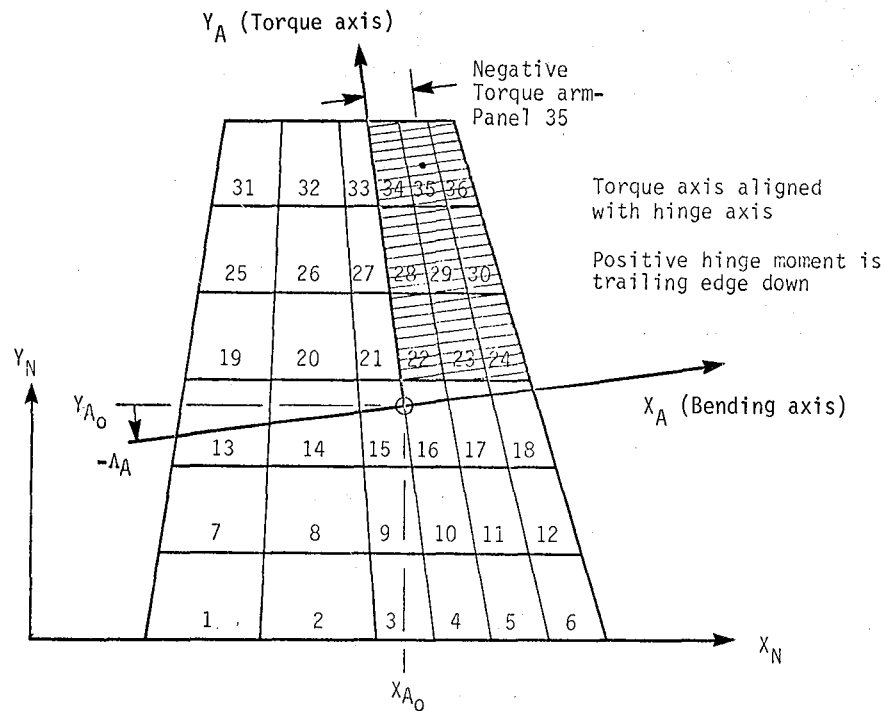


Figure 7. Integration geometry for hinge moments.

6.2.3 Slender body integrations - An example of the integration geometry for a slender body is shown in figure 8. Slender bodies are defined by a series of aerocentroids lying along the local slender body  $X_M$  axis. Each aerocentroid has a radius  $R_i$  and interval  $\Delta x_i$  which form the equivalent of panels within one row. Both vertical and lateral force coefficients can exist at each aerocentroid. The bending axis  $Y_A$  is established at a point along the  $X_M$  axis. The torque axis  $X_A$  is assumed to be coincident with the  $X_M$  axis which implies that torque loads are not normally computed for simple slender bodies.

When executing the automatic geometry option, the integration geometry is determined in a manner unique to slender bodies. First, an integration interval is established by the coordinates  $X_{FWD}$  and  $X_{AFT}$ . All panel areas outside of this interval are set to zero. Effective panel areas within the interval are computed as shown on the figure. The bending axis location is specified by the coordinate  $X_{MR}$  which is independent of  $X_{FWD}$  and  $X_{AFT}$ . Bending arms are computed from the midpoint of the effective panel area. The parameter MRC controls the sign convention for positive bending moments.

The example shown in the figure represents an integration definition for computing vertical loads at a forward fuselage station. An identical integration definition could be applied separately to compute lateral loads. Other types of load stations can be established by defining appropriate locations to  $X_{FWD}$ ,  $X_{AFT}$ , and  $X_{MR}$ . Aft fuselage loads could be defined by placing  $X_{FWD}$  and  $X_{MR}$  at the load station and placing  $X_{AFT}$  at any point aft of the last panel area. Loads on the complete slender body could be defined by placing  $X_{FWD}$  ahead of the first panel and placing  $X_{AFT}$  aft of the last panel. Bending moments (equivalent to a pitching moment) would be summed about  $X_{MR}$  which could be placed at the body quarter chord or center of gravity.

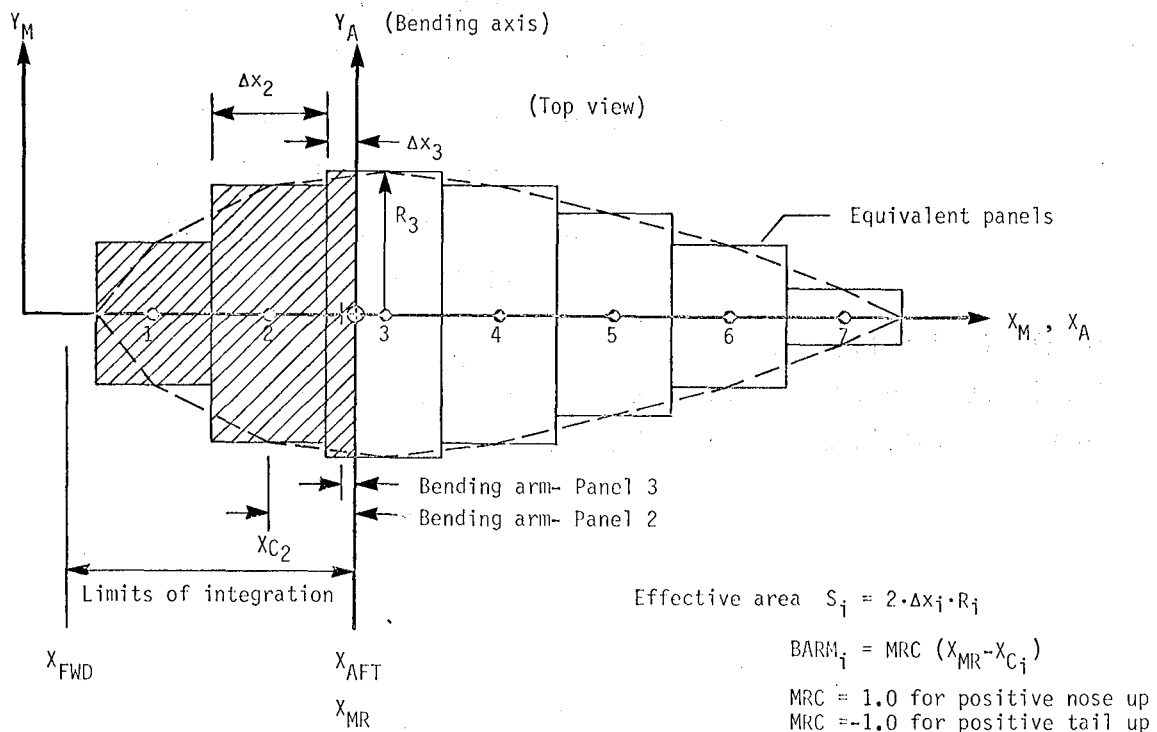


Figure 8. Integration geometry for slender body loads.



6.2.4 Additional load definitions.- This option is used to define any additional loads that are a linear combination of previously integrated loads. To illustrate the general setup, a simple example is shown in figure 9. The total shear and bending at a aft fuselage station ( $L_7, L_8$ ) are to be computed. These loads are generated from the integrated loads on the aft fuselage itself ( $L_1, L_2$ ) and the horizontal tail root loads ( $L_3-L_6$ ). The component factors are assembled in matrix form as shown below. Each row of the matrix is read in using CARD SET 11.

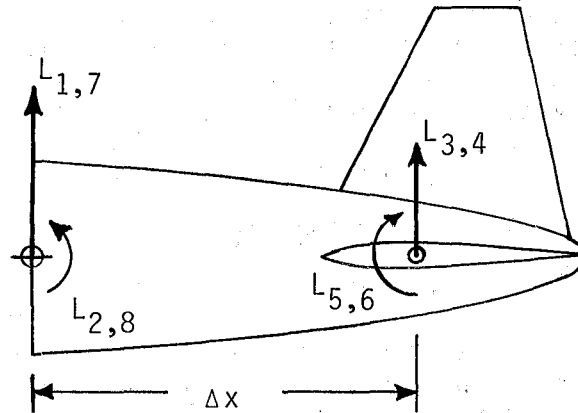


Figure 9. Additional load example.

$L_1$  = Aft fuselage vertical shear

$L_2$  = Aft fuselage bending

$L_3$  = Horizontal tail shear, left

$L_4$  = Horizontal tail shear, right


$L_5$  = Horizontal tail torque, left

$L_6$  = Horizontal tail torque, right

$$\text{Total aft fuselage shear} = L_7 = L_1 + L_3 + L_4$$

$$\text{Total aft fuselage bending} = L_8 = L_2 + \Delta x \cdot L_3 + \Delta x \cdot L_4 - L_5 - L_6$$

$$\text{Total aft fuselage torque} = L_9 = 0$$

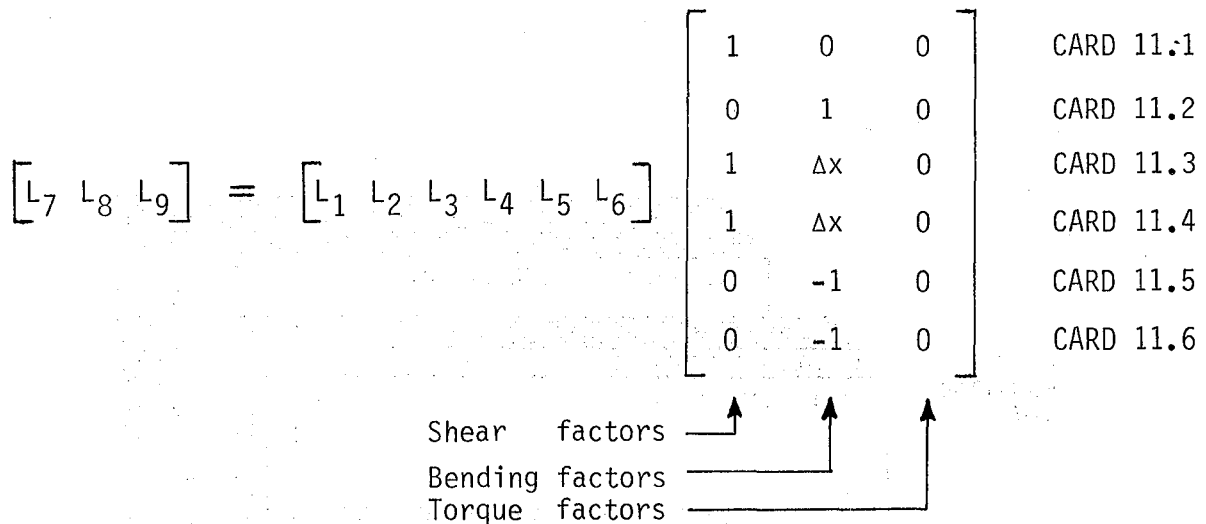

6.2.5 Card input for GOP = 2. - The card arrangement for the surface/axis data file if GOP = 2 is shown in figure 10. Under this option, each integration is defined on a panel by panel basis. In fact, each card record is directly copied to the unformatted disk file (TAPE 20). For each integration definition, the card sequence - CARD 6, CARD 7, CARD SET 8 - is repeated. Within this sequence, CARD 7 and CARD SET 8 is repeated for each row on the body. The order of the integration definitions is arbitrary. More than one integration may be specified for a particular body. The format is the same for both thin and slender bodies.

After all integrations are specified, any additional loads are defined. The card sequence - CARD 10, CARD SET 11 - is repeated for each additional load definition. Note that CARD 9 is not used in this deck.

6.2.6 Card input for GOP = 3 or 4. - A different card arrangement is used for this option as shown in figure 11. The deck format is essentially the same except that all of the row and panel data cards for a given integration are replaced by a single card which specifies the integration axis. CARD 9A is used for thin bodies and CARD 9B is used for slender bodies. The geometry subroutine will then interface the axis data with the FLEXSTAB GDTAPE and automatically generate the row and panel data. Any additional load definitions follow the integration definitions as before. The disk file created by this option is identical to that for GOP = 2.

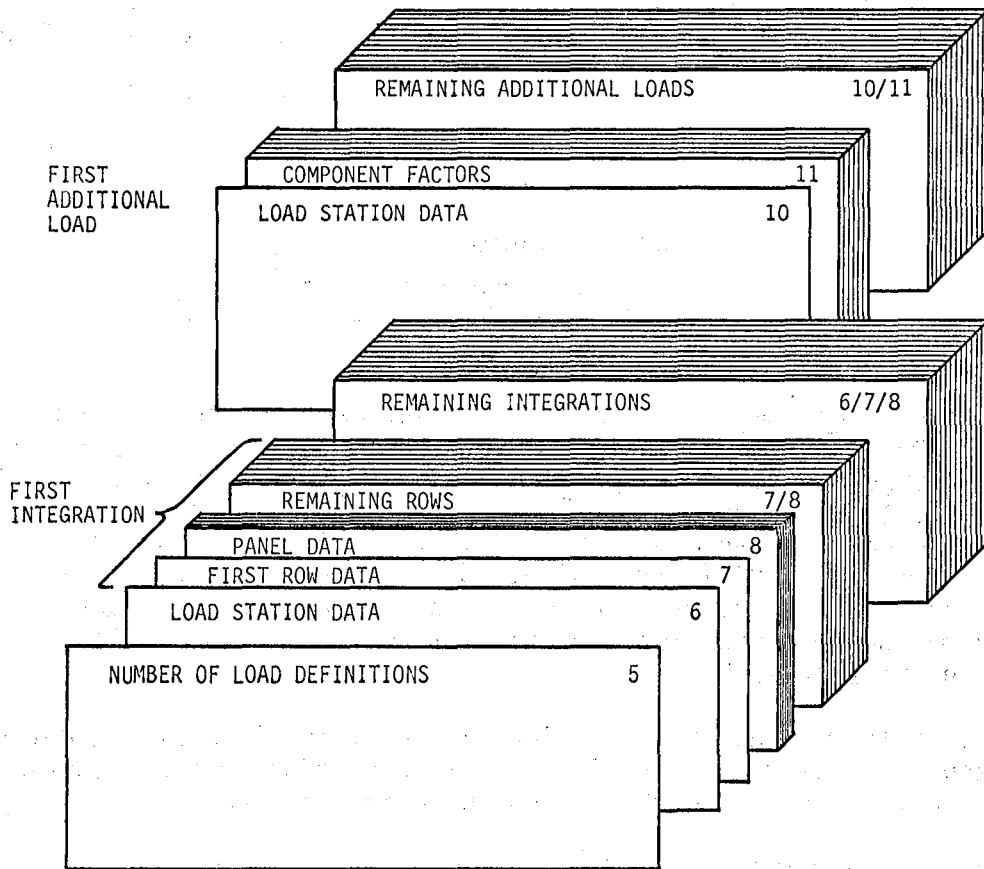


Figure 10. Card arrangement for the surface/axis data file if GOP = 2.

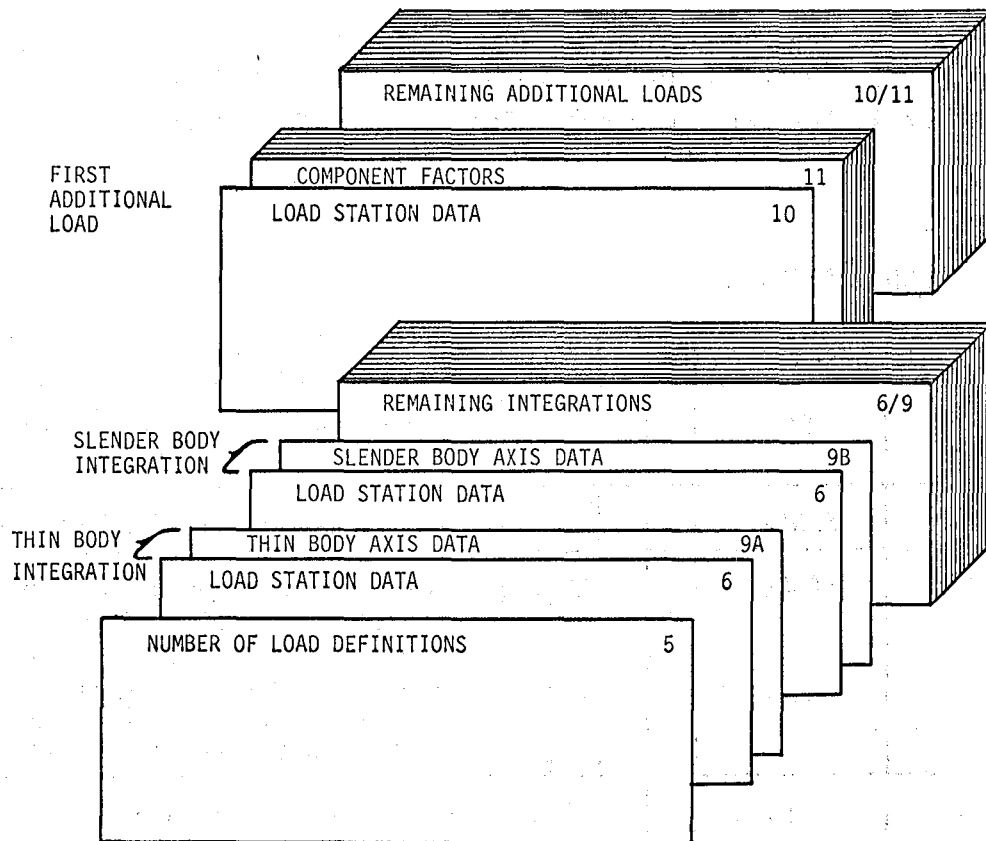


Figure 11. Card arrangement for the surface/axis data file if  $GOP = 3$  or  $4$ .

CARD 5 - NUMBER OF LOAD DEFINITIONS.

If  $GOP=0$  or  $1$ , OMIT this card section and skip to CARD 12.

The total number of load definitions ( $NSAD+NALD$ ) must not exceed 50.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-2	I2	NSAD			X		Number of integrations defined with card sequence 6-7-8 (if $GOP=2$ ) or card sequence 6-9 (if $GOP=3$ or $4$ ).
31-32	I2	NALD			X		Number of additional loads defined with card sequence 10-11.

If GOP=2, the card sequence - CARD 6, CARD 7, CARD SET 8 - is repeated for each integration definition (NSAD times).

If GOP=3 or 4, the card sequence - CARD 6, CARD 9 - is repeated for each integration definition (NSAD times).

CARD 6 - LOAD STATION DATA.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-2	I2	SAN			X		Unique number assigned to this load station (1 to 50).
5-20	4A4	SANAME			X		Name given to this load station.
23-30	2A4	SABODY			X		Name of body associated with this load station. Must match exactly (left justified) with a CPBODY name defined in pressure data files (CARD 22). These are the body names used in the GD program.
33	I1	ITC			X		Integration type code. = 1 : Slender body - vertical load. = 2 : Slender body - lateral load. = 3 : Thin body.
36	I1	SC			X		Symmetry code. = 0 : Body off centerline. = 1 : Body on centerline. (can leave blank if GOP=3 or 4).
39-40	I2	NR			X		Number of rows on body. Always = 1 for slender bodies. (can leave blank if GOP=3 or 4).
41-50	F10.0	SREF			X		Reference area (square feet). Default = 1.0
51-60	F10.0	BREF			X		Reference semispan (bending arm). Default = 1.0 (inches).
61-70	F10.0	CREF			X		Reference chord (torque arm). Default = 1.0 (inches).
71-80	F10.0	CAVG		X			Average chord (inches).

CARD 7 - ROW DATA.

The card sequence - CARD 7, CARD SET 8 - is repeated for each row on the body (NR times- CARD 6).

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-2	I2	RN			X		Row number.
3-10	F8.0	ETA		X			Nondimensional semispan station.
11-20	F10.0	YL		X			Y coordinate in local system of row centroid (inches).
29-30	I2	NP			X		Number of panels in row.
31-40	F10.0	CROW		X			Chord of row at centroid (inches).

CARD SET 8 - PANEL DATA.

Contains NP cards, one card for each panel on row, leading to trailing edge.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-10	2I5	PN			X		Panel index. 1st integer = row number. 2nd integer = panel number.
11-20	F10.0	SP			X		Effective panel area outboard of load station (square inches). If entire panel is inboard of bending axis, set SP = 0.0 .
21-30	F10.0	BARM			X		Effective bending arm of panel (in.).
31-40	F10.0	TARM			X		Effective torque arm of panel (in.) . (positive for effective panel centroid ahead of torque axis).
41-50	F10.0	XCN	X				New value of x/c, nondimensional x coordinate of panel aerocentroid, for repunch option.

CARD 9A - THIN BODY AXIS DATA.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-10	F10.0	XAZ			X		X coordinate in local system of integration axis origin (inches).
11-20	F10.0	YAZ			X		Y coordinate in local system of integration axis origin (inches).
21-30	F10.0	LAD			X		Sweep angle of integration axis (deg).

CARD 9B - SLENDER BODY AXIS DATA.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-10	F10.0	XFWD			X		X coordinate in local system of forward limit of integration (inches).
11-20	F10.0	XAFT			X		X coordinate in local system of aft limit of integration (inches).
21-30	F10.0	XMR			X		X coordinate in local system of moment reference point (inches).
31-40	F10.0	MRC			X		Moment reference sign convention. = 1.0 : Positive nose up or to right. = -1.0 : Positive tail up or to right.

The card sequence - CARD 10, CARD SET 11 - is repeated for each additional load definition (NALD times - CARD 5).

CARD 10 - LOAD STATION DATA.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-2	I2	SAN			X		Unique number assigned to this load station (1 to 50).
5-20	4A4	SANAME			X		Name given to this load station.
33	I1	ITC			X		Integration type code. = 4 : Additional load.
36	I1	SC			X		Symmetry code. = 0 : Load station off centerline. = 1 : Load station on centerline.
38-40	I3	NT			X		Number of component loads defined with CARD SET 11.
41-50	F10.0	SREF			X		Reference area (square feet). Default = 1.0
51-60	F10.0	BREF			X		Reference semispan (bending arm). Default = 1.0 (inches)
61-70	F10.0	CREF			X		Reference chord (torque arm). Default = 1.0 (inches)



CARD SET 11 - COMPONENT FACTORS.

Repeated NT times - CARD 10.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-2	I2	CN			X		Load station number (SAN) of this component (1 to 50). If CN = 0, VFAC, BFAC, and TFAC contain simple constants added to additional load. Leave CL,CT blank.
6	I1	CL			X		Component location. = 1 : Left side. = 2 : Right side. = 3 : Centerline.
10	I1	CT			X		Component type. = 1 : Shear load. = 2 : Bending load. = 3 : Torque load.
11-20	F10.3	VFAC			X		Shear factor for this component.
21-30	F10.3	BFAC			X		Bending factor for this component.
31-40	F10.3	TFAC			X		Torque factor for this component.

NOTE : If SC=0 (on CARD 10), define the left hand components only. Both left hand and right hand loads will be computed automatically.

If SC=1 (on CARD 10), additional load station is on centerline which means left hand, right hand, and centerline loads can be specified as components.

If the geometry input option is the only option requested (POP=ROP=SOP=IOP=WOP=0), the remaining CARDS 12-24 are omitted

### 6.3 Wind Tunnel Data File (CARDS 12-15)

The card arrangement for the wind tunnel data file is shown in figure 12. These cards are included only if WOP = 2 on CARD 1. The card sequence - CARD 13, CARD SET 14 - is repeated for each of 6 possible load stations. Any station that is not applicable to the configuration is simply omitted. For each station, CARD SET 14 contains 15 cards which define the airload coefficients as specified in tables 3 thru 7. Two separate sets of coefficients can be entered for the vertical tail.

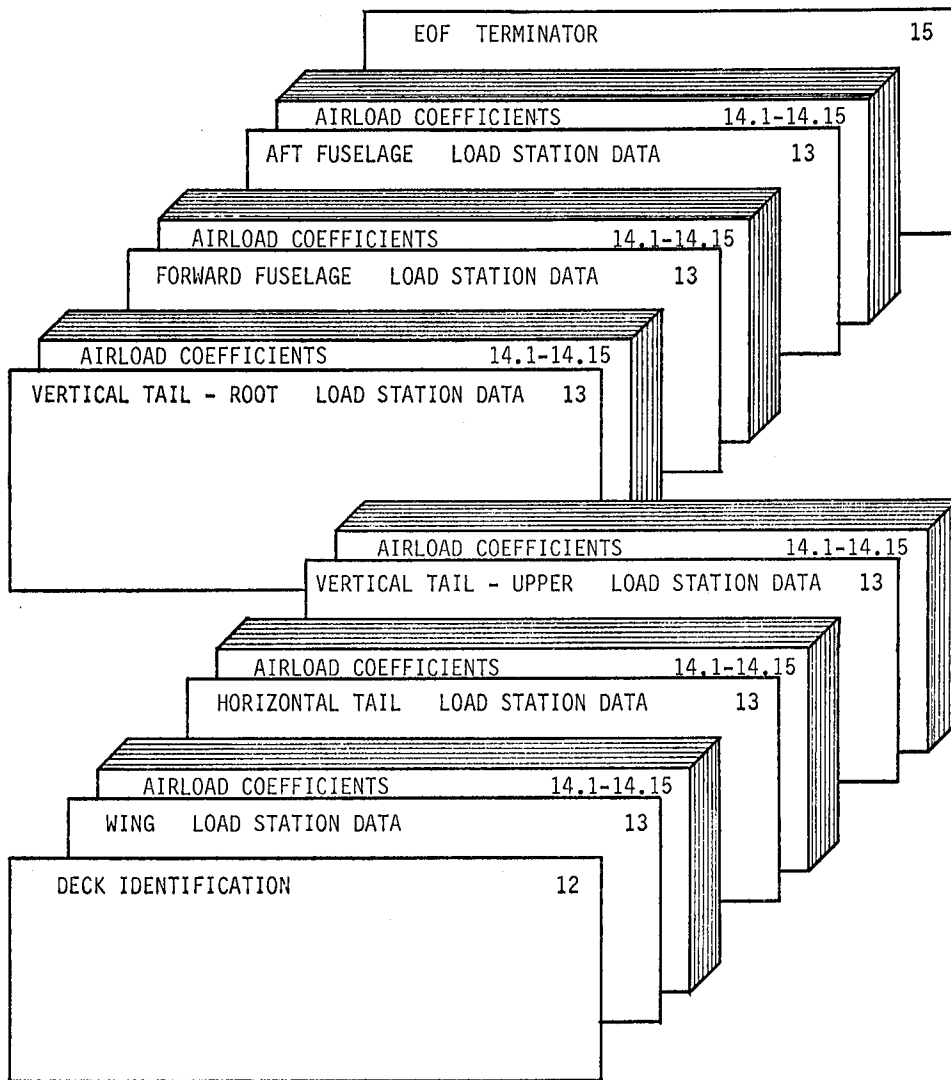


Figure 12. Card arrangement for the wind tunnel data file.

If WOP=0 or 1 , OMIT this card section and skip to CARD SET 16.

CARD 12 - DECK IDENTIFICATION.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-72	18A4	WID				X	Wind tunnel deck identification. (Alpha-numeric)

The card sequence - CARD 13, CARD SET 14 is repeated for each of the 6 possible load stations to be defined.

CARD 13 - LOAD STATION DATA.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-2	I2	WTN				X	Load station number. = 1 : Wing. = 2 : Horizontal tail. = 3 : Vertical tail - upper. = 4 : Vertical tail - root. = 5 : Forward fuselage. = 6 : Aft fuselage.
5-20	4A4	WTNAME				X	Name given to this load station.
21-30	F10.0	SWT				X	Reference area (square feet).
31-40	F10.0	BWT				X	Reference semispan (inches).
41-50	F10.0	CWT				X	Reference chord (inches).
53-59	F7.0	XHT				X	Horizontal tail, longitudinal moment transfer arm (inches). ( $\Delta x$ between horizontal tail and aft fuselage load stations)
60-66	F7.0	YHT				X	Horizontal tail, lateral moment transfer arm (inches). ( $\Delta y$ between horizontal tail and aft fuselage load stations)
67-73	F7.0	XVT				X	Vertical tail root, longitudinal moment transfer arm (inches). ( $\Delta x$ between vertical tail root and aft fuselage load stations)
74-80	F7.0	ZVT				X	Vertical tail root, vertical moment transfer arm (inches). ( $\Delta z$ between vertical tail root and aft fuselage load stations)

NOTE : XHT, YHT, XVT, and ZVT are defined for the aft fuselage load station only (WTN=6). Refer to equations 16, 18, and 19. Leave blank for other load stations.

CARD SET 14 - AIRLOAD COEFFICIENTS.

Contains 15 cards as specified in :  
 Table 3 - Wing station  
 Table 4 - Horizontal tail station  
 Table 5 - Vertical tail  
 Table 6 - Forward fuselage station  
 Table 7 - Aft fuselage station.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
6-10	I5	NSEQ				X	Component sequence number. (See tables)
11-20	E10.2	CV				X	Shear coefficient for this component effect.
21-30	E10.2	CB				X	Bending coefficient for this component effect.
31-40	E10.2	CT				X	Torque coefficient for this component effect.
43-63	3A7	DES				X	Descriptive name (Alpha-numeric) of this component effect. (See tables)
64-80	Not read	-				X	These columns are available to the user for a deck ID.

TABLE 3. AIRLOAD COEFFICIENTS FOR WING STATION

WTN=1 Refer to equation 8.

CARD	NSEQ	DES (Component effect)
14.1	101	ALPHA = 0
14.2	102	ALPHA
14.3	103	ALPHA DOT
14.4	104	DELTA SPOILER
14.5	105	ROLL DAMPING, P
14.6	106	PITCH DAMPING, Q
14.7	107	BETA, ALPHA=0, A/S
14.8	108	BETA*ALPHA, A/S
14.9	109	BETA, ALPHA=0, SYM
14.10	110	BETA*ALPHA, SYM
14.11	111	BLANK FILLER,NOT USED
14.12	112	BLANK FILLER,NOT USED
14.13	113	BLANK FILLER,NOT USED
14.14	114	BLANK FILLER,NOT USED
14.15	115	BLANK FILLER,NOT USED

TABLE 4. AIRLOAD COEFFICIENTS FOR HORIZONTAL TAIL STATION

WTN=2 Refer to equation 9.

CARD	NSEQ	DES (Component effect)
14.1	201	ALPHA = 0
14.2	202	ALPHA
14.3	203	DELTA H
14.4	204	ALPHA DOT
14.5	205	BETA
14.6	206	DELTA H PRIME
14.7	207	DELTA SPOILER
14.8	208	DELTA SPOILER C/O
14.9	209	ROLL DAMPING, P
14.10	210	PITCH DAMPING, Q
14.11	211	BLANK FILLER,NOT USED
14.12	212	BLANK FILLER,NOT USED
14.13	213	BLANK FILLER,NOT USED
14.14	214	BLANK FILLER,NOT USED
14.15	215	BLANK FILLER,NOT USED

TABLE 5. AIRLOAD COEFFICIENTS FOR UPPER VERTICAL TAIL STATION

WTN=3 Refer to equation 10.

CARD	NSEQ	DES (Component effect)
14.1	301	BETA, ALPHA=0
14.2	302	BETA* ALPHA
14.3	303	DELTA H PRIME
14.4	304	DELTA SPOILER
14.5	305	DELTA RUDDER, UPPER
14.6	306	DELTA RUDDER, LOWER
14.7	307	ROLL DAMPING, P
14.8	308	YAW DAMPING, R
14.9	309	BLANK FILLER,NOT USED
14.10	310	BLANK FILLER,NOT USED
14.11	311	BLANK FILLER,NOT USED
14.12	312	BLANK FILLER,NOT USED
14.13	313	BLANK FILLER,NOT USED
14.14	314	BLANK FILLER,NOT USED
14.15	315	BLANK FILLER,NOT USED

Airload coefficients for the vertical tail root station are input using the same format as TABLE 5 with NSEQ numbers in 400 series. Vertical tail root loads should be defined if tail induced lateral loads at the aft fuselage station are to be computed.

TABLE 6. AIRLOAD COEFFICIENTS FOR FORWARD FUSELAGE STATION

WTN=5 Refer to equations 11&12

CARD	NSEQ	DES (Component effect)
14.1	501	ALPHA=0 (VERTICAL)
14.2	502	ALPHA (VERTICAL)
14.3	503	ROLL DAMP, P (LAT)
14.4	504	BETA (LATERAL)
14.5	505	BLANK FILLER,NOT USED
14.6	506	BLANK FILLER,NOT USED
14.7	507	BLANK FILLER,NOT USED
14.8	508	BLANK FILLER,NOT USED
14.9	509	BLANK FILLER,NOT USED
14.10	510	BLANK FILLER,NOT USED
14.11	511	BLANK FILLER,NOT USED
14.12	512	BLANK FILLER,NOT USED
14.13	513	BLANK FILLER,NOT USED
14.14	514	BLANK FILLER,NOT USED
14.15	515	BLANK FILLER,NOT USED

TABLE 7. AIRLOAD COEFFICIENTS FOR AFT FUSELAGE STATION

WTN=6 Refer to equations 13&14

CARD	NSEQ	DES (Component effect)
14.1	601	ALPHA=0 (VERTICAL)
14.2	602	ALPHA (VERTICAL)
14.3	603	BETA,ALPHA=0,C/O(LAT)
14.4	604	BETA*ALPHA,C/O (LAT)
14.5	605	DELTA H PRIME (LAT)
14.6	606	DELTA RUD, LOWER(LAT)
14.7	607	ROLL DAMPING, P (LAT)
14.8	608	BETA (LATERAL)
14.9	609	BLANK FILLER,NOT USED
14.10	610	BLANK FILLER,NOT USED
14.11	611	BLANK FILLER,NOT USED
14.12	612	BLANK FILLER,NOT USED
14.13	613	BLANK FILLER,NOT USED
14.14	614	BLANK FILLER,NOT USED
14.15	615	BLANK FILLER,NOT USED

CARD 15 - EOF TERMINATOR.

Terminates wind tunnel data file.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1	-	EOF				X	7-8-9 multipunch.

#### 6.4 Case Description Data (CARDS 16-18)

The card arrangement for the case description data is shown in figure 13. CARD SET 16 defines aerodynamic parameters ( $\alpha, \beta$ , etc.) describing each specific case to be processed. It is required for execution of the wind tunnel option (WOP = 1 or 2). For the integration option, it provides printout header information only, and is optional. (Alpha, beta, and Qbar values only are obtained from the pressure data files for the integration option.) CARD SET 16 contains one card for each parameter to be defined for each case. However, to minimize the card count, an automatic recycle feature is incorporated that works as follows: All parameter values for case 1 are initially defaulted to zero. The user defines any non-zero parameters. These values are automatically used for each succeeding case until reset with an additional card defining the new value. A simple example is included after the card descriptions at the end of this section.

CARD 17 serves as an EOF terminator for CARD SET 16. It is always included even if CARD SET 16 is omitted. CARD 18 controls the number of cases processed for the pressure data, integration, and wind tunnel options.

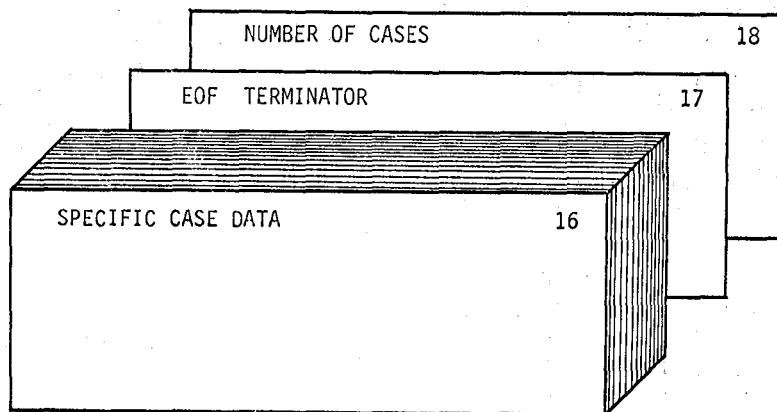


Figure 13. Card arrangement for the case description data.

If POP=0 AND WOP=0, OMIT this card section.

CARD SET 16 - SPECIFIC CASE DATA.

Required for wind tunnel option.  
Optional for integration option.

This card set incorporates an automatic recycle feature. Only non-zero value parameters need be defined and/or thereafter only if they change for a succeeding case. Order does not matter as long as the case number for any specific parameter always increases. The use of this card set is clarified in the example after CARD 18.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1	I1	CI	I	I	I	X	Case index (1-9).
5-6	I2	PI	I	I	I	X	Parameter index. = 1 : Angle of attack (deg). = 2 : Angle of sideslip (deg). = 3 : Dynamic pressure (psf). = 4 : True airspeed (ft/sec). = 5 : Alpha dot (deg/sec). = 6 : CNA-airplane normal force coeff. = 7 : Roll rate (deg/sec). = 8 : Pitch rate (deg/sec). = 9 : Yaw rate (deg/sec). =10 : Not used- =11 : Not used. =12 : Not used. =13 : Aileron deflection, $\delta h'$ (deg). =14 : Elevator deflection, $\delta h$ (deg). =15 : Upper rudder deflection (deg). =16 : Lower rudder deflection (deg). =17 : Left spoiler deflection (deg). =18 : Right spoiler deflection (deg). =19 : Not used. =20 : Not used.
10-19	F10.0	PV	I	I	I	X	Parameter value for this case.



CARD 17 - EOF TERMINATOR.

This card terminates CARD SET 16 and is included even if CARD SET 16 is omitted.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1	-	EOF	X	X	X	X	7-8-9 multipunch.

CARD 18 - NUMBER OF CASES

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1	I1	NC	X	X	X	X	Number of cases in this run (1-9). Note that if a decimal point is added in column 2, this card can be used with the pressure data files (CARDS 19-24) to execute the FLEXSTAB PDPLLOT program (Level 1.02 only).

Example for the case description data -

Assume the following 4 parameters are to be defined for 4 cases to be processed by the wind tunnel option :

Case 1 :  $Q_{bar}=1000$  ,  $\alpha=0$  ,  $\beta=0$  ,  $\delta h=0$

Case 2 :  $Q_{bar}=1000$  ,  $\alpha=5$  ,  $\beta=0$  ,  $\delta h=0$

Case 3 :  $Q_{bar}=1000$  ,  $\alpha=0$  ,  $\beta=0$  ,  $\delta h=-5$

Case 4 :  $Q_{bar}= 500$  ,  $\alpha=0$  ,  $\beta=5$  ,  $\delta h=0$

CARD SECTION 16-18 would consist of the following cards :

CARD	CI	PI	PV
16.1	1	03	1000.
16.2	4	03	500.
16.3	2	01	5.
16.4	3	01	0.
16.5	4	02	5.
16.6	3	14	-5.
16.7	4	14	0.
17	7/8/9		
18	4.		

$Q_{bar}$ , cases 1-3  
 $Q_{bar}$ , case 4  
 $\alpha$ , case 2 (case 1 defaults to 0)  
 $\alpha$ , cases 3-4  
 $\beta$ , case 4  
 $\delta h$ , case 3 (cases 1-3 default to 0)  
 $\delta h$ , case 4  
 EOF  
 Number of cases

Note that if the integration option were executed without the wind tunnel option, CARD SET 16 would contain CARDS 16.6 and 16.7 only. Alpha, Beta, and  $Q_{bar}$  values would be obtained directly from the pressure data files.

## 6.5 Pressure Data Files (CARDS 19-24)

This card section is for the creation of the pressure data files. If POP = 0 or 2, these cards are omitted. This entire card section is normally punched by the FLEXSTAB SD&SS program (references 2-4). Current versions of FLEXSTAB punch only thin body pressures, but slender body force coefficients can be manually added to the deck punched by FLEXSTAB.

The card arrangement is shown in figure 14. CARDS 19, 20 and 21 are identification and control data. The card sequence -CARD 22, CARD 23, CARD SET 24- is repeated for each thin body. Within this sequence, CARD 23, CARD SET 24 is repeated for each row on the body. Any slender bodies are added to

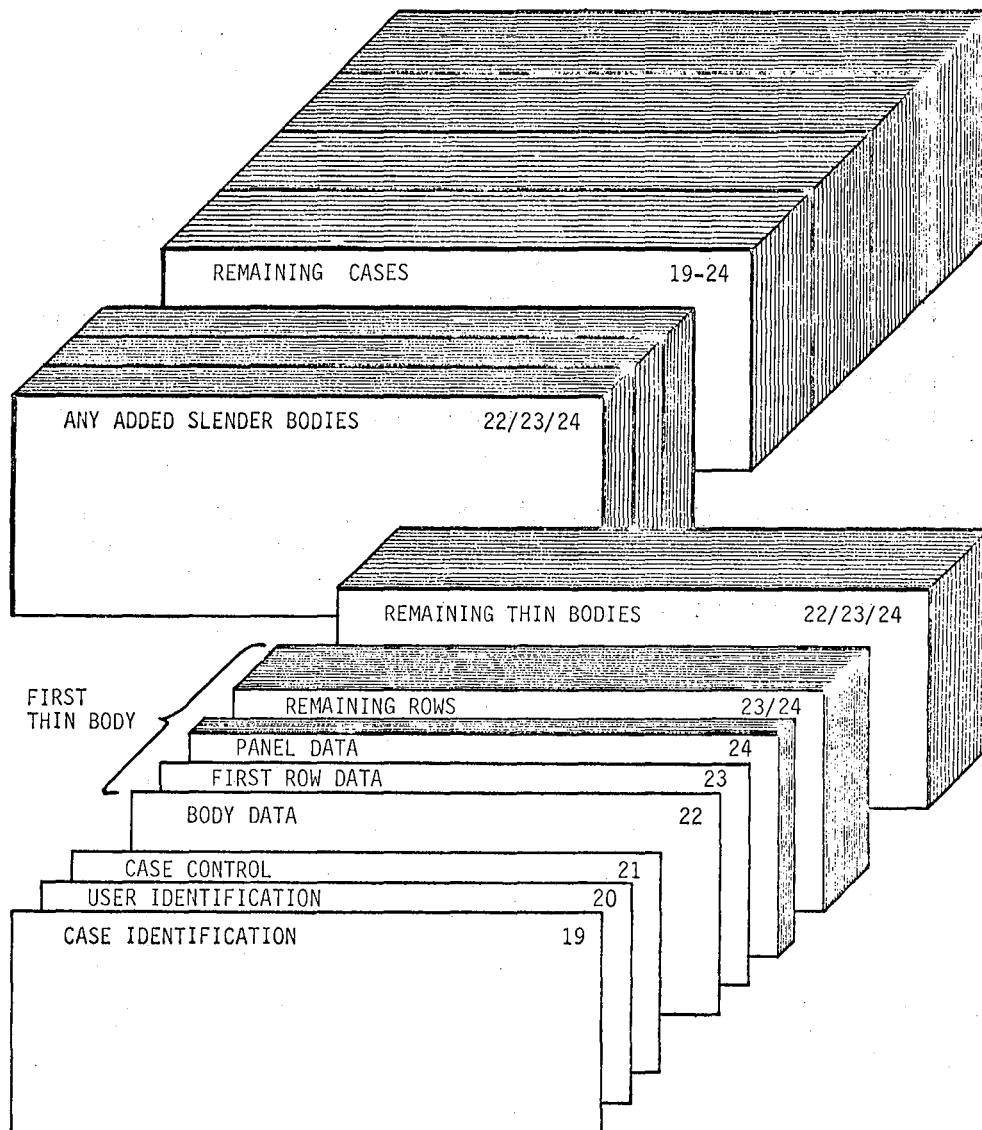


Figure 14. Card arrangement for the pressure data files.

the deck using the same format as for thin bodies. (The slender body data is analogous to a thin body with one row.) If any slender bodies are added, the number of bodies entered on CARD 21 must be changed to reflect the total number of bodies now in the deck.

The entire card sequence 19-24 is repeated for any additional cases. It is important to note that the pressure decks punched by FLEXSTAB contain a "STEADY PRESSURE DISTRIBUTION" header card at the beginning of each case. These header cards must be discarded from each case for execution in both this program and the FLEXSTAB PD PLOT program.

If POP=0 or 2 , OMIT this card section.

CARD 19 - CASE IDENTIFICATION.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-72	18A4	CID	X	X	X		Case title. This title card is the same as input to the SD&SS program. It is printed as part of the page header for the repunch, section, integration, and summary print options.

CARD 20 - USER IDENTIFICATION.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-72	18A4	UID	X	X	X		User subtitle.

CARD 21 - CASE CONTROL.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-10	F10.4	NTB	X	X	X		Number of thin bodies PLUS any slender bodies manually added to this case.
11-20	F10.4	MR	X	X	X		Motion reference. = 1.0 : Symmetric motion. = 2.0 : Asymmetric motion.
21-30	F10.4	M1	X	I	I		Mach number.
31-40	F10.4	A1	X	I	I		Angle of attack (deg).
41-50	F10.4	B1	X	I	I		Angle of sideslip (deg).
51-60	F10.4	Q1	X	X	X		Dynamic pressure (psf).

The card sequence - CARD 22, CARD 23, CARD SET 24 - is repeated for each body in this case (NTB times).

CARD 22 - BODY DATA.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-8	2A4	CPBODY	X	X	X		Name of body (from GD program).
11-20	F10.4	NAF	X	X	X		Number of rows on body. (always equals 1 for slender bodies)
21-30	F10.4	THETA	X	I	I		Dihedral angle of thin body (deg). (blank or zero for slender bodies)

The card sequence - CARD 23, CARD SET 24 - is repeated for each row on the body (NAF times).

CARD 23 - ROW DATA.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-10	F10.4	YR	X				Y coordinate in Reference system of row centroid (inches).
11-20	F10.4	NPT	X	X	X		Number of panels in row.

CARD SET 24 - PANEL DATA.

Contains NPT cards, one card for each panel on row, leading to trailing edge.

C-C	FORMAT	DESCRIPTOR	R	S	I	W	EXPLANATION
1-10	F10.4	XC					X/C , nondimensional x coordinate of aerocentroid.
11-20	F10.4	CPS	X	X	X		Pressure coefficient ( $\Delta CP$ ) due to symmetric motion.  For thin bodies: If MR=1.0=symmetric motion, CPS is used for both left and right hand surfaces, so that CPR and CPL need not be defined.(CPS=CPR=CPL)  For slender bodies: CPS is the vertical force coefficient (DELTA CP(ZM) from the SD&SS printout). Applies to left and right hand or centerline bodies.
21-30	F10.4	CPR	X	X	X		Pressure coefficient for the right hand surface aerocentroid.
31-40	F10.4	CPL	X	X	X		Pressure coefficient for the left hand surface aerocentroid.  For thin bodies: If MR=2.0=asymmetric motion, CPR $\neq$ CPL $\neq$ CPS. Note that for a positive sideslip (nose left), FLEX STAB sign conventions for a vertical tail on the centerline (THETA=+90) result in CPR being positive and CPL=-CPR. Thus only CPL is used to compute loads so that a positive sideslip produces a negative vertical tail load.  For slender bodies: CPR is the lateral force coefficient, DELTA CP(YM), on the right hand OR centerline body. CPL is the lateral force coefficient on the left hand slender body.
41-50	F10.4	XR	X				X coordinate in Reference system of aerocentroid (inches).

## 7.0 OUTPUT DESCRIPTION

Output from FSLIP consists of line printer listings, punched cards, and disk permanent files as described in section 4.2. Each of these is briefly outlined below along with equations for estimating the amount of printed or punched output.

### 7.1 Printed Output

Printed output is produced by 4 of the major program options as described below. Specific details of the printed output are not presented here as the printout makes generous use of headers and descriptors. See section 8.0 for example output listings.

7.1.1 Geometry option.- If  $GOP = 3$  or  $4$ , the surface/axis data file is created by using the FLEXSTAB GDTAPE. A printout is generated which lists complete details of each integration definition including effective areas and arms computed for each panel on the specified body. Any panels cut by the bending axis are flagged. Total panel area outboard of the bending axis is also listed. Details of any additional load definitions are printed out. An example of these listings is shown in section 8.1. The amount of output can be estimated from the following equation:

$$\text{Number of pages} = 1.5 * \text{NSAD} + \text{NALD} + 1$$

where NSAD and NALD are as specified on CARD 5

7.1.2 Integration option.- If  $IOP = 1$ , a printout is generated for each integration definition set true on CARD 2A. The listing includes a panel by panel description of the integration process. After all integrations are performed, any additional load definitions are listed. The printout is then repeated for any succeeding cases. Section 8.2 contains an example of this printout. If  $IOP = 2$ , this printout is suppressed. The amount of output can be estimated from the following equation:

$$\text{Number of pages} = (1.5 * \text{NSAD} + \text{NALD} + 1) * \text{NC}$$

where NSAD and NALD are now the number of integrations and additional loads set true on CARD 2A and NC is the number of cases specified on CARD 18.

7.1.3 Wind tunnel option.- A printout is generated for each load station showing the component loads due to each aerodynamic effect. An example is shown in section 8.2. The amount of output varies from 1 to 5 pages per case depending on which stations are set true on CARD 2B. The 5 stations consist of wing, horizontal tail, vertical tail, forward fuselage, and aft fuselage.

7.1.4 Summary print option.- This option produces a concise summary of the total loads and coefficients for each specified load station for all cases processed. If  $IOP = 2$ , this option must be used to print the total integrated loads. The amount of output consists of 1 page per load station specified with CARD 3.



## 7.2 Punched Output

The only punched card output is produced by the  $GOP = 4$  option. It consists of a complete surface/axis data file which may be input using  $GOP = 2$ . The format of the punched deck is described in section 6.2. The number of punched cards can be estimated from the following equations:

For each integration defined with CARD 6:

$$\begin{aligned} \text{Number of cards} &= NR + NP + 1 \\ \text{where } NR &= \text{number of rows on body} \\ NP &= \text{number of panels on body} \end{aligned}$$

For each additional load specified with CARD 10:

$$\begin{aligned} \text{Number of cards} &= NT + 1 \\ \text{where } NT &= \text{number of terms (CARD 10)} \end{aligned}$$

## 7.3 Disk File Output

Disk files produced by FSLIP consist of the pressure data files (TAPE 11 to 19), the surface/axis data file (TAPE 20), and the wind tunnel data file (TAPE 40). The detailed format of these files is not presented as they are a direct one-for-one unformatted copy of each card record. Thus the user is referred to sections 6.2, 6.3, and 6.5 for details of the file formats.

## 8.0 EXAMPLE PROBLEMS

This section includes 3 example problems which illustrate the major program options and suggested job sequencing. Section 8.1 presents an example of creating the integration geometry data base using the FLEXSTAB GDTAPE for input. Section 8.2 is an example which creates a revised geometry data base and wind tunnel coefficient data base from card input and then executes the integration and wind tunnel loads options. Section 8.3 is an example which executes the integration option only using previously created data bases with minimum input/output. All three examples are based on runs from the airloads research study being conducted on the B-1 aircraft. Each section includes a brief discussion followed by listings of the card input and program printouts.

### 8.1 Geometry Option Only

This example represents what would normally be the first job executed through FSLIP. The only option exercised is  $GOP = 4$  which will punch the integration geometry for the B-1 airload measurement stations as defined in figure 15. Figure 16 shows the equivalent FLEXSTAB GD model which is composed of 7 thin bodies and 1 slender body. Note that the wing and vertical tail are both split into 2 separate thin bodies.

Integration axes are shown at the 8 load stations which were arbitrarily assigned surface/axis numbers 1 through 8. Separate vertical and lateral integra-

tions are defined for the forward and aft fuselage stations. The additional loads option is used to define 3 new loads (surface/axis numbers 31-33) for computing total aft fuselage loads. First, the two vertical tail stations are summed to get the total vertical tail root loads. Second, the horizontal tail components are added to the aft fuselage to get total vertical loads at the aft fuselage station. Third, vertical tail root and horizontal tail components are added to the aft fuselage to get total lateral loads at the aft fuselage station.

Note that the wing integration applies to WING2 only. The geometry subroutine will compute effective areas for all panels outboard of the XA axis, but it was desired to neglect the area of the two shaded panels to account for the nacelle and fairings. For this reason, the punched deck from this job must be modified and resubmitted with GOP = 2 as shown in the next example.

LW, RW - left and right wing

BP ±239.779 in.  
 FS 1161.871 in.  
 WL 9.107 in.

LHT, RHT - left and right horizontal tail:

BP ±10.75 in.  
 FS 1582.0 in.  
 WL 126.0 in.

UVT - upper vertical tail:

WL 136.56 in.  
 FS 1582.0 in.  
 BP 0.0 in.

VTR - vertical tail root:

WL 75.0 in.  
 FS 1535.56 in.  
 BP 0.0 in.

FF - forward fuselage:

FS 528.5 in.  
 WL 32.0 in.  
 BP 0.0 in.

AF - aft fuselage:

FS 1337.5 in.  
 WL 34.0 in.  
 BP 0.0 in.


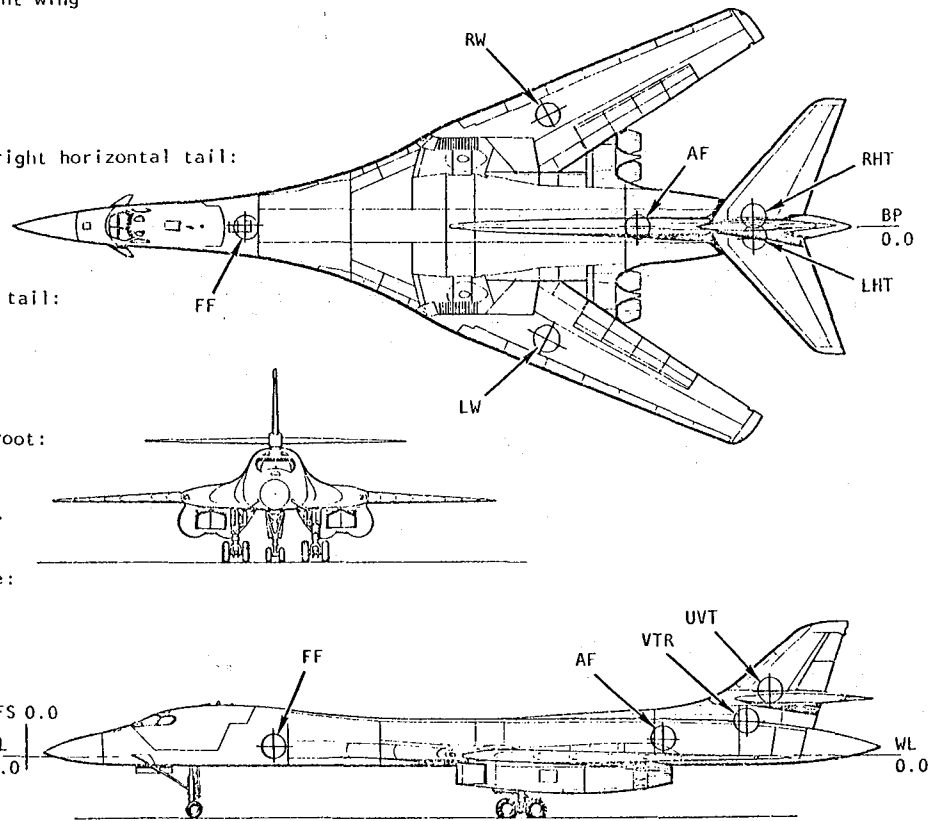


Figure 15. B-1 airload measurement stations.

Thin bodies:

- 1 WING1 2 rows, 10 panels
- 2 WING2 9 rows, 45 panels
- 3 HORTZTAIL 6 rows, 30 panels
- 4 VERTTIP 2 rows, 10 panels
- 5 VERTTIP 6 rows, 30 panels
- 6 PLATE 1 row, 4 panels
- 7 CANARD 1 row, 2 panels

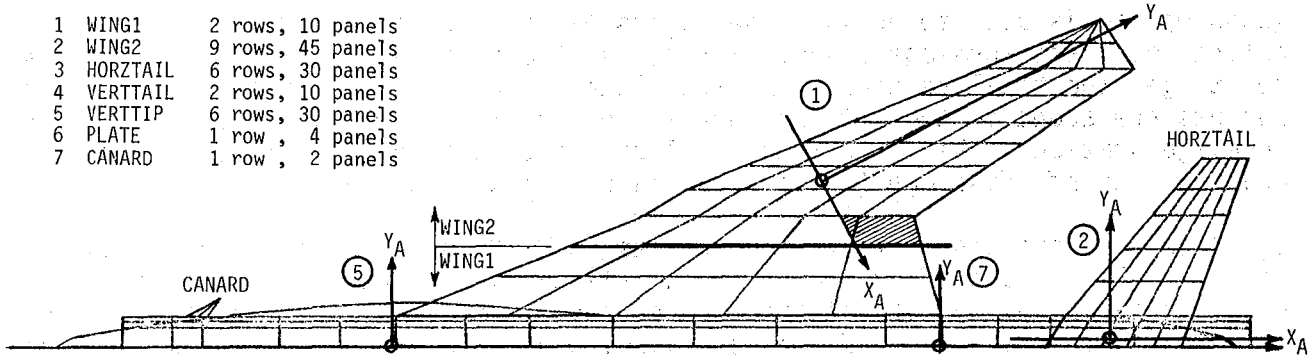

Slender bodies:

- 1 FUSELAGE 1 row, 20 panels

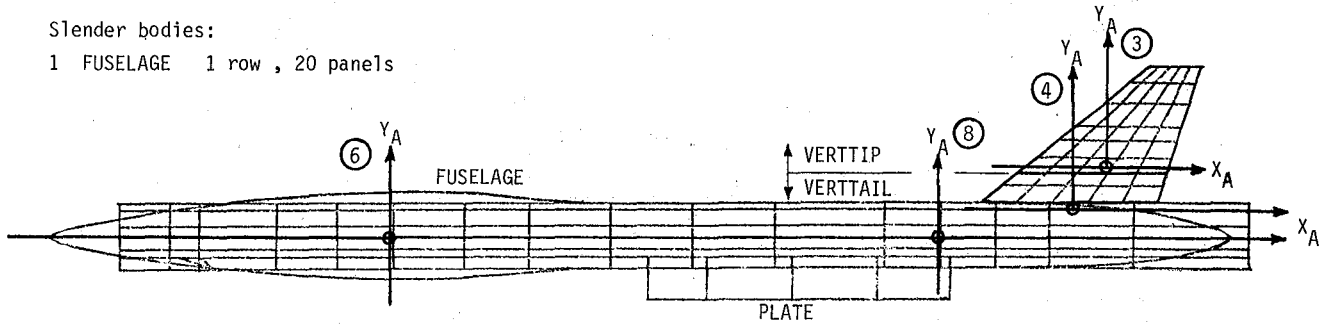


Figure 16. FLEXSTAB aerodynamic model of the B-1.

Card input listing for example 8.1

CARD NO	1	2	3	4	5	6	7	8
	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
	08	NSAD	POP 0	POP 0	SDP 0	IOP 0	WLP 0	
1	1	WING - SG AXIS	WING2	03	9	1946.00	820.08	184.05
2	1161.87	239.92	63.52	3	0			170.85
3	2	HORIZ TAIL - SG	HORZTAIL	3	0	238.77	259.03	149.38
4	1582.00	10.75	0.00	3	1	247.40	206.76	188.95
5	3	VERT TAIL - SG	VERTTIP	3	1	247.40	206.76	188.95
6	1582.00	136.50	0.00	3	1	247.40	206.76	188.95
7	4	VERT TAIL - ROOT	VERTTAIL	3	1	247.40	206.76	188.95
8	1535.56	75.00	0.00	1	1	1946.00	820.08	184.05
9	5	FWD FUS SG VERT	FUSELAGE	2	1	1946.00	820.08	184.05
10	0.00	528.50	528.50	1	1	1946.00	820.08	184.05
11	6	FWD FUS SG LAT	FUSELAGE	1	1	1946.00	820.08	184.05
12	0.00	528.50	528.50	2	1	1946.00	820.08	184.05
13	7	AFT FUS SG VERT	FUSELAGE	1	1	1946.00	820.08	184.05
14	0.00	1800.00	1337.50	2	1	1946.00	820.08	184.05
15	8	AFT FUS SG LAT	FUSELAGE	2	1	1946.00	820.08	184.05
16	1337.50	1800.00	1337.50	4	1	247.40	206.76	188.95
17	19	VT ROOT TOTAL		4	1	247.40	206.76	188.95
18	31		61.56					
19	03		1.00					
20	03		0.00					
21	03		0.00					
22	03		0.00					
23	03		0.00					
24	04		0.00					
25	04		0.00					
26	04		0.00					
27	04		0.00					
28	32	AFT FUS SG V-TOT		4	1	1946.00	820.08	184.05
29	1.00		0.00					
30	0.00		1.00					
31	0.00		244.50					
32	0.00		244.50					
33	0.00		-1.00					
34	0.00		-1.00					
35	33	AFT FUS SG L-TOT		4	1	1946.00	820.08	184.05
36	1.00		0.00					
37	0.00		0.00					
38	0.00		0.00					
39	0.00		0.00					
40	0.00		198.06					
41	0.00		0.00					
42	0.00		0.00					
43	0.00		0.00					
44	0.00		0.00					

Program output listing for example 8.1

GEOMETRY OPTION = 4

8 SURFACE/AXIS DEFINITIONS TO BE COMPUTED AND PUNCHED  
USING FLEXSTAB GOTAPE , FILE 1

CASE ID = B1 AR3 GD-20....67.5WS  
: :

USER ID = NASA/DFRC BOB SIMS EXT 308  
: :

UNITS OPTION = INCH

3 ADDITIONAL LOADS TO BE DEFINED

SURFACE/AXIS NUMBER = 1 SURFACE/AXIS NAME = WING - SG AXIS GD BODY NAME = WING2

INTEGRATION TYPE CODE = 3 SREF = 1946.000 BREF = 820.680 CPEF = 184.050

BODY TYPE CODE = 3 SYMMETRY CODE = OFF

NUMBER OF ROWS = 9 THETA = -1.94 DEG

INTEGRATION AXIS DEFINITION

ORIGIN AT XN = 1161.670  
 YN = 239.920  
 SWEEP ANGLE = 63.520 DEG

ROW DATA

NUMBER	YN	NUMBER OF PANELS
1	166.023	5
2	278.430	5
3	245.245	5
4	280.220	5
5	312.775	5
6	347.552	5
7	387.246	5
8	423.704	5
9	456.000	5

PANEL DATA

INDEX	AREA-IN2	BARM-IN	TARM-IN	
1 1	0.000	0.000	0.000	
1 2	0.000	0.000	0.000	
1 3	0.000	0.000	0.000	
1 4	614.071	9.239	-76.261	CUT PANEL
1 5	4043.684	53.207	-109.024	CUT PANEL
2 1	0.000	0.000	0.000	
2 2	0.000	0.000	0.000	
2 3	240.559	9.391	-23.688	CUT PANEL
2 4	2499.882	37.166	-50.712	CUT PANEL
2 5	3078.947	98.103	-84.051	
3 1	0.000	0.000	0.000	
3 2	348.747	12.541	13.358	CUT PANEL
3 3	2189.756	39.651	-11.371	CUT PANEL
3 4	2618.773	97.892	-42.815	
3 5	2618.773	164.907	-76.199	

PANEL DATA

INDEX	AREA-IN2	BANK-IN	TANK-IN	CUT PANEL
4 1	792.891	19.598	46.131	CUT PANEL
4 2	2229.513	50.026	21.195	CUT PANEL
4 3	2389.686	107.243	-8.399	
4 4	2389.686	168.404	-38.866	
4 5	2389.636	229.565	-69.333	
5 1	1865.969	60.901	48.067	
5 2	1865.969	122.612	20.315	
5 3	1865.969	178.323	-7.438	
5 4	1865.969	234.035	-35.190	
5 5	1865.969	289.746	-62.942	
6 1	2226.145	154.478	43.295	
6 2	2226.145	204.368	18.442	
6 3	2226.145	254.258	-6.411	
6 4	2226.145	304.148	-31.263	
6 5	2226.145	354.038	-56.116	
7 1	1904.691	254.436	37.847	
7 2	1904.691	297.681	16.304	
7 3	1904.691	340.927	-5.238	
7 4	1904.691	384.173	-26.761	
7 5	1904.691	427.418	-48.324	
8 1	1216.113	343.147	34.387	
8 2	1216.113	374.094	18.970	
8 3	1216.113	405.042	3.554	
8 4	1216.113	435.990	-11.863	
8 5	1216.113	466.938	-27.279	
9 1	397.976	418.302	33.030	
9 2	397.976	431.496	26.458	
9 3	397.976	444.689	19.886	
9 4	397.976	457.883	13.313	
9 5	397.976	471.076	6.741	

TOTAL AREA 66499.123

SURFACE/AXIS NUMBER = 2 SURFACE/AXIS NAME = HORIZ TAIL - SG GD BODY NAME = HORIZTAIL

INTEGRATION TYPE CODE = 3 SKEW = 238.775 BREF = 259.030 CREF = 149.380

BODY TYPE CODE = 3 SYMMETRY CODE = OFF

NUMBER OF ROWS = 6 THETA = 1.00 DEG

INTEGRATION AXIS DEFINITION ORIGIN AT XN = 1582.000  
YN = 10.750  
SWEEP ANGLE = 0.000 DEG

ROW DATA

NUMBER	YN	NUMBER OF PANELS
1	21.506	5
2	68.120	5
3	116.862	5
4	164.204	5
5	207.859	5
6	249.416	5

PANEL DATA

INDEX	AREA-IN2	BARM-IN	TARM-IN	
1 1	1263.184	16.236	54.720	CUT PANEL
1 2	1263.184	16.236	16.241	CUT PANEL
1 3	1263.184	16.236	-22.438	CUT PANEL
1 4	1263.184	16.236	-61.017	CUT PANEL
1 5	1263.184	16.236	-99.595	CUT PANEL
2 1	1765.972	57.370	23.705	
2 2	1765.972	57.370	-11.330	
2 3	1765.972	57.370	-46.365	
2 4	1765.972	57.370	-81.400	
2 5	1765.972	57.370	-116.435	
3 1	1406.099	106.112	-16.683	
3 2	1406.099	106.112	-46.666	
3 3	1406.099	106.112	-76.649	
3 4	1406.099	106.112	-106.632	
3 5	1406.099	106.112	-136.615	
4 1	1199.702	153.454	-56.304	
4 2	1199.702	153.454	-81.301	
4 3	1199.702	153.454	-106.457	
4 4	1199.702	153.454	-131.533	
4 5	1199.702	153.454	-156.610	



PANEL DATA

INDEX	AREA-IN2	BARR-IN	TARM-IN
5 1	798.922	197.109	-92.656
5 2	798.922	197.109	-113.208
5 3	798.922	197.109	-133.760
5 4	798.922	197.109	-154.311
5 5	798.922	197.109	-174.863
6 1	725.942	238.666	-127.261
6 2	725.942	238.666	-143.506
6 3	725.942	238.666	-159.750
6 4	725.942	238.666	-175.994
6 5	725.942	238.666	-192.239

TOTAL AREA 35799.106

SURFACE/AXIS NUMBER = 3 SURFACE/AXIS NAME = VERT TAIL - SG GD BODY NAME = VERTTIP

INTEGRATION TYPE CODE = 3 SURF = 247.400 BREF = 206.760 CREF = 188.950

BODY TYPE CODE = 3 SYMMETRY CODE = CN

NUMBER OF ROWS = 6 THETA = 90.00 DEG

INTEGRATION AXIS DEFINITION

ORIGIN AT XN = 1582.000  
YN = 136.560  
SWEEP ANGLE = 0.000 DEG

ROW DATA

NUMBER	YN	NUMBER OF PANELS
1	137.790	5
2	162.245	5
3	184.576	5
4	210.878	5
5	242.432	5
6	269.123	5

PANEL DATA

INDEX	AREA-IN2	BARN-IN	TARM-IN	
1 1	553.150	6.653	90.303	CUT PANEL
1 2	553.150	6.653	49.133	CUT PANEL
1 3	553.150	6.653	7.964	CUT PANEL
1 4	553.150	6.653	-33.206	CUT PANEL
1 5	553.150	6.653	-74.375	CUT PANEL
2 1	940.289	25.685	68.034	
2 2	940.289	25.685	30.376	
2 3	940.289	25.685	-7.283	
2 4	940.289	25.685	-44.942	
2 5	940.289	25.685	-82.600	
3 1	653.390	48.016	41.906	
3 2	653.390	48.016	8.366	
3 3	653.390	48.016	-25.173	
3 4	653.390	48.016	-58.712	
3 5	653.390	48.016	-92.252	
4 1	971.470	74.318	11.130	
4 2	971.470	74.318	-17.557	
4 3	971.470	74.318	-46.245	
4 4	971.470	74.318	-74.932	
4 5	971.470	74.318	-103.619	

PANEL DATA

INDEX	AREA-IN2	BARN-IN	TARM-IN
5 1	660.096	105.872	-25.790
5 2	660.096	105.872	-48.657
5 3	660.096	105.872	-71.523
5 4	660.096	105.872	-94.390
5 5	660.096	105.872	-117.257
6 1	433.031	132.563	-57.020
6 2	433.031	132.563	-74.963
6 3	433.031	132.563	-92.906
6 4	433.031	132.563	-110.849
6 5	433.031	132.563	-128.792

TOTAL AREA 21057.132

SURFACE/AXIS NUMBER = 4 SURFACE/AXIS NAME = VERT TAIL - ROOT GO BODY NAME = VERTTAIL

INTEGRATION TYPE CODE = 3 SREF = 247.400 BREF = 206.760 CREF = 188.950

BODY TYPE CODE = 3 SYMMETRY CODE = CN

NUMBER OF ROWS = 2 THETA = 90.00 DEG

INTEGRATION AXIS DEFINITION

ORIGIN AT XN = 1535.560  
YN = 75.000  
SWEET ANGLE = 0.000 DEG

ROW DATA

NUMBER	YN	NUMBER OF PANELS
1	96.566	5
2	117.404	5

PANEL DATA

INDEX	AREA-IN2	BARM-IN	TARM-IN
1 1	1217.063	21.566	98.032
1 2	1217.063	21.566	48.322
1 3	1217.063	21.566	-1.387
1 4	1217.063	21.566	-51.097
1 5	1217.063	21.566	-100.806
2 1	780.196	42.404	73.940
2 2	780.196	42.404	28.029
2 3	780.196	42.404	-17.882
2 4	780.196	42.404	-63.794
2 5	780.196	42.404	-105.705

TOTAL AREA 9986.297

SURFACE/AXIS NUMBER = 5 SURFACE/AXIS NAME = FWD POS SG VERT GD BODY NAME = FUSELAGE

INTEGRATION TYPE CODE = 1 SREF = 1946.000 BREF = 820.000 CREF = 184.050

BODY TYPE CODE = 1 SYMMETRY CODE = ON

NUMBER OF ROWS = 1

INTEGRATION AXIS DEFINITION FORWARD LIMIT AT XR = 0.000  
 LEFT LIMIT AT XR = 528.500  
 MOMENTS SUMMED ABOUT XR = 528.500 POSITIVE = NOSE UP

ROW DATA Y = 0.000 NUMBER OF PANELS = 20

PANEL DATA

INDEX	AREA-IN2	BARN-IN	TAPH-IN
1 1	2731.606	462.200	0.000
1 2	5677.311	373.600	0.000
1 3	7434.302	285.000	0.000
1 4	9074.412	196.400	0.000
1 5	10341.924	107.800	0.000
1 6	8088.122	31.750	0.000
1 7	0.000	0.000	0.000
1 8	0.000	0.000	0.000
1 9	0.000	0.000	0.000
1 10	0.000	0.000	0.000
1 11	0.000	0.000	0.000
1 12	0.000	0.000	0.000
1 13	0.000	0.000	0.000
1 14	0.000	0.000	0.000
1 15	0.000	0.000	0.000
1 16	0.000	0.000	0.000
1 17	0.000	0.000	0.000
1 18	0.000	0.000	0.000
1 19	0.000	0.000	0.000
1 20	0.000	0.000	0.000

TOTAL AREA 43317.077

SURFACE/AXIS NUMBER = 6 SURFACE/AXIS NAME = FWD FLS SG LAT GD BODY NAME = FUSELAGE

INTEGRATION TYPE CODE = 2 SREF = 1946.000 BREF = 820.080 CREF = 184.050

BODY TYPE CODE = 1 SYMMETRY CODE = UN

NUMBER OF ROWS = 1

INTEGRATION AXIS DEFINITION FORWARD LIMIT AT XR = 0.000  
AFT LIMIT AT XR = 528.500  
MOMENTS SUMMED ABOUT XR = 528.500 POSITIVE - NOSE RIGHT

ROW DATA Y = 0.000 NUMBER OF PANELS = 20

PANEL DATA

INDEX	AREA-IN2	BARM-IN	TARM-IN
1 1	2731.006	462.200	0.000
1 2	5677.311	373.600	0.000
1 3	7404.302	265.000	0.000
1 4	9074.412	196.400	0.000
1 5	10341.924	107.800	0.000
1 6	8988.122	31.750	0.000
1 7	0.000	0.000	0.000
1 8	0.000	0.000	0.000
1 9	0.000	0.000	0.000
1 10	0.000	0.000	0.000
1 11	0.000	0.000	0.000
1 12	0.000	0.000	0.000
1 13	0.000	0.000	0.000
1 14	0.000	0.000	0.000
1 15	0.000	0.000	0.000
1 16	0.000	0.000	0.000
1 17	0.000	0.000	0.000
1 18	0.000	0.000	0.000
1 19	0.000	0.000	0.000
1 20	0.000	0.000	0.000

TOTAL AREA 43317.077

SURFACE/AXIS NUMBER = 7 SURFACE/AXIS NAME = AFT FUS SG VERT GD BODY NAME = FUSELAGE

INTEGRATION TYPE CODE = 1 SREF = -946.000 BREF = 820.080 CREF = 184.050

BODY TYPE CODE = 1 SYMMETRY CODE = CN

NUMBER OF ROWS = 1

INTEGRATION AXIS DEFINITION FORWARD LIMIT AT XR = 1337.500  
AFT LIMIT AT XR = 1600.000  
MOMENTS SUMMED ABOUT XR = 1337.500 POSITIVE - TAIL UP

ROW DATA Y = 0.000 NUMBER OF PANELS = 20

PANEL DATA

INDEX	AREA-IN2	BARM-IN	TARM-IN
1 1	0.000	0.000	0.000
1 2	0.000	0.000	0.000
1 3	0.000	0.000	0.000
1 4	0.000	0.000	0.000
1 5	0.000	0.000	0.000
1 6	0.000	0.000	0.000
1 7	0.000	0.000	0.000
1 8	0.000	0.000	0.000
1 9	0.000	0.000	0.000
1 10	0.000	0.000	0.000
1 11	0.000	0.000	0.000
1 12	0.000	0.000	0.000
1 13	0.000	0.000	0.000
1 14	0.000	0.000	0.000
1 15	1232.397	6.750	0.000
1 16	7982.328	57.800	0.000
1 17	7825.329	146.400	0.000
1 18	7646.180	235.000	0.000
1 19	5779.201	323.600	0.000
1 20	1878.980	412.200	0.000

TOTAL AREA 32344.415

SURFACE/AXIS NUMBER = 8 SURFACE/AXIS NAME = AFT FUS SG LAT GD BODY NAME = FUSELAGE

INTEGRATION TYPE CODE = 2 SREF = 1946.000 BREF = 820.080 CREF = 184.450

BODY TYPE CODE = 1 SYMMETRY CODE = ON

NUMBER OF ROWS = 1

INTEGRATION AXIS DEFINITION FORWARD LIMIT AT XR = 1337.500  
AFT LIMIT AT XR = 1800.000  
MOMENTS SUMMED ABOUT XR = 1337.500 POSITIVE - TAIL RIGHT

ROW DATA Y = 0.000 NUMBER OF PANELS = 20

PANEL DATA

INDEX	AREA-IN2	BARR-IN	TAFR-IN
1 1	0.000	0.000	0.000
1 2	0.000	0.000	0.000
1 3	0.000	0.000	0.000
1 4	0.000	0.000	0.000
1 5	0.000	0.000	0.000
1 6	0.000	0.000	4.000
1 7	0.000	0.000	0.000
1 8	0.000	0.000	0.000
1 9	0.000	0.000	0.000
1 10	0.000	0.000	0.000
1 11	0.000	0.000	0.000
1 12	0.000	0.000	0.000
1 13	0.000	0.000	0.000
1 14	0.000	0.000	0.000
1 15	1232.397	6.750	0.000
1 16	7982.328	57.800	0.000
1 17	7825.329	146.400	2.000
1 18	7646.180	235.000	0.000
1 19	5779.201	323.600	0.000
1 20	1679.980	412.200	0.000

TOTAL AREA 32344.415



ADDITIONAL LOADS OPTION

SURFACE/AXIS NUMBER = 31 SURFACE/AXIS NAME = VT ROOT TOTAL

INTEGRATION TYPE CODE = 4 SREF = 247.400 BREF = 206.760 CREP = 188.950

SYMMETRY CODE = ON NUMBER OF TERMS = 6

COMPONENT DEFINITION FOR CENTERLINE LOAD

TERM	INDICES	COMPONENT DESCRIPTION	V FACTOR	B FACTOR	T FACTOR
1	3 3 1	VERT TAIL - SG CL V	1.000	61.560	-46.440
2	3 3 2	VERT TAIL - SG CL B	0.000	1.000	0.000
3	3 3 3	VERT TAIL - SG CL T	0.000	0.000	1.000
4	4 3 1	VERT TAIL - ROOT CL V	1.000	0.000	0.000
5	4 3 2	VERT TAIL - ROOT CL B	0.000	1.000	0.000
6	4 3 3	VERT TAIL - ROOT CL T	0.000	0.000	1.000

ADDITIONAL LOADS OPTION

SURFACE/AXIS NUMBER = 32 SURFACE/AXIS NAME = AFT FUS SG V-TOT

INTEGRATION TYPE CODE = 4 SKEF = 1946.000 BREF = 820.080 CREF = 184.050

SYMMETRY CODE = ON NUMBER OF TERMS = 6

COMPONENT DEFINITION FOR CENTERLINE LOAD

TERM	INDICES	COMPONENT DESCRIPTION	V FACTOR	B FACTOR	T FACTOR
1	7 3 1	AFT FUS SG VERT CL V	1.000	0.000	0.000
2	7 3 2	AFT FUS SG VERT CL B	0.000	1.000	0.000
3	2 1 1	HORIZ TAIL - SG LH V	1.000	244.500	0.000
4	2 2 1	HORIZ TAIL - SG RH V	1.000	244.500	0.000
5	2 1 3	HORIZ TAIL - SG LH T	0.000	-1.000	0.000
6	2 2 3	HORIZ TAIL - SG RH T	0.000	-1.000	0.000

ADDITIONAL LOADS OPTION

SURFACE/AXIS NUMBER = 33

SURFACE/AXIS NAME = AFT FUS SG L-1CT

INTEGRATION TYPE CODE = 4

SREF = 1946.000

BREF = 820.080

CREF = 184.050

SYMMETRY CODE = ON

NUMBER OF TERMS = 10

COMPONENT DEFINITION FOR CENTERLINE LOAD

TERM	INDICES	COMPONENT DESCRIPTION	V FACTOR	B FACTOR	T FACTOR
1	8 3 1	AFT FUS SG LAT CL V	1.000	0.000	0.000
2	8 3 2	AFT FUS SG LAT CL B	0.000	1.000	0.000
3	8 3 3	AFT FUS SG LAT CL T	0.000	0.000	1.000
4	31 3 1	VT ROOT TOTAL CL V	1.000	198.000	41.000
5	31 3 2	VT ROOT TOTAL CL B	0.000	0.000	1.000
6	31 3 3	VT ROOT TOTAL CL T	0.000	-1.000	0.000
7	2 1 1	HORIZ TAIL - SG LH V	0.000	0.000	10.750
8	2 2 1	HORIZ TAIL - SG RH V	0.000	0.000	-10.750
9	2 1 2	HORIZ TAIL - SG LH B	0.000	0.000	1.000
10	2 2 2	HORIZ TAIL - SG RH B	0.000	0.000	-1.000

```

MFA SCOPE 3.4.2 DS17 CMR G 07/23/81
14.08.15.B1FS14I FROM
14.08.15.DP 00000384 WORDS - FILE INPUT , DC 00
14.08.15.B1FS1,T777,FTN,1462.
14.08.07.ATTACH(LGU,$FSLIP34,ID=SIMS,MR=1)
14.08.08.PF CYCLE NO. = 001
14.08.08.PAUSE. PLEASE MOUNT FRC077
14.09.25.GO.
14.09.25.MOUNT(VSN=FRC077,SN=FLRF1)
14.09.29.GO.
14.11.45.MOUNTED VSN=FRC077,SN=FLRF1
14.11.45.ATTACH(GDTAPE,$B1 GU-205,ID=SIMS,MR=1,SN
14.11.45.=FLRF1)
14.11.45.PF CYCLE NO. = 002
14.11.47.COPY(GDTAPE,TAPE30)
14.11.48.MAP(OFF)
14.11.48.LG7(PL=10000)
15.57.40.I STOP
15.57.40.I 2.817 CP SECONDS EXECUTION TIME
15.57.40.DD 00002816 WORDS - FILE OUTPUT , DC 40
15.57.40.DP 00001344 WORDS - FILE PUNCH , DC 10
15.57.40.CPA 2.874 SEC. 2.874 ADJ.
15.57.40.CPB 3.606 SEC. 3.606 ADJ.
15.57.40.CPD 1.162 SEC. 1.162 ADJ.
15.57.40.CM 270.049 KWS. 16.482 ADJ.
15.57.40.BS 24.125
15.57.40.PP 9.419 SEC. DATE 08/10/81
15.57.40.EJ END OF JOB, **

```

```

***** B1FS14I //// END OF LIST ////
***** B1FS14I //// END OF LIST ////

```

## 8.2 Integration and Wind Tunnel Options

This example creates the revised geometry file with  $GOP = 2$  and the wind tunnel coefficient file with  $WOP = 2$  using card input. For brevity, only 1 pressure case for an asymmetric flight condition ( $\alpha=0$ ,  $\beta=+8$ ) is input on cards with  $POP = 1$ . The integration and wind tunnel loads options are then executed for all load stations. In addition, comparisons for 6 selected load stations are output using the summary print option.

Card input listing for example 8.2

CARD NO	1	2	3	4	5	6	7	8
1	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
2	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT
3	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT	TTTTTTTT
4	01	WING	- SG	AXIS				
5	02	03	H	T	- SG	AXIS		
6	06	08	F	F	- SG	AXIS (LAT)		
7	09	05	V	T	- SG	AXIS		
8	10	06	V	T	-	ROOF	TOTAL	
9	11	14	A	F	-	TOTAL	(LAT)	
10								
11	08	NSAD						
12	1	WING	- SG	AXIS	WING2	3	0	9
13								
14								
15								
16								
17								
18								
19	2							
20								
21								
22								
23								
24								
25	3							
26								
27								
28								
29								
30								
31	4							
32								
33								
34								
35								
36								
37								
38	5							
39								
40								
41								
42								
43								
44								
45								
46								
47								
48								
49	7							
50								
51								
52								
53								
54								
55								
56	8							
57								
58								
59								
60								
61								
62	9							
63								
64								
65								
66								
67								
68	2	HORIZ	TAIL	-	SG	HORIZ	TAIL	3
69	1							
70								
71								

WOP 2  
INTEGRATE ASYMMETRIC  
WIND TUNNEL ASYMMETRIC

SUMMARY PRINT TERMINATOR

U3

NAJD

1945.000

820.080

184.050

CARD NO

1 2 3 4 5 6 7 8  
 1234567890 1234567890 1234567890 1234567890 1234567890 1234567890 1234567890 1234567890

72	1	4	1263.184	16.236	-61.017				
73	1	5	1263.184	16.236	-99.195				
74	2		68.120						
75	2	1	1765.972	57.370	23.765				
76	2	2	1765.972	57.370	-11.330				
77	2	3	1765.972	57.370	-46.365				
78	2	4	1765.972	57.370	-81.400				
79	2	5	1765.972	57.370	-116.435				
80	3		116.362						
81	3	1	1406.099	106.112	-16.883				
82	3	2	1406.099	106.112	-46.866				
83	3	3	1406.099	106.112	-76.849				
84	3	4	1406.099	106.112	-106.832				
85	3	5	1406.099	106.112	-136.815				
86	4		164.204						
87	4	1	1199.702	153.454	-56.364				
88	4	2	1199.702	153.454	-81.381				
89	4	3	1199.702	153.454	-106.457				
90	4	4	1199.702	153.454	-131.533				
91	4	5	1199.702	153.454	-156.510				
92	5		207.859						
93	5	1	798.922	197.109	-92.656				
94	5	2	798.922	197.109	-113.208				
95	5	3	798.922	197.109	-133.760				
96	5	4	798.922	197.109	-154.311				
97	5	5	798.922	197.109	-174.863				
98	6		249.416						
99	6	1	725.942	238.666	-127.261				
100	6	2	725.942	238.666	-143.506				
101	6	3	725.942	238.666	-159.750				
102	6	4	725.942	238.666	-175.994				
103	6	5	725.942	238.666	-192.239				
104	3	VERT	TAIL	VERT	TIP	3	1	6	247.400 206.760 188.950
105	1		137.790	6.653	90.303				
106	1	1	553.150	6.653	49.133				
107	1	2	553.150	6.653	7.964				
108	1	3	553.150	6.653	-33.206				
109	1	4	553.150	6.653	-74.375				
110	2		162.245						
111	2	1	940.289	25.685	68.034				
112	2	2	940.289	25.685	30.376				
113	2	3	940.289	25.685	-7.283				
114	2	4	940.289	25.685	-44.942				
115	2	5	940.289	25.685	-82.600				
116	3		184.376						
117	3	1	653.390	48.016	41.906				
118	3	2	653.390	48.016	8.366				
119	3	3	653.390	48.016	-23.173				
120	3	4	653.390	48.016	-58.712				
121	3	5	653.390	48.016	-92.252				
122	4		210.878						
123	4	1	971.470	74.318	11.130				
124	4	2	971.470	74.318	-17.557				
125	4	3	971.470	74.318	-46.245				
126	4	4	971.470	74.318	-74.932				
127	4	5	971.470	74.318	-103.619				
128	5		242.432						
129	5	1	660.096	105.872	-25.790				
130	5	2	660.096	105.872	-48.657				
131	5	3	660.096	105.872	-71.523				
132	5	4	660.096	105.872	-94.390				
133	5	5	660.096	105.872	-117.257				
134	6		269.122						
135	6	1	433.031	132.563	-57.020				
136	6	2	433.031	132.563	-74.963				
137	6	3	433.031	132.563	-92.906				
138	6	4	433.031	132.563	-110.849				
139	6	5	433.031	132.563	-128.792				
140	4	VERT	TAIL	VERT	TAIL	3	1	2	247.400 206.760 188.950
141	1		96.566						

CARD  
NO

1 2 3 4 5 6 7 8  
1234567890123456789012345678901234567890123456789012345678901234567890

143	1	1	1217.063	21.566	98.032					
144	1	2	1217.063	21.566	48.322					
145	1	3	1217.063	21.566	-1.387					
146	1	4	1217.063	21.566	-51.097					
147	1	5	1217.063	21.566	-100.806					
148	2		117.404							
149	2	1	780.196	42.404	73.940					
150	2	2	780.196	42.404	28.029					
151	2	3	780.196	42.404	-17.882					
152	2	4	780.196	42.404	-63.794					
153	2	5	780.196	42.404	-109.705					
154	5	FWD	SG VERT	FUSELAGE	1	1	1	1946.000	820.080	184.050
155	1		0.000	20						
156	1	1	2731.006	462.200	0.000					
157	1	2	5677.311	373.600	0.000					
158	1	3	7404.302	285.000	0.000					
159	1	4	9074.412	196.400	0.000					
160	1	5	10341.924	107.800	0.000					
161	1	6	8088.122	31.750	0.000					
162	1	7	0.000	0.000	0.000					
163	1	8	0.000	0.500	0.000					
164	1	9	0.000	0.000	0.000					
165	1	10	0.000	0.000	0.000					
166	1	11	0.000	0.000	0.000					
167	1	12	0.000	0.000	0.000					
168	1	13	0.000	0.000	0.000					
169	1	14	0.000	0.000	0.000					
170	1	15	0.000	0.000	0.000					
171	1	16	0.000	0.000	0.000					
172	1	17	0.000	0.000	0.000					
173	1	18	0.000	0.000	0.000					
174	1	19	0.000	0.000	0.000					
175	1	20	0.000	0.000	0.000					
176	6	FWD	SG LAT	FUSELAGE	2	1	1	1946.000	820.080	184.050
177	1		0.000	20						
178	1	1	2731.006	462.200	0.000					
179	1	2	5677.311	373.600	0.000					
180	1	3	7404.302	285.000	0.000					
181	1	4	9074.412	196.400	0.000					
182	1	5	10341.924	107.800	0.000					
183	1	6	8088.122	31.750	0.000					
184	1	7	0.000	0.000	0.000					
185	1	8	0.000	0.000	0.000					
186	1	9	0.000	0.000	0.000					
187	1	10	0.000	0.000	0.000					
188	1	11	0.000	0.000	0.000					
189	1	12	0.000	0.000	0.000					
190	1	13	0.000	0.000	0.000					
191	1	14	0.000	0.000	0.000					
192	1	15	0.000	0.000	0.000					
193	1	16	0.000	0.000	0.000					
194	1	17	0.000	0.000	0.000					
195	1	18	0.000	0.000	0.000					
196	1	19	0.000	0.000	0.000					
197	1	20	0.000	0.000	0.000					
198	7	AFT	SG VERT	FUSELAGE	1	1	1	1946.000	820.080	184.050
199	1		0.000	20						
200	1	1	0.000	0.000	0.000					
201	1	2	0.000	0.000	0.000					
202	1	3	0.000	0.000	0.000					
203	1	4	0.000	0.000	0.000					
204	1	5	0.000	0.000	0.000					
205	1	6	0.000	0.000	0.000					
206	1	7	0.000	0.000	0.000					
207	1	8	0.000	0.000	0.000					
208	1	9	0.000	0.000	0.000					
209	1	10	0.000	0.000	0.000					
210	1	11	0.000	0.000	0.000					
211	1	12	0.000	0.000	0.000					
212	1	13	0.000	0.000	0.000					
213	1	14	0.000	0.000	0.000					



CARD  
NO

1 2 3 4 5 6 7 8  
123456789012345678901234567890123456789012345678901234567890

214	1	15	1232.397	6.750	0.000				
215	1	15	7982.328	57.800	0.000				
216	1	17	7825.329	146.400	0.000				
217	1	18	7646.180	233.000	0.000				
218	1	19	5779.201	323.600	0.000				
219	1	20	1878.980	412.200	0.000				
220	8	AFT FUS SG LAT FUSE FLAGE				2	1	1	1946.000 820.080 184.050
221			0.000	0.000	0.000				
222	1	1	0.000	0.000	0.000				
223	1	2	0.000	0.000	0.000				
224	1	3	0.000	0.000	0.000				
225	1	4	0.000	0.000	0.000				
226	1	5	0.000	0.000	0.000				
227	1	6	0.000	0.000	0.000				
228	1	7	0.000	0.000	0.000				
229	1	8	0.000	0.000	0.000				
230	1	9	0.000	0.000	0.000				
231	1	10	0.000	0.000	0.000				
232	1	11	0.000	0.000	0.000				
233	1	12	0.000	0.000	0.000				
234	1	13	0.000	0.000	0.000				
235	1	14	0.000	0.000	0.000				
236	1	15	1232.397	6.750	0.000				
237	1	16	7982.328	57.800	0.000				
238	1	17	7825.329	146.400	0.000				
239	1	18	7646.180	233.000	0.000				
240	1	19	5779.201	323.600	0.000				
241	1	20	1878.980	412.200	0.000				
242	31	VT RCDT TOTAL				4	1	6	247.40 206.76 188.95
243	03	1	1.00	61.56	-46.44				
244	03	2	0.00	1.00	0.00				
245	03	3	0.00	0.00	1.00				
246	04	1	1.00	0.00	0.00				
247	04	2	0.00	0.00	1.00				
248	04	3	0.00	0.00	0.00				
249	07	AFT FUS SG V-TOT				4	1	6	1946.00 820.08 184.05
250	07	1	1.00	0.00	0.00				
251	07	2	0.00	1.00	0.00				
252	07	3	0.00	0.00	0.00				
253	02	1	1.00	244.50	0.00				
254	02	2	0.00	-1.00	0.00				
255	02	3	0.00	-1.00	0.00				
256	03	AFT FUS SG L-TOT				4	1	10	1946.00 820.08 184.05
257	03	1	1.00	0.00	0.00				
258	03	2	0.00	1.00	0.00				
259	03	3	0.00	0.00	1.00				
260	08	1	1.00	198.06	41.00				
261	08	2	0.00	0.00	1.00				
262	08	3	0.00	-1.00	0.00				
263	02	1	0.00	0.00	10.75				
264	02	2	0.00	0.00	-10.75				
265	02	3	0.00	0.00	1.00				
266	02	3	0.00	0.00	-1.00				
267	81	ARS WING HOP-2D RIGID WIND TUNNEL DATA							M=1.20 WS=67.5 9-29-80
268	1	101	0.029213	1946.00	820.08				184.05
269		102	0.012051	0.005831	-0.003133				ALPHA = 0 MZ1.20 SW % 67.5
270		103	0.0	0.003229	0.000584				ALPHA DOT MZ1.20 SW % 67.5
271		104	0.000299	0.0	0.0				DELTA SPOILER MZ1.20 SW % 67.5
272		105	0.003232	-0.000057	-0.000034				ROLL VELOC P MZ1.20 SW % 67.5
273		106	0.429887	-0.000955	-0.000223				PITCH VELOC Q MZ1.20 SW % 67.5
274		107	0.000759	0.012062	-0.001284				BETA ALPHA ZERO A/S MZ1.20 SW % 67.5
275		108	0.000226	-0.000167	-0.000149				BETA ALPHA A/S MZ1.20 SW % 67.5
276		109	0.000311	-0.000058	-0.000025				BETA ALPHA ZERO SYM MZ1.20 SW % 67.5
277		110	0.000008	0.000119	-0.000174				BETA ALPHA SYM MZ1.20 SW % 67.5
278		111		0.000005	-0.000011				FILLER M Z1.20 SW % 67.5
279		112							FILLER M Z1.20 SW % 67.5
280		113							FILLER M Z1.20 SW % 67.5
281		114							FILLER M Z1.20 SW % 67.5
282		115							FILLER M Z1.20 SW % 67.5
283									FILLER M Z1.20 SW % 67.5
284	2	HORIZ TAIL - SG		238.77	259.03				149.38

CARD  
NU

1 2 3 4 5 6 7 8

285	201	-.136192	-.049452	-.051116	ALPHA = 0	MZ1.20	SW	%	67.5	
286	202	.042237	.018920	-.019427	ALPHA	MZ1.20	SW	%	67.5	
287	203	.066513	.027107	-.027833	DELTA H	MZ1.20	SW	%	67.5	
288	204	.233930	.104789	-.107545	ALPHA DOT	MZ1.20	SW	%	67.5	
289	205	-.017738	-.006993	-.004648	BETA	MZ1.20	SW	%	67.5	
290	206	.049585	.022735	-.022025	DELTA H PRIME	MZ1.20	SW	%	67.5	
291	207	.000753	-.000317	-.000269	DELTA SPOILER SYM	MZ1.20	SW	%	67.5	
292	208	.000277	.000145	-.000168	DELTA SPOILER A/S	MZ1.20	SW	%	67.5	
293	209	.002479	-.002038	-.002313	ROLL VELOCITY P	MZ1.20	SW	%	67.5	
294	210	.552160	.254971	-.297065	PITCH VELOCITY Q	MZ1.20	SW	%	67.5	
295	211				FILLER	M Z1.20	SW	%	67.5	
296	212				FILLER	M Z1.20	SW	%	67.5	
297	213				FILLER	M Z1.20	SW	%	67.5	
298	214				FILLER	M Z1.20	SW	%	67.5	
299	215				FILLER	M Z1.20	SW	%	67.5	
300	3	VERT TAIL - SG	247.40	206.76	188.95					
301	301	.034484	-.010927	.003146	BETA ALPHA=0	136.56	MZ1.20	SW	%	67.5
302	302	-.001115	-.000354	.000102	BETA ALPHA	136.56	MZ1.20	SW	%	67.5
303	303	.003032	-.000800	.000464	DELTA H PRIME	136.56	MZ1.20	SW	%	67.5
304	304	.000270	-.000089	.000023	DELTA SPOILER	136.56	MZ1.20	SW	%	67.5
305	305	.009663	.002854	-.003630	DELTA RUD UP	136.56	MZ1.20	SW	%	67.5
306	306	.0	.0	.0	DELTA RUD LOW	136.56	MZ1.20	SW	%	67.5
307	307	.003995	-.001461	-.000756	ROLL VELOC P	136.56	MZ1.20	SW	%	67.5
308	308	.032297	.010244	-.005595	YAW VELOC R	136.56	MZ1.20	SW	%	67.5
309	309				FILLER	M Z1.20	SW	%	67.5	
310	310				FILLER	M Z1.20	SW	%	67.5	
311	311				FILLER	M Z1.20	SW	%	67.5	
312	312				FILLER	M Z1.20	SW	%	67.5	
313	313				FILLER	M Z1.20	SW	%	67.5	
314	314				FILLER	M Z1.20	SW	%	67.5	
315	315				FILLER	M Z1.20	SW	%	67.5	
316	4	VERT TAIL ROOT	247.40	206.76	188.95					
317	401	.053487	-.023324	.010230	BETA ALPHA=0	WL 75	MZ1.20	SW	%	67.5
318	402	.001730	-.000755	.000331	BETA ALPHA	WL 75	MZ1.20	SW	%	67.5
319	403	.002353	-.001621	.001072	DELTA H PRIME	WL 75	MZ1.20	SW	%	67.5
320	404	.000349	-.000177	.000079	DELTA SPOILER	WL 75	MZ1.20	SW	%	67.5
321	405	.009675	.005734	-.006210	DELTA RUD UP	WL 75	MZ1.20	SW	%	67.5
322	406	.003878	.000352	-.001119	DELTA RUD LOW	WL 75	MZ1.20	SW	%	67.5
323	407	.003700	-.002645	-.002065	ROLL VELOC P	WL 75	MZ1.20	SW	%	67.5
324	408	.047596	.022154	-.013930	YAW VELOC R	WL 75	MZ1.20	SW	%	67.5
325	409				FILLER	M Z1.20	SW	%	67.5	
326	410				FILLER	M Z1.20	SW	%	67.5	
327	411				FILLER	M Z1.20	SW	%	67.5	
328	412				FILLER	M Z1.20	SW	%	67.5	
329	413				FILLER	M Z1.20	SW	%	67.5	
330	414				FILLER	M Z1.20	SW	%	67.5	
331	415				FILLER	M Z1.20	SW	%	67.5	
332	5	FWD FUS SG	1946.00	820.08	184.05					
333	501	.00317	-.000822	.0	ALPHA=0 (VERTICAL)	M Z1.20	SW	%	67.5	
334	502	.00188	-.000605	.0	ALPHA (VERTICAL)	M Z1.20	SW	%	67.5	
335	503	.00014	.00004	-.00002	ROLL VEL. P (LATERAL)	M Z1.20	SW	%	67.5	
336	504	.00571	-.00166	-.00099	BETA (LATERAL)	M Z1.20	SW	%	67.5	
337	505				FILLER	M Z1.20	SW	%	67.5	
338	506				FILLER	M Z1.20	SW	%	67.5	
339	507				FILLER	M Z1.20	SW	%	67.5	
340	508				FILLER	M Z1.20	SW	%	67.5	
341	509				FILLER	M Z1.20	SW	%	67.5	
342	510				FILLER	M Z1.20	SW	%	67.5	
343	511				FILLER	M Z1.20	SW	%	67.5	
344	512				FILLER	M Z1.20	SW	%	67.5	
345	513				FILLER	M Z1.20	SW	%	67.5	
346	514				FILLER	M Z1.20	SW	%	67.5	
347	515				FILLER	M Z1.20	SW	%	67.5	
348	6	AFT FUS SG	1945.00	820.08	184.05	244.50	10.75	198.06	41.00	
349	601	.00530	-.002173	.0	ALPHA=0 (VERTICAL)	M Z1.20	SW	%	67.5	
350	602	-.00046	-.000118	.0	ALPHA (VERTICAL)	M Z1.20	SW	%	67.5	
351	603	.00211	-.00030	-.00037	BETA ALPHA=C/C (LAT)	M Z1.20	SW	%	67.5	
352	604	.00007	-.00001	-.00001	BETA ALPHA C/C (LAT)	M Z1.20	SW	%	67.5	
353	605	.00022	.00006	.00004	DELTA H PRIME (LAT)	M Z1.20	SW	%	67.5	
354	606	.00009	.00001	.00002	DELTA RUDDER LOWER (L)	M Z1.20	SW	%	67.5	
355	607	.00044	.00011	.00008	ROLL VELOCITY P (LAT)	M Z1.20	SW	%	67.5	

CARD NO 1 2 3 4 5 6 7 8  
 1234567890 1234567890 1234567890 1234567890 1234567890 1234567890 1234567890 1234567890

356	608	-.00168	-.00034	-.00029	BETA (LATERAL)	M	Z	1.20	SW	Z	67.5
357	609				FILLER	M	Z	1.20	SW	Z	67.5
358	610				FILLER	M	Z	1.20	SW	Z	67.5
359	611				FILLER	M	Z	1.20	SW	Z	67.5
360	612				FILLER	M	Z	1.20	SW	Z	67.5
361	613				FILLER	M	Z	1.20	SW	Z	67.5
362	614				FILLER	M	Z	1.20	SW	Z	67.5
363	615				FILLER	M	Z	1.20	SW	Z	67.5

364 7/8/9 END OF RECORD 1

365	1	03	982.32	QBAR
366	1	04	1245.1	VIAS
367	1	02	8.0	BETA

368 7/8/9 END OF RECORD 2

369	1.0	CASE							
370	BI ARS	SOS	3C.2.1D	67.5WS, 1.2M, 20K ALT, RIGID, ALPHA=0, DE=0, BETA=8					
371	NASA/DFRC	808	SIMS	EXT 308					
372	8.0000	0.0000	2.0000	1.2000	0.0000	8.0000	982.3151		
373	VERTTAIL	2.0000	90.0000						
374	96.5665	5.0000							
375	.0991	0.0000	.6462	-.6462	1437.5285				
376	.2993	0.0000	.4574	-.4574	1487.2380				
377	.4994	0.0000	.5850	-.5850	1536.9475				
378	.6995	0.0000	.4035	-.4035	1585.6570				
379	.8997	0.0000	.1038	-.1038	1636.3664				
380	117.4044	5.0000							
381	.0995	0.0000	.8009	-.8009	1461.6198				
382	.2996	0.0000	.6260	-.6260	1507.5311				
383	.4997	0.0000	.5953	-.5953	1553.4425				
384	.6997	0.0000	.3307	-.3307	1599.3538				
385	.8998	0.0000	.0458	-.0458	1645.2652				
386	VERTTIP	6.0000	90.0000						
387	137.7898	5.0000							
388	.0988	0.0000	.9417	-.9417	1485.3523				
389	.2990	0.0000	.1576	-.1576	1527.5221				
390	.4992	0.0000	.3073	-.3073	1569.6918				
391	.6994	0.0000	.3683	-.3683	1611.8616				
392	.8996	0.0000	.3330	-.3330	1654.0314				
393	162.2446	5.0000							
394	.0984	0.0000	1.0583	-1.0583	1513.9658				
395	.2987	0.0000	.2534	-.2534	1551.6245				
396	.4989	0.0000	.3536	-.3536	1589.2831				
397	.6992	0.0000	.3684	-.3684	1626.9418				
398	.8994	0.0000	.3399	-.3399	1664.6005				
399	184.5756	5.0000							
400	.0988	0.0000	1.1589	-1.1589	1540.0944				
401	.2990	0.0000	.3699	-.3699	1573.6337				
402	.4992	0.0000	.3960	-.3960	1607.1731				
403	.6994	0.0000	.3862	-.3862	1640.7124				
404	.8995	0.0000	.3429	-.3429	1674.2517				
405	210.8781	5.0000							
406	.0949	0.0000	1.3447	-1.3447	1570.8699				
407	.2957	0.0000	.4612	-.4612	1599.5573				
408	.4965	0.0000	.4443	-.4443	1628.2447				
409	.6973	0.0000	.4069	-.4069	1656.9321				
410	.8981	0.0000	.3081	-.3081	1685.6195				
411	242.4320	5.0000							
412	.0942	0.0000	1.5950	-1.5950	1607.7899				
413	.2951	0.0000	.5742	-.5742	1630.6566				
414	.4960	0.0000	.5035	-.5035	1653.5234				
415	.6969	0.0000	.2977	-.2977	1676.3901				
416	.8978	0.0000	.1184	-.1184	1699.2568				
417	269.1231	5.0000							
418	.0934	0.0000	1.8874	-1.8874	1639.0201				
419	.2944	0.0000	.5312	-.5312	1656.9632				
420	.4955	0.0000	.1397	-.1397	1674.9063				
421	.6965	0.0000	.0690	-.0690	1692.8494				
422	.8975	0.0000	.0474	-.0474	1710.7925				

CARD  
NJ

1 2 3 4 5 6 7 8  
1234567890123456789012345678901234567890123456789012345678901234567890

423	WING1	2.0000	-1.9400				
424	71.0699	5.0000					
425	.0557	.0502	.0052	.1152	675.4890		
426	.2975	-.0368	-.0034	-.0083	821.0326		
427	.4984	.0010	-.0490	.0510	966.5762		
428	.6992	.0454	.0589	.0320	1112.1198		
429	.9000	.0839	.0873	.0805	1257.6634		
430	122.1584	5.0000					
431	.0970	.0265	-.0227	.0758	789.7062		
432	.2978	.0458	-.0232	.1148	906.7428		
433	.4985	-.0081	-.0200	.0037	1023.7794		
434	.6993	.1029	.0704	.1354	1140.8161		
435	.9000	.1793	.1835	.1752	1257.8527		
436	WING2	9.0000	-1.9400				
437	165.9276	5.0000					
438	.0953	-.0221	-.0655	.0193	687.5599		
439	.2964	.0223	.2420	-.1974	980.1737		
440	.4976	.2447	.0784	.4110	1072.7874		
441	.6988	.0723	.1682	-.0237	1165.4011		
442	.9000	.0536	.1158	-.0086	1258.0149		
443	208.3183	5.0000					
444	.0997	-.0332	.0181	-.0846	971.3564		
445	.2997	.1249	.1226	.1273	1050.3069		
446	.4997	.1662	.1055	.2269	1129.2573		
447	.6997	.0556	.1431	-.0319	1208.2077		
448	.8997	.1229	.1559	.0898	1287.1582		
449	245.1043	5.0000					
450	.0984	.0199	.0355	.0044	1043.9731		
451	.2985	.1212	.0992	.1433	1118.8429		
452	.4987	.0984	.1295	.0673	1193.7127		
453	.6988	.1032	.1420	.0644	1268.5825		
454	.8989	.1326	.1398	.1253	1343.4523		
455	280.0598	5.0000					
456	.0481	.0684	.0616	.0753	1124.9494		
457	.2983	.0916	.1102	.0730	1193.2784		
458	.4984	.1017	.1185	.0849	1261.6074		
459	.6986	.1368	.1519	.1217	1329.9365		
460	.8987	.1253	.1303	.1202	1398.2655		
461	312.5952	5.0000					
462	.0983	.0949	.0885	.1012	1200.3195		
463	.2985	.0882	.1110	.0655	1262.5606		
464	.4986	.1211	.1317	.1106	1324.8017		
465	.6987	.1466	.1501	.1436	1387.0428		
466	.8989	.1149	.1189	.1110	1449.2840		
467	347.3528	5.0000					
468	.0983	.1097	.1165	.1028	1280.8371		
469	.2986	.1123	.1185	.1061	1336.5746		
470	.4989	.1394	.1422	.1365	1392.3120		
471	.6972	.1366	.1406	.1325	1448.0494		
472	.8975	.1069	.1071	.1067	1503.7868		
473	387.0238	5.0000					
474	.0952	.1456	.1495	.1418	1372.7372		
475	.2955	.1333	.1348	.1318	1421.0515		
476	.4959	.1367	.1407	.1328	1469.3658		
477	.6963	.1193	.1190	.1196	1517.6801		
478	.8967	.0868	.0840	.0896	1565.9945		
479	423.4607	5.0000					
480	.1000	.2007	.2002	.2012	1453.6845		
481	.3000	.1333	.1400	.1267	1488.2095		
482	.5000	.1289	.1248	.1329	1522.8346		
483	.7000	.0474	.0450	.0498	1557.4096		
484	.9000	.1478	.1439	.1516	1591.9846		
485	455.7386	5.0000					
486	.1000	.2928	.2911	.2946	1521.5604		
487	.3000	.1150	.1117	.1184	1536.3002		
488	.5000	-.0354	-.0385	-.0323	1551.0401		
489	.7000	.3116	.3102	.3130	1565.7799		
490	.9000	.1237	.1214	.1260	1580.5197		
491	HDRZYAIL	6.0000	1.0600				
492	21.5032	5.0000					
493	.0992	-.0604	.2846	-.4054	1523.7916		

CARD NU	1	2	3	4	5	6	7	8
	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
494	.2993	-.0559	.0873	-.1991	1562.6997			
495	.4994	-.0437	-.0540	-.0335	1691.6077			
496	.6994	-.0321	-.1391	.4349	1640.5158			
497	.8995	-.0182	-.1616	.1413	1679.4238			
498	68.1097	0.0000						
499	.0975	-.0728	.3143	-.4548	1558.2948			
500	.2974	-.0517	.0508	-.1543	1593.3298			
501	.4977	-.0314	-.0636	.0007	1628.3648			
502	.6981	-.0226	-.1599	.1542	1653.3999			
503	.8985	-.0121	-.2452	.2010	1698.4349			
504	116.8445	0.0000						
505	.0964	-.0360	.2745	-.4706	1598.8828			
506	.2969	-.0303	.0315	-.1322	1523.8659			
507	.4973	-.0320	-.0722	.0081	1658.8493			
508	.6978	-.0396	-.1605	.1413	1688.8320			
509	.8982	-.0276	-.2262	.1710	1713.8151			
510	164.1783	0.0000						
511	.0947	-.1351	.2117	-.4819	1638.3045			
512	.2954	-.0517	.0215	-.1248	1663.3808			
513	.4960	-.0390	.0703	-.0077	1688.4571			
514	.6967	-.0180	-.1495	.1135	1713.5334			
515	.8973	-.0281	-.1897	.1335	1738.6098			
516	207.8270	0.0000						
517	.0948	-.1700	.4720	-.5120	1674.6563			
518	.2954	-.0594	.0070	-.1259	1695.2079			
519	.4961	-.0305	-.0749	.0260	1715.7596			
520	.6967	-.0357	-.1414	.0701	1736.3112			
521	.8974	-.0171	-.1641	.1300	1756.8629			
522	249.3778	0.0000						
523	.0888	-.2265	.1159	-.5688	1759.2612			
524	.2902	-.0721	-.0019	-.1424	1725.5057			
525	.4916	-.0278	-.0646	.0091	1741.7501			
526	.6930	-.0004	-.1235	.1226	1757.9945			
527	.8944	-.0032	-.1525	.1589	1774.2389			
528	PLATE	1.0000	-87.0000					
529	146.4763	0.0000						
530	.0989	-.0599	-.4056	.5253	951.8000			
531	.3384	-.1720	.0250	-.3590	1058.3000			
532	.6195	-.1093	-.1194	.3391	1183.3000			
533	.8600	-.0691	.1135	.0246	1299.1500			
534	CANARD	1.0000	-30.0000					
535	48.2700	0.0000						
536	.1250	-.4614	-1.3920	.4691	230.5311			
537	.6250	-.1793	-.4972	.1387	244.8045			
538	FUSELAGE	1.0	0.0					
539	0.0	21.0						
540	.0250	-.0976	-.2731					
541	.0750	-.1860	-.1389					
542	.1250	-.2340	-.1155					
543	.1750	-.2908	-.0939					
544	.2250	-.3490	-.0636					
545	.2750	-.4182	-.0497					
546	.3250	-.0363	-.0037					
547	.3750	-.1099	.0907					
548	.4250	-.0744	.0911					
549	.4750	-.0008	.0765					
550	.5250	-.0202	.1050					
551	.5750	.0319	.0135					
552	.6250	.0339	.0113					
553	.6750	.1001	.0519					
554	.7250	.0935	.0415					
555	.7750	.0120	.0173					
556	.8250	.0289	.1550					
557	.8750	.0807	.2512					
558	.9250	-.0507	.0576					
559	.9750	-.2572	.5806					

Program output listing for example 8.2

INTEGRATION OPTION

CASE 1 B1 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8  
 MR=ASYM

ALPHA= 0.00 BETA= 8.00 CBAR= 982.3  
 TAS =1245.1

SAN= 1 WING - SG AXIS CPBJDY=WING2 ITC=3 SC=OFF THETA= -1.94 SREF= 1946.000 BREF= 820.08 CRFF= 184.05

PANEL	AREA IN2	BARM IN	TARM IN	CP-L	V-L KIPS	B-L IN-KIPS	T-L IN-KIPS	CP-R	V-R KIPS	B-R IN-KIPS	T-R IN-KIPS
1 1	0.00	0.00	0.00	.0193	0.000	0.000	0.000	-.0655	0.000	0.000	0.000
1 2	0.00	0.00	0.00	-.1974	0.000	0.000	0.000	.2420	0.000	0.000	0.000
1 3	0.00	0.00	0.00	.4110	0.000	0.000	0.000	.0784	0.000	0.000	0.000
1 4	0.00	0.00	0.00	-.0237	0.000	0.000	0.000	.1682	0.000	0.000	0.000
1 5	0.00	0.00	0.00	-.0086	0.000	0.000	0.000	.1158	0.000	0.000	0.000
2 1	0.00	0.00	0.00	-.0846	0.000	0.000	0.000	.0181	0.000	0.000	0.000
2 2	0.00	0.00	0.00	.1273	0.000	0.000	0.000	.1226	0.000	0.000	0.000
2 3	240.56	9.39	-23.69	.2269	.372	3.497	-8.820	.1055	.173	1.626	-4.101
2 4	2499.88	37.17	-50.71	-.0319	-.544	-20.218	27.587	.1431	2.440	90.697	-123.754
2 5	3076.95	98.10	-84.05	.0898	1.886	185.033	-158.529	.1559	3.274	321.232	-275.220
3 1	0.00	0.00	0.00	.0044	0.000	0.000	0.000	.0355	0.000	0.000	0.000
3 2	348.75	12.04	15.36	.1433	.341	4.275	4.554	.0992	.236	2.960	3.152
3 3	2189.76	39.65	-11.37	.0673	1.005	39.861	-11.431	.1295	1.934	76.702	-21.996
3 4	2618.77	97.89	-42.82	.0644	1.150	112.621	-49.257	.1420	2.537	248.326	-108.610
3 5	2618.77	164.91	-76.20	.1253	2.238	369.127	-179.564	.1398	2.497	411.844	-190.302
4 1	792.99	19.60	46.13	.0753	.407	7.982	18.788	.0616	.333	6.530	15.370
4 2	2229.51	50.33	21.20	.0730	1.110	35.541	23.532	.1102	1.676	83.845	35.223
4 3	2389.59	107.24	-8.40	.0849	1.384	148.425	-11.624	.1185	1.932	207.165	-16.225
4 4	2389.69	168.40	-38.87	.1217	1.984	334.097	-77.106	.1519	2.476	417.003	-96.240
4 5	2389.69	229.57	-69.33	.1202	1.959	449.821	-135.854	.1303	2.124	487.617	-147.270
5 1	1865.97	66.90	48.07	.1012	1.288	86.180	61.918	.0885	1.127	75.365	54.146
5 2	1865.97	122.61	20.32	.0655	.834	102.227	16.938	.1110	1.413	173.240	28.703
5 3	1865.97	178.32	-7.44	.1106	1.408	251.047	-10.471	.1317	1.676	298.941	-12.465
5 4	1865.97	234.04	-30.19	.1436	1.828	427.787	-64.323	.1501	1.911	447.151	-67.235
5 5	1865.97	289.75	-62.94	.1110	1.413	409.386	-88.932	.1189	1.513	438.523	-95.261
6 1	2226.15	154.48	43.30	.1028	1.561	241.158	67.588	.1165	1.769	273.297	76.596
6 2	2226.15	204.37	16.44	.1061	1.611	329.284	29.714	.1185	1.800	367.767	33.187
6 3	2226.15	254.25	-6.41	.1365	2.073	527.047	-13.289	.1422	2.159	549.055	-13.844
6 4	2226.15	304.15	-31.26	.1325	2.012	611.988	-62.905	.1406	2.135	649.400	-66.751
6 5	2226.15	354.04	-56.12	.1067	1.620	573.652	-90.927	.1071	1.626	575.813	-91.268
7 1	1904.69	254.44	37.85	.1418	1.842	468.778	69.730	.1495	1.942	494.234	73.517
7 2	1904.69	297.68	16.30	.1318	1.712	509.776	27.920	.1348	1.751	521.379	28.556
7 3	1904.69	340.93	-5.24	.1328	1.725	588.264	-9.038	.1407	1.828	623.259	-9.576
7 4	1904.69	384.17	-26.78	.1196	1.554	596.995	-41.617	.1190	1.546	594.000	-41.408
7 5	1904.69	427.42	-48.32	.0896	1.164	497.592	-56.258	.0840	1.091	466.493	-52.742
8 1	1216.11	343.15	34.39	.2012	1.669	572.757	57.396	.2002	1.661	569.910	57.111
8 2	1216.11	374.09	18.97	.1267	1.051	393.206	19.939	.1400	1.161	434.481	22.032
8 3	1216.11	405.04	3.55	.1329	1.103	446.568	3.918	.1248	1.035	419.353	3.680
8 4	1216.11	435.99	-11.86	.0498	.413	180.123	-4.901	.0450	.373	162.761	-4.428
8 5	1216.11	466.94	-27.28	.1516	1.258	587.247	-34.308	.1439	1.194	557.420	-32.565

## INTEGRATION OPTION

SAN= 1 WING - SG AXIS

PANEL	AREA IN2	BARN IN	TARM IN	CP-L	V-L KIPS	B-L IN-KIPS	T-L IN-KIPS	CP-R	V-R KIPS	B-R IN-KIPS	T-R IN-KIPS
9 1	397.98	418.33	33.03	.2946	.800	334.555	26.417	.2911	.790	330.581	26.102
9 2	397.98	431.50	26.46	.1184	.321	138.699	8.505	.1117	.303	130.853	8.623
9 3	397.98	444.69	19.89	-.0323	-.088	-38.995	-1.744	-.0385	-.105	-46.480	-2.079
9 4	397.98	457.88	13.31	.3130	.850	389.085	11.313	.3102	.842	385.604	11.211
9 5	397.98	471.03	6.74	.1260	.342	161.141	2.306	.1214	.330	155.258	2.222
TOTAL INTEGRATED LOADS					44.660	11075.619	-623.834		54.508	12003.200	-994.208
TOTAL LOADS PER QBAR					.045464	11.275017	-.635066		.055490	12.219297	-1.012107
TOTAL LOAD COEFFICIENTS					.023363	.007065	-.001773		.028515	.007657	-.002826

INTEGRATION OPTION

CASE 1 81 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID, ALPHA=0,DE=0,BETA=8 ALPHA= 0.00 BETA= 8.00 CSAR= 982.3  
 MR=ASYM TAS =1245.1

SAN= 2 HORIZ TAIL - SG CPBODY=HORIZTAIL ITC=3 SC=OFF THETA= 1.00 SREF= 238.770 BREF= 259.03 CRFF= 149.38

PANEL	AREA IN2	BARM IN	TARM IN	CP-L	V-L KIPS	B-L IN-KIPS	T-L IN-KIPS	CP-R	V-R KIPS	B-R IN-KIPS	T-R IN-KIPS
1 1	1263.18	16.24	54.72	-.4054	-3.493	-56.718	-191.155	.2646	2.452	39.817	134.195
1 2	1263.18	16.24	16.14	-.1991	-1.716	-27.855	-27.692	.0873	.752	12.214	12.142
1 3	1263.18	16.24	-22.44	-.0335	-.289	-4.687	6.477	-.0540	-.465	-7.555	10.441
1 4	1263.18	16.24	-51.02	.1349	1.162	18.873	-70.928	-.1391	-1.199	-19.461	73.136
1 5	1263.18	16.24	-99.59	.1413	1.218	19.769	-121.265	-.1616	-1.393	-22.609	138.666
2 1	1765.97	57.37	23.71	-.4598	-5.539	-317.780	-131.305	.3143	3.786	217.221	69.755
2 2	1765.97	57.37	-11.33	-.1543	-1.859	-106.641	21.060	.0508	.612	35.109	-6.534
2 3	1765.97	57.37	-46.37	.0007	.008	.484	-.391	-.0636	-.766	-43.956	35.524
2 4	1765.97	57.37	-81.40	.1542	1.858	106.572	-151.210	-.1593	-1.919	-110.056	156.211
2 5	1765.97	57.37	-116.44	.2010	2.421	138.916	-281.937	-.2452	-2.954	-169.464	343.935
3 1	1406.10	106.11	-16.88	-.4706	-4.514	-478.984	76.209	.2745	2.633	279.399	-44.453
3 2	1406.10	106.11	-46.87	-.1322	-1.268	-134.555	59.426	.0315	.302	32.061	-14.160
3 3	1406.10	106.11	-76.85	.0081	.078	8.244	-5.971	-.0722	-.593	-73.466	53.221
3 4	1406.10	106.11	-106.83	.1413	1.355	143.817	-144.793	-.1605	-1.539	-163.359	164.468
3 5	1406.10	106.11	-136.82	.1710	1.640	174.046	-224.406	-.2262	-2.170	-230.230	296.646
4 1	1199.70	153.45	-56.30	-.4819	-3.944	-605.197	222.054	.2117	1.733	255.865	-97.549
4 2	1199.70	153.45	-81.38	-.1248	-1.021	-156.731	83.119	.0215	.176	27.001	-14.319
4 3	1199.70	153.45	-116.46	-.0077	-.063	-9.670	6.709	-.0703	-.575	-84.287	61.248
4 4	1199.70	153.45	-131.53	.1135	.929	142.540	-122.178	-.1495	-1.223	-167.751	160.930
4 5	1199.70	153.45	-156.61	.1335	1.093	167.657	-171.105	-.1897	-1.552	-238.236	243.136
5 1	798.92	197.11	-92.66	-.5120	-2.790	-550.008	258.545	.1720	.937	134.768	-86.651
5 2	798.92	197.11	-113.21	-.1209	-.586	-135.246	77.678	.0070	.039	7.520	-4.319
5 3	798.92	197.11	-133.76	-.0260	-.142	-27.930	18.954	-.0749	-.408	-80.460	54.601
5 4	798.92	197.11	-154.31	.0701	.382	75.304	-58.953	-.1414	-.771	-151.897	118.516
5 5	798.92	197.11	-174.86	.1300	.708	139.651	-123.889	-.1641	-.894	-176.282	156.366
6 1	725.94	238.67	-127.26	-.5688	-2.817	-672.265	358.464	.1159	.574	136.982	-73.041
6 2	725.94	238.67	-143.31	-.1424	-.705	-168.303	101.198	-.0019	-.009	-2.245	1.350
6 3	725.94	238.67	-159.75	.0091	.045	10.755	-7.199	-.0646	-.320	-76.351	51.105
6 4	725.94	238.67	-175.99	.1226	.607	144.901	-106.851	-.1235	-.612	-145.965	107.635
6 5	725.94	238.67	-192.24	.1589	.787	187.804	-151.271	-.1525	-.755	-180.240	145.178

TOTAL INTEGRATED LOADS -16.554 -1973.236 -802.605 -6.222 -929.980 2267.415  
 TOTAL LOADS PER QBAR -.016852 -2.008761 -.817054 -.006334 -.946723 2.308236  
 TOTAL LOAD COEFFICIENTS -.070579 -.032479 -.022908 -.026527 -.015307 .064715



## INTEGRATION OPTION

CASE 1 81 ARS SDSS-3C.2.10 67.5WS, 1.2M, 20K ALT, RIGID, ALPHA=0, DE=0, BETA=8  
 HR=ASYM

ALPHA= 0.00 BETA= 8.00 CBAR= 9E2.3  
 TAS =1245.1

SAN= 3 VERT TAIL - SG CPBODY=VERTTIP ITC=3 SC= DN THETA= 90.00 SREF= 247.400 BREF= 206.76 CREF= 166.95

PANEL	AREA IN2	BARM IN	TARM IN	CP-R	V-R KIPS	B-R IN-KIPS	T-R IN-KIPS
1 1	553.15	6.65	90.30	-.9417	-3.553	-23.641	-320.882
1 2	553.15	6.65	49.13	-.1576	-.595	-3.956	-29.219
1 3	553.15	6.65	7.96	-.3073	-1.160	-7.715	-9.235
1 4	553.15	6.65	-33.21	-.3683	-1.390	-9.245	46.148
1 5	553.15	6.65	-74.38	-.3330	-1.257	-8.360	93.455
2 1	940.29	25.69	68.03	-1.0583	-6.788	-174.356	-461.832
2 2	940.29	25.69	30.38	-.2534	-1.625	-41.748	-49.373
2 3	940.29	25.69	-7.28	-.3536	-2.268	-58.256	16.519
2 4	940.29	25.69	-44.94	-.3584	-2.363	-60.694	106.199
2 5	940.29	25.69	-82.60	-.3399	-2.180	-55.999	180.086
3 1	653.39	48.02	41.91	-1.1589	-5.165	-248.023	-216.463
3 2	653.39	48.02	8.37	-.3699	-1.649	-79.165	-13.793
3 3	653.39	48.02	-25.17	-.3960	-1.765	-84.750	44.431
3 4	653.39	48.02	-58.71	-.3862	-1.721	-82.653	101.065
3 5	653.39	48.02	-92.25	-.3429	-1.528	-73.386	140.995
4 1	971.47	74.32	11.13	-1.3447	-8.911	-662.273	-99.183
4 2	971.47	74.32	-17.56	-.4612	-3.056	-227.144	53.661
4 3	971.47	74.32	-46.25	-.4443	-2.944	-218.821	136.163
4 4	971.47	74.32	-74.93	-.4069	-2.697	-200.401	202.656
4 5	971.47	74.32	-103.62	-.3381	-2.042	-151.741	211.567
5 1	660.10	105.87	-25.79	-1.5950	-7.182	-760.391	185.228
5 2	660.10	105.87	-48.66	-.5742	-2.586	-273.741	125.807
5 3	660.10	105.87	-71.52	-.5005	-2.254	-238.606	161.193
5 4	660.10	105.87	-94.39	-.2977	-1.341	-141.924	126.532
5 5	660.10	105.87	-117.26	-.1184	-.533	-56.445	62.515
6 1	433.03	132.55	-57.02	-1.8874	-5.575	-739.084	317.906
6 2	433.03	132.55	-74.96	-.5312	-1.569	-208.012	117.628
6 3	433.03	132.55	-92.91	-.1397	-.413	-54.705	38.340
6 4	433.03	132.55	-110.85	-.0690	-.204	-27.020	22.594
6 5	433.03	132.55	-128.79	-.0474	-.140	-18.561	18.033

TOTAL INTEGRATED LOADS	-76.454	-4990.817	1308.142
TOTAL LOADS PER QBAR	-.077831	-5.080668	1.331692
TOTAL LOAD COEFFICIENTS	-.314595	-.099324	.028488

INTEGRATION OPTION

CASE 1 B1 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8  
 MR=ASYM

ALPHA= 0.00 BETA= 8.00 CBAR= 992.3  
 TAS =1245.1

SAN= 4 VERT TAIL - ROOT CP800Y=VERTTAIL ITC=3 SC= ON THETA= 90.00 SREF= 247.400 BREF= 206.76 CREF= 188.95

PANEL	AREA IN2	BARM IN	TAFM IN	CP-R	V-R KIPS	B-R IN-KIPS	T-R IN-KIPS
1 1	1217.06	21.57	98.03	-.6462	-5.365	-115.701	-525.940
1 2	1217.06	21.57	48.32	-.4574	-3.797	-51.897	-183.593
1 3	1217.06	21.57	-1.39	-.5950	-4.857	-104.743	6.736
1 4	1217.06	21.57	-51.10	-.4035	-3.350	-72.246	171.175
1 5	1217.06	21.57	-100.81	-.1038	-.862	-18.585	86.873
2 1	780.20	42.40	73.94	-.8009	-4.263	-180.750	-315.174
2 2	780.20	42.40	28.03	-.6260	-3.332	-141.278	-93.384
2 3	780.20	42.40	-17.98	-.5953	-3.168	-134.349	56.656
2 4	780.20	42.40	-63.79	-.3307	-1.760	-74.633	112.281
2 5	780.20	42.40	-109.71	-.0458	-.244	-10.336	26.741

TOTAL INTEGRATED LOADS -30.998 -934.519 -657.538  
 TOTAL LOADS PER QBAR -.031556 -.951343 -.669376  
 TOTAL LOAD COEFFICIENTS -.127549 -.018598 -.014319

## INTEGRATION OPTION

CASE 1 61 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8  
 MR=ASYM

ALPHA= 0.00 BETA= 5.00 CRAR= 5E2.3  
 TAS =1245.1

SAN= 5 FWD FUS S6 VERT CPBODY=FUSELAGE ITC=1 SC= ON

SREF= 1946.000 BREF= 820.08 CREF= 184.05

PANEL	AREA IN2	BARM IN	TARM IN	CP-R	V-R KIPS	B-R IN-KIPS	T-R IN-KIPS
1 1	2731.01	462.20	0.00	-.0978	-1.822	-842.131	0.000
1 2	5677.31	373.60	0.00	-.1880	-7.281	-2720.168	0.000
1 3	7404.30	285.00	0.00	-.2340	-11.819	-3368.474	0.000
1 4	9774.41	195.40	0.00	.2906	17.989	3533.002	0.000
1 5	10341.92	107.80	0.00	.1490	10.512	1133.169	0.000
1 6	8088.12	31.75	0.00	.1182	6.522	207.060	0.000
1 7	0.00	0.00	0.00	-.0363	0.000	0.000	0.000
1 8	0.00	0.00	0.00	-.1099	0.000	0.000	0.000
1 9	0.00	0.00	0.00	-.0744	0.000	0.000	0.000
1 10	0.00	0.00	0.00	-.0008	0.000	0.000	0.000
1 11	0.00	0.00	0.00	.0202	0.000	0.000	0.000
1 12	0.00	0.00	0.00	.0319	0.000	0.000	0.000
1 13	0.00	0.00	0.00	.0339	0.000	0.000	0.000
1 14	0.00	0.00	0.00	.1001	0.000	0.000	0.000
1 15	0.00	0.00	0.00	.0935	0.000	0.000	0.000
1 16	0.00	0.00	0.00	.0120	0.000	0.000	0.000
1 17	0.00	0.00	0.00	.0289	0.000	0.000	0.000
1 18	0.00	0.00	0.00	-.0807	0.000	0.000	0.000
1 19	0.00	0.00	0.00	-.0507	0.000	0.000	0.000
1 20	0.00	0.00	0.00	-.2572	0.000	0.000	0.000

TOTAL INTEGRATED LOADS	14.100	-2057.541	0.000
TOTAL LOADS PER QBAK	.014354	-2.094584	0.000000
TOTAL LOAD COEFFICIENTS	.007376	-.001312	0.000000

INTEGRATION OPTION

CASE 1 81 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=6  
 MR=ASYM

ALPHA= 0.00 BETA= 8.00 CEAR= 982.3  
 TAS =1245.1

SAN= 6 FWD FUS SG LAT CPBODY=FUSELAGE ITC=2 SC= ON

SREF= 1946.000 BREF= 620.08 CREF= 164.05

PANEL	AREA IN2	BARX IN	TARM IN	CP-R	V-R KIPS	B-R IN-KIPS	T-R IN-KIPS
1 1	2731.01	462.27	0.00	-.2731	-5.088	-2351.596	0.000
1 2	5677.31	373.53	0.00	-.1369	-5.379	-2009.741	0.000
1 3	7404.30	285.00	0.00	-.1155	-5.834	-1662.644	0.000
1 4	9074.41	196.40	0.00	-.0939	-5.813	-1141.600	0.000
1 5	10341.92	107.80	0.00	-.0636	-4.487	-483.638	0.000
1 6	8068.12	31.75	0.00	-.0497	-2.742	-87.054	0.000
1 7	0.00	0.00	0.00	-.0037	0.000	0.000	0.000
1 8	0.00	0.00	0.00	.0967	0.000	0.000	0.000
1 9	0.00	0.00	0.00	.0911	0.000	0.000	0.000
1 10	0.00	0.00	0.00	.0765	0.000	0.000	0.000
1 11	0.00	0.00	0.00	.1050	0.000	0.000	0.000
1 12	0.00	0.00	0.00	.0135	0.000	0.000	0.000
1 13	0.00	0.00	0.00	-.0113	0.000	0.000	0.000
1 14	0.00	0.00	0.00	.0519	0.000	0.000	0.000
1 15	0.00	0.00	0.00	.0425	0.000	0.000	0.000
1 16	0.00	0.00	0.00	-.0173	0.000	0.000	0.000
1 17	0.00	0.00	0.00	-.1550	0.000	0.000	0.000
1 18	0.00	0.00	0.00	-.2512	0.000	0.000	0.000
1 19	0.00	0.00	0.00	.0576	0.000	0.000	0.000
1 20	0.00	0.00	0.00	.5806	0.000	0.000	0.000

TOTAL INTEGRATED LOADS -29.343 -7736.332 0.000  
 TOTAL LOADS PER QBAK -.029871 -7.875612 0.000000  
 TOTAL LOAD COEFFICIENTS -.015350 -.004935 0.000000

INTEGRATION OPTION

CASE 1 81 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=C,BETA=8  
 MK=ASYM

ALPHA= 0.00 BETA= 8.00 CBAR= 982.3  
 TAS =1245.1

PAN= 7 AFT FUS SG VERT CPBODY=FUSELAGE ITC=1 SC= ON

SREF= 1946.000 9REF= 820.08 CREF= 184.05

PANEL	AREA IN2	BAR IN	TARM IN	CP-R	V-R KIPS	B-R IN-KIPS	T-R IN-KIPS
1 1	0.00	0.00	0.00	-.0978	0.000	0.000	0.000
1 2	0.00	0.00	0.00	-.1880	0.000	0.000	0.000
1 3	0.00	0.00	0.00	-.2340	0.000	0.000	0.000
1 4	0.00	0.00	0.00	.2906	0.000	0.000	0.000
1 5	0.00	0.00	0.00	.1499	0.000	0.000	0.000
1 6	0.00	0.00	0.00	.1182	0.000	0.000	0.000
1 7	0.00	0.00	0.00	-.0363	0.000	0.000	0.000
1 8	0.00	0.00	0.00	-.1099	0.000	0.000	0.000
1 9	0.00	0.00	0.00	-.0744	0.000	0.000	0.000
1 10	0.00	0.00	0.00	-.0008	0.000	0.000	0.000
1 11	0.00	0.00	0.00	.0202	0.000	0.000	0.000
1 12	0.00	0.00	0.00	.0319	0.000	0.000	0.000
1 13	0.00	0.00	0.00	.0339	0.000	0.000	0.000
1 14	0.00	0.00	0.00	.1001	0.000	0.000	0.000
1 15	1232.40	6.75	0.00	.0935	.786	5.306	0.000
1 16	7982.33	57.80	0.00	.0120	.653	37.768	0.000
1 17	7825.33	146.40	0.00	.0289	1.543	225.855	0.000
1 18	7046.18	235.00	0.00	.0807	4.209	969.178	0.000
1 19	5779.20	323.60	0.00	-.0507	-1.999	-646.674	0.000
1 20	1678.98	412.20	0.00	-.2572	-3.297	-1358.906	0.000

TOTAL INTEGRATED LOADS 1.896 -747.603 0.000  
 TOTAL LOADS PER QBAR .001930 -.761063 0.000000  
 TOTAL LOAD COEFFICIENTS .000992 -.000477 0.000000

INTEGRATION OPTION

CASE 1 E1 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8  
 MR=ASYM

ALPHA= 0.00 BETA= 8.00 QBAR= 982.3  
 TAS =1245.1

SAN= 8 AFT FUS SG LAT CPBODY=FUSELAGE ITC=2 SC= DN

SREF= 1946.000 BREF= 820.00 CREF= 184.05

PANEL	APEA IN2	BARM IN	TARM IN	CP-R	V-R KIPS	B-R IN-KIPS	T-R IN-KIPS
1 1	0.00	0.00	0.00	-.2731	0.000	0.000	0.000
1 2	0.00	0.00	0.00	-.1389	0.000	0.000	0.000
1 3	0.00	0.00	0.00	-.1155	0.000	0.000	0.000
1 4	0.00	0.00	0.00	-.0939	0.000	0.000	0.000
1 5	0.00	0.00	0.00	-.0536	0.000	0.000	0.000
1 6	0.00	0.00	0.00	-.0497	0.000	0.000	0.000
1 7	0.00	0.00	0.00	-.0037	0.000	0.000	0.000
1 8	0.00	0.00	0.00	.0907	0.000	0.000	0.000
1 9	0.00	0.00	0.00	.0911	0.000	0.000	0.000
1 10	0.00	0.00	0.00	.0765	0.000	0.000	0.000
1 11	0.00	0.00	0.00	.1050	0.000	0.000	0.000
1 12	0.00	0.00	0.00	.0135	0.000	0.000	0.000
1 13	0.00	0.00	0.00	-.0113	0.000	0.000	0.000
1 14	0.00	0.00	0.00	.0519	0.000	0.000	0.000
1 15	1232.40	6.75	0.00	.0415	.349	2.355	0.000
1 16	7962.33	57.97	0.00	-.0173	-.942	-54.449	0.000
1 17	7825.33	146.40	0.00	-.1550	-8.274	-1211.333	0.000
1 18	7646.18	235.00	0.00	-.2512	-13.102	-3079.076	0.000
1 19	5779.20	323.60	0.00	.0576	2.271	734.830	0.000
1 20	1878.98	412.20	0.00	.5806	7.442	3067.577	0.000

TOTAL INTEGRATED LOADS	-12.257	-540.096	0.000
TOTAL LOADS PER QBAR	-.012478	-.549819	0.000000
TOTAL LOAD COEFFICIENTS	-.006412	-.000345	0.000000

## ADDITIONAL LOADS OPTION

CASE 1 B1 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8  
 MR=ASYM

ALPHA= 0.00 BETA= 8.00 CBR= 982.3  
 TAS =1245.1

SAN= 31 VT ROOT TOTAL

ITC=4 SC= DN NT= 6

SREF= 247.400 BPEF= 206.76 CPEF= 186.95

## CENTERLINE

	COMPONENT DESCRIPTION	VALUE	V FACTOR	B FACTOR	T FACTOR	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	3 VERT TAIL - SG CL V	-76.454	1.000	61.560	-46.440	-76.454	-4706.534	3550.543	-.314595	-.093666	.077321
2	3 VERT TAIL - SG CL B	-4990.817	0.000	1.000	0.000	0.000	-4990.817	0.000	0.000000	-.099324	0.000000
3	3 VERT TAIL - SG CL T	1308.142	0.000	0.000	1.000	0.000	0.000	1308.142	0.000000	0.000000	.022468
4	4 VERT TAIL - ROOT CL V	-30.998	1.000	0.000	0.000	-30.998	0.000	0.000	-.127549	0.000000	0.000000
5	4 VERT TAIL - ROOT CL B	-934.519	0.000	1.000	0.000	0.000	-934.519	0.000	0.000000	-.016595	0.000000
6	4 VERT TAIL - ROOT CL T	-657.538	0.000	0.000	1.000	0.000	0.000	-657.538	0.000000	0.000000	-.014319
TOTAL LOADS AND COEFFICIENTS						-107.452	-10631.869	4201.147	-.442144	-.211589	.091469

ADDITIONAL LOADS OPTION

CASE 1 B1 ARS SOSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8  
 MR=ASYM

ALPHA= 0.00 BETA= 8.00 CRAP= 982.3  
 TAS =1245.1

SAN= 32 AFT FUS SG V-TOT

ITC=4 SC= ON NT= 6

SREF= 1946.000 BPEF= 820.08 CPEF= 184.05

CENTERLINE

COMPONENT DESCRIPTION	VALUE	V FACTOR	B FACTOR	T FACTOR	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1 7 AFT FUS SG VERT CL V	1.896	1.000	0.000	0.000	1.896	0.000	0.000	.000992	0.000000	0.000000
2 7 AFT FUS SG VERT CL B	-747.603	0.000	1.000	0.000	0.000	-747.603	0.000	0.000000	-0.00477	0.000000
3 2 HORIZ TAIL - SG LH V	-16.554	1.000	244.500	0.000	-16.554	-4047.497	0.000	-0.008660	-0.002582	0.000000
4 2 HORIZ TAIL - SG RH V	-6.222	1.000	244.500	0.000	-6.222	-1521.231	0.000	-0.003255	-0.000970	0.000000
5 2 HORIZ TAIL - SG LH T	-802.605	0.000	-1.000	0.000	0.000	802.605	0.000	0.000000	0.000512	0.000000
6 2 HORIZ TAIL - SG RH T	2267.415	0.000	-1.000	0.000	0.000	-2267.415	0.000	0.000000	-0.001446	0.000000
TOTAL LOADS AND COEFFICIENTS					-20.880	-7781.141	0.000	-0.010923	-0.004964	0.000000



## ADDITIONAL LOADS OPTION

CASE 1 B1 ARS SDSS-3C.2.1D 07.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8  
 MR=ASYM

ALPHA= 0.00 BETA= 8.00 QBAR= 9E2.3  
 TAS =1245.1

SAN= 33 AFT FUS SG L-TOT

ITC=4 SC= DN NT= 10

SREF= 1946.000 BREF= 820.08 CREF= 184.05

## CENTERLINE

COMPONENT DESCRIPTION		VALUE	V FACTOR	B FACTOR	T FACTOR	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	8 AFT FUS SG LAT CL V	-12.257	1.000	0.000	0.000	-12.257	0.000	0.000	-0.006412	0.000000	0.000000
2	8 AFT FUS SG LAT CL B	-540.096	0.000	1.000	0.000	0.000	-540.096	0.000	0.000000	-0.003345	0.000000
3	8 AFT FUS SG LAT CL T	0.000	0.000	0.000	1.000	0.000	0.000	0.000	0.000000	0.000000	0.000000
4	31 VT ROOT TOTAL CL V	-107.452	1.000	198.060	41.000	-107.452	-21281.932	-4405.530	-0.056211	-0.013576	-0.012522
5	31 VT ROOT TOTAL CL B	-10631.869	0.000	0.000	1.000	0.000	0.000	-10631.869	0.000000	0.000000	-0.030219
6	31 VT ROOT TOTAL CL T	4201.147	0.000	-1.000	0.000	0.000	-4201.147	0.000	0.000000	-0.002680	0.000000
7	2 HORIZ TAIL - SG LH V	-16.554	0.000	0.000	10.750	0.000	0.000	-177.957	0.000000	0.000000	-0.000506
8	2 HORIZ TAIL - SG RH V	-0.222	0.000	0.000	-10.750	0.000	0.000	66.884	0.000000	0.000000	0.000190
9	2 HORIZ TAIL - SG LH B	-1973.236	0.000	0.000	1.000	0.000	0.000	-1973.236	0.000000	0.000000	-0.005609
10	2 HORIZ TAIL - SG RH B	-929.980	0.000	0.000	-1.000	0.000	0.000	929.980	0.000000	0.000000	0.002643
TOTAL LOADS AND COEFFICIENTS						-119.709	-26023.175	-16191.728	-0.062623	-0.016600	-0.046022

INTEGRATION OPTION AND ADDITIONAL LOADS OPTION

CASE 1 COMPLETE

WIND TUNNEL OPTION

CASE 1 31 AFS WDP-20 RIGID WIND TUNNEL DATA M=1.20 WS=67.5 9-29-80 ALPHA= 0.0000 BETA= 8.0000 QBAR= 982.32  
 P= 0.0 Q= 0.0 R= 0.0 DSL= 0.0 DSR= 0.0 DRU= 0.00 DRI= 0.00 DE= 0.0000 DA= 0.0000 TAS=1245.10

WTN= 1 WING - SG AXIS SREF= 1946.000 BREF= 820.08 CREF= 184.05

LEFT HAND

NSEQ	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS
101	ALPHA = 0	1.00	.029213	.008831	-.003133	.029213	.008831	-.003133	55.843	13844.011	-1102.280
102	ALPHA	0.30	.012051	.003229	-.000584	0.000000	0.000000	0.000000	0.000	0.000	0.000
103	ALPHA DOT	0.00	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.000	0.000	0.000
104	DELTA SPOILER	0.00	.000290	.000057	-.000034	0.000000	0.000000	0.000000	0.000	0.000	0.000
105	ROLL VELOC P	0.00	-.003232	-.000955	-.000223	0.000000	0.000000	0.000000	0.000	0.000	0.000
106	PITCH VELOC Q	0.00	.042987	.012062	-.001284	0.000000	0.000000	0.000000	0.000	0.000	0.000
107	BETA ALPHA ZERO A/S	8.00	-.000759	-.000167	-.000149	-.000672	-.001336	.001192	-11.607	-2094.395	419.380
108	BETA ALPHA A/S	0.00	-.000226	-.000058	-.000025	0.000000	0.000000	0.000000	0.000	0.000	0.000
109	BETA ALPHA ZERO SYM	8.00	.000311	.000119	-.000174	.002488	.000952	-.001392	4.756	1492.413	-489.746
110	BETA ALPHA SYM	0.00	.000008	.000005	-.000011	0.000000	0.000000	0.000000	0.000	0.000	0.000
WLN= 1	TOTAL LOADS ON SURFACE					.025629	.008447	-.003333	48.992	13242.029	-1172.646
WLN= 2	TOTAL LOADS ON SURFACE WITHOUT ALPHA=0 TERM					-.003584	-.003384	-.000200	-6.851	-601.982	-70.366

RIGHT HAND

NSEQ	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS
101	ALPHA = 0	1.00	.029213	.008831	-.003133	.029213	.008831	-.003133	55.843	13844.011	-1102.280
102	ALPHA	0.30	.012051	.003229	-.000584	0.000000	0.000000	0.000000	0.000	0.000	0.000
103	ALPHA DOT	0.00	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.000	0.000	0.000
104	DELTA SPOILER	0.00	-.000290	-.000057	.000034	0.000000	0.000000	0.000000	0.000	0.000	0.000
105	ROLL VELOC P	0.00	.003232	.000955	.000223	0.000000	0.000000	0.000000	0.000	0.000	0.000
106	PITCH VELOC Q	0.00	.042987	.012062	-.001284	0.000000	0.000000	0.000000	0.000	0.000	0.000
107	BETA ALPHA ZERO A/S	8.00	.000759	.000167	-.000149	.000672	.001336	-.001192	11.607	2094.395	-419.380
108	BETA ALPHA A/S	0.00	.000226	.000058	.000025	0.000000	0.000000	0.000000	0.000	0.000	0.000
109	BETA ALPHA ZERO SYM	8.00	.000311	.000119	-.000174	.002488	.000952	-.001392	4.756	1492.413	-489.746
110	BETA ALPHA SYM	0.00	.000008	.000005	-.000011	0.000000	0.000000	0.000000	0.000	0.000	0.000
WLN= 1	TOTAL LOADS ON SURFACE					.037773	.011119	-.005717	72.207	17430.618	-2011.406
WLN= 2	TOTAL LOADS ON SURFACE WITHOUT ALPHA=0 TERM					.008560	.002288	-.002584	16.363	3586.607	-909.126

WIND TUNNEL OPTION

CASE 1 B1 ARS WOP-29 RIGID WIND TUNNEL DATA M=1.20 WS=67.5 9-29-80 ALPHA= 0.0000 BETA= 8.0000 QBAR= 992.32  
 P= 0.0 Q= 0.0 R= 0.0 DSL= 0.0 DSR= 0.0 DRU= 0.00 DRL= 0.00 DE= 0.0000 DA= 0.0000 TAS=1245.10

WTN= 2 HORIZ TAIL - SG SREF= 238.773 BREF= 259.03 CREF= 149.38

LEFT HAND

NSEQ	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS
201	ALPHA = 0	1.00	-.136182	-.049482	.051116	-.136182	-.049482	.051116	-31.941	-3006.284	1790.944
202	ALPHA	0.00	.042237	.018920	-.019427	0.000000	0.000000	0.000000	0.000	0.000	0.000
203	DELTA H	0.00	.060513	.027107	-.027833	0.000000	0.000000	0.000000	0.000	0.000	0.000
204	ALPHA DOT	0.00	.233930	.104789	-.107545	0.000000	0.000000	0.000000	0.000	0.000	0.000
205	BETA	8.00	-.017738	-.006993	.004648	-.141904	-.055944	.037184	-33.283	-3398.884	1302.811
206	DELTA H PRIME	0.00	.049585	.022735	-.022025	0.000000	0.000000	0.000000	0.000	0.000	0.000
207	DELTA SPOILER SYM	0.00	.000750	.000317	-.000369	0.000000	0.000000	0.000000	0.000	0.000	0.000
208	DELTA SPOILER A/S	0.00	.000277	.000145	-.000168	0.000000	0.000000	0.000000	0.000	0.000	0.000
209	ROLL VELOCITY P	0.00	-.002479	-.002088	.002313	0.000000	0.000000	0.000000	0.000	0.000	0.000
210	PITCH VELOCITY Q	0.00	.592160	.254971	-.297065	0.000000	0.000000	0.000000	0.000	0.000	0.000
WLN= 3	TOTAL LOADS ON SURFACE					-.276086	-.105426	.088300	-65.225	-6495.168	3093.755
WLN= 4	TOTAL LOADS ON SURFACE WITHOUT ALPHA=0 TERM					-.141904	-.055944	.037184	-33.283	-3398.884	1302.811

RIGHT HAND

NSEQ	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS
201	ALPHA = 0	1.00	-.136182	-.049482	.051116	-.136182	-.049482	.051116	-31.941	-3006.284	1790.944
202	ALPHA	0.00	.042237	.018920	-.019427	0.000000	0.000000	0.000000	0.000	0.000	0.000
203	DELTA H	0.00	.060513	.027107	-.027833	0.000000	0.000000	0.000000	0.000	0.000	0.000
204	ALPHA DOT	0.00	.233930	.104789	-.107545	0.000000	0.000000	0.000000	0.000	0.000	0.000
205	BETA	8.00	.017738	.006993	-.004648	.141904	.055944	-.037184	33.283	3398.884	-1302.811
206	DELTA H PRIME	0.00	-.049585	-.022735	.022025	0.000000	0.000000	0.000000	0.000	0.000	0.000
207	DELTA SPOILER SYM	0.00	-.000750	-.000317	.000369	0.000000	0.000000	0.000000	0.000	0.000	0.000
208	DELTA SPOILER A/S	0.00	-.000277	-.000145	.000168	0.000000	0.000000	0.000000	0.000	0.000	0.000
209	ROLL VELOCITY P	0.00	.002479	.002088	-.002313	0.000000	0.000000	0.000000	0.000	0.000	0.000
210	PITCH VELOCITY Q	0.00	.592160	.254971	-.297065	0.000000	0.000000	0.000000	0.000	0.000	0.000
WLN= 3	TOTAL LOADS ON SURFACE					.005722	.006462	-.013932	1.342	392.600	488.134
WLN= 4	TOTAL LOADS ON SURFACE WITHOU: ALPHA=0 TERM					.141904	.055944	-.037184	33.283	3398.884	-1302.811

## WIND TUNNEL OPTION

CASE 1 BI ARS WOP-2D RIGID WIND TUNNEL DATA M=1.20 WS=67.5 9-29-80 ALPHA= 0.0000 BETA= 8.0000 QBAR= 982.32  
 P= 0.0 Q= 3.0 R= 0.0 DSL= 0.0 DSR= 0.0 DRU= 0.00 DRL= 0.00 DE= 0.0000 DA= 0.0000 TAS=1245.10

WTN= 3 VERT TAIL - SG SREF= 247.400 BREF= 206.76 CREF= 188.95

NSEQ	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS
301	BETA ALPHA=J 136.56	8.00	-.034464	-.010927	.003146	-.275872	-.087416	.025168	-67.044	-4392.483	1155.708
302	BETA ALPHA 136.56	0.00	-.001115	-.000354	.000102	0.000000	0.000000	0.000000	0.000	0.000	0.000
303	DELTA H PRIME 136.56	0.00	-.003032	-.000900	.000464	0.000000	0.000000	0.000000	0.000	0.000	0.000
304	DELTA SPOILER 136.56	0.00	-.000270	-.000089	.000023	0.000000	0.000000	0.000000	0.000	0.000	0.000
305	DELTA RUD UP 136.56	0.00	.009663	.002854	-.003830	0.000000	0.000000	0.000000	0.000	0.000	0.000
306	DELTA RUD LOW 136.56	0.00	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.000	0.000	0.000
307	ROLL VELOC P 136.56	0.00	-.003995	-.001461	.000756	0.000000	0.000000	0.000000	0.000	0.000	0.000
308	YAW VELOC R 136.56	0.00	.002297	.010244	-.005596	0.000000	0.000000	0.000000	0.000	0.000	0.000

WLN= 5 TOTAL LOADS ON SURFACE -0.275872 -0.087416 .025168 -67.044 -4392.483 1155.708

WTN= 4 VERT TAIL ROOT SREF= 247.400 BREF= 206.76 CREF= 188.95

NSEQ	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS
401	BETA ALPHA=0 WL 75	8.00	-.053487	-.023324	.010230	-.427896	-.186592	.061840	-103.990	-9375.684	3758.073
402	BETA ALPHA WL 75	0.00	-.001730	-.000755	.000331	0.000000	0.000000	0.000000	0.000	0.000	0.000
403	DELTA H PRIME WL 75	0.00	-.002353	-.001621	.001072	0.000000	0.000000	0.000000	0.000	0.000	0.000
404	DELTA SPOILER WL 75	0.00	-.000346	-.000177	.000079	0.000000	0.000000	0.000000	0.000	0.000	0.000
405	DELTA RUD UP WL 75	0.00	.009675	.005734	-.006210	0.000000	0.000000	0.000000	0.000	0.000	0.000
406	DELTA RUD LOW WL 75	0.00	.003876	.000352	-.001119	0.000000	0.000000	0.000000	0.000	0.000	0.000
407	ROLL VELOC P WL 75	0.00	-.003703	-.002645	.002065	0.000000	0.000000	0.000000	0.000	0.000	0.000
408	YAW VELOC R WL 75	0.00	.047590	.022154	-.013930	0.000000	0.000000	0.000000	0.000	0.000	0.000

WLN= 6 TOTAL LOADS ON SURFACE -0.427896 -0.186592 .061840 -103.990 -9375.684 3758.073

WIND TUNNEL OPTION

CASE 1 B1 ARS WOP-20 RIGID WIND TUNNEL DATA M=1.20 WS=67.5 9-29-80 ALPHA= 0.0000 BETA= 8.0000 CSAR= 982.32  
 P= 0.0 Q= 0.0 R= 0.0 DSL= 0.0 DSR= 0.0 DRU= 0.0 DRI= 0.0 DE= 0.0000 DA= 0.0000 TAS=1245.10

WTN= 5 FWD FUS SG SREF= 1946.000 BREF= 820.06 CREF= 184.05

VERTICAL

NSEQ	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS
501	ALPHA=0 (VERTICAL)	1.00	.003170	-.000822	0.000000	.003170	-.000822	0.000000	6.060	-1288.617	0.000
502	ALPHA (VERTICAL)	0.00	.001880	.000605	0.000000	0.000000	0.000000	0.000000	0.000	0.000	0.000
WLN= 7	TOTAL LOADS ON SURFACE					.003170	-.000822	0.000000	6.060	-1288.617	0.000

LATERAL

NSEQ	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS
503	ROLL VEL.P (LATERAL)	0.00	.000140	.000040	.000020	0.000000	0.000000	0.000000	0.000	0.000	0.000
504	BETA (LATERAL)	8.00	-.005710	-.001660	-.000990	-.045680	-.013280	-.007920	-87.322	-20818.533	-2786.486
WLN= 8	TOTAL LOADS ON SURFACE					-.045680	-.013280	-.007920	-87.322	-20818.533	-2786.486

## WIND TUNNEL OPTION

CASE 1 B1 ARS WDP-2D RIGID WIND TUNNEL DATA M=1.20 WS=67.5 9-29-80 ALPHA= 0.0000 BETA= 8.0000 QBAR= 952.32  
 P= 0.0 Q= 3.0 R= 0.0 DSL= 0.0 DSR= 0.0 DRU= 0.00 DRL= 0.90 DE= 0.0000 DA= 0.0000 TAS=1245.10

WLN= 6 AFT FUS SG SREF= 1946.000 BREF= 820.08 CREF= 164.05 XHT=244.50 YHT= 10.75 XVT=198.06 ZVT= 41.00

## VERTICAL

NSEO	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS	
.601	ALPHA=0 (VERTICAL)	1.00	.005300	.002173	0.000000	.005300	.002173	0.000000	10.131	3406.526	0.000	
.602	ALPHA (VERTICAL)	0.00	-.000460	-.000118	0.000000	0.000000	0.000000	0.000000	0.000	0.000	0.000	
WLN= 9	TOTAL LOADS ON SURFACE					.005300	.002173	0.000000	10.131	3406.526	0.000	
	TAIL INDUCED LOADS		V FACTOR	B FACTOR	T FACTOR							
	LHT V	-65.225	KIPS	1.00	244.50	-	-.034121	-.010173	-	-65.225	-15947.431	-
	RHT V	1.342	KIPS	1.00	244.50	-	.000702	.000209	-	1.342	328.140	-
	LHT T	3093.755	IN-KIPS	-	-1.00	-	-	-.001973	-	-	-3093.755	-
	RHT T	488.134	IN-KIPS	-	-1.00	-	-	-.000311	-	-	-488.134	-
WLN= 10	TOTAL TAIL LOADS ADDING TO AFT FUSELAGE					-.033418	-.012248	-	-63.883	-19201.179	-	
WLN= 11	TOTAL LOADS ON AFT FUSELAGE - VERTICAL					-.028118	-.010075	-	-53.751	-15794.653	-	

## LATERAL

NSEO	AERODYNAMIC EFFECT	VALUE	CV PER	CB PER	CT PER	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS	
.603	BETA ALPHA=0 C/D (LAT)	8.00	-.002110	-.000300	-.000370	-.016880	-.002400	-.002960	-32.268	-3762.385	-1041.414	
.604	BETA ALPHA C/D (LAT)	0.00	-.000070	-.000010	-.000010	0.000000	0.000000	0.000000	0.000	0.000	0.000	
.605	DELTA H PRIME (LAT)	0.00	.000220	.000060	.000040	0.000000	0.000000	0.000000	0.000	0.000	0.000	
.606	DELTA RUDDER LOWER(L)	0.00	.000090	.000010	.000020	0.000000	0.000000	0.000000	0.000	0.000	0.000	
.607	ROLL VELOCITY P (LAT)	0.00	.000440	.000110	.000080	0.000000	0.000000	0.000000	0.000	0.000	0.000	
.608	BETA (LATERAL)	8.00	-.001660	-.000340	-.000290	-.013440	-.002720	-.002320	-25.692	-4264.037	-816.243	
WLN= 12	TOTAL LOADS ON SURFACE					-.030320	-.005120	-.005280	-57.960	-8026.422	-1857.657	
	TAIL INDUCED LOADS		V FACTOR	B FACTOR	T FACTOR							
	VTR V	-103.990	KIPS	1.00	198.06	41.00	-.054400	-.013138	-.012118	-103.990	-20596.228	-4263.563
	VTR B	-9375.884	IN-KIPS	-	-	1.00	-	-.026649	-	-	-9375.884	
	VTR T	3758.073	IN-KIPS	-	-1.00	-	-	-.002397	-	-	-3758.073	
	LHT V	-65.225	KIPS	-	-	10.75	-	-.001993	-	-	-701.165	
	RHT V	1.342	KIPS	-	-	-10.75	-	-.003641	-	-	-14.427	
	LHT B	-6405.168	IN-KIPS	-	-	1.00	-	-.018205	-	-	-6405.165	
	RHT B	392.600	IN-KIPS	-	-	-1.00	-	-.001116	-	-	-392.600	
WLN= 13	TOTAL TAIL LOADS ADDING TO AFT FUSELAGE					-.054400	-.015535	-.060122	-103.990	-24354.301	-21152.828	
WLN= 14	TOTAL LOADS ON AFT FUSELAGE - LATERAL					-.064720	-.020655	-.065402	-161.949	-32380.723	-23010.485	

SUMMARY PRINT OPTION

CASE 1  
 MR=ASYM B1 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8

ALPHA= 0.00 BETA= 8.00 QFAP= 982.3  
 TAS =1245.1

SAN= 1  
 WLN= 1 WING - SG AXIS

ITC= 3 SC= OFF

SREF= 1946.000

BREF= 820.08

CREF= 184.05

LEFT SIDE PRESSURE INTEGRATED LOADS

CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	44.600	11075.619	-623.834	.023363	.007065	-.001773

WIND TUNNEL DERIVED LOADS

CASE	WIND TUNNEL DERIVED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	48.992	13242.029	-1172.646	.025629	.008447	-.003333

RIGHT SIDE LOADS FOR ASYMMETRIC CASES

1	54.508	12003.200	-994.208	.028515	.007657	-.002826
---	--------	-----------	----------	---------	---------	----------

1	72.207	17430.818	-2011.406	.037773	.011119	-.005717
---	--------	-----------	-----------	---------	---------	----------



## SUMMARY PRINT OPTION

CASE 1 B1 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8 ALPHA= 0.00 BETA= 8.00 CBAP= 962.3  
 HR=ASYM TAS =1245.1

SAN= 2 HORIZ TAIL - SG ITC= 3 SC= OFF SREF= 238.770 BREF= 259.03 CREF= 149.3E  
 WLN= 3

LEFT SIDE CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS			WIND TUNNEL DERIVED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	-16.554	-1973.236	-802.605	-.070579	-.032479	-.022908	-65.225	-6405.168	3093.755	-.278986	-.105426	.088360
RIGHT SIDE LOADS FOR ASYMMETRIC CASES												
1	-6.222	-929.980	2267.415	-.026527	-.015307	.064715	1.342	392.600	488.134	.005722	.006462	.012932

SUMMARY PRINT OPTION

CASE 1 81 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8  
 MR=ASYM

ALPHA= 0.00 BETA= 8.00 CBAR= 982.3  
 TAS =1245.1

SAN= 6 FWD FUS SG LAT  
 WLN= 8

ITC= 2 SC= ON

SREF= 1946.000

BREF= 620.08

CREF= 184.05

CENTRELINE CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS			WIND TUNNEL DERIVED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	-29.343	-7736.332	0.000	-0.015350	-0.004935	0.000000	-87.322	-20818.533	-2786.486	-0.045560	-0.013280	-0.007920

## SUMMARY PRINT OPTION

CASE 1 B1 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8  
 MK=ASYM

ALPHA= 0.00 BETA= 8.00 QBAR= 982.3  
 TAS =1245.1

SAN= 3 VERT TAIL - SG  
 WLN= 5

ITC= 3 SC= ON

SREF= 247.400

BREF= 206.76

CREF= 166.95

CENTERLINE CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS			WIND TUNNEL DERIVED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	-76.454	-4990.317	1308.142	-.314595	-.099324	.026468	-67.044	-4392.483	1155.708	-.275872	-.087416	.025168

SUMMARY PRINT OPTION

CASE 1  
NR=ASYM

B1 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8

ALPHA= 0.00 BETA= 8.00 CBAR= 962.3  
TAS =1245.1

SAN= 31  
HLN= 6

VT ROOT TOTAL

ITC= 4 SC= ON

SREF= 247.400

BREF= 206.76

CREF= 188.95

CENTER LINE CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS			WIND TUNNEL DERIVED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	-107.452	-10631.839	4201.147	-.442144	-.211589	.091489	-163.990	-9375.884	3758.073	-.627896	-.186592	.061840

## SUMMARY PRINT OPTION

CASE 1 B1 ARS SDSS-3C.2.1D 67.5WS,1.2M, 20K ALT,RIGID,ALPHA=0,DE=0,BETA=8 ALPHA= 0.00 BETA= 6.00 CSAR= 952.3  
 HR=ASYM TAS =1245.1

SAN= 33 AFT FUS SG L-TOT ITC= 4 SC= ON SPEF= 1946.000 BREF= 820.08 CREF= 164.05  
 WLN= 14

CENTERLINE CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS			WIND TUNNEL DERIVED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	-119.709	-26023.175	-16191.728	-.062623	-.016600	-.046022	-161.949	-32380.723	-23010.485	-.064720	-.020655	-.065402

SIMQALO. 81/07/02.0FRC N3S (NDS10).

10.50.24.BIFS2,T100.  
10.50.24.UCCR, AA01, 0.566KCDS.  
10.50.24.USER(SIMS,)  
10.50.24.CHARGE(14,62,FTN)  
10.50.25.ATTACH(LGD=FSLIP3)  
10.50.25.DEFINE(TAPE20=3163P/CT=SPRIV)  
10.50.25.DEFINE(TAPE40=8140P2/CT=SPRIV)  
10.50.26.LDSET(PRESET=ZERO)  
10.50.26.MAP(OFF)  
10.50.26.LGD.  
10.50.29. CM LWA+1 =1001548, LOADER USED 1233008  
10.50.42. STOP  
10.50.42. 114100 MAXIMUM EXECUTION FL.  
10.50.42. 5.493 CP SECONDS EXECUTION TIME.  
10.50.43.UEAD, 0.002KUNS.  
10.50.43.UEPF, 0.029KUNS.  
10.50.43.UEMS, 3.294KUNS.  
10.50.43.UECP, 7.276SECS.  
10.50.43.AESR, 11.913UNTS.  
10.51.37.UCLP, AA04, 1.918KLNS.

### 8.3 Integration Option With Minimum I/O

In this final example, the geometry file and pressure data files already exist (GOP = 1 and POP = 2) so the card input is at a minimum. Output is minimized by executing IOP = 2 for symmetric flight cases where the aircraft is trimmed at 4 different load factors. Output for the vertical tail and lateral fuselage stations is suppressed with CARD 2A. The wind tunnel option is not executed. The only printed output is generated by the summary print option for the wing, horizontal tail, and vertical fuselage stations.

Card input listing for example 8.3

CARD	1	2	3	4	5	6	7	8
N)	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
1	IT	GRP 1	FJP 2	ROP 0	SUP 0	IOP 2	WOP 0	
2	T	T		T			INTEGRATE	SYMMETRIC
3	01	01	WTNG -	SG	AXIS			
4	02	03	H T	SG	AXIS			
5	05	07	F F	SG	AXIS (VERT)			
6	07	09	A F	SG	AXIS (VERT)			
7	32	11	A F	TOTAL	(VERT)			
8								
9	1	04	1255.0		SUMMARY PRINT	TERMINATOR		
10	1	14	-2.16		VTAS			
11	1	14	-3.90		DE			
12	3	14	-4.75		DE			
13	4	14	-6.68		DE			
14	7/8/9		END OF RECORD					1
15	4.0		CASES					



Program output listing for example 8.3

108

INTEGRATION OPTION AND ADDITIONAL LOADS OPTION

CASE 1 COMPLETE

CASE 2 COMPLETE

CASE 3 COMPLETE

CASE 4 COMPLETE

SUMMARY PRINT OPTION

CASE 1 R1 AFS 00SS-3E.2.2A 67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=0.65  
 MR= SYM  
 CASE 2 B1 ARS 00SS-3E.2.2B 67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=1.0  
 MR= SYM  
 CASE 3 B1 ARS 00SS-3E.2.2C 67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=1.685  
 MR= SYM  
 CASE 4 B1 ARS 00SS-3E.2.2D 67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=2.436  
 MR= SYM

ALPHA= .84 BETA= 0.00 CFAR=1067.3  
 DE= -2.16 TAS =1255.0  
 ALPHA= 1.86 BETA= 0.00 CFAR=1067.3  
 DE= -2.00 TAS =1255.0  
 ALPHA= 3.93 BETA= 0.00 CFAR=1067.3  
 DE= -4.75 TAS =1255.0  
 ALPHA= 6.20 BETA= 0.00 CFAR=1067.3  
 DE= -6.68 TAS =1255.0

SAN= 1 WING - SG AXIS

ITC= 3 SC= OFF

SREF= 1946.000

BREF= 820.68

CREF= 164.05

LEFT SIDE CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	41.276	8605.004	-883.997	.020018	.005169	-.001789
2	57.732	12142.315	-456.559	.027796	.007129	-.001194
3	93.551	18924.751	7.635	.043598	.011111	.000020
4	126.512	26357.885	516.362	.060912	.015475	.001351

RIGHT SIDE LOADS = LEFT SIDE (SYMMETRIC MOTION FOR ALL CASES)

## SUMMARY PRINT OPTION

CASE 1 MR= SYM	B1 ARS	SDSS-3L.2.2A	67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=0.65	ALPHA= .84 DE= -2.16	BETA= 0.00	CBAR=1067.3 TAS =1255.0
CASE 2 MR= SYM	B1 ARS	SDSS-3E.2.2B	67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=1.0	ALPHA= 1.86 DE= -3.00	BETA= 0.00	CBAR=1067.3 TAS =1255.0
CASE 3 MR= SYM	B1 ARS	SDSS-3C.2.2C	67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=1.685	ALPHA= 3.93 DE= -4.75	BETA= 0.00	CBAR=1067.3 TAS =1255.0
CASE 4 MR= SYM	B1 ARS	SDSS-3D.2.2D	67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=2.436	ALPHA= 6.20 DE= -6.68	BETA= 0.00	CBAR=1067.3 TAS =1255.0

SAN= 2 HORIZ TAIL - SG                    ITC= 3    SC= OFF                    SREF= 238.770    BREF= 259.03    CREF= 149.38

CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	-29.737	-3079.208	1303.309	-.146689	-.046647	.035813
2	-32.264	-3274.798	1385.721	-.126605	-.049610	.036428
3	-37.805	-3715.817	1455.706	-.148349	-.056291	.038240
4	-44.091	-4222.117	1542.576	-.173015	-.063961	.040522

RIGHT SIDE LOADS = LEFT SIDE (SYMMETRIC MOTION FOR ALL CASES)

SUMMARY PRINT OPTION

CASE 1     24 ARS     SDSS-3E.2.2A     67.5WS,1.2JM,18K ALT,ELASTIC,316K GW,NZ=0.65  
 MR= SYM  
 CASE 2     21 ARS     SDSS-3E.2.2B     67.5WS,1.2JM,18K ALT,ELASTIC,316K GW,NZ=1.0  
 MR= SYM  
 CASE 3     21 ARS     SDSS-3E.2.2C     67.5WS,1.2JM,18K ALT,ELASTIC,316K GW,NZ=1.685  
 MR= SYM  
 CASE 4     21 ARS     SDSS-3E.2.2D     67.5WS,1.2JM,18K ALT,ELASTIC,316K GW,NZ=2.436  
 MR= SYM

ALPHA= .064     BETA= 0.00     CBAR=1067.3  
 DL= -2.16     TAS =1255.0  
 ALPHA= 1.86     BETA= 0.00     CBAR=1067.3  
 DE= -2.60     TAS =1255.0  
 ALPHA= 3.93     BETA= 0.00     CBAR=1067.3  
 DE= -4.75     TAS =1255.0  
 ALPHA= 6.20     BETA= 0.00     CBAR=1067.3  
 DE= -6.68     TAS =1255.0

SAR= 5     FAD FUS SG VERT

ITC= 1     SC= ON

SREF= 1946.000

BREF= 820.00

CREF= 184.05

CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS		
	V KIPS	H IN-KIPS	T IN-KIPS	CV	CB	CT
1	16.123	-1593.754	0.000	.008726	-.000936	0.000000
2	22.223	-500.019	0.000	.010700	-.000329	0.000000
3	30.537	1523.792	0.000	.014703	.000895	0.000000
4	39.602	3794.594	0.000	.019067	.002228	0.000000

## SUMMARY PRINT OPTION

CASE 1 MR= SYM	B1 AFS	SDSS-3E.2.2A	67.5WS, 1.20M, 18K	ALT, ELASTIC, 316K	GW, NZ=0.65	ALPHA= .0F4 DE= -2.16	BETA= 0.00	CRPF=1067.3 TAS =1255.0
CASE 2 MR= SYM	B1 AFS	SDSS-3E.2.2B	67.5WS, 1.20M, 18K	ALT, ELASTIC, 316K	GW, NZ=1.0	ALPHA= 1.86 DE= -3.60	BETA= 0.00	CRPF=1067.3 TAS =1255.0
CASE 3 MR= SYM	B1 AFS	SDSS-3E.2.2C	67.5WS, 1.20M, 18K	ALT, ELASTIC, 316K	GW, NZ=1.665	ALPHA= 3.92 DE= -4.75	BETA= 0.00	CRPF=1067.3 TAS =1255.0
CASE 4 MR= SYM	B1 AFS	SDSS-3E.2.2D	67.5WS, 1.20M, 18K	ALT, ELASTIC, 316K	GW, NZ=2.436	ALPHA= 6.20 DE= -6.68	BETA= 0.00	CRPF=1067.3 TAS =1255.0

SAN= 7 AFI FUS SG VERT ITC= 1 SC= ON SREF= 1946.000 BRFF= 626.08 CRFF= 164.05

CENTERLINE CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS		
	V KIPS	B IN-KIPS	T IN-KIPS	CV	CB	CT
1	1.066	-1707.227	0.000	.000513	-.001002	0.000000
2	-0.549	-2445.551	0.000	-.000264	-.001436	0.000000
3	-3.803	-3947.876	0.000	-.001631	-.002318	0.000000
4	-7.342	-5592.794	0.000	-.003535	-.003284	0.000000

SUMMARY PRINT OPTION

CASE 1 81 ARS SDSS-3E.2.2A 67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=0.65  
 MR= SYM  
 CASE 2 81 ARS SDSS-3E.2.2B 67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=1.0  
 MR= SYM  
 CASE 3 81 ARS SDSS-3E.2.2C 67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=1.685  
 MR= SYM  
 CASE 4 81 ARS SDSS-3E.2.2D 67.5WS,1.20M,18K ALT,ELASTIC,316K GW,NZ=2.435  
 MR= SYM

ALPHA= .84 BETA= 0.00 CRFP=1067.3  
 DE= -2.16 TAS =1255.0  
 ALPHA= 1.86 BETA= 0.00 CRFP=1067.3  
 DL= -3.00 TAS =1255.0  
 ALPHA= 3.93 BETA= 0.00 CRFP=1067.3  
 DE= -4.75 TAS =1255.0  
 ALPHA= 6.20 BETA= 0.00 CRFP=1067.3  
 DE= -6.66 TAS =1255.0

SAN= 32 AFT FUS SG V-TOT

ITC= 4 SC= ON

SREF= 1946.000

BREF= 820.06

CRFP= 184.05

CENTERLINE CASE	PRESSURE INTEGRATED LOADS			COEFFICIENTS		
	V KIPS	<sup>3</sup> IN-KIPS	<sup>1</sup> IN-KIPS	CV	CB	CT
1	-58.406	-18975.130	0.000	-.028122	-.011140	0.000000
2	-61.077	-20995.837	0.000	-.031333	-.012327	0.000000
3	-79.413	-25345.970	0.000	-.038235	-.014881	0.000000
4	-55.824	-35238.610	0.000	-.045492	-.017753	0.000000

SIMQAZE. 81/07/07.0FRC NDS (NDS10).

19.50.50.EIFFS, TICD.  
19.50.50.LCCR, AAO1, 9.026KCDs.  
19.50.51.USE\*(SIMS,)  
19.50.51.CHARGE(14,62,PTH)  
19.50.51.ATTACH(L50=FSLIP3)  
19.50.51.ATTACH(TAPE20=816GP)  
19.50.52.ATTACH(TAPE11=33E22A)  
19.50.52.ATTACH(TAPE12=33E22B)  
19.50.52.ATTACH(TAPE13=33E22C)  
19.50.53.ATTACH(TAPE14=33E22D)  
19.50.54.LDSET(PRESET=ZERD)  
19.50.54.PAP(OFF)  
19.50.54.LGD.  
19.51.04. CM LWA+1 =105154E, LOADER USED 123300B  
19.51.20. STOP  
19.51.20. 11400 MAXIMUM EXECUTION FL.  
19.51.20. 3.602 CP SECONDS EXECUTION TIME.  
19.51.21.UEAD, 0.112KUNS.  
19.51.21.UEPF, 0.053KUNS.  
19.51.21.UEMS, 2.931KUNS.  
19.51.21.UECP, 5.411SECS.  
19.51.21.AESA, 9.523UNTS.  
19.51.45.ULLP, AAO4, 0.745KUNS.

Dryden Flight Research Center  
National Aeronautics and Space Administration  
July 17, 1981



## REFERENCES

1. Tinoco, E. N.; and Mercer, J. E.: FLEXSTAB - A Summary of the Functions and Capabilities of the NASA Flexible Airplane Analysis Computer System. NASA CR-2564, 1974.
2. Hink, G. R.; Snow, R. N.; Bhatia, K. G.; Maier, R. E.; Bills, G. R.; Henderson, D. M.; Bailey, D. C.; Dornfeld, G. M.; and D'Auria, P. V.: A Method for Predicting the Stability Characteristics of an Elastic Airplane - Volume II: FLEXSTAB 1.02.00 User's Manual. NASA CR-114713, 1974.
3. Bills, G. R.; Hink, G. R.; and Dornfeld, G. M.: A Method for Predicting the Stability Characteristics of an Elastic Airplane, Volume II - FLEXSTAB 3.01.00 User's Manual. AFFDL-TR-77-55, Vol. II, Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio, June 1977.
4. A Method for Predicting the Stability Characteristics of an Elastic Airplane, Volume II - FLEXSTAB 3.02.00 User's Manual. D6-44361-2, Boeing Commercial Airplane Co. and Boeing Computer Services Co., Oct. 1978.
5. Carter, Alan L.; and Sims, Robert L.: Comparison of Theoretical Predictions of Orbiter Airloads with Wind Tunnel and Flight Test Results for a Mach Number of 0.52. NASA TM-81358, 1981.
6. Bartlett, M. D.; Olsen, A. D., Jr.; and Wildermuth, P. F.: Airloads Research Study - Airload Coefficients Derived from Wind Tunnel Data. NA-76-563, Rockwell International, Los Angeles Div., Sept. 1976. (Revised Aug. 1979.)
7. FORTRAN Extended Version 4 Reference Manual. Pubn. No. 60305600, Control Data Corp., c.1974
8. A Method for Predicting the Stability Characteristics of an Elastic Airplane, Volume III - FLEXSTAB 3.02.00 Program Description. D6-44361-3, Boeing Commercial Airplane Co. and Boeing Computer Services Co., Oct. 1978.
9. SCOPE Version 3.4 Reference Manual. Pubn. No. 60307200, Control Data Corp., c.1974.
10. NOS Version 1 Reference Manual. Pubn. No. 60435400, Control Data Corp., c.1980.

1. Report No. NASA TM-81364	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle USER'S MANUAL FOR FSLIP-3, FLEXSTAB LOADS INTEGRATION PROGRAM		5. Report Date August 1981	
		6. Performing Organization Code RTOP 505-33-54	
7. Author(s) Robert L. Sims		8. Performing Organization Report No. H-1158	
9. Performing Organization Name and Address NASA Dryden Flight Research Center P.O. Box 273 Edwards, California 93523		10. Work Unit No.	
		11. Contract or Grant No.	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546		13. Type of Report and Period Covered Technical Memorandum	
		14. Sponsoring Agency Code	
15. Supplementary Notes Microfiche supplement is attached.			
16. Abstract  This report constitutes the FSLIP program documentation and user's manual. As a follow-on program to the FLEXSTAB computer analysis system, the primary function of this Fortran IV program is to integrate panel pressure coefficients computed by FLEXSTAB to obtain total shear, bending, and torque airloads on various surfaces, summed relative to user specified axes. The program essentially replaces the ALOADS module in FLEXSTAB with expanded capabilities and flexibility. As such, FSLIP is generalized to work on any FLEXSTAB model or other pressure data if in a compatible format.			
17. Key Words (Suggested by Author(s)) FLEXSTAB Fortran program Airload prediction Pressure integration		18. Distribution Statement  Unclassified--Unlimited  Subject category 61	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 116	22. Price* A06

*\*For sale by the National Technical Information Service, Springfield, Virginia 22161*

SLIT THIS END

Microfiche supplement for NASA TM-81364

USER'S MANUAL FOR FSLIP-3,  
FLEXSTAB LOADS INTEGRATION PROGRAM

by Robert L. Sims

**Fiche Mailer**

WILSON  
JONES  
P-470

(Caution: This paper is not acid free. If used  
for storing—store diazo or vesicular fiche only.)

MADE IN U.S.A.

## FLEXSTAB LOADS INTEGRATION PROGRAM

6 PRIMARY OPTIONS ARE... (1) REPUNCH PRESSURE DATA WITH NEW X/C  
 (2) SECTION DATA  
 (3) INTEGRATED SURFACE/AXIS LOADS  
 (4) WIND TUNNEL DERIVED AIRLOADS

TAPE11 IS DISK COPY OF PUNCHED CP CARDS, CASE 1  
 TAPE12 IS DISK COPY OF PUNCHED CP CARDS, CASE 2  
 TAPE13 IS DISK COPY OF PUNCHED CP CARDS, CASE 3  
 TAPE14 IS DISK COPY OF PUNCHED CP CARDS, CASE 4  
 TAPE15 IS DISK COPY OF PUNCHED CP CARDS, CASE 5  
 TAPE16 IS DISK COPY OF PUNCHED CP CARDS, CASE 6  
 TAPE17 IS DISK COPY OF PUNCHED CP CARDS, CASE 7  
 TAPE18 IS DISK COPY OF PUNCHED CP CARDS, CASE 8  
 TAPE19 IS DISK COPY OF PUNCHED CP CARDS, CASE 9  
 TAPE20 IS DISK INPUT OF SURFACE/AXIS DATA  
 TAPE30 IS GDTAPE DISK INPUT  
 TAPE40 IS DISK INPUT OF WIND TUNNEL COEFFICIENT DATA  
 TAPE50 IS TEMPORARY SCRATCH DISK

PROGRAM FLIP(INPUT=65,OUTPUT=129,PUNCH=65,TAPE1=513,TAPE12=513,  
 1 TAPE13=513,TAPE14=513,TAPE15=513,TAPE16=513,TAPE17=513,  
 2 TAPE18=513,TAPE19=513,TAPE20=513,TAPE30=513,TAPE40=513,  
 3 TAPE50=513,TAPE1=INPUT)

INTEGER SPI(51),SPH(51)  
 LOGICAL WGR(50),WGS(50),WGI(50),WGW(14),RS  
 INTEGER GOP,POP,ROP,SOP,IOP,HOP,AC(2,2),NC,NSB,LRVL(4),SCN(2)  
 INTEGER LRC(3),VBT(3)  
 REAL RD(20,9),FAL(9,50,6),FCL(9,50,6),HAL(9,14,6),HCL(9,14,6)  
 INTEGER NSAD,N,SANAME(4,50),SABODY(2,50),BTC(50),SC(50),NR  
 INTEGER RN,NP,PN(2),NALD,NT,CN,CL,CT  
 REAL SREF(50),BREF(50),CREF(50),CAVG,ETA,YL,CROW  
 REAL SP,BARM,TARM,XCN,C(3)  
 LOGICAL SB  
 INTEGER DN,DUMHY(4),T11(18,9),TIT2(18),INTB,IMR(9),CPBODY(2)  
 INTEGER INAF,INPT,MRN(2)  
 REAL NTB,MR,M1(9),A1(9),B1(9),Q1(9),NAF,THETA,YR,NPT  
 REAL XC,CPS,CPR,CPL,XR  
 COMMON/GENCOM/GOP,POP,ROP,SOP,IOP,HOP,WGR,WGS,WGI,WGW,AC,NC,NSB,  
 RD,LRVL,FAL,FCL,HAL,HCL,SCN,IC,LRC,VBT,RS  
 1 COMMON/GOPCOM/NSAD,N,SANAME,SABODY,BTC,SC,NR,SREF,BREF,CREF,CAVG,  
 RN,ETA,YL,NP,CROW,PN,SP,BARM,TARM,XCN,NALD,NT,CN,CL,CT,C  
 1 COMMON/POPCOM/DN,DUMHY,TIT1,TIT2,NPT,MR,M1,A1,B1,INTB,IMR,  
 1 CPBODY,NAF,THETA,INAF,YR,NPT,INPT,XC,CPS,CPR,CPL,XR,MRN,SB  
 DATA FCL/2700\*0.0/,FAL/2700\*0.0/  
 DATA WCL/0756\*0.0/,HAL/0756\*0.0/  
 DATA SREF/50\*1.0/,BREF/50\*1.0/,CREF/50\*1.0/  
 DATA BTC/50\*9/,SC/50\*0/  
 DATA SANAME/200(" ")/,SABODY/100(" ")/  
 DATA LRVL/"LEFT HAND","RIGHT HAND","VERTICAL","LATERAL"/  
 DATA SCN/"OFF","ON"/  
 DATA LRC/"LH","RH","CL"/,VBT/"V","B","T"/  
 DATA MRN/"SYM","ASYM"/  
 DATA RD/180\*0.0/  
 DATA WGR/50\*.TRUE./,WGS/50\*.TRUE./,WGI/50\*.TRUE./,WGW/14\*.TRUE./  
 NC=0

```

400 C CUT PANEL
    650 SP= ST(1)+ST(2)+ST(3)
        IF(SP.EQ.0.0) SP=1.0
        BARM= (YT(1)*ST(1)+YT(2)*ST(2)+YT(3)*ST(3))/SP
        TARM=- (XT(1)*ST(1)+XT(2)*ST(2)+XT(3)*ST(3))/SP
        GO TO 700
405 C INBOARD PANEL
    660 SP= 0.0
        BARM= 0.0
        TARM= 0.0
        GO TO 700
410 C OUTBOARD PANEL
    670 SP= AP(J)
        BARM= YA(5,J)
        TARM=-XA(5,J)
415 C PRINT= PANEL DATA PLUS ANY MESSAGE
    700 PRINT 3600, PN,SP,BARM,TARM
        IF(JJ.EQ.0) GO TO 710
        IF(JJ.GE.90) PRINT 7000
        IF(JJ.GE.91) PRINT 7001
        IF(JJ.EQ.91) PRINT 7011
        IF(JJ.EQ.92) PRINT 7012
        IF(JJ.EQ.93) PRINT 7013
        IF(JJ.EQ.99) PRINT 7019, NV
425 7000 FORMAT(+++,T61,*CUT PANEL*)
    7001 FORMAT(+++,T71,19H***** WARNING *****
    1 * ERROR DETECTED IN GEOMETRY -*)
    7011 FORMAT(+++,T121,*TRIANGLE 1*)
    7012 FORMAT(+++,T121,*TRIANGLE 2*)
    7013 FORMAT(+++,T121,*TRIANGLE 3*)
430 7019 FORMAT(+++,T119,I3,* VERTICES*)
    C WRITE,PUNCH PANEL DATA
    710 WRITE(20) PN,SP,BARM,TARM,XCN
        IF(GOP.NE.4) GO TO 720
        PUNCH 3601, PN,SP,BARM,TARM
435 720 TA= TA+SP
    C GO TO NEXT PANEL
    50 CONTINUE
    C PRINT TOTAL AREA OUTBOARD OF AXIS
    PRINT 3700, TA
440 C THIN BODY COMPLETED - GO TO NEXT SURFACE/AXIS DEFINITION
    20 CONTINUE
    C
    C READ,WRITE,PRINT,PUNCH ANY ADDITIONAL LOAD DEFINITIONS
    C
445 800 IF(NALD.LE.0) GO TO 999
        DO 80 I=1,NALD
        READ(1,8000) N, (SNAME(L,N),L=1,4),
    1 BTC(N), SC(N),NT,SREF(N),CREF(N)
450 8000 FORMAT(I2,2X,4A4,10X,2I3,14,3F10.3)
    C CHECK FOR INPUT ERROR
        IF(N.LT.1.OR.N.GT.50) GO TO 991
        BTC(N)= 4
        IF(SC(N).NE.0) SC(N)= 1
        JJ= SC(N) + 1
455 IF(NT.LE.0) GO TO 991
        IF(SREF(N).EQ.0.0) SREF(N)= 1.0

```

## SUBROUTINE IOPSR

```

C
C INTEGRATES PANEL PRESSURES TO OBTAIN SURFACE/AXIS LOADS
C AND COMPUTES ANY LOADS DERIVED FROM INTEGRATED LOADS
C
5
REAL CP(2),PL(6)
LOGICAL HGR(50),WGS(50),HGI(50),HGH(14),RS
INTEGER GOP,POP,ROP,SOP,IOP,HOP,AC(2,2),NC,NSB,LRVL(4),SCN(2)
INTEGER LRC(3),VBT(3)
10 REAL RD(20,9),FAL(9,50,6),FCL(9,50,6),HAL(9,14,6),HCL(9,14,6)
INTEGER NSAD,N,SANAME(4,50),SABODY(2,50),BTC(50),SC(50),NR
INTEGER RN,NP,PN(2),NALD,NT,CN,CL,CT
REAL SREF(50),BREF(50),CREF(50),CAVG,ETA,YL,CROW
15 REAL SP,BARM,TARM,XCN,C(3)
LOGICAL SB
INTEGER DN,DUMMY(4),TIT1(18,9),TIT2(18),INTB,IHR(9),CPBODY(2)
INTEGER INAF,INPT,MRN(2)
REAL NTB,MR,H1(9),A1(9),B1(9),Q1(9),NAF,THETA,YR,NPT
REAL XC,CPS,CPR,CPL,XR
20 COMMON/GENCOM/GOP,POP,ROP,SOP,IOP,HOP,WGR,WGS,HGI,HGH,AC,NC,NSB,
RD,LRVL,FAL,FCL,HAL,HCL,SCN,IC,LRC,VBT,RS
COMMON/GOPCOM/NSAD,N,SANAME,SABODY,BTC,SC,NR,SREF,BREF,CREF,CAVG,
RN,ETA,YL,NP,CROW,PN,SP,BARM,TARM,XCN,NALD,NT,CN,CL,CT,C
COMMON/POPCOM/DN,DUMMY,TIT1,TIT2,NTB,MR,H1,A1,B1,Q1,INTB,IHR,
25 CPBODY,NAF,THETA,INAF,YR,NPT,INPT,XC,CPS,CPR,CPL,XR,MRN,SB
DO 10 IC=1,NC
REHIND 20
DN= IC*10
READ(20) NSAD,NALD
DO 20 I=1,NSAD
30 CALL SYNC(3),RETURNS(20,500)
C NORMAL RETURN FOR CPBODY MATCHED WITH SABODY
C RETURNS 20 FOR SABODY SKIPPED
C RETURNS 500 FOR MATCH NOT FOUND
35 C SUPPRESS ALL PRINTED DETAIL OUTPUT IF IOP=2
IF(IOP.EQ.2) GO TO 200
PRINT 1000
1000 FORMAT(*1*/ * INTEGRATION OPTION*)
C PRINT CASE INFO HEADER
CALL CHEAD
C PRINT SURFACE/AXIS GEOMETRY INFO
JJ= SC(N)+1
IF(SC(N).NE.D) JJ= 2
45 PRINT 1020, N,(SANAME(L,N),L=1,4),CPBODY,BTC(N),SCN(JJ)
IF(BTC(N).EQ.3) PRINT 1021, THETA
PRINT 1022, SREF(N),BREF(N),CREF(N)
1020 FORMAT(// * SAN= *,I2,2X,4A4,4X,*CPBODY=Y=*,2A4,3X,*ITC=*,I1,3X,
*SC=*,A3)
1021 FORMAT(***,T66,*THETA=*,F7.2)
50 1022 FORMAT(***,T88,*SREF=*,F10.3,3X,*BREF=*,F8.2,3X,*CREF=*,F8.2)
IF(SC(N).EQ.D) PRINT 1030
IF(SC(N).NE.D) PRINT 1031
1030 FORMAT(*0* ,*PANEL AREA BARM TARM *,5X,
1 *L= L V=L B=L T=L *,10X,
2 *C= R V=R B=R T=R ***,5X,
* * IN IN *5X,
* * KIPS IN-KIPS N-KIPS*,10X

```

\*\*\*\* A03 \*\*\*\*

## SUBROUTINE CHEAD

C  
C  
C

## PRINTS CASE HEADER

```

5 LOGICAL HGR(50),HGS(50),HGI(50),HGH(14),RS
  INTEGER GOP,POP,ROP,SOP,IOP,HOP,AC(2,2),NC,NSB,LRLV(4),SCN(2)
  INTEGER LRC(3),VBT(3)
  REAL RD(20,9),FAL(9,50,6),FCL(9,50,6),HAL(9,14,6),HCL(9,14,6)
10 LOGICAL SB
  INTEGER DN,DUMMY(4),TIT1(18,9),TIT2(18),INTB,IHR(9),CPBODY(2)
  INTEGER INAF,INPT,MRN(2)
  REAL NTB,MR,M1(9),A1(9),B1(9),Q1(9),NAF,THETA,YR,NPT
  REAL XC,CPS,CPR,CPL,XR
15 COMMON/GENCOM/GOP,POP,ROP,SOP,IOP,HOP,HGR,HGS,HGI,HGH,AC,NC,NSB,
  1 RD,LRLV,FAL,FCL,HAL,HCL,SCN,IC,LRC,W,T,RS
  COMMON/POPCOM/DN,DUMMY,TIT1,TIT2,NTB,MR,M1,A1,B1,Q1,INTB,IHR,
  1 CPBODY,NAF,THETA,INAF,YR,NPT,INPT,XC,CPS,CPR,CPL,XR,HRN,SB
  JJ= IHR(IC)
  PRINT 1001, IL, (TIT1(L,IC),L=1,18),A1(IC),B1(IC),Q1(IC)
20 PRINT 1002, MRN(JJ)
  1001 FORMAT(*0*,*CASE *,I1,5X,18A4,T97,*ALPHA=*,F6.2,* BETA=*,F6.2,
  1 * QBAR=*,F6.1)
  1002 FORMAT(* MR=*,A4)
25 IF(RD( 7,IC).NE.0.0) PRINT 1003, RD( 7,IC)
  IF(RD( 8,IC).NE.0.0) PRINT 1004, RD( 8,IC)
  IF(RD( 9,IC).NE.0.0) PRINT 1005, RD( 9,IC)
  IF(RD(17,IC).NE.0.0) PRINT 1006, RD(17,IC)
  IF(RD(18,IC).NE.0.0) PRINT 1007, RD(18,IC)
  IF(RD(15,IC).NE.0.0) PRINT 1008, RD(15,IC)
30 IF(RD(16,IC).NE.0.0) PRINT 1009, RD(16,IC)
  IF(RD( 6,IC).NE.0.0) PRINT 1013, RD( 6,IC)
  IF(RD(14,IC).NE.0.0) PRINT 1010, RD(14,IC)
  IF(RD(13,IC).NE.0.0) PRINT 1011, RD(13,IC)
  IF(RD( 4,IC).NE.0.0) PRINT 1012, RD( 4,IC)
35 1003 FORMAT(*+*,T14 ,*P=*, F6.1)
  1004 FORMAT(*+*,T24 ,*Q=*, F5.1)
  1005 FORMAT(*+*,T33 ,*R=*, F5.1)
  1006 FORMAT(*+*,T42 ,*DSL=*, F5.1)
  1007 FORMAT(*+*,T53 ,*DSR=*, F5.1)
40 1008 FORMAT(*+*,T64 ,*DRU=*, F6.2)
  1009 FORMAT(*+*,T76 ,*DRL=*, F6.2)
  1013 FORMAT(*+*,T88 ,*CHA=*, F6.3)
  1010 FORMAT(*+*,T100,*DE=*, F6.2)
  1011 FORMAT(*+*,T114,*DA=*, F6.2)
45 1012 FORMAT(*+*,T126,*TAS =*,F6.1)
  RETURN
  END

```

\*\*\*\*\* A04 \*\*\*\*\*

NASA DFRG

```

C
C   READ OPTION CONTROL,SURFACE/AXIS SKIP CONTROL,
60  C
C   READ(1,1000)  GOP,POP,ROP,SOP,IOP,WOP
      1000  FORMAT( 6(9X,I1) )
      IF(IOP.NE.0)  READ(1,1001)  WGI
      IF(WOP.NE.0)  READ(1,1001)  WGW
65  1001  FORMAT( 50L1 )
C
C   READ CASE SUMMARY PRINT SPECS
C
C   DO 5 I=1,51
      READ(1,1003)  SPI(I),SPW(I)
70  1003  FORMAT(I2,3X,I2)
      IF(SPI(I).EQ.0)  GO TO 100
      5  CONTINUE
      100  NSP= I-1
75  C
C   IF SURFACE/AXIS INFO NOT ON DISK, CREATE FROM CARDS OR GDTAPE
C
C   IF(GOP.GE.2)  CALL GOPSR
      TERMINATE IF ERROR IN GEOMETRY OPTION OR IF NO OTHER OPTION REQ.
80  IF(GOP.EQ.9)  GO TO 999
      IF(POP.EQ.0.A.WOP.EQ.0)  GO TO 999
C
C   IF WIND TUNNEL COEFFICIENTS NOT ON DISK, COPY FROM CARD INPUT
85  C
C   IF(WOP.EQ.2)  CALL WOPSR
C
C   READ RUN DATA FOR ALL CASES
C
C   200  READ(1,2000)  I,J,RD(J,I)
90  2000  FORMAT(I1,3X,I2,3X,F10.0)
      IF(EOF(1).NE.0.0)  GO TO 300
      IF(I.GE.9)  GO TO 200
      DO 10 K=1,8
95  10  RD(J,K+1)= RD(J,I)
      GO TO 200
      300  READ(1,3000)  NC,NSB
      3000  FORMAT(I1,27X,I2)
C
C   READ PRESSURE DATA IF ON CARDS (INCLUDING SLENDER BODIES IF ANY)
100  C
C   IF(POP.EQ.1)  CALL POPSR
C
C   ALL DATA INPUT COMPLETE - PROCEED WITH ROP,SOP,IOP,WOP
105  C
C   IF(IOP.NE.0)  CALL IOPSR
      IF(WOP.NE.0.AND.NC.NE.0)  CALL WOPSR
C   SUMMARY PRINT OPTION
110  500  IF(NSP.EQ.0)  GO TO 999
      IF(IOP.EQ.0)  GO TO 999
C   COMPRESS VERTICAL SPACING TO 8 LINES/INCH
      PRINT 5000
5000  FORMAT(*T*)
C   PROCESS EACH SUMMARY PRINT SPECIFICATION
      DO 50 I=1,NSP

```



```

IF(BREF(N).EQ.0.0) BREF(N)= 1.0
IF(CREF(N).EQ.0.0) CREF(N)= 1.0
WRITE(20) N,(SNAME(L,N),L=1,4),
460 1 BTC(N),SC(N),NT,SREF(N),BREF(N),CREF(N)
IF(GOP.EQ.2) GO TO 850
PRINT 8200, N,(SNAME(L,N),L=1,4),
1 BTC(N), SREF(N),BREF(N),CREF(N)
PRINT 8201, SCN(JJ),NT
465 8200 FORMAT(*,*/1X,*ADDITIONAL LOADS OPTION*/// * SURFACE/AXIS NUMBER ==
1 ,I3,6X,*SURFACE/AXIS NAME = *,4A4// * INTEGRATION TYPE CODE ==
2 ,I3,4X,*SREF ==,F10.3,4X,*BREF ==,F10.3,4X,*CREF ==,F10.3/)
8201 FORMAT(* SYMMETRY CODE = *,I3,7X,*NUMBER OF TERMS ==,I3//
1 * * COMPONENT DEFINITION FOR *)
470 IF(SC(N).EQ.0) PRINT 8202
IF(SC(N).EQ.1) PRINT 8205
8202 FORMAT(*+*,T30,*LEFT SIDE LOAD *)
8203 FORMAT(*+*,T30,*CENTERLINE LOAD*)
PRINT 8300
475 8300 FORMAT(/// * TERM INDICES COMPONENT DESCRIPTION *)
1 *V FACTOR B FACTOR T FACTOR*)
IF(GOP.EQ.3) GO TO 850
PUNCH 8000, N,(SNAME(L,N),L=1,4),
1 BTC(N),SC(N),NT,SREF(N),BREF(N),CREF(N)
480 C PROCESS EACH COMPONENT SPECIFICATION
850 DO 85 J=1,NT
READ(1,8500) CN,CL,CT,C
8500 FORMAT(I2,2I4,3F10.3)
485 C CHECK FOR INPUT ERROR
IF(CN.EQ.0) GO TO 855
IF(CN.LT.1.OR.CN.GT.50) GO TO 991
IF(CL.LT.1.OR.CL.GT.3) GO TO 991
IF(CT.LT.1.OR.CT.GT.3) GO TO 991
490 855 WRITE(20) CN,CL,CT,C
IF(GOP.EQ.2) GO TO 85
IF(J.EQ.041.OR.J.EQ.081.OR.J.EQ.121) GO TO 860
IF(J.EQ.161.OR.J.EQ.201.OR.J.EQ.241) GO TO 860
GO TO 870
495 C NEW PAGE WITH HEADER
860 PRINT 3500
PRINT 8300
C SPECIAL CASE IF CN=0 (CONSTANT)
870 IF(CN.GE.1) GO TO 875
500 PRINT 8700, J,CN,CL,CT,C
8700 FORMAT(* *,I3,5X,3I3,6X,*CONSTANTS *,14X,3F10.3)
GO TO 880
875 PRINT 8750, J,CN,CL,CT,(SNAME(L,CN),L=1,4),LRC(CL),VBT(CT),C
8750 FORMAT(* *,I3,5X,3I3,6X,4A4,3X,A2,2X,A1,2X,3F10.3)
505 880 IF(GOP.EQ.3) GO TO 85
PUNCH 8500, CN,CL,CT,C
85 CONTINUE
80 CONTINUE
GO TO 999
C
510 C PRINT ERROR MESSAGES
C
990 PRINT 9900
GO TO 998

```

```

5      *      KIPS      IN-KIPS      IN-KIPS*)
1031  FORMAT(*0*,*PANEL      AREA      BARM      TARM      *, 5X,
60    1      *CP-R      V-R      B-R      T-R      /** *,
      2      *      IN2      IN      *, 5X,
      3      *      KIPS      IN-KIPS      IN-KIPS*)
      LU= 17
C     PROCESS ROW DATA
65    200  DO 30 J=1,NR
      READ(20)      RN,ETA,YL,NP,CROW
      READ(DN)      YR,NPT
      IF(IOP.EQ.2)  GO TO 300
C     CHECK FOR NEW PAGE / PRINT HEADER
70    IF((LU+NP+1).LE.66)  GO TO 250
      PRINT 1000
      PRINT 2000,      N,(SNAME(L,N),L=1,4)
2000  FORMAT(*0*,*SAN= *,I2,2X,4A4)
75    IF(SC(N).EQ.0)  PRINT 1030
      IF(SC(N).NE.0)  PRINT 1031
      LU= 13
      LU= LU+NP+1
      PRINT 2500
80    2500  FORMAT(* *)
C     PROCESS PANEL DATA
      DO 40 K=1,NP
      READ(20)      PN,SP,BARM,TARM,XCN
      READ(DN)      XC,CPS,CPR,CPL,XR
85    C     SET UP PRESSURES FOR CURRENT BODY TYPE
      GO TO (310,320,330) BTC(N)
C     SLENDER BODY - VERTICAL
310  CP(1)= CPS
      CP(2)= CPS
      GO TO 400
90    C     SLENDER BODY - LATERAL
320  CP(1)= CPL
      CP(2)= CPR
      GO TO 400
C     THIN BODY
95    330  IF(MR.EQ.1.0)  CP(1)= CPS
      IF(MR.EQ.1.0)  CP(2)= CPS
      IF(MR.EQ.2.0)  CP(1)= CPL
      IF(MR.EQ.2.0)  CP(2)= CPR
C     SPECIAL CONVENTION FOR VERTICAL TAIL ON CENTERLINE
100   IF(MR.EQ.2.0.AND.SC(N).NE.0.AND.THETA.EQ.90.0)  CP(2)= CPL
C     COMPUTE PANEL LOADS
      PL(1)= CP(1)*Q1(IC)*SP/144.0
      PL(4)= CP(2)*Q1(IC)*SP/144.0
105   PL(2)= PL(1)*BARM
      PL(5)= PL(4)*BARM
      PL(3)= PL(1)*TARM
      PL(6)= PL(4)*TARM
C     RUNNING TOTAL
      DO 35 L=1,6
110   35  FAL(IC,N,L)= FAL(IC,N,L) + PL(L)
      IF(IOP.EQ.2)  GO TO 40
      IF(SC(N).EQ.0)  PRINT 4000,      PN,SP,BARM,TARM,CP(1),(PL(L),L=1,3),
      CP(2),(PL(L),L=4,6)
      IF(SC(N).NE.0)  PRINT 4001,      PN,SP,BARM,TARM,CP(2),(PL(L),L=4,6)

```

\*\*\*\*\* BOJ \*\*\*\*\*

## SYMBOLIC REFERENCE MAP (R=3)

ENTRY	POINTS	DEF LINE	REFERENCES																					
1	CHEAD	1	46																					
VARIABLES		SN	TYPE	RELOCATION																				
252	AC		INTEGER	ARRAY	GENCOM	REFS	6	14																
304	A1		REAL	ARRAY	POPCOM	REFS	12	16			19													
315	B1		REAL	ARRAY	POPCOM	REFS	12	16			19													
351	CPBODY		INTEGER	ARRAY	POPCOM	REFS	10	16																
364	CPL		REAL		POPCOM	REFS	13	16																
363	CPR		REAL		POPCOM	REFS	13	16																
362	CPS		REAL		POPCOM	REFS	13	16																
0	DN		INTEGER		POPCOM	REFS	10	16																
1	DUMMY		INTEGER	ARRAY	POPCOM	REFS	10	16																
550	FAL		REAL	ARRAY	GENCOM	REFS	8	14																
5764	FCL		REAL	ARRAY	GENCOM	REFS	8	14																
0	GOP		INTEGER		GENCOM	REFS	6	14																
16152	IC		INTEGER		GENCOM	REFS	14	18			5*19	2*24	2*25	2*26	2*27	2*28	2*29	2*30	2*31	2*32	2*33	2*34	2*27	
340	IMR		INTEGER	ARRAY	POPCOM	REFS	10	16			18													
355	INAF		INTEGER		POPCOM	REFS	11	16																
360	INPT		INTEGER		POPCOM	REFS	11	16																
337	INTB		INTEGER		POPCOM	REFS	10	16																
4	IOP		INTEGER		GENCOM	REFS	6	14																
321	JJ		INTEGER			REFS	20	DEFINED			18													
322	L		INTEGER			REFS	19	DEFINED			19													
16153	LRC		INTEGER	ARRAY	GENCOM	REFS	7	14																
544	LRVL		INTEGER	ARRAY	GENCOM	REFS	6	14																
272	MR		REAL		POPCOM	REFS	12	16																
366	MRN		INTEGER	ARRAY	POPCOM	REFS	11	16			20													
273	M1		REAL	ARRAY	POPCOM	REFS	12	16																
353	NAF		REAL		POPCOM	REFS	12	16																
256	NC		INTEGER		GENCOM	REFS	6	14																
357	NPT		REAL		POPCOM	REFS	12	16																
257	NSB		INTEGER		GENCOM	REFS	6	14																
271	NTB		REAL		POPCOM	REFS	12	16																
1	POP		INTEGER		GENCOM	REFS	6	14																
326	q1		REAL	ARRAY	POPCOM	REFS	12	16			19													
260	RD		REAL	ARRAY	GENCOM	REFS	8	14			2*24	2*25	2*26	2*27	2*28	2*29	2*30	2*31	2*32	2*33	2*34			
2	ROP		INTEGER		GENCOM	REFS	6	14																
16161	RS		LOGICAL		GENCOM	REFS	5	14																
370	SB		LOGICAL		POPCOM	REFS	9	16																
16150	SCN		INTEGER	ARRAY	GENCOM	REFS	6	14																
3	SOP		INTEGER		GENCOM	REFS	6	14																
354	THETA		REAL		POPCOM	REFS	12	16																
5	TIT1		INTEGER	ARRAY	POPCOM	REFS	10	16			19													
247	TIT2		INTEGER	ARRAY	POPCOM	REFS	10	16																
16156	VBT		INTEGER	ARRAY	GENCOM	REFS	7	14																
13200	WAL		REAL	ARRAY	GENCOM	REFS	8	14																
14564	WCL		REAL	ARRAY	GENCOM	REFS	8	14																
152	WGI		LOGICAL	ARRAY	GENCOM	REFS	5	14																
6	WGR		LOGICAL	ARRAY	GENCOM	REFS	5	14																
70	WGS		LOGICAL	ARRAY	GENCOM	REFS	5	14																
234	WGW		LOGICAL	ARRAY	GENCOM	REFS	5	14																
5	WOP		INTEGER		GENCOM	REFS	6	14																

\*\*\*\* 804 \*\*\*\*

```

115 C SET INTEGRATION LOAD INDEX
      N= SPI(I)
      IF(.NOT.WGI(N)) GO TO 50
120 C SET WINDTUNNEL LOAD INDEX IF DEFINED
      M= SPW(I)
      IF(M.EQ.0) GO TO 520
      IF(WOP.EQ.0) GO TO 510
      IF(WGW(M)) GO TO 520
130 C WINDTUNNEL LOAD OUTPUT SUPPRESSED
      510 M= 0
      520 RS= .FALSE.
      LR= 0
      PRINT 5200
      5200 FORMAT(*I*/ * SUMMARY PRINT OPTION*)
135 C PRINT CASE DATA
      DO 54 IC=1,NC
      54 CALL CHEAD
      PRINT SURFACE/AXIS DATA
      JJ= SC(N)+1
      PRINT 5400, N, (SANAME(L,N),L=1,4),BTC(N),SCN(JJ),
      1 SREF(N),BREF(N),CREF(N)
      5400 FORMAT(///// * SAN=*I3,3X,4A4,14X,*ITC=*I2,4X,*SC=*I3,13X,
      1 *SREF=*F10,3,5X,*BREF=*F10.2,5X,*CREF=*F10.2/)
140 C 5401 IF(M.NE.0) PRINT 5401, M
      PRINT HEADER INFO
      IF(SC(N).EQ.0.AND..NOT.RS) PRINT 5500
      IF(SC(N).EQ.1) PRINT 5501
      PRINT 5502
      IF(M.NE.0) PRINT 5503
145 5500 FORMAT(*-*,*LEFT SIDE *)
      5501 FORMAT(*-*,*CENTERLINE*)
      5502 FORMAT(*+*,T17,*PRESSURE INTEGRATED LOADS*,11X,*COEFFICIENTS*)
      5503 FORMAT(*+*,T80,*WIND TUNNEL DERIVED LOADS*,14X,*COEFFICIENTS*)
150 PRINT 5510
      IF(M.NE.0) PRINT 5511
      PRINT 5520
      IF(M.NE.0) PRINT 5521
      5510 FORMAT(*0*,*CASE V CB B CT* T*,
      1 * CV *V CB B CT* T*,
      1 * CV *V CB B CT* T*,
      5520 FORMAT(* * * * KIPS IN-KIPS IN-KIPS*)
      5521 FORMAT(*+*,T79, *KIPS IN-KIPS IN-KIPS*)
160 C RIGHT SIDE RECYCLE ENTRY POINT
      C RESET INDEX FOR RIGHT SIDE OR CENTERLINE LOAD
      560 IF(RS.OR.SC(N).EQ.1) LR= 3
      C PRINT V,B,T,CV,CB,CT FOR EACH CASE
      DO 57 IC=1,NC
165 C SKIP RIGHT SIDE LOADS IF SYMMETRIC MOTION
      IF(RS.AND.IMR(IC).EQ.1) GO TO 57
      PRINT 5700, IC, (FAL(IC,N,K+LR),K=1,3), (FCL(IC,N,K+LR),K=1,3)
      C PRINT WINDTUNNEL LOADS IF DEFINED
      IF(M.EQ.0) GO TO 57
170 PRINT 5701, (WAL(IC,M,K+LR),K=1,3), (WCL(IC,M,K+LR),K=1,3)
      5700 FORMAT(*0*,I2,2X,-3P,3F12.5,OP,3F10.6)

```

SUBROUTINE GOPSR

73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.29.

PAGE 10

```
515      991 PRINT 9910
          GO TO 998
          992 PRINT 9920
520      9900 FORMAT(/// * EOF ENCOUNTERED ON GDTAPE - PROGRAM TERMINATED*)
          9910 FORMAT(/// * CARD INPUT ERROR DETECTED - PROGRAM TERMINATED*)
          9920 FORMAT(/// * GDTAPE TRAILER RECORD ENCOUNTERED - *,
                    1 *CAN NOT FIND REQUESTED BODY - PROGRAM TERMINATED*)
          998 GOP= 9
          999 REWIND 20
          RETURN
          END
```

SUBROUTINE IOPSR 73774 OPT=1

FTN 4.2+75060

07/29/81 16.31.44.

PAGE 3

```

115 4000 FORMAT(* *,I2,1X,I2,2X,3F10.2,F12.4, 3(-3PF12.3)2X,0P,
      1 F12.4, 3(-3PF12.3))
4001 FORMAT(* *,I2,1X,I2,2X,3F10.2,F12.4, 3(-3PF12.3))
40 CONTINUE
30 CONTINUE
120 C TOTAL LOADS, LOADS PER QBAR, AND COEFFICIENTS
      IF(IOP.EQ.2) GO TO 450
      CHECK FOR NEW PAGE
      IF((LU+7).LE.66) GO TO 430
      PRINT 1000
125      PRINT 2000, N,(SANAME(L,N),L=1,4)
      IF(SC(N).EQ.0) PRINT 4100
      IF(SC(N).NE.0) PRINT 4101
4100 FORMAT(+*+,T59*V-L B-L T-L *,
      1 T109*V-R B-R T-R */
130      3 T59*KIPS IN-KIPS IN-KIPS*,
      3 T109*KIPS IN-KIPS IN-KIPS*)
4101 FORMAT(+*+,T59*V-R B-R T-R *,
      1 T59*KIPS IN-KIPS IN-KIPS*)
135      430 DO 45 L=1,6
      45 FCL(IC,N,L) = FAL(IC,N,L)/(Q1(IC))
      IF(SC(N).EQ.0) PRINT 4300, (FAL(IC,N,L),L=1,6),(FCL(IC,N,L),L=1,6)
      IF(SC(N).NE.0) PRINT 4301, (FAL(IC,N,L),L=4,6),(FCL(IC,N,L),L=4,6)
4300 FORMAT(//T22,*TOTAL INTEGRATED LOADS*,T51,-3P,3F12.3,14X,3F12.3
      1 //T22,*TOTAL LOADS PER QBAR *,T51,3F12.6,14X,3F12.6)
140 4301 FORMAT(//T22,*TOTAL INTEGRATED LOADS*,T51,-3P,3F12.3
      1 //T22,*TOTAL LOADS PER QBAR *,T51,
      3F12.6)
450 FCL(IC,N,1) = FAL(IC,N,1) / (Q1(IC)*SREF(N))
      FCL(IC,N,4) = FAL(IC,N,4) / (Q1(IC)*SREF(N))
145 FCL(IC,N,2) = FAL(IC,N,2) / (Q1(IC)*SREF(N)*BREF(N))
      FCL(IC,N,5) = FAL(IC,N,5) / (Q1(IC)*SREF(N)*BREF(N))
      FCL(IC,N,3) = FAL(IC,N,3) / (Q1(IC)*SREF(N)*CREF(N))
      FCL(IC,N,6) = FAL(IC,N,6) / (Q1(IC)*SREF(N)*CREF(N))
      IF(IOP.EQ.2) GO TO 20
      IF(SC(N).EQ.0) PRINT 4500, (FCL(IC,N,L),L=1,6)
      IF(SC(N).NE.0) PRINT 4501, (FCL(IC,N,L),L=4,6)
150 4500 FORMAT / T22,*TOTAL LOAD COEFFICIENTS*,T51,3F12.6,T101,3F12.6)
      4501 FORMAT / T22,*TOTAL LOAD COEFFICIENTS*,T51,3F12.6)
      GO TO 20
155 500 PRINT 1000
      PRINT 5000, (SABODY(L,N),L=1,2),N,(SANAME(L,N),L=1,4)
5000 FORMAT(////,10X,*CAN NOT FIND CPBODY NAMED *,2A4,5X,*FOR SAN= *,
      1 I2,5X,4A4)
160 C READY FOR NEXT SURFACE/AXIS DEFINITION
      20 CONTINUE
      ADDITIONAL LOADS OPTION
      IF(NALD.EQ.0) GO TO 800
      DO 60 I=1,NALD
      REWIND 50
165 C READ NEXT ADDITIONAL LOAD DEFINITION
      READ(20) N,(SANAME(L,N),L=1,4),BTC(N),SC(N),
      1 NT,SREF(N),BREF(N),CREF(N)
      C READ AND STORE COMPONENT TERMS
      DO 62 J=1,NT
170      62 READ(20) CN,CL,CT,C
      WRITE(50) CN,CL,CT,C
      C CHECK FOR LOAD TO BE SKIPPED

```

SUBROUTINE CHEAD

73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.55.

PAGE 3

VARIABLES	SN	TYPE
361 XC	REAL	
365 XR	REAL	
356 YR	REAL	

RELOCATION
POP COM
POP COM
POP COM

REFS	13	16
REFS	13	16
REFS	12	16

FILE NAMES	MODE
OUTPUT	FMT

WRITES	19	20	24	25	26	27	28	29
30	31	32	33	34				

## STATEMENT LABELS

DEF LINE REFERENCES

DEF LINE	REFERENCES
155 1001 FMT	21 19
166 1002 FMT	23 20
245 1003 FMT	35 24
251 1004 FMT	36 25
255 1005 FMT	37 26
261 1006 FMT	38 27
265 1007 FMT	39 28
271 1008 FMT	40 29
275 1009 FMT	41 30
305 1010 FMT	43 32
311 1011 FMT	44 33
315 1012 FMT	45 34
301 1013 FMT	42 31

COMMON BLOCKS	LENGTH
GENCOM	7282

MEMBERS - BIAS NAME(LENGTH)

0 GOP (1)	1 POP (1)	2 ROP (1)
3 SOP (1)	4 IOP (1)	5 WOP (1)
6 WGR (50)	56 WGS (50)	106 WGI (50)
156 WGW (14)	170 AC (4)	174 NC (1)
175 NSB (1)	176 RD (180)	356 LRVL (4)
360 FAL (2700)	3060 FCL (2700)	5760 WAL (756)
6516 WCL (756)	7272 SCN (2)	7274 IC (1)
7275 LRC (3)	7278 VBT (3)	7281 RS (1)
0 DN (1)	1 DUMMY (4)	5 TIT1 (162)
167 TIT2 (18)	185 NTB (1)	186 MR (1)
187 M1 (9)	196 A1 (9)	205 B1 (9)
214 Q1 (9)	223 INTB (1)	224 IMR (9)
233 CPBODY (2)	235 NAF (1)	236 THETA (1)
237 INAF (1)	238 YR (1)	239 NPT (1)
240 INPT (1)	241 XC (1)	242 CPS (1)
243 CPR (1)	244 CPL (1)	245 XR (1)
246 MRN (2)	248 SB (1)	

## STATISTICS

PROGRAM LENGTH	323B	211
CM LABELED COMMON LENGTH	16553B	7531

\*\*\*\* 604 \*\*\*\*

PROGRAM FLIP 73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.26.

PAGE 4

```
5701 FORMAT(***,T72 , -3P,3F12.3,0P,3F10.6)
57 CONTINUE
175 C CHECK FOR RIGHT SIDE LOAD RECYCLE
IF(RS.OR.SC(N).EQ.1) GO TO 50
C TEST FOR SYMMETRIC MOTION - ALL CASES
DO 58 IC=1,NC
IF(IMR(IC).NE.1) GO TO 580
180 58 CONTINUE
GO TO 590
C RECYCLE FOR RIGHT SIDE - ASYMMETRIC CASES ONLY
580 RS= .TRUE.
PRINT 5800
185 5800 FORMAT(///* RIGHT SIDE LOADS FOR ASYMMETRIC CASES*)
GO TO 560
C MESSAGE FOR ALL CASES SYMMETRIC
590 PRINT 5900
190 5900 FORMAT(///* RIGHT SIDE LOADS = LEFT SIDE *
1 *(SYMMETRIC MOTION FOR ALL CASES)*)
C READY FOR NEXT SUMMARY PRINT DEFINITION
50 CONTINUE
C RETURN TO 6 LINES/INCH
PRINT 5001
195 5001 FORMAT(*S*)
999 STOP
END
```



SYMBOLIC REFERENCE MAP (R=3)

ENTRY	POINTS	DEF LINE	REFERENCES									
1	GOPSR	1	523									
VARIABLES	SN	TYPE	RELOCATION									
252	AC	INTEGER	ARRAY GENCOM	REFS	13	20						
15106	AP	REAL	ARRAY	REFS	10	254	255	412	DEFINED	229		
3612	AR	REAL		REFS	254	258	DEFINED	251	254			
3613	AY	REAL		REFS	255	258	DEFINED	252	255			
1062	BARM	REAL	GOPCOM	REFS	19	22	46	211	213	215	416	
				REFS	432	434	DEFINED	45	189	201	403	408
705	BREF	REAL	ARRAY GOPCOM	REFS	18	22	37	91	100	130	133	
				REFS	265	268	459	462	478			
456	BTC	INTEGER	ARRAY GOPCOM	DEFINED	35	88	100	447	457			
				REFS	16	22	37	91	2*98	119	120	
				REFS	121	130	133	144	145	146	147	265
				REFS	268	459	462	478	DEFINED	35	88	447
				REFS	452							
1072	C	REAL	ARRAY GOPCOM	REFS	19	22	489	499	502	505		
				DEFINED	482							
1051	CAVG	REAL	GOPCOM	REFS	18	22	37	130	265			
				DEFINED	24	35						
15416	CB	REAL	ARRAY	REFS	10	DEFINED	229					
3614	CID	INTEGER	ARRAY	REFS	5	74	DEFINED	69				
1070	CL	INTEGER	GOPCOM	REFS	17	22	2*487	489	499	2*502	505	
				DEFINED	482							
1067	CN	INTEGER	GOPCOM	REFS	17	22	485	2*486	489	498	499	
				REFS	2*502	505	DEFINED	482				
767	CREF	REAL	ARRAY GOPCOM	REFS	18	22	37	91	101	130	133	
				REFS	265	268	458	459	462	478		
				DEFINED	35	88	101	447	458			
1056	CROW	REAL	GOPCOM	REFS	18	22	42	163	312			
				DEFINED	24	41						
1071	CT	INTEGER	GOPCOM	REFS	17	22	2*488	489	499	2*502	505	
				DEFINED	482							
4262	DRDX	REAL	ARRAY	REFS	8	DEFINED	154					
3553	DUM	REAL		REFS	7	DEFINED	2*69	103				
3572	DX	REAL		REFS	8	178	199	DEFINED	176	177		
				REFS	198							
4426	DYDX	REAL	ARRAY	REFS	8	DEFINED	154					
4572	DZDX	REAL	ARRAY	REFS	8	DEFINED	154					
1053	ETA	REAL	GOPCOM	REFS	18	22	42	163	312			
				DEFINED	24	41						
550	FAL	REAL	ARRAY GENCOM	REFS	15	20						
5764	FCL	REAL	ARRAY GENCOM	REFS	15	20						
0	GOP	INTEGER	GENCOM	REFS	13	20	27	57	61	132	164	
				REFS	214	267	313	433	461	477	490	504
				DEFINED	521							
3605	I	INTEGER		REFS	71	DEFINED	34	65	446			
3547	IBN	INTEGER		REFS	6	DEFINED	103					
3543	IBTC	INTEGER		REFS	6	106	116	119	120	121		
				DEFINED	103							
16152	IC	INTEGER	GENCOM	REFS	20							
3546	ICBN	INTEGER		REFS	6	DEFINED	103					
3542	IFN	INTEGER		REFS	6	DEFINED	73	DEFINED	69			

```

C      IF(.NOT.WGI(N)) GO TO 60
C      PROCESS THIS LOAD
C      RS= .FALSE.
175  C      RIGHT SIDE RECYCLE ENTRY POINT FOR NT .GT. 15
C      SUPPRESS PRINTING IF IOP=2
C      620 IF(IOP.EQ.2) GO TO 640
C      PRINT 6200
180  C      6200 FORMAT(*1*/ * ADDITIONAL LOADS OPTION*)
C      PRINT CASE DATA HEADER
C      CALL CHEAD
C      PRINT SURFACE/AXIS DATA
C      JJ= SC(N)+1
C      PRINT 6250, N, (SANAME(L,N),L=1,4),BTC(N),SCN(JJ),
185  1      NT,SREF(N),BREF(N),CREF(N)
C      6250 FORMAT(/ * SAN= * ,I2,2X,4A4,22X,*ITC=*,I1,3X,*SC=*,A3,3X,*NT=*,I3
1      ,T88,*SREF=*,F10.3,3X,*BREF=*,F8.2,3X,*CREF=*,F8.2)
C      IF(SC(N).EQ.0.AND..NOT.RS) PRINT 6300
C      IF(SC(N).EQ.1) PRINT 6301
190  C      RIGHT SIDE RECYCLE ENTRY POINT FOR NT .LE. 15
C      630 IF(IOP.EQ.2) GO TO 640
C      IF(SC(N).EQ.0.AND.RS) PRINT 6302
C      6300 FORMAT(/ * LEFT SIDE *)
C      6301 FORMAT(/ * CENTERLINE*)
195  C      6302 FORMAT(/ * RIGHT SIDE*)
C      PRINT COLUMN HEADER
C      PRINT 6350
C      6350 FORMAT(*D*, 7X,*COMPONENT DESCRIPTION VALUE V FACTOR *,
200  1      *B FACTOR T FACTOR V KIPS B IN-KIPS *,
2      *T IN-KIPS CV CB CT*/)
C      SET LOAD INDEX FOR LEFT OR RIGHT SIDE
C      640 LR= 0
C      IF(RS.OR.SC(N).EQ.1) LR= 3
C      REWIND 50
203  C      PROCESS EACH COMPONENT TERM
C      DO 65 J=1,NT
C      CHECK FOR NEW PAGE AND HEADER
C      IF(IOP.EQ.2) GO TO 655
C      IF(J.EQ.041.OR.J.EQ.081.OR.J.EQ.121) GO TO 650
C      IF(J.EQ.161.OR.J.EQ.201.OR.J.EQ.241) GO TO 650
C      GO TO 655
210  C      650 PRINT 6200
C      PRINT 6500, N, (SANAME(L,N),L=1,4)
C      6500 FORMAT(/ * SAN= * ,I2,2X,4A4)
C      IF(SC(N).EQ.0.AND..NOT.RS) PRINT 6300
C      IF(SC(N).EQ.1) PRINT 6301
215  C      IF(SC(N).EQ.0.AND.RS) PRINT 6302
C      PRINT 6350
C      READ NEXT COMPONENT DEFINITION
220  C      655 READ(50) CN,CL,CT,C
C      SET UP COMPONENT INDICES
C      IF(CN.EQ.0) GO TO 660
C      IF(CL.EQ.1.AND.RS) CL=2
C      LC= CT
225  C      IF(CL.GE.2) LC= CT+3
C      CV= FAL(IC,CN,LC)
C      SPECIAL CASE FOR CONSTANTS
C      660 IF(CN.EQ.0) CV= 1.0

```

```

SUBROUTINE WOPSR
C
C   COMPUTES RIGID LOAD DATA FROM WIND TUNNEL AIRLOAD COEFFICIENTS
5
C   INTEGER TIT3(18),WTN,WTNAME(4),NSEQ(15),DES(3,15)
REAL CPER(3,15),R(15),CTOT(3),LTOT(3)
LOGICAL WGR(30),WGS(30),WGI(50),WGW(14),RS
10  INTEGER GOP,POP,ROP,SOP,IOP,WOP,AC(2,2),NC,NSB,LRVL(4),SCN(2)
INTEGER LRC(3),VBT(3)
REAL RD(20,9),FAL(9,50,6),FCL(9,50,6),WAL(9,14,6),WCL(9,14,6)
COMMON/GENCOM/GOP,POP,ROP,SOP,IOP,WOP,WGR,WGS,WGI,WGW,AC,NC,NSB,
1  RD,LRVL,FAL,FCL,WAL,WCL,SCN,IC,LRC,VBT,RS
REWIND 40
IF(NC.NE.0) GO TO 300
15
C   CREATE AIRLOAD COEFFICIENT FILE FROM CARDS
C
C   READ(1,1000) TIT3
WRITE(40) TIT3
20  1000 FORMAT(18A4)
100  READ(1,1001) WTN,WTNAME,SWT,BWT,CWT,XHT,YHT,XVT,ZVT
1001  FORMAT(I2,2X,4A4,3F10.0,2X,4F7.0)
IF(EOF(1).NE.0.0) RETURN
WRITE(40) WTN,WTNAME,SWT,BWT,CWT,XHT,YHT,XVT,ZVT
25  DO 10 I=1,15
READ(1,1002) NSEQ(I),(CPER(J,I),J=1,3),(DES(J,I),J=1,3)
10  WRITE(40) NSEQ(I),(CPER(J,I),J=1,3),(DES(J,I),J=1,3)
1002  FORMAT(5X,I5,3E10.2,2X,3A7)
GO TO 100
30
C   COMPUTE LOADS/COEFFICIENTS FOR ALL CASES
C
C
300 DO 30 IC=1,NC
A = RD(1,IC)
35  B = RD(2,IC)
Q = RD(3,IC)
V = RD(4,IC)
AB = RD(1,IC) * RD(2,IC)
DA = RD(15,IC)
40  DE = RD(14,IC)
DRU = RD(15,IC)
DRL = RD(16,IC)
DSL = RD(17,IC)
DSR = RD(18,IC)
45  IF(V.EQ.0.0) V=1.0
REWIND 40
READ(40) TIT3
400 READ(40) WTN,WTNAME,SWT,BWT,CWT,XHT,YHT,XVT,ZVT
IF(EOF(40).NE.0.0) GO TO 30
50  DO 40 I=1,15
40  READ(40) NSEQ(I),(CPER(J,I),J=1,3),(DES(J,I),J=1,3)
IF((WTN.EQ.1).AND.(.NOT.WGW(1))) GO TO 400
IF((WTN.EQ.2).AND.(.NOT.WGW(3))) GO TO 400
IF((WTN.EQ.3).AND.(.NOT.WGW(5))) GO TO 400
55  IF((WTN.EQ.4).AND.(.NOT.WGW(6))) GO TO 400
IF((WTN.EQ.5).AND.(.NOT.WGW(7))) GO TO 400
IF((WTN.EQ.6).AND.(.NOT.WGW(9))) GO TO 400

```

\*\*\*\* D04 \*\*\*\*

SYMBOLIC REFERENCE MAP (R=3)

ENTRY	POINTS	DEF LINE	REFERENCES								
16463	FLIP	22									
VARIABLES SN TYPE RELOCATION											
252	AC	INTEGER	ARRAY	GENCOM	REFS	28	40				
304	A1	REAL	ARRAY	POPCOM	REFS	38	44				
1062	BARM	REAL		POPCOM	REFS	34	42				
705	BREF	REAL	ARRAY	POPCOM	REFS	33	42				
456	BTC	INTEGER	ARRAY	POPCOM	REFS	31	42	135	DEFINED	48	
315	B1	REAL	ARRAY	POPCOM	REFS	38	44	135	DEFINED	49	
1072	C	REAL	ARRAY	POPCOM	REFS	34	42				
1051	CAVG	REAL		POPCOM	REFS	33	42				
1070	CL	INTEGER		POPCOM	REFS	32	42				
1067	CN	INTEGER		POPCOM	REFS	32	42				
351	CPBODY	INTEGER	ARRAY	POPCOM	REFS	36	44				
364	CPL	REAL		POPCOM	REFS	39	44				
363	CPR	REAL		POPCOM	REFS	39	44				
362	CPS	REAL		POPCOM	REFS	39	44				
767	CREF	REAL	ARRAY	POPCOM	REFS	33	42	135	DEFINED	48	
1056	CROW	REAL		POPCOM	REFS	33	42				
1071	CT	INTEGER		POPCOM	REFS	32	42				
0	DN	INTEGER		POPCOM	REFS	36	44				
1	DUMMY	INTEGER	ARRAY	POPCOM	REFS	36	44				
1053	ETA	REAL		POPCOM	REFS	33	42				
550	FAL	REAL	ARRAY	GENCOM	REFS	30	40	167	DEFINED	46	
5764	FCL	REAL	ARRAY	GENCOM	REFS	30	40	167	DEFINED	46	
0	GOP	INTEGER		GENCOM	REFS	28	40	78	80	DEFINED	61
17367	I	INTEGER			REFS	2*70	72	74	89	92	93
					REFS	116	119	DEFINED	69	89	114
16152	IC	INTEGER		GENCOM	REFS	40	166	3*167	2*170	178	94
					DEFINED	131	164	177			
340	IMR	INTEGER	ARRAY	POPCOM	REFS	36	44	166	178		
355	INAF	INTEGER		POPCOM	REFS	37	44				
360	INPT	INTEGER		POPCOM	REFS	37	44				
337	INTB	INTEGER		POPCOM	REFS	36	44				
4	IOP	INTEGER		GENCOM	REFS	28	40	63	105	109	
					DEFINED	61					
17371	J	INTEGER			REFS	89	2*94	DEFINED	89		
17375	JJ	INTEGER			REFS	135	DEFINED	134			
17372	K	INTEGER			REFS	94	2*167	2*170	DEFINED	93	2*167
17376	L	INTEGER			REFS	135	DEFINED	135			
17374	LR	INTEGER			REFS	2*167	2*170	DEFINED	127	162	
16153	LRC	INTEGER	ARRAY	GENCOM	REFS	29	40	DEFINED	53		
544	LRLV	INTEGER	ARRAY	GENCOM	REFS	28	40	DEFINED	51		
17373	M	INTEGER			REFS	120	122	2*139	145	151	153
					2*170	DEFINED	119	124			169
272	MR	REAL		POPCOM	REFS	38	44				
366	MRN	INTEGER	ARRAY	POPCOM	REFS	37	44	DEFINED	54		
273	MI	REAL	ARRAY	POPCOM	REFS	38	44				
1	N	INTEGER		POPCOM	REFS	31	42	117	134	6*135	142
				GENCOM	REFS	42	2*167	175	DEFINED	116	143
353	NAF	REAL		POPCOM	REFS	38	44				
1065	NALD	INTEGER		POPCOM	REFS	32	42				
256	NC	INTEGER		GENCOM	REFS	28	40	106	131	164	177
					DEFINED	57	96				

NASA DFRC

SUBROUTINE GOPSR		73/74	OPT=1	FTN 4.2+75060		07/29/81	16.31.29.	PAGE	12
VARIABLES	SN	TYPE	RELOCATION	REFS	13	20			
4 IOP		INTEGER	GENCOM	REFS	174	3*176	3*177	178	179
3607 J		INTEGER		REFS	3*242	3*243	248	254	2*255
				2*241	3*289	300	4*318	332	256
				3*283	6*339	342	345	332	334
				2*337	354	357	2*359	2*347	2*349
				354	354	357	6*361	2*364	366
				369	2*371	6*373	412	413	3*491
				499	502	DEFINED	40	173	240
				288	298	481			247
3552 JJ		INTEGER		REFS	6	107	116	417	418
				421	422	423	464	DEFINED	106
				324	377	383	384	390	391
				454					397
3610 K		INTEGER		REFS	2*235	2*236	2*237	2*238	2*241
				3*282	3*283	327	328	329	DEFINED
				280	326				3*242
3606 L		INTEGER		REFS	2*335	2*337	2*88	2*91	2*130
				7*229	2*265	2*268	447	459	462
				DEFINED	2*335	2*337	2*88	2*91	2*130
				3*229	2*265	2*268	447	459	462
3603 LA	REAL			REFS	11	2*282	2*283	DEFINED	279
3604 LAD	REAL			REFS	11	273	279	DEFINED	271
16153 LRC	INTEGER	ARRAY	GENCOM	REFS	14	20	502		
544 LRLV	INTEGER	ARRAY	GENCOM	REFS	13	20			
3611 M	INTEGER			REFS	14*229	DEFINED	229		
3554 MN	REAL			REFS	7	DEFINED	69		
3571 MRC	REAL			REFS	8	144	145	146	147
				DEFINED	137				201
1 N	INTEGER		GOPCOM	REFS	16	22	7*35	8*37	6*88
				2*98	2*99	2*100	2*101	103	2*109
				119	120	121	8*130	8*133	144
				147	8*265	8*268	6*447	2*451	452
				2*456	2*457	2*458	7*459	6*462	470
				DEFINED	35	88	447		
1065 NALD	INTEGER		GOPCOM	REFS	17	22	32	56	64
				446	DEFINED	22	32		85
				REFS	446	22	32		85
3666 NB	INTEGER	ARRAY	GENCOM	REFS	13	20	5	103	
256 NC	INTEGER			REFS	6	106	153	154	159
3545 NCP	INTEGER			REFS	247	280	298	DEFINED	103
				REFS	6	154	DEFINED	153	
3550 NIB	INTEGER			REFS	6	304	306	DEFINED	297
3553 NLP	INTEGER			REFS	6	304	306	DEFINED	297
1055 NP	INTEGER		GOPCOM	REFS	17	22	42	44	161
				REFS	173	176	177	253	257
				250	253				DEFINED
622 NR	INTEGER		GOPCOM	REFS	16	22	37	40	127
				262	265	268	288	297	DEFINED
				260					35
3664 NRB	INTEGER	ARRAY	GOPCOM	REFS	5	DEFINED	103		
0 NSAD	INTEGER			REFS	16	22	32	34	56
				65	DEFINED	31	55		59
257 NSB	INTEGER		GENCOM	REFS	13	20			
1066 NT	INTEGER		GOPCOM	REFS	17	22	455	459	464
				DEFINED	447				478
3551 NV	INTEGER			REFS	6	333	334	335	338
				343	344	345	350	351	352
				357	360	361	362	367	368
									339
									355
									356
									372

```

230      C   COMPUTE COMPONENT V,B,T,CV,CB,CT
          PL(1)= CV*C(1)
          PL(2)= CV*C(2)
          PL(3)= CV*C(3)
          PL(4)= PL(1) / (Q1(IC)*SREF(N))
          PL(5)= PL(2) / (Q1(IC)*SREF(N)*BREF(N))
235      C   COMPUTE RUNNING TOTALS
          DO 67 K=1,3
            LN= LR+K
            FAL(IC,N,LN)= FAL(IC,N,LN) + PL(K)
240      67 FCL(IC,N,LN)= FCL(IC,N,LN) + PL(K+3)
          C   PRINT COMPONENTS
          IF(IOP.EQ.2) GO TO 65
          IF(CN.NE.0) PRINT 6700, J,CN,(SNAME(L,CN),L=1,4),
1          LRC(CL),VBT(CT),CV,C,PL
245      1 IF(CN.EQ.0) PRINT 6701, J,CN,CV,C,PL
          6700 FORMAT(*,2I3,1X,4A4,1X,A2,1X,A1,-3PF12.3,OP,3F10.3,-3P,3F12.3,
1          OP,3F10.6)
          6701 FORMAT(*,2I3,* CONSTANTS*,12X,F12.3,3F10.3,3F12.3,3F10.6)
250      C   CONTINUE
          C   PRINT TOTAL LOADS AND COEFFICIENTS
          IF(IOP.EQ.2) GO TO 680
          PRINT 6800, (FAL(IC,N,K+LR),K=1,3),(FCL(IC,N,K+LR),K=1,3)
255      6800 FORMAT(/,T32,*TOTAL LOADS AND COEFFICIENTS*,T72,-3P,3F12.3,
1          OP,3F10.6//)
          C   CHECK FOR RIGHT SIDE LOAD RECYCLE
          680 IF(RS.OR.SC(N).EQ.1) GO TO 60
          IF(IMR(IC).EQ.1) GO TO 690
          C   RECYCLE FOR RIGHT SIDE
          RS= .TRUE.
260      IF(NT.GT.15) GO TO 620
          IF(NT.LE.15) GO TO 630
          C   SYMM MOTION SET RIGHT SIDE EQUAL TO LEFT
          690 DO 69 K=1,3
            FAL(IC,N,K+3)= FAL(IC,N,K)
265      69 FCL(IC,N,K+3)= FCL(IC,N,K)
          IF(IOP.EQ.2) GO TO 60
          PRINT 6900
          6900 FORMAT(*+*,*RIGHT SIDE LOADS = LEFT SIDE (SYMMETRIC MOTION)**)
          C   GO TO NEXT ADDITIONAL LOAD DEFINITION
          60 CONTINUE
          C   CLOSE OUT THIS CASE
          800 IF(IOP.EQ.2.AND.IC.NE.1) GO TO 820
          PRINT 1000
          IF(MALD.NE.0) PRINT 8000
275      8000 FORMAT(*+*,23X,*AND ADDITIONAL LOADS OPTION*//)
          820 PRINT 8200, IC
          8200 FORMAT(*+*,*CASE * I2,* COMPLETE*)
          C   READY FOR NEXT CASE
          10 CONTINUE
          RETURN
280      END

```

```

        IF((WTN.EQ.4).AND.( . . WGW(5))) GO TO 500
60      C
        C      PRINT CASE DATA FOR DESIRED SURFACE
        C
        PRINT 4000, IC,TIT3,A,B,Q
4000  FORMAT(*1*,T2*WIND TUNNEL OPTION*/T2*CASE *,I1,5X,18A4,T9I
        1  *ALPHA=*,F8.4,* BETA=*,F8.4,* QBAR=*,F7.2)
65      PRINT 4001, RD(7,IC),RD(8,IC),RD(9,IC),DSL,DSR,DRU,DRL,DE,DA,V
4001  FORMAT(T14*P=*,F6.1,* Q=*,F5.1,* R=*,F5.1,* DSL=*,F5.1,
        1  * DSR=*,F5.1,* DRU=*,F6.2,* DRL=*,F6.2,6X,*DE=*,F8.4,
        2  * 5X,*DA=*,F8.4,* TAS=*,F7.2)
70      500 PRINT 5000, WTN,WTNAME,SWT,BWT,CWT
5000  FORMAT( /* WTN= *,I2,2X,4A4,4X,*SREF=*,F10.3,4X,* BREF=*,F8.2,
        1  * 4X,*CREF=*,F8.2)
        IF(WTN.EQ.6) PRINT 5001, XHT,YHT,XVT,ZVT
5001  FORMAT(***,T88*XHT=*,F6.2,* YHT=*,F6.2,
        1  * 3X,*XVT=*,F6.2,* ZVT=*,F6.2)
75      IF(WTN.GE.1.AND.WTN.LE.6) GO TO 600
        PRINT 5010, WTN
5010  FORMAT(/** WTN=*,I3,* IS ILLEGAL....GOING TO NEXT SURFACE*)
        GO TO 400
80      PD= (RD(7,IC)*BWT)/(V*12.0)
        QD= (RD(8,IC)*CWT)/(V*24.0)
        YD= (RD(9,IC)*BWT)/(V*12.0)
        AD= (RD(5,IC)*CWT)/(V*24.0)
        C
        C      SET UP CONTROL DATA FOR DIFFERENT SURFACES
85      GO TO (610,620,630,650,660) WTN
        C
610    WING - LEFT HAND
        NSA=1
90      IS= 1
        JA= 0
        NF= 1
        NL=10
        R(1) = 1.0
        R(2) = A
95      R(3) = AD
        R(4) = DSL
        R(5) = PD
        R(6) = QD
        R(7) = B
100     R(8) = AB
        R(9) = B
        R(10)= AB
        DO 61 I=1,3
105     61 CPER(I,4)= -(CPER(I,4))
        GO TO 700
        C
        620 WING - LEFT HAND
        NSA=3
110     IS= 1
        JA= 0
        NF= 1
        NL=10
        R(1) = 1.0
        R(2) = A
        R(3) = DE
    
```

NASA DFRC

PROGRAM	FLIP	73/74	OPT=1	FTN	4.2+75060	07/29/81	16.31.26.	PAGE	6
VARIABLES	SN	TYPE	RELOCATION						
1055	NP	INTEGER	GOPCOM	REFS	32	42			
357	NPT	REAL	POPCOM	REFS	38	44			
622	NR	INTEGER	GOPCOM	REFS	31	42			
0	NSAD	INTEGER	GOPCOM	REFS	31	42			
257	NSB	INTEGER	GENCOM	REFS	28	40	DEFINED	96	
17370	NSP	INTEGER		REFS	108	114	DEFINED	74	
1066	NT	INTEGER	GOPCOM	REFS	32	42			
271	NTB	REAL	POPCOM	REFS	38	44			
1057	PN	INTEGER	ARRAY	GOPCOM	REFS	32	42		
1	POP	INTEGER		GENCOM	REFS	28	40	81	101
326	QT	REAL	ARRAY	POPCOM	REFS	38	44	DEFINED	61
260	RD	REAL	ARRAY	GENCOM	REFS	30	40	94	DEFINED
1052	RN	INTEGER		POPCOM	REFS	32	42	55	89
2	ROP	INTEGER		GENCOM	REFS	28	40	DEFINED	61
16161	RS	LOGICAL		GENCOM	REFS	27	40	142	162
				REFS	27	40	DEFINED	166	175
312	SABODY	INTEGER	ARRAY	GOPCOM	REFS	31	42	DEFINED	50
2	SANAME	INTEGER	ARRAY	GENCOM	REFS	31	42	135	DEFINED
370	SB	LOGICAL		POPCOM	REFS	35	44		
540	SC	INTEGER	ARRAY	POPCOM	REFS	31	42	134	142
				REFS	49		DEFINED	143	162
16150	SCN	INTEGER	ARRAY	GENCOM	REFS	28	40	135	DEFINED
3	SOP	INTEGER		GENCOM	REFS	28	40	DEFINED	61
1061	SP	REAL		POPCOM	REFS	34	42		
17377	SPI	INTEGER	ARRAY		REFS	26	72	116	DEFINED
17462	SPW	INTEGER	ARRAY		REFS	26	119	DEFINED	70
623	SREF	REAL	ARRAY		REFS	33	42	135	DEFINED
1063	TARM	REAL		GOPCOM	REFS	34	42		48
354	THETA	REAL		POPCOM	REFS	38	44		
5	TIT1	INTEGER	ARRAY	POPCOM	REFS	36	44		
247	TIT2	INTEGER	ARRAY	POPCOM	REFS	36	44		
16156	VBT	INTEGER	ARRAY	GENCOM	REFS	29	40	DEFINED	53
13200	VAL	REAL	ARRAY	GENCOM	REFS	30	40	170	DEFINED
14564	WCL	REAL	ARRAY	GENCOM	REFS	30	40	170	DEFINED
152	WGI	LOGICAL	ARRAY	GENCOM	REFS	27	40	117	DEFINED
6	WGR	LOGICAL	ARRAY	GENCOM	REFS	27	40	DEFINED	56
70	WGS	LOGICAL	ARRAY	GENCOM	REFS	27	40	DEFINED	56
234	WGW	LOGICAL	ARRAY	GENCOM	REFS	27	40	122	DEFINED
5	WOP	INTEGER		GENCOM	REFS	28	40	64	81
				REFS	61		DEFINED	85	106
361	XC	REAL		POPCOM	REFS	39	44		121
1064	XCN	REAL		GOPCOM	REFS	34	42		
365	XR	REAL		POPCOM	REFS	39	44		
1054	YL	REAL		GOPCOM	REFS	33	42		
356	YR	REAL		POPCOM	REFS	38	44		
FILE NAME	MODE								
0	INPUT								
142	OUTH JT	FMT	WRITES	111	128	135	139	142	143
			150	151	152	153	167	170	183
404	PUNCH								
0	TAPE1	FMT	READS	61	63	64	70	89	96
548	TAPE11								
1610	TAPE12								
2652	TAPE13								
314	TAPE14								
4756	TAPE15								

\*\*\*\* F01 \*\*\*\*



NASA DFRC

SUBROUTINE GOPSR		73/74	OPT=1	FTN 4.2+75060		07/29/81	16.31.29.	PAGE	13		
VARIABLES	SN	TYPE	RELOCATION								
				373	374	2*376	385	392	423		
				DEFINED	325	335	338	343	350	355	360
				367	372						
3544	NW	INTEGER		REFS	16	106	153	DEFINED	103		
4736	PC	REAL	ARRAY	REFS	9	248	256	300	DEFINED	229	
1057	PN	INTEGER	ARRAY	REFS	17	22	46	211	213	215	315
			GOPCOM	REFS	416	432	434	DEFINED	45	168	302
				303	315						
1	JP	INTEGER		REFS	13	20					
4116	RCP	REAL	ARRAY	REFS	7	199	DEFINED	154			
260	RD	REAL	ARRAY	REFS	15	20					
1052	RN	INTEGER		REFS	17	22	42	163	165	249	257
			GOPCOM	REFS	258	260	301	302	304	310	3*312
				DEFINED	41	157	246	249	296	301	3*314
				REFS	13	20					
2	ROP	INTEGER		REFS	12	20					
16161	RS	LOGICAL		REFS	12	20					
312	SABODY	INTEGER	ARRAY	REFS	16	22	37	91	2*109	130	133
			GOPCOM	REFS	265	268	DEFINED	35	88		
2	SANAME	INTEGER	ARRAY	REFS	16	22	37	91	130	133	265
			GOPCOM	REFS	268	459	462	478	502	DEFINED	35
				447							
540	SC	INTEGER	ARRAY	REFS	16	22	37	114	115	130	133
			GOPCOM	REFS	265	268	453	454	459	470	478
				DEFINED	35	103	114	447	453		
16150	SCN	INTEGER	ARRAY	REFS	13	20	116	464			
3	SOP	INTEGER		REFS	13	20					
1061	SP	REAL		REFS	19	22	46	211	213	215	217
			GOPCOM	REFS	402	403	404	416	432	434	435
				DEFINED	45	188	199	401	402	407	412
623	SREF	REAL	ARRAY	REFS	18	22	37	91	99	130	133
			GOPCOM	REFS	265	268	456	459	462	478	
				DEFINED	35	88	99	447	456		
27310	ST	REAL	ARRAY	REFS	11	383	390	397	3*401	3*403	3*404
				DEFINED	327	380	387	394			
3574	TA	REAL		REFS	8	217	221	435	439		
				DEFINED	66	217	435				
1063	TARM	REAL		REFS	19	22	46	211	213	215	416
			GOPCOM	REFS	432	434	DEFINED	45	169	404	409
				REFS	7	DEFINED	154				414
3565	TBL	REAL		REFS	10	DEFINED	229				
15726	TC	REAL	ARRAY	REFS	7	2*242	2*243	261	DEFINED	103	229
3561	TN	REAL		REFS	7	262	DEFINED	261			
3562	TND	REAL		REFS	6	289	304	310	312	314	
3670	TNP	INTEGER	ARRAY	DEFINED	257						
27226	TYL	REAL	ARRAY	REFS	11	289	312	314	DEFINED	258	
3640	UID	INTEGER	ARRAY	REFS	5	75	DEFINED	69			
1705	UON	INTEGER		REFS	5	81	DEFINED	25			
3541	UOPT	INTEGER		REFS	5	76	81	DEFINED	69		
16156	VBT	INTEGER	ARRAY	REFS	14	20	502				
13200	WAL	REAL	ARRAY	REFS	15	20					
14564	WCL	REAL	ARRAY	REFS	15	20					
152	WGI	LOGICAL	ARRAY	REFS	12	20					
6	WGR	LOGICAL	ARRAY	REFS	12	20					
70	WGS	LOGICAL	ARRAY	REFS	12	20					
234	WGW	LOGICAL	ARRAY	REFS	12	20					
5	WOP	INTEGER		REFS	13	20					
27321	X	REAL	ARRAY	REFS	11	3*380	3*381	3*387	3*388	3*394	3*395

\*\*\*\* F02 \*\*\*\*

SYMBOLIC REFERENCE MAP (R=3)

ENTRY	POINTS	DEF LINE	REFERENCES								
1	IOPSR	1	280								
VARIABLES	SN	TYPE	RELOCATION								
252	AC	INTEGER	ARRAY GENCOM	REFS	8	20					
304	A1	REAL	ARRAY POPCOM	REFS	18	24					
1062	BARM	REAL	GOPCOM	REFS	14	22	104	105	112	114	
705	BREF	REAL	ARRAY POPCOM	DEFINED	82	22	46	144	145	184	234
456	BTC	INTEGER	ARRAY POPCOM	DEFINED	165	22	44	45	85	184	
315	B1	REAL	ARRAY POPCOM	REFS	11	24					
1072	C	REAL	ARRAY POPCOM	DEFINED	165	22					
1051	CAVG	REAL	GOPCOM	REFS	18	24					
1070	CL	INTEGER	GOPCOM	REFS	14	22	170	230	231	232	243
1067	CN	INTEGER	GOPCOM	DEFINED	245	169	220				
2075	CP	REAL	ARRAY	REFS	13	22	170	223	225	243	
				REFS	12	22	170	222	226	228	3*243
				DEFINED	169	220	223				
				REFS	12	22	170	222	226	228	3*243
				2*245	DEFINED	169	220				
				REFS	6	102	103	2*112	114	96	97
				DEFINED	87	88	91	92	95	96	97
				REFS	98	100					
351	CPBODY	INTEGER	ARRAY POPCOM	REFS	16	24	44				
364	CPL	REAL	ARRAY POPCOM	REFS	19	24	91	97	100		
				DEFINED	83						
363	CPR	REAL	POPCOM	REFS	19	24	92	98	DEFINED	83	
362	CPS	REAL	POPCOM	REFS	19	24	87	88	95	96	
767	CREF	REAL	ARRAY POPCOM	DEFINED	83	22	46	146	147	184	235
1056	CROW	REAL	GOPCOM	REFS	13	22	46	146	147	184	235
1071	CT	INTEGER	GOPCOM	REFS	13	22	DEFINED	66			
				REFS	12	22	170	224	225	243	
2073	CV	REAL		DEFINED	169	220					
				REFS	230	231	232	243	245		
				DEFINED	226	228					
0	DN	INTEGER	POPCOM	REFS	16	24	DEFINED	28	I/O REFS	67	83
1	DUMMY	INTEGER	ARRAY POPCOM	REFS	16	24					
1053	ETA	REAL	GOPCOM	REFS	13	22	DEFINED	66			
550	FAL	REAL	ARRAY GENCOM	REFS	10	20	110	135	136	137	142
				REFS	143	145	146	147	226	239	252
				DEFINED	264	110	239	264			
5764	FCL	REAL	ARRAY GENCOM	REFS	10	20	136	137	149	150	240
				REFS	252	265	DEFINED	135	142	143	145
				REFS	146	147	240	265			
0	GOP	INTEGER	GENCOM	REFS	8	20					
2063	I	INTEGER		DEFINED	30	162					
16152	IC	INTEGER	GENCOM	REFS	20	28	102	103	2*110	3*135	2*136
				2*137	3*142	3*143	3*144	3*145	3*146	3*147	149
				150	226	233	234	235	2*239	2*240	2*252
				257	2*264	2*265	272	276	DEFINED	26	
340	IMR	INTEGER	ARRAY POPCOM	REFS	16	24					
355	INAF	INTEGER	POPCOM	REFS	17	24					
360	INPT	INTEGER	POPCOM	REFS	17	24					
337	INTB	INTEGER	POPCOM	REFS	16	24					

\*\*\*\*\* F03 \*\*\*\*\*

```

115      R(4) = AD
        R(5) = B
        R(6) = DA
        R(7) = DSL
120      R(8) = DSR
        R(9) = PD
        R(10) = QD
        DO 62 I=1,3
          62 CPER(I,7) = -(CPER(I,7))
          GO TO 700
125      C  VERT TAIL (SG OR ROOT)
          630 NSA= WTN+2
              IS= 5
              JA= 3
              NF= 1
130              NL= 8
              R(1) = B
              R(2) = AB
              R(3) = DA
              R(4) = DSR + DSL
135              R(5) = DRU
              R(6) = DRL
              R(7) = PD
              R(8) = YD
              GO TO 700
140      C  FORWARD FUSELAGE - VERTICAL
          650 NSA=7
              IS= 3
              JA= 3
              NF= 1
145              NL= 2
              R(1) = 1.0
              R(2) = A
              GO TO 700
          C  AFT FUSELAGE - VERTICAL
150      660 NSA=9
              IS= 3
              JA= 3
              NF= 1
155              NL= 2
              R(1) = 1.0
              R(2) = A
          700 PRINT 7000
          7000 FORMAT(9D5)
          IF (S.NE.5) PRINT 7001, LRVL(IS)
160      7001 FORMAT(*,A10/)
          PRINT 7002
          7002 FORMAT(*,NSEQ AERODYNAMIC EFFECT*,7X,*VALUE CV PER *,
1        1 *CB PER CT PER CV CB CT *,
2        2 *V KIPS B IN-KIPS T IN-KIPS*/)
165      C  COMPUTE COMPONENT COEFFICIENTS AND LOADS
          C
          C
          DO 70 I=NF,NL
          DO 72 J=1,3
170      72 CTOT(J) = R(I) * CPER(J,I)
          LTOT(1) = CTOT(1) * Q * SWT

```

\*\*\*\* F04 \*\*\*\*

PROGRAM FLIP 73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.26

PAGE 7

FILE NAMES MODE  
 6020 TAPE16  
 7062 TAPE17  
 10124 TAPE18  
 11166 TAPE19  
 12230 TAPE20  
 13272 TAPE30  
 14334 TAPE40  
 15376 TAPE50

EXTERNALS	TYPE	ARGS	REFERENCES
CHEAD		0	132
EOF	REAL	1	91
GOPSR		0	78
IOPSR		0	105
POPSR		0	101
WOPSR		0	85
			106

STATEMENT LABELS	DEF LINE	REFERENCES
0 5	73	69
0 10	94	93
17016 50	191	114 117 175
0 54	132	131
16772 57	173	164 166 169
0 58	179	177
16510 100	74	72
16526 200	89	92 95
16551 300	96	91
0 500	108	
	INACTIVE	
16401 510	124	121
16402 520	126	120 122
16465 560	162	185
17010 580	182	178
17014 590	187	180
17022 999	195	80 81 108 109
17040 1000	FMT 62	61
17054 1001	FMT 65	63 64
17064 1003	FMT 71	70
17076 2000	FMT 90	89
17107 3000	FMT 97	96
17114 5000	FMT 112	111
17362 5001	FMT 194	193
17121 5200	FMT 129	128
17140 5400	FMT 137	135
17160 5401	FMT 140	139
17177 5500	FMT 146	142
17203 5501	FMT 147	143
17207 5502	FMT 148	144
17216 5503	FMT 149	145
17241 5510	FMT 154	150
17253 5511	FMT 156	151
17284 5520	FMT 158	152
17273 5521	FMT 159	153
17322 5700	FMT 171	167
17326 5701	FMT 172	170
17335 5800	FMT 184	183
17346 5900	FMT 188	187

SUBROUTINE GOPSR			73/74	OPT=1	FTN 4.2+75060				07/29/81	16.31.29.	PAGE	14
VARIABLES	SN	TYPE	RELOCATION		DEFINED	334	339	344	351	356	361	368
5246	XA	REAL	ARRAY		REFS	373						
					REFS	9	241	334	2*339	344	2*351	356
3567	XAFT	REAL			REFS	2*361	368	2*373	414	DEFINED	6*229	282
					REFS	8	139	181	183		184	185
3601	XAZ	REAL			REFS	191	196	DEFINED	137			
1064	XCN	REAL		GOPCOM	REFS	11	273	282	283	DEFINED	271	
					REFS	19	22	46	213		432	
3752	XCP	REAL	ARRAY		DEFINED	24	45					
					REFS	7	2*176	2*177	178		179	
3573	XCT	REAL			DEFINED	154						
3566	XFW	REAL			REFS	8	201	DEFINED	200			
					REFS	8	139	182	183		184	185
					REFS	195	195	DEFINED	137			
3563	XLE	REAL			REFS	7	181	183	184		185	186
					REFS	200	DEFINED	154	178	193	195	198
3570	XMR	REAL			REFS	8	139	201	201	DEFINED	137	
20206	XN	REAL	ARRAY		REFS	10	282	283	283	DEFINED	2*347	2*364
					DEFINED	241						
27313	XT	REAL	ARRAY		REFS	11	3*404	DEFINED	328		388	395
3564	XTE	REAL			REFS	7	182	183	184		185	186
					REFS	200	DEFINED	154	179		191	198
3556	XZ	REAL			REFS	7	241	DEFINED	103			
27326	Y	REAL	ARRAY		REFS	11	6*380	3*382	6*387	3*389	6*394	3*396
					DEFINED	335	340	345	352	357	362	369
10346	YA	REAL	ARRAY		REFS	9	235	237	242	243	4*318	4*321
					REFS	332	335	2*337	4*339	342	345	2*349
					REFS	354	357	2*359	4*361	366	369	2*371
					REFS	413	DEFINED	2*229	235	237	283	4*373
3602	YAZ	REAL			REFS	11	273	282	283	DEFINED	271	
3575	YIN	REAL			REFS	9	DEFINED	229				
1054	YL	REAL		GOPCOM	REFS	18	22	42	161		163	165
					DEFINED	41	158					
22466	YN	REAL	ARRAY		REFS	10	255	282	283	DEFINED	242	
3577	YOUT	REAL			REFS	9	DEFINED	229				
27316	YT	REAL	ARRAY		REFS	11	384	391	398	3*403		
					DEFINED	329	382	389	396			
3557	YZ	REAL			REFS	7	158	242	243	DEFINED	103	154
12626	ZA	REAL	ARRAY		REFS	9	236	238	242		243	
					DEFINED	2*229	236	238				
3576	ZIN	REAL			REFS	9	DEFINED	229				
24746	ZN	REAL	ARRAY		REFS	10	DEFINED	243				
3600	ZOUT	REAL			REFS	9	DEFINED	229				
3560	ZZ	REAL			REFS	7	242	243	DEFINED	103	154	
FILE NAMES	MODE											
OUTPUT	FMT			WRITES	57	59	62	73	74	75	76	82
					85	91	116	127	139	144	145	147
					161	170	204	205	209	211	221	273
					286	289	292	293	307	308	309	416
					418	419	420	421	422	423	439	464
					470	471	474	495	496	499	502	514
					516							
PUNCH	FMT			WRITES	64	133	165	215	268	314	434	478
TAPE1	FMT			READS	31	35	41	45	55	88	137	271

\*\*\*\* 602 \*\*\*\*

NASA DFRC

SUBROUTINE IOPSR		73/74	OPT=1	FTN 4.2+75060		07/29/81	16.31.44.	PAGE	7
VARIABLES	SN	TYPE	RELOCATION	REFS					
4	IOP	INTEGER	GENCOM	8	20	36	68	111	121
				177	191	208	251	266	272
2067	J	INTEGER		REFS 3*209	3*210	243	245	DEFINED	65
				206					168
2064	JJ	INTEGER		REFS 44	184	DEFINED	42	43	183
2070	Y	INTEGER		REFS 238	239	240	2*252	2*264	2*265
				DEFINED 81	237	2*252	263		
2065	L	INTEGER		REFS 44	72	3*110	2*112	114	125
				REFS 2*136	149	150	2*155	165	184
				243	DEFINED 44	72	109	2*112	114
				134	2*136	2*137	149	150	2*155
				213	243				165
2072	LC	INTEGER		REFS 226	DEFINED	224	225		
2074	LN	INTEGER		REFS 2*239	2*240	DEFINED	238		
2071	LR	INTEGER		REFS 238	2*252	DEFINED	202	203	
16153	LRC	INTEGER	ARRAY	GENCOM	REFS 9	20	243		
544	LRLV	INTEGER	ARRAY	GENCOM	REFS 8	20			
2056	LU	INTEGER		REFS 70	77	123	DEFINED	63	76
272	MR	REAL		POP COM	REFS 18	24	95	97	98
366	MRN	INTEGER	ARRAY	POP COM	REFS 17	24			
273	M1	REAL	ARRAY	POP COM	REFS 18	24			
1	N	INTEGER		GOP COM	REFS 11	22	42	43	3*44
					51	52	2*72	74	75
					112	114	2*125	126	127
					3*142	3*143	4*144	4*145	4*146
					3*155	6*165	172	183	6*184
					203	2*213	215	216	217
					2*239	2*240	2*252	256	2*264
					DEFINED 165			2*265	2*265
353	NAF	REAL		POP COM	REFS 18	24			
1065	NALD	INTEGER		GOP COM	REFS 12	22	161	162	274
					DEFINED 29				
256	NC	INTEGER		GENCOM	REFS 8	20	26		
1055	NP	INTEGER		GOP COM	REFS 12	22	70	77	81
					DEFINED 66				
357	NPT	REAL		POP COM	REFS 18	24	DEFINED	67	
622	NR	INTEGER		GOP COM	REFS 11	22	65		
0	NSAD	INTEGER		GOP COM	REFS 11	22	30	DEFINED	29
257	NSB	INTEGER		GENCOM	REFS 8	20			
1066	NT	INTEGER		GOP COM	REFS 12	22	168	184	206
					DEFINED 165				260
271	NTB	REAL		POP COM	REFS 18	24			
2077	PL	REAL	ARRAY		REFS 6	104	105	106	110
					114	233	234	235	240
					DEFINED 102	103	104	105	106
					231	232	233	234	235
1057	PN	INTEGER	ARRAY	GOP COM	REFS 12	22	112	114	DEFINED
1	POP	INTEGER		GENCOM	REFS 8	20			82
326	Q1	REAL	ARRAY	POP COM	REFS 18	24	102	103	135
					REFS 144	146	147	233	234
260	RD	REAL	ARRAY	GENCOM	REFS 10	20			142
1052	RN	INTEGER		GOP COM	REFS 12	22	DEFINED	66	235
2	ROP	INTEGER		GENCOM	REFS 8	20			
16161	RS	LOGICAL		GENCOM	REFS 7	20	188	192	203
					223	256	DEFINED	174	259
312	SABODY	INTEGER	ARRAY	GOP COM	REFS 11	22	155		215
2	SANAME	INTEGER	ARRAY	GOP COM	REFS 11	22	44	72	125
									155
									184

\*\*\*\* 603 \*\*\*\*

NASA DFRC

```

      LTOT(2) = CTOT(2) * Q * SWT * BWT
      LTOT(3) = CTOT(3) * Q * SWT * CWT
      DO 75 J=1,3
175     WCL(IC,NSA,J+JA) = WCL(IC,NSA,J+JA) + CTOT(J)
        75 WAL(IC,NSA,J+JA) = WAL(IC,NSA,J+JA) + LTOT(J)
        70 PRINT 7500, NSEQ(I),(DES(J,I),J=1,3),R(I),(CPER(J,I),J=1,3),
          1 CTOT,LTOT
      7500 FORMAT(* * ,I5,3X,3A7,F10.2,6F10.6,-3P,F11.3,F13.3,F12.3)
180     PRINT 7600, NSA,(WCL(IC,NSA,J+JA),J=1,3),(WAL(IC,NSA,J+JA),J=1,3)
      7600 FORMAT(*0* ,*WLN= * ,I2,6X,*TOTAL LOADS ON SURFACE*,31X,
          1 3F10.6,-3P,F11.3,F13.3,F12.3)
      C
      C ALPHA=0 OPTION FOR WING AND HORIZ TAIL
      C
      IF(WTN.GT.2) GO TO 800
      IF(.NOT.WGW(NSA+1)) GO TO 800
      DO 77 J=1,3
190     77 WCL(IC,NSA+1,J+JA) = WCL(IC,NSA,J+JA) - CPER(J,I)
        WAL(IC,NSA+1,1+JA) = WCL(IC,NSA+1,1+JA)*Q*SWT
        WAL(IC,NSA+1,2+JA) = WCL(IC,NSA+1,2+JA)*Q*SWT*BWT
        WAL(IC,NSA+1,3+JA) = WCL(IC,NSA+1,3+JA)*Q*SWT*CWT
        PRINT 7700, (NSA+1),(WCL(IC,NSA+1,J+JA),J=1,3),
          1 (WAL(IC,NSA+1,J+JA),J=1,3)
195     7700 FORMAT(*0* ,*WLN= * ,I2,6X,*TOTAL LOADS ON SURFACE WITHOUT * ,
          1 *ALPHA=0 TERM*,7X,3F10.6,-3P,F11.3,F13.3,F12.3)
      C
      C RECYCLE CONTROL DATA
      C
200     800 GO TO (810,820,400,400,850,860) WTN
      C WING - RIGHT HAND
      810 IF(JA.EQ.3) GO TO 400
      IS= 2
      JA= 3
205     R(4)= DSR
      DO 81 I=1,3
        CPER(I,4) = -(CPER(I,4))
        CPER(I,5) = -(CPER(I,5))
210     81 CPER(I,7) = -(CPER(I,7))
        CPER(I,8) = -(CPER(I,8))
      GO TO 700
      C HORIZ TAIL - RIGHT HAND
      820 IF(JA.EQ.3) GO TO 400
      IS= 2
      JA= 3
215     R(7)= DSR
      R(8)= DSL
      DO 82 I=1,3
        CPER(I,5) = -(CPER(I,5))
220     CPER(I,6) = -(CPER(I,6))
        CPER(I,7) = -(CPER(I,7))
        CPER(I,8) = -(CPER(I,8))
      82 CPER(I,9) = -(CPER(I,9))
      GO TO 700
225     C FORWARD FUSELAGE - LATERAL
      850 IF(NSA.EQ.8.OR..NOT.WGW(8)) GO TO 400
      NSA=8
      IS= 4

```

\*\*\*\* 604 \*\*\*\*

NASA DFRC

PROGRAM FLIP 73/74 OPT=1 FTN 4.2+75060 07/29/81 16.31.26. PAGE 8

LOOPS	LABEL	INDEX	FROM-TO	LENGTH	PROPERTIES	EXT REFS	EXITS
16476	5	* I	69 73	12B			
16547	10	K	93 94	2B	INSTACK		
16572	50	* I	114 191	2273		EXT REFS	NOT INNER
16606	54	* IC	131 132	4B		EXT REFS	
16673	57	* IC	164 173	102B		EXT REFS	NOT INNER
16702		* K	167	14B		EXT REFS	
16717		* K	167	14B		EXT REFS	
16740		* K	170	14B		EXT REFS	
16755		* K	170	14B		EXT REFS	
17004	58	* IC	177 179	3B	INSTACK		EXITS

COMMON BLOCKS	LENGTH	MEMBERS	- BIAS NAME(LENGTH)				
GENCOM	7282	0	GOP (1)	1	POP (1)	2	ROP (1)
		3	SOP (1)	4	IOP (1)	5	WOP (1)
		6	WGR (50)	56	WGS (50)	106	WGI (50)
		156	WGW (14)	170	AC (4)	174	NC (1)
		175	NSB (1)	176	RD (180)	356	LRVL (4)
		360	FAL (2700)	3060	FCL (2700)	5760	WAL (756)
		6516	WCL (756)	7272	SCN (2)	7274	IC (1)
		7275	LRC (3)	7278	VBT (3)	7281	RS (1)
		0	NSAD (1)	1	N (1)	2	SANAME (200)
		202	SABODY (100)	302	BTC (50)	352	SC (50)
		402	NR (1)	403	SREF (50)	453	BREF (50)
		503	CREF (50)	553	CAVG (1)	554	RN (1)
		555	ETA (1)	556	YL (1)	557	NP (1)
		558	CROW (1)	559	PN (2)	561	SP (1)
562	BARM (1)	563	TARM (1)	564	XCN (1)		
565	NALD (1)	566	NT (1)	567	CN (1)		
POPCOM	249	568	CL (1)	569	CT (1)	570	C (3)
		0	DN (1)	1	DUMMY (4)	5	TIT1 (162)
		167	TIT2 (18)	185	NTB (1)	186	MR (1)
		187	M1 (9)	196	A1 (9)	205	B1 (9)
		214	M1 (9)	223	INTB (1)	224	IMR (1)
		233	CPBODY (2)	235	NAF (1)	236	THETA (1)
		237	INAF (1)	238	YR (1)	239	NPT (1)
		240	INPT (1)	241	XC (1)	242	CPS (1)
		243	CPR (1)	244	CPL (1)	245	XR (1)
		246	MRN (2)	248	SB (1)		

STATISTICS

PROGRAM LENGTH	1105B	581
BUFFER LENGTH	16440B	7456
CM LABELED COMMON LENGTH	17650B	8104



SUBROUTINE GOPSR		73/74	OPT=1	FTN 4.2+7_060			07/29/81	16.31.29.	PAGE	15
FILE NAMES		MODE								
TAPE20	UNFMT		WRITES	482						
				32	37	42	46	56	130	163
				312	432	459	489	26	26	522
TAPE30	UNFMT		READS	69	103	111	154	229	MOTION	67
EXTERNALS*		TYPE		ARGS		REFERENCES				
COS	REAL	1	LIBRARY	242	282	283				
EOF	REAL	1		70						
SIN	REAL	1	LIBRARY	242	282	283				
STATEMENT LABELS		DEF LINE		REFERENCES						
0	10		49	34						
0	11		48	40						
0	12		46	44						
1440	20		441	65	224					
0	30		219	173						
0	40		244	234						
0	41		243	240						
722	45		259	247	256					
0	47		284	280						
0	48		283	281						
0	49		289	288						
0	50		437	298						
0	55		329	326						
0	80		507	446						
1660	85		506	481	490	504				
76	200		55	27						
114	205		65	61						
142	207		85	81						
144	210		88	71						
222	220		103	112						
245	230		114	109						
272	300		126	119	120					
336	310		137	132						
437	320		168	164						
472	330		188	181	182					
474	331		191	183						
476	332		193	184						
500	333		195	185						
503	340		198	186	192	194				
514	350		203	190						
526	360		211	203						
536	370		217	214						
545	400		229	121						
712	450		253	248						
771	460		271	267						
1116	495		315	300	313					
1076	497		311	306						
	0	INACTIVE	324							
1150	510		337	332						
1161	520		342	337						
1167	530		347	342						
0	540	INACTIVE	349							
1203	550		354	349						
1211	560		359	347	354					
1222	570		364	359						
0	580	INACTIVE	366							

SUBROUTINE IOPSR		73/74	OPT=1	FTN 4.2+75060		07/29/81	16.31.44.	PAGE	8
VARIABLES	SN	TYPE	RELOCATION						
370 SB		LOGICAL		POP COM	REFS	213	243	DEFINED	165
540 SC		INTEGER	ARRAY	GOP COM	REFS	15	24		
					REFS	11	22	43	51
					REFS	75	100	114	126
					REFS	149	150	183	188
					REFS	216	217	256	165
16150 SCN		INTEGER	ARRAY	GEN COM	REFS	8	20	44	184
3 SOP		INTEGER		GEN COM	REFS	8	20		
1061 SP		REAL		GOP COM	REFS	14	22	102	103
					DEFINED	82			
623 SREF		REAL	ARRAY	GOP COM	REFS	13	22	46	142
					REFS	146	147	184	233
					DEFINED	165			
1063 TARM		REAL		GOP COM	REFS	14	22	106	107
					DEFINED	82			
354 THETA		REAL		POP COM	REFS	18	24	45	100
5 TIT1		INTEGER	ARRAY	POP COM	REFS	16	24		
247 TIT2		INTEGER	ARRAY	POP COM	REFS	16	24		
16156 VBT		INTEGER	ARRAY	GEN COM	REFS	9	20	243	
13200 WAL		REAL	ARRAY	GEN COM	REFS	10	20		
14564 WCL		REAL	ARRAY	GEN COM	REFS	10	20		
152 WGI		LOGICAL	ARRAY	GEN COM	REFS	7	20	172	
6 WGR		LOGICAL	ARRAY	GEN COM	REFS	7	20		
70 WGS		LOGICAL	ARRAY	GEN COM	REFS	7	20		
234 WGW		LOGICAL	ARRAY	GEN COM	REFS	7	20		
5 WOP		INTEGER		GEN COM	REFS	8	20		
361 XC		REAL		POP COM	REFS	19	24	DEFINED	83
1064 XCN		REAL		GOP COM	REFS	14	22	DEFINED	82
365 XR		REF		POP COM	REFS	19	24	DEFINED	83
1054 YL		REF		GOP COM	REFS	13	22	DEFINED	66
356 YR		REAL		POP COM	REFS	18	24	DEFINED	67
FILE NAMES	MODE								
OUTPUT	FMT			WRITES		37	44	45	46
						74	75	78	114
						136	137	149	150
						189	192	197	212
						243	245	252	267
TAPE20	UNFMT			READS		29	66	82	165
TAPE50	UNFMT			WRITES		170	READS	220	MOTION
VARIABLES USED AS FILE NAMES,				SEE ABOVE					163
									204
EXTERNALS	TYPE	ARGS	REFERENCES						
CHEAD		0	40	181					
SYNC		1	31						
STATEMENT LABELS	DEF LINE	REFERENCES							
0 10	279	26							
437 20	159	30	31	148	153				
0 30	119	65							
0 35	110	109							
225 40	118	81	111						
0 45	135	134							
1013 60	270	162	172	256	266				
0 62	170	168							
725 65	249	206	242						
0 67	240	237							

\*\*\*\* H03 \*\*\*\*

```

230      JA= 3
        NF= 3
        NL= 4
        R(3)= PD
        R(4)= B
        GO TO 700
235      C
        AFT FUSELAGE
        860 IF(NSA.EQ.12) GO TO 880
          IF(.NOT.WGW(10)) GO TO 870
        C
        TOTAL TAIL LOADS - VERTICAL
        PRINT 8600
240      LTOT(1) = WAL(IC,3,1)
        LTOT(2) = WAL(IC,3,1) * XHT
        CTOT(1) = LTOT(1) / (Q*SWT)
        CTOT(2) = LTOT(2) / (Q*SWT*BWT)
245      WAL(IC,10,4) = WAL(IC,10,4) + LTOT(1)
        WAL(IC,10,5) = WAL(IC,10,5) + LTOT(2)
        PRINT 8601, WAL(IC,3,1),XHT,CTOT(1),CTOT(2),LTOT(1),LTOT(2)
        LTOT(1) = WAL(IC,3,4)
        LTOT(2) = WAL(IC,3,4) * XHT
250      CTOT(1) = LTOT(1) / (Q*SWT)
        CTOT(2) = LTOT(2) / (Q*SWT*BWT)
        WAL(IC,10,4) = WAL(IC,10,4) + LTOT(1)
        WAL(IC,10,5) = WAL(IC,10,5) + LTOT(2)
        PRINT 8602, WAL(IC,3,4),XHT,CTOT(1),CTOT(2),LTOT(1),LTOT(2)
255      LTOT(2) = WAL(IC,3,3) * (-1.0)
        CTOT(2) = LTOT(2) / (Q*SWT*BWT)
        WAL(IC,10,5) = WAL(IC,10,5) + LTOT(2)
        PRINT 8603, WAL(IC,3,3),CTOT(2),LTOT(2)
        LTOT(2) = WAL(IC,3,6) * (-1.0)
        CTOT(2) = LTOT(2) / (Q*SWT*BWT)
260      WAL(IC,10,5) = WAL(IC,10,5) + LTOT(2)
        PRINT 8604, WAL(IC,3,6),CTOT(2),LTOT(2)
        WCL(IC,10,4) = WAL(IC,10,4) / (Q*SWT)
        WCL(IC,10,5) = WAL(IC,10,5) / (Q*SWT*BWT)
265      WCL(IC,11,4) = WCL(IC,10,4)+WCL(IC,9,4)
        WCL(IC,11,5) = WCL(IC,10,5)+WCL(IC,9,5)
        WAL(IC,11,4) = WAL(IC,10,4)+WAL(IC,9,4)
        WAL(IC,11,5) = WAL(IC,10,5)+WAL(IC,9,5)
        PRINT 8605, WCL(IC,10,4),WCL(IC,10,5),WAL(IC,10,4),WAL(IC,10,5)
        PRINT 8606, WCL(IC,11,4),WCL(IC,11,5),WAL(IC,11,4),WAL(IC,11,5)
270      8600 FORMAT(+D*,T15,*TAIL INDUCED LOADS V FACTOR B FACTOR *,
        1 *T FACTOR*)
        8601 FORMAT(T15,*LHT V*,-3PF12.3,0P,* KIPS*,5X,* 1.00*,4X,F6.2,5X,
        1 * *,-*2F10.6,6X,*- *,-3P,F11.3,F13.3,8X,*-*)
275      8602 FORMAT(T15,*RHT V*,-3PF12.3,0P,* KIPS*,5X,* 1.00*,4X,F6.2,5X,
        1 * *,-*2F10.6,6X,*- *,-3P,F11.3,F13.3,8X,*-*)
        8603 FORMAT(T15,*LHT T*,-3PF12.3,0P,* IN-KIPS*,5X,* *,-*5X,*-1.00*,
        1 *6X,* *,-*F10.6,6X,* *,-*7X,*- *,-3PF13.3,8X,*-*)
        8604 FORMAT(T15,*RHT T*,-3PF12.3,0P,* IN-KIPS*,5X,* *,-*5X,*-1.00*,
        1 *5X,* *,-*F10.6,6X,* *,-*7X,*- *,-3PF13.3,8X,*-*)
280      8605 FORMAT(+D*,*WLN=10*,6X,*TOTAL TAIL LOADS ADDING TO AFT *,
        1 *FUSELAGE*,T71,2F10.6,6X,*- *,-3P,F11.3,F13.3,8X,*-*)
        8606 FORMAT(+D*,*WLN=11*,6X,*TOTAL LOADS ON AFT FUSELAGE - *,
        1 *VERTICAL*,T71,2F10.6,6X,*- *,-3P,F11.3,F13.3,8X,*-*)
        C
        AFT FUSELAGE - LATERAL RECYCLE
285      870 IF(.NOT.WGW(12)) GO TO 400

```

\*\*\*\*\* NO4 \*\*\*\*\*

SUBROUTINE GOPSR

73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.29.

PAGE 1

```

SUBROUTINE GOPSR
C
C   CREATES SURFACE/AXIS DEFINITION FILE
5
  INTEGER CID(20),UID(20),UOPT,UON,NRB(2),NB(2)
  INTEGER IFN,IBTC,NW,NCP,ICBM,IBN,NIB,NV,JJ,TNP(50),NLP
  REAL MN,DUM,XL,YZ,ZZ,TN,TND,XLE,XTE,TBL,XCP(100),RCP(100)
  REAL DRDX(100),DYDX(100),DZDX(100),XFW,XAFT,XMR,MRC,DX,XCT,TA
  REAL YIN,ZIN,YOUT,ZOUT,PC(200),XA(8,200),YA(6,200),ZA(6,200)
  REAL AP(200),CB(200),TC(6,200),XN(6,200),YN(6,200),ZN(6,200)
  REAL XAZ,YAZ,LA,LAD,TYL(50),BT(3),XT(3),YT(3),X(5),Y(5)
  LOGICAL WGR(50),WGS(50),WGI(50),WGW(14),RS
  INTEGER GOP,POP,ROP,SOP,IOP,WOP,AC(2,2),NC,NSB,LRVL(4),SCN(2)
  INTEGER LRC(3),VBT(3)
15
  REAL RD(20,9),FAL(9,50,6),FCL(9,50,6),WAL(9,14,6),WCL(9,14,6)
  INTEGER NSAD,N,SANAME(4,50),SABODY(2,50),BTC(50),SC(50),NR
  INTEGER RN,NP,PN(2),NALD,NT,CN,CL,CT
  REAL SREF(50),BREF(50),CREF(50),CAVG,ETA,YL,CROW
  REAL SP,BARM,TARM,XCN,C(3)
20
  COMMON/GENCOM/GOP,POP,ROP,SOP,IOP,WOP,WGR,WGS,WGI,WGW,AC,NC,NSB,
  1  RD,LRVL,FAL,FCL,WAL,WCL,SCN,IC,LRC,VBT,RS
  COMMON/GOPCOM/NSAD,N,SANAME,SABODY,BTC,SC,NR,SREF,BREF,CREF,CAVG,
  1  RN,ETA,YL,NP,CROW,PN,SP,BARM,TARM,XCN,NALD,NT,CN,CL,CT,C
25
  DATA CAVG/1.0/,ETA/0.0/,CROW/0.0/,XCN/0.0/
  DATA UON/'INCH'/
  REWIND 20
  IF(GOP.GT.2) GO TO 200
C
C   READ SURFACE/AXIS DATA IF ON CARDS
30
  READ(1,1000) NSAD,NALD
  WRITE(20) NSAD,NALD
1000 FORMAT(I2,28X,I2)
  DO 10 I=1,NSAD
35
  READ(1,1001) N,(SANAME(L,N),L=1,4),(SABODY(L,N),L=1,2),
  1  BTC(N),SP(N),NR,SREF(N),BREF(N),CREF(N),CAVG
  1  WRITE(20) N,(SANAME(L,N),L=1,4),(SABODY(L,N),L=1,2),
  1  BTC(N),SC(N),NR,SREF(N),BREF(N),CREF(N),CAVG
40
1001 FORMAT(I2,2X,4A4,2X,2A4,I3,I3,I4,4F10.0)
  DO 11 J=1,NR
  READ(1,1002) RN,ETA,YL,NP,CROW
  WRITE(20) RN,ETA,YL,NP,CROW
1002 FORMAT(I2,F8.0,F10.0,8X,I2,F10.0)
  DO 12 K=1,NP
45
  READ(1,1003) PN,SP,BARM,TARM,XCN
  12 WRITE(20) PN,SP,BARM,TARM,XCN
1003 FORMAT(I2,I5,4F10.0)
  11 CONTINUE
  10 CONTINUE
50
  C   CHECK FOR ANY ADDITIONAL LOADS
  GO TO 800
C
C   GREATE DATA FROM GDTAPE
C
55
  200 READ(1,1000) NSAD,NALD
  WRITE(20) NSAD,NALD
  PRINT *800, GOP

```



SUBROUTINE IOPSR

73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.44.

PAGE 9

STATEMENT LABELS	DEF LINE	REFERENCES				
0 69	265	263				
60 200	65	36				
111 250	77	70				
115 300	81	68				
132 310	87	85				
135 320	91	85				
140 330	95	85				
171 400	102	89	93			
254 430	134	123				
347 450	142	121				
425 500	154	31				
500 620	177	260				
535 630	191	261				
546 640	202	177	191			
575 650	212	209	210			
627 655	220	208	211			
650 660	228	222				
766 680	256	251				
1000 690	263	257				
1016 800	272	161				
1030 820	276	272				
1053 1000 FMT	38	37	71	124	154	273
1102 1020 FMT	47	44				
1112 1021 FMT	49	45				
1116 1022 FMT	50	46				
1133 1030 FMT	53	51	74			
1171 1031 FMT	59	52	75			
1243 2000 FMT	73	72	125			
1260 2500 FMT	79	78				
1326 4000 FMT	115	112				
1336 4001 FMT	117	114				
1362 4100 FMT	128	126				
1402 4101 FMT	132	127				
1433 4300 FMT	138	136				
1450 4301 FMT	140	137				
1477 4500 FMT	151	149				
1506 4501 FMT	152	150				
1525 5000 FMT	156	155				
1572 6200 FMT	179	178	212			
1612 6250 FMT	186	184				
1640 6300 FMT	193	188				
1643 6301 FMT	194	189	215			
1646 6302 FMT	195	192	217			
1654 6350 FMT	198	197	218			
1705 6500 FMT	214	213				
1757 6700 FMT	246	243				
1767 6701 FMT	248	245				
2006 6800 FMT	253	252				
2021 6900 FMT	268	267				
2036 8000 FMT	275	274				
2050 8200 FMT	277	276				

LOOPS	LABEL	INDEX	FROM-TO	LENGTH	PROPERTIES
3	10	* IC	26 279	1032B	EXT REFS NOT INNER
12	20	* I	30 159	430B	EXT REFS NOT INNER
61	30	* J	65 119	151B	EXT REFS NOT INNER
116	40	* K	81 118	112B	EXT REFS NOT INNER

\*\*\*\*\* I03 \*\*\*\*\*

```

NSA=12
IS= 4
JA= 3
NF= 3
NL= 8
R(3)= B
R(4)= AB
R(5)= DA
R(6)= DRL
R(7)= PD
R(8)= B
GO TO 700
C TOTAL TAIL LOADS - LATERAL
880 IF(.NOT.MGW(13)) GO TO 400
PRINT 8600
LTOT(1) = WAL(IC,6,4)
LTOT(2) = WAL(IC,6,4) * XVT
LTOT(3) = WAL(IC,6,4) * ZVT
CTOT(1) = LTOT(1) / (Q*SWT)
CTOT(2) = LTOT(2) / (Q*SWT*BWT)
CTOT(3) = LTOT(3) / (Q*SWT*CWT)
WAL(IC,13,4) = WAL(IC,13,4) + LTOT(1)
WAL(IC,13,5) = WAL(IC,13,5) + LTOT(2)
WAL(IC,13,6) = WAL(IC,13,6) + LTOT(3)
PRINT 8801, WAL(IC,6,4),XVT,ZVT,CTOT,LTOT
LTOT(3) = WAL(IC,6,5)
CTOT(3) = LTOT(3) / (Q*SWT*CWT)
WAL(IC,13,6) = WAL(IC,13,6) + LTOT(3)
PRINT 8802, WAL(IC,6,5),CTOT(3),LTOT(3)
LTOT(2) = WAL(IC,6,6) * (-1.0)
CTOT(2) = LTOT(2) / (Q*SWT*BWT)
WAL(IC,13,5) = WAL(IC,13,5) + LTOT(2)
PRINT 8803, WAL(IC,6,6),CTOT(2),LTOT(2)
LTOT(3) = WAL(IC,3,1) * YHT
CTOT(3) = LTOT(3) / (Q*SWT*CWT)
WAL(IC,13,6) = WAL(IC,13,6) + LTOT(3)
PRINT 8804, WAL(IC,3,1),YHT,CTOT(3),LTOT(3)
YHT = -(YHT)
LTOT(3) = WAL(IC,3,4) * YHT
CTOT(3) = LTOT(3) / (Q*SWT*CWT)
WAL(IC,13,6) = WAL(IC,13,6) + LTOT(3)
PRINT 8805, WAL(IC,3,4),YHT,CTOT(3),LTOT(3)
LTOT(3) = WAL(IC,3,2)
CTOT(3) = LTOT(3) / (Q*SWT*CWT)
WAL(IC,13,6) = WAL(IC,13,6) + LTOT(3)
PRINT 8806, WAL(IC,3,2),CTOT(3),LTOT(3)
LTOT(3) = WAL(IC,3,5) * (-1.0)
CTOT(3) = LTOT(3) / (Q*SWT*CWT)
WAL(IC,13,6) = WAL(IC,13,6) + LTOT(3)
PRINT 8807, WAL(IC,3,5),CTOT(3),LTOT(3)
WCL(IC,13,4) = WAL(IC,13,4) / (Q*SWT)
WCL(IC,13,5) = WAL(IC,13,5) / (Q*SWT*BWT)
WCL(IC,13,6) = WAL(IC,13,6) / (Q*SWT*CWT)
WCL(IC,14,4) = WCL(IC,13,4)+WCL(IC,12,4)
WCL(IC,14,5) = WCL(IC,13,5)+WCL(IC,12,5)
WCL(IC,14,6) = WCL(IC,13,6)+WCL(IC,12,6)
WAL(IC,14,4) = WAL(IC,13,4)+WAL(IC,12,4)

```

\*\*\*\* IO4 \*\*\*\*

```

2000 FORMAT(*1//1X,*GEOMETRY OPTION =*,I2,/)
PRINT 2001, NSAD
60 2001 FORMAT(*,I2,* SURFACE/AXIS DEFINITIONS TO BE COMPUTED*)
IF(GOP.NE.4) GO TO 205
PRINT 2002
2002 FORMAT(***;T47,*AND PUNCHED*/)
65 205 DO 20 I=1,NSAD
PUNC 1000, NSAD,NALD
TA= 0.0
REWIND 30
C READ GDTAPE HEADER RECORD
70 READ(30) CID,UID,IFN,MN,DUM,UOPT,DUM
IF(EOF(30).NE.0.0) GO TO 990
IF(I.NE.1) GO TO 210
C PRINT GDTAPE INFO AND CHECK UNITS
PRINT 2050, IFN
PRINT 2051, CID
75 PRINT 2052, UID
PRINT 2053, UOPT
2050 FORMAT(* USING FLEXSTAB GDTAPE , FILE*,I3//)
2051 FORMAT(* CASE ID = *,20A4/)
2052 FORMAT(* USER ID = *,20A4/)
80 2053 FORMAT(* UNITS OPTION = *,A4////////)
IF(UOPT.EQ.UOPT) GO TO 207
PRINT 2054
2054 FORMAT(30H ***** WARNING *****
85 1 // * UNITS OTHER THAN INCHES - PROCEED ANYWAY*////////)
207 PRINT 2070, NALD
2070 FORMAT(*,I2,* ADDITIONAL LOADS TO BE DEFINED*)
C READ NEXT SURFACE/AXIS DEFINITION
210 READ(1,2100) N,(SNAME(L,N),L=1,4),(SABODY(L,N),L=1,2),
1 BTC(N), SREF(N),BREF(N),CREF(N)
90 2100 FORMAT(I2,2X,4A4,2X,2A4,I3,7X, 3F10.0)
PRINT 2101, N,(SNAME(L,N),L=1,4),(SABODY(L,N),L=1,2),
1 BTC(N), SREF(N),BREF(N),CREF(N)
2101 FORMAT(*1//1X,*SURFACE/AXIS NUMBER =*,I3,6X,*SURFACE/AXIS NAME **
95 1 ,1X,4A4,4X,*GD BODY NAME = *,2A4// * INTEGRATION TYPE CODE **
2 ,I3,4X,*SREF =*,F10.3,4X,*BREF =*,F10.3,4X,*CREF =*,F10.3/)
C CHECK FOR INPUT ERROR
IF(N.LT.1.OR.N.GT.50) GO TO 991
IF(BTC(N).LT.1.OR.BTC(N).GT.3) GO TO 991
100 IF(SREF(N).EQ.0.0) SREF(N)=1.0
IF(BREF(N).EQ.0.0) BREF(N)=1.0
IF(CREF(N).EQ.0.0) CREF(N)=1.0
C READ GDTAPE BODY ID RECORD
220 READ(30) IBTC,NM,NCP,DUM,ICBN,IBN,NRB,NB,XZ,YZ,ZZ,TN,SC(N)
IF(EOF(30).NE.0.0) GO TO 990
105 C CHECK FOR TRAILER RECORD
JJ = IBTC+NM+NCP
IF(JJ.EQ.0) GO TO 992
C CHECK FOR MATCH WITH SABODY
IF(NB(1).EQ.SABODY(1,N).A.NB(2).EQ.SABODY(2,N)) GO TO 230
110 C SKIP GDTAPE BODY DATA RECORD
READ(30)
GO TO 220
C MATCH FOUND
230 IF(SC(N).NE.0) SC(N)= 1

```



SUBROUTINE GOPSR

73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.29.

PAGE 17

STATEMENT LABELS

DEF LINE REFERENCES

STATEMENT LABELS	DEF LINE	REFERENCES
3012 4900 FMT	287	286
3030 4901 FMT	290	289
3042 4910 FMT	294	293
3136 7000 FMT	424	418
3142 7001 FMT	425	419
3152 7011 FMT	427	420
3156 7012 FMT	428	421
3162 7013 FMT	429	422
3166 7019 FMT	430	423
3231 8000 FMT	449	447
3265 8200 FMT	465	462
3311 8201 FMT	468	464
3331 8202 FMT	472	470
3335 8203 FMT	473	471
3344 8300 FMT	475	474
3402 8500 FMT	483	482
3431 8700 FMT	500	499
3452 8750 FMT	503	502
3477 9900 FMT	517	512
3506 9910 FMT	518	514
3515 9920 FMT	519	516

LOOPS LABEL INDEX

FROM-TO

LENGTH

PROPERTIES

LOOPS LABEL INDEX	FROM-TO	LENGTH	PROPERTIES
13 10 * I	34 49	63B	EXT REFS NOT INNER
55 11 * J	40 48	16B	EXT REFS NOT INNER
62 12 * K	44 46	7B	EXT REFS
115 20 * I	65 441	1326B	EXT REFS EXITS NOT INNER
400 * L	154 48	14B	EXT REFS
406 * L	154 48	14B	EXT REFS
444 30 * J	173 219	77B	EXT REFS
550 * M	229	61B	EXT REFS NOT INNER
555 * L	229	14B	EXT REFS
577 * L	229	14B	EXT REFS
633 40 * K	234 244	46B	EXT REFS NOT INNER
643 41 * J	240 243	33B	EXT REFS
706 45 J	247 259	16B	OPT
1000 47 * K	280 284	33B	EXT REFS NOT INNER
1001 48 * J	281 283	27B	EXT REFS
1035 49 * J	288 289	11B	EXT REFS
1055 50 * J	298 437	362B	EXT REFS NOT INNER
1140 55 K	326 329	2B	INSTACK
1446 80 * I	446 507	217B	EXT REFS EXITS NOT INNER
1576 85 * J	481 506	65B	EXT REFS EXITS

COMMON BLOCKS GENCOM

LENGTH 7282

MEMBERS - BIAS NAME(LENGTH)

0 GOP (1)	1 POP (1)	2 ROP (1)
3 SOP (1)	4 IOP (1)	5 WOP (1)
6 WGR (50)	56 WGS (50)	106 WGI (50)
156 WGH (14)	170 AC (4)	174 NC (1)
175 NSB (1)	176 RD (180)	356 LRVL (4)
360 FAL (2700)	3060 FCL (2700)	5760 WAL (756)
650 WCL (756)	7272 SCN (2)	7274 IC (1)
7275 LRC (3)	7278 VBT (3)	7281 RS (1)
0 NSAD (1)	1 N (1)	2 SANAME (200)
202 SABODY (100)	302 BTC (50)	352 SC (50)
402 NR (1)	403 SREF (50)	453 BREF (50)
503 CREF (50)	553 CAVG (1)	554 RN (1)

GOPCOM

573

SUBROUTINE IOPSR

73/74

OPT=1

FTN 4.2+75060

07/29/81 16.31.44.

PAGE 10

LOOPS	LABEL	INDEX	FROM-TO	LENGTH	PROPERTIES
212	35	L	109 110	3B	INSTACK
261	45	L	134 135	2B	INSTACK
267		* L	136	12B	EXT REFS
302		* L	136	12B	EXT REFS
321		* L	137	12B	EXT REFS
334		* L	137	12B	EXT REFS
372		* L	149	12B	EXT REFS
411		* L	150	12B	EXT REFS
444	60	* I	162 270	352B	EXT REFS NOT INNER
466	62	* J	168 170	7B	EXT REFS
557	65	* J	206 249	151B	EXT REFS NOT INNER
676	67	* K	237 240	11B	OPT
734		* K	252	14B	EXT REFS
751		* K	252	14B	EXT REFS
1005	69	K	263 265	3B	INSTACK

COMMON BLOCKS	LENGTH	MEMBERS	- BIAS	NAME (LENGTH)
* GENCOM	7282	0	GOP	(1)
		3	SOP	(1)
		6	WGR	(50)
		156	WGW	(14)
		175	NSB	(1)
		360	FAL	(2700)
		6516	WCL	(756)
		7275	LRC	(3)
		0	NSAD	(1)
		202	SABODY	(100)
		402	NR	(1)
		503	CREF	(50)
		555	ETA	(1)
		558	CROW	(1)
		562	BARM	(1)
		565	NALD	(1)
		568	CL	(1)
		0	DN	(1)
		167	TIT2	(18)
		187	M1	(9)
		214	Q1	(9)
		233	CPBODY	(2)
		237	INAF	(1)
		240	INPT	(1)
		243	CPR	(1)
		246	MRN	(2)

GOPCOM 573

POPCOM 249

1	POP	(1)	2	ROP	(1)
4	IOP	(1)	5	WOP	(1)
56	WGS	(50)	106	WGI	(50)
170	AC	(4)	174	NC	(1)
176	RD	(180)	356	LRVL	(4)
3060	FCL	(2700)	5760	WAL	(756)
7272	SCN	(2)	7274	IC	(1)
7278	VBT	(3)	7281	RS	(1)
1	N	(1)	2	SANAME	(200)
302	BTC	(50)	352	SC	(50)
403	SREF	(50)	453	BREF	(50)
553	CAVG	(1)	554	RN	(1)
556	YL	(1)	557	NP	(1)
559	PN	(2)	561	SP	(1)
563	TARM	(1)	564	XCN	(1)
566	NT	(1)	567	CN	(1)
569	CT	(1)	570	C	(3)
1	DUMMY	(4)	5	TIT1	(162)
185	NTB	(1)	186	MR	(1)
196	A1	(9)	205	B1	(9)
223	INTB	(1)	224	IMR	(9)
235	NAF	(1)	236	THETA	(1)
238	YR	(1)	239	NPT	(1)
241	XC	(1)	242	CPS	(1)
244	CPL	(1)	245	XR	(1)
248	SB	(1)			

## STATISTICS

PROGRAM LENGTH	2105B	1093
CM LABELED COMMON LENGTH	17650B	8104

\*\*\*\*\* JOB \*\*\*\*\*

```

      WAL(IC,14,5) = WAL(IC,13,5)+WAL(IC,12,5)
      WAL(IC,14,6) = WAL(IC,13,6)+WAL(IC,12,6)
345     PRINT 8808      (WCL(IC,13,J),J=4,6), (WAL(IC,13,J),J=4,6)
      PRINT 8809      (WCL(IC,14,J),J=4,6), (WAL(IC,14,J),J=4,6)
8801     FORMAT(T15,*VTR V*,-3PF12.3,OP,*      KIPS*,5X,* :.00*,4X,F6.2,4X,
      1      F6.2,3F10.6,-3P,F11.3,F13.3,F12.3)
8802     FORMAT(T15,*VTR B*,-3PF12.3,OP,*      IN-KIPS*,2(SX,* - *) ,6X,*1.00*
      1      2(6X,*- *) ,F10.6,7X,*- * ,9X,*- *,-3PF12.3)
350     8803     FORMAT(T15,*VTR T*,-3PF12.3,OP,*      IN-KIPS*,5X,* - * ,5X,*-1.00*
      1      5X,* - * ,6X,*- * ,F10.6,6X,*- * ,7X,*- *,-3PF13.3,8X,*-*)
8804     FORMAT(T15,*LHT V*,-3PF12.3,OP,*      KIPS*,2(SX,* - *) ,4X,F6.2,
      1      2(6X,*- *) ,F10.6,7X,*- * ,9X,*- *,-3PF12.3)
355     8805     FORMAT(T15,*RHT V*,-3PF12.3,OP,*      KIPS*,2(SX,* - *) ,4X,F6.2,
      1      2(6X,*- *) ,F10.6,7X,*- * ,9X,*- *,-3PF12.3)
8806     FORMAT(T15,*LHT B*,-3PF12.3,OP,*      IN-KIPS*,2(7X,*- *) ,5X,* 1.00*
      1      2(6X,*- *) ,F10.6,7X,*- * ,9X,*- *,-3PF12.3)
360     8807     FORMAT(T15,*RHT B*,-3PF12.3,OP,*      IN-KIPS*,2(7X,*- *) ,5X,*-1.00*
      1      2(6X,*- *) ,F10.6,7X,*- * ,9X,*- *,-3PF12.3)
8808     FORMAT(*0* ,*WLN= 13* ,6X,*TOTAL      TAIL LOADS  ADDING TO AIT *
      1      *FUSELAGE*,T71,3F10.6,-3P,F11.3,F13.3,F12.3)
8809     FORMAT(*0* ,*WLN= 14* ,6X,*TOTAL      LOADS ON AFT FUSELAGE .. *
      1      * LATERAL*,T71,3F10.6,-3P,F11.3,F13.3,F12.3)
365     GO TO 400
      30     CONTINUE
      RETURN
      END

```

\*\*\*\*\* JOB \*\*\*\*\*

NASA DFRC

SUBROUTINE GOPSR 73/74 OPT=1 FTN 4.2+75060 07/29/81 16.31.29. PAGE 3

```

115      JJ = SC(N) + 1
        PRINT 2300, IBTC, SCN(JJ)
1200    FORMAT(* BODY TYPE CODE =*,I3,I1X,*SYMMETRY CODE = *,A3/)
        TEST FOR BODY/INTEGRATION TYPE
        IF (IBTC.EQ.1.A.BTC(N).EQ.1) GO TO 300
        IF (IBTC.EQ.1.A.BTC(N).EQ.2) GO TO 300
        IF (IBTC.EQ.3.A.BTC(N).EQ.3) GO TO 400
        GO TO 991

        C
        C
        C      SLENDER BODY TYPE
        C
        C      300 NR = 1
        PRINT 3000, NR
        3000 FORMAT(* NUMBER OF ROWS =*,I3//)
        C      WRITE AND PUNCH SURFACE/AXIS DATA
        WRITE(20) N, (SANAME(L,N),L=1,4), (SABODY(L,N),L=1,2),
130      1      BTC(N), SC(N), NR, SREF(N), BREF(N), CREF(N), CAVG
        IF (GOP.NE.4) GO TO 310
        PUNCH 3010, N, (SANAME(L,N),L=1,4), (SABODY(L,N),L=1,2),
135      1      BTC(N), SC(N), NR, SREF(N), BREF(N), CREF(N)
        3010 FORMAT(I2,2X,4A4,2X,2A4,I3,I4,3F10.3)
        C      READ AND PRINT INTEGRATION AXIS DATA
        310 READ(1,3100) XFWD,XAFT,XMR,MRC
        3100 FORMAT(4F10.0)
        PRINT 3101, XFWD,XAFT,XMR
140      3101 FOR:AT(* INTEGRATION AXIS DEFINITION*,
        1      T31,* FORWARD LIMIT AT XR =*,F10.3/
        2      T31,* AFT LIMIT AT XR =*,F10.3/
        3      T31,*MOMENTS SUMMED ABOUT XR =*,F10.3)
        IF (MRC.GT.0.0.A.BTC(N).EQ.1) PRINT 3102
        IF (MRC.LT.0.0.A.BTC(N).EQ.1) PRINT 3103
        IF (MRC.GT.0.0.A.BTC(N).EQ.2) PRINT 3104
        IF (MRC.LT.0.0.A.BTC(N).EQ.2) PRINT 3105
145      3102 FORMAT(***,T73,*POSITIVE - NOSE UP**//)
        3103 FORMAT(***,T73,*POSITIVE - TAIL UP**//)
        3104 FORMAT(***,T73,*POSITIVE - NOSE RIGHT**//)
        3105 FORMAT(***,T73,*POSITIVE - TAIL RIGHT**//)
        C      READ SLENDER BODY DATA RECORD
        NIB = (NW-3-5*NCP)/2
        READ(30) (XLE,XTE,L=1,NIB), YZ,ZZ,TBL,
155      1      (XCP(L),RCP(L),DRDX(L),DYDX(L),DZDX(L),L=1,NCP)
        C      COMPUTE ROW DATA
        RN = 1
        YL = YZ
        NP = NCP
160      C      PRINT,WRITE,PUNCH ROW DATA
        PRINT 3110, YL,NP
        3110 FORMAT(* ROW DATA*,7X,*Y =*,F10.3,6X,*NUMBER OF PANELS =*,I3//)
        WRITE(20) RN,ETA,YL,NP,CROW
        IF (GOP.NE.4) GO TO 320
165      PUNCH 3111, RN, YL, NP
        3111 FORMAT(I2,8X,F10.3,8X,I2)
        C      COMPUTE PANEL DATA
        320 PNL(1) = 1
        IARM = 0.0
        PRINT 3200
170      3200 FORMAT(* PANEL DATA*//* INDEX*,7X,*AREA-IN2*,8X,*BARM-IN*,8X,

```

SUBROUTINE GOPSR 73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.29.

PAGE 18

COMMON BLOCKS	LENGTH	MEMBERS - BIAS NAME(LENGTH)
		555 ETA (1)
		558 CROW (1)
		562 BARM (1)
		565 NALD (1)
		568 CL (1)

556 YL (1)
559 PN (2)
563 TARM (1)
566 NT (1)
569 CT (1)

557 NP (1)
561 SP (1)
564 XCN (1)
567 CN (1)
570 C (3)

STATISTICS

PROGRAM LENGTH	27333B	11995
CM LABELED COMMON LENGTH	17257B	7855

```

SUBROUTINE SYNC(M),RETURNS(R1,R2)
C
C
C
5     LOGICAL WGR(50),WGS(50),WGI(50),WGW(14),RS
      INTEGER GOP,POP,ROP,SOP,IOP,WOP,AC(2,2),NC,NSB,LRLVL(4),SCN(2)
      INTEGER LRC(3),VBT(3)
      REAL RD(20,9),FAL(9,50,6),FCL(9,50,6),WAL(9,14,6),WCL(9,14,6)
10    INTEGER NSAD,N,SANAME(4,50),SABODY(2,50),BTC(50),SC(50),NR
      INTEGER RN,NP,PN(2),NALD,NT,CN,CL,CT
      REAL SREF(50),BREF(50),CREF(50),CAVG,ETA,YL,CROW
      REAL SP,BARM,TARM,XCN,C(3)
      LOGICAL SB
15    INTEGER DN,DUMMY(4),TIT1(18,9),TIT2(18),INTB,IMR(9),CPBODY(2)
      INTEGER INAF,INPT,MRN(2)
      REAL NTB,MR,M1(9),A1(9),B1(9),Q1(9),NAF,THETA,YR,NPT
      REAL XC,CPS,CPR,CPL,XR
      COMMON/GENCOM/GOP,POP,ROP,SOP,IOP,WOP,WGR,WGS,WGI,WGW,AC,NC,NSB,
20    RD,LRLVL,FAL,FCL,WAL,WCL,SCN,IC,LRC,VBT,RS
      COMMON/GOPCOM/NSAD,N,SANAME,SABODY,BTC,SC,NR,SREF,BREF,CREF,CAVG,
1    RN,ETA,YL,NP,CROW,PN,SP,BARM,TARM,XCN,NALD,NT,CN,CL,CT,C
      COMMON/POPCOM/DN,DUMMY,TIT1,TIT2,NTB,MR,M1,A1,B1,Q1,INTB,IMR,
1    CPBODY,NAF,THETA,INAF,YR,NPT,INPT,XC,CPS,CPR,CPL,XR,MRN,SB
25    READ(20) N,(SANAME(L,N),L=1,4),(SABODY(L,N),L=1,2),
1    BTC(N),SC(N),NR,SREF(N),BREF(N),CREF(N),CAVG
      IF(M.EQ.1.AND.WGR(N)) GO TO 200
      IF(M.EQ.2.AND.WGS(N)) GO TO 200
      IF(M.EQ.3.AND.WGI(N)) GO TO 200
30    C
      SKIP THIS SURFACE/AXIS DEFINITION
      DO 10 I=-1,NR
      READ(20)
      DO 20 J=1,NP RN,ETA,YL,NP,CROW
      20 READ(20) PN,SP,BARM,TARM,XCN
      10 CONTINUE
35    RETURN R1
C
C
C
200   WANT SURFACE - SEARCH FOR MATCHING CPBODY
      REWIND DN
      READ(DN) (TIT1(J,IC),J=1,18)
      READ(DN) TIT2
40    READ(DN) NTB,MR,M1(IC),A1(IC),B1(IC),Q1(IC)
      IMR(IC)= MR
      300 READ(DN) CPBODY,NAF,THETA
      IF(.EOF(DN).EQ.0.0) GO TO 400
      MATCHING CPBODY NOT FOUND - SKIP SURFACE/AXIS DATA
45    DO 30 I=-1,NR
      READ(20) RN,ETA,YL,NP,CROW
      DO 40 J=1,NP
      40 READ(20) PN,SP,BARM,TARM,XCN
      30 CONTINUE
50    RETURN R2
      400 IF(CPBODY(1).EQ.SABODY(1,N).AND.CPBODY(2).EQ.SABODY(2,N)) RETURN
C
C
C
55    SKIP CPBODY
      INAF= NAF
      DO 50 I=-1,INAF
      READ(DN) YR,NPT
      INPT= NPT
      DO 60 J=1,INPT

```

\*\*\*\*\* K03 \*\*\*\*\*

SUBROUTINE WOPSR 73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.57.

PAGE 8

## SYMBOLIC REFERENCE MAP (R=3)

ENTRY	POINTS	DEF LINE	REFERENCES
1	WOPSR	1	23 367

VARIABLES	SN	TYPE	RELOCATION
-----------	----	------	------------

2354	A	REAL		REFS	62	94	113	147	156				
				DEFINED	34								
2360	AB	REAL		REFS	100	102	132	292	DEFINED	38			
252	AC	INTEGER	ARRAY	GENCOM	8	11							
2372	AD	REAL		REFS	95	115	DEFINED	82					
2355	B	REAL		REFS	62	99	101	116	131	233	291		
				DEFINED	296	35							
2344	BWT	REAL		REFS	24	69	79	81	172	191	243		
				DEFINED	250	255	259	263	305	316	337		
2522	CPER	REAL	ARRAY		DEFINED	21	48						
				REFS	207	27	104	123	170	177	189		
				DEFINED	207	209	210	219	220	221	222		
				REFS	223	26	51	104	123	207	208		
				DEFINED	209	210	219	220	221	222	223		
2616	CTOT	REAL	ARRAY		REFS	6	171	172	173	175	177	2*246	
				REFS	2*253	257	261	310	314	318	322	327	
				DEFINED	331	335	304	305	242	243	249	250	
				REFS	255	259	304	305	306	312	316	320	
				DEFINED	325	329	333						
2345	CWT	REAL		REFS	24	69	80	82	173	192	306		
				DEFINED	312	320	325	329	333	338			
				REFS	65	117	133	293	DEFINED	39			
2361	DA	REAL		REFS	65	114	DEFINED	40					
2362	DE	REAL		REFS	5	27	177	DEFINED	26	51			
2445	DES	INTEGER	ARRAY		REFS	65	136	294	DEFINED	42			
2364	DRL	REAL		REFS	65	135	DEFINED	41					
2363	DRU	REAL		REFS	65	96	118	134	217				
2365	DSL	REAL		DEFINED	43								
2366	DSR	REAL		REFS	65	119	134	205	216				
				DEFINED	44								
550	FAL	REAL	ARRAY	GENCOM	REFS	10	11						
5764	FCL	REAL	ARRAY	GENCOM	REFS	10	11						
0	GOP	INTEGER		GENCOM	REFS	8							
2352	I	INTEGER		REFS	3*26	3*27	3*51	2*104	2*123	2*170	4*177		
				DEFINED	2*207	2*209	2*210	2*219	2*220	2*221	2*222		
				REFS	2*223	25	50	103	122	168	206		
				DEFINED	218								
16152	IC	INTEGER		GENCOM	REFS	11	34	35	36	37	2*38	39	
				REFS	40	41	42	43	44	62	3*65	79	
				REFS	80	81	82	2*175	2*176	2*180	2*189	2*190	
				DEFINED	2*191	2*192	2*193	240	241	2*244	2*245	246	
				REFS	247	248	2*251	2*252	253	254	2*256	257	
				DEFINED	258	2*260	261	2*262	2*263	3*264	3*265	3*266	
				REFS	3*267	4*268	4*269	301	302	303	2*307	2*308	
				DEFINED	2*309	310	311	2*313	314	315	2*317	318	
				REFS	319	2*321	322	324	2*326	327	328	2*330	
				DEFINED	331	332	2*334	335	2*336	2*337	2*338	3*339	
				REFS	3*340	3*341	3*342	3*343	3*344	2*345	2*346		
				DEFINED	33								
4	IOP	INTEGER		GENCOM	REFS	8	11						

\*\*\*\* KO4 \*\*\*\*

NASA DFRC

SUBROUTINE GOPS; 73/74 OPT=1 FTN 4.2+75060 07/29/81 16.31.29. PAGE 4

```

1          *TARM-IN*/)
DO 30 J=1,NP
PN(2) = J
175      C   COMPUTE PANEL EDGES
          IF(J.LT.NP) DX= XCP(J+1)-XCP(J)
          IF(J.EQ.NP) DX= XCP(J)-XCP(J-1)
          XLE = XCP(J)-(DX/2.0)
          XTE = XCP(J)+(DX/2.0)
180      C   DETERMINE PANEL/AXIS INTERSECTION TYPE
          IF(XLE.GE.XAFT) GO TO 330
          IF(XTE.LE.XFWD) GO TO 330
          IF(XLE.GE.XFWD.A.XTE.GT.XAFT) GO TO 331
          IF(XLE.LT.XFWD.A.XTE.LE.XAFT) GO TO 332
185      C   IF(XLE.LT.XFWD.A.XTE.GT.XAFT) GO TO 333
          IF(XLE.GE.XFWD.A.XTE.LE.XAFT) GO TO 340
          C   COMPUTE NEW EFFECTIVE PANEL EDGES
          SP= 0.0
          BARM= 0.0
190      C   GO TO 350
          331 XTE= XAFT
              GO TO 340
          332 XLE= XFWD
              GO TO 340
195      C   333 XLE= XFWD
              XTE= XAFT
          C   COMPUTE EFFECTIVE AREA AND BARM
          340 DX= XTE-XLE
              SP= 2.0*RCP(J)*DX
              XCT= (XLE+XTE)/2.0
              BARM= MRC*(XMR-XCT)
          C   CHECK FOR NEW PANEL
          350 IF(J.NE.31.A.J.NE.81) GO TO 360
              PRINT 3500
205      C   PRINT 3501
          3500 FORMAT(*1*)
          3501 FORMAT(* *)
          3502 FORMAT(*0*)
          PRINT 3200
210      C   PRINT,WRITE,PUNCH PANEL DATA
          360 PRINT 3600, PN,SP,BARM,TARM
          3600 FORMAT(* *,I3,I4,3(F10.3))
              WRITE(20) PN,SP,BARM,TARM,XCN
          IF(GOP.NE.4) GO TO 370
          PUNCH 3601, PN,SP,BARM,TARM
215      C   3601 FORMAT(2I5,3F10.3)
          370 TA= TA+SP
              GO TO NEXT PANEL
          C   30 CONTINUE
220      C   PRINT TOTAL EFFECTIVE AREA OF ALL PANELS
          PRINT 3700, TA
          3700 FORMAT(/// * TOTAL AREA*,F12.3)
          C   SLENDER BODY COMPLETED - GO TO NEXT SURFACE/AXIS DEFINITION
          GO TO 20
225      C
          C   THIN BODY TYPE
          C
          C   READ THIN BODY DATA RECORD
    
```



```

SUBROUTINE POPSR
C
C
C   CREATS PRESSURE FILES FROM CARDS
5
LOGICAL WGR(50),WGS(50),WGI(50),WGW(14),RS
INTEGER GOP,POP,ROP,SOP,IOP,WOP,AC(2,2),NC,NSB,LRVL(4),SCN(2)
INTEGER LRC(3),VBT(5)
REAL RD(20,9),FAL(9,50,6),FCL(9,50,6),HAL(9,14,6),WCL(9,14,6)
10
LOGICAL SB
INTEGER DN,DUMMY(4),TIT1(18,9),TIT2(18),INTB,IMR(9),CPBODY(2)
INTEGER INAF,INPT,MRN(2)
REAL NTB,MR,M1(9),A1(9),B1(9),Q1(9),NAF,THETA,YR,NPT
REAL XC,CPS,CPR,CPL,XR
COMMON/GENCOM/GOP,POP,ROP,SOP,IOP,WOP,WGR,WGS,WGI,WGW,AC,NC,NSB,
1  RD,LRVL,FAL,FCL,HAL,WCL,SCN,IC,LRC,VBT,RS
COMMON/POPCOM/DN,DUMMY,TIT1,TIT2,NTB,MR,M1,A1,B1,Q1,INTB,IMR,
1  CPBODY,NAF,THETA,INAF,YR,NPT,INPT,XC,CPS,CPR,CPL,XR,MRN,SB
SB=.FALSE.
C
C
C   READ THIN BODY CPS, ALL CASES
20
C
C
100 DO 10 I=1,NC
DN= I+10
IF(SB) GO TO 200
25
REWIND DN
READ(1,1001) (TIT1(M,I),M=1,18)
WRITE(DN) (TIT1(M,I),M=1,18)
1001 FORMAT(18A4)
READ(1,1001) TIT2
30
WRITE(DN) TIT2
READ(1,1002) NTB,MR,M1(I),A1(I),B1(I),Q1(I)
WRITE(DN) NTB,MR,M1(I),A1(I),B1(I),Q1(I)
1002 FORMAT(6F10.4)
INTB= NTB
35
IMR(I)= MR
IF(SB) INTB= NSB
DO 20 J=1,INTB
READ(1,1003) CPBODY,NAF,THETA
40
WRITE(DN) CPBODY,NAF,THETA
1003 FORMAT(2A4,2X,2F10.4)
INAF= NAF
DO 30 K=1,INAF
READ(1,1004) YR,NPT
45
WRITE(DN) YR,NPT
1004 FORMAT(2F10.4)
INPT= NPT
DO 40 L=1,INPT
READ(1,1005) XC,CPS,CPR,CPL,XR
50
WRITE(DN) XC,CPS,CPR,CPL,XR
1005 FORMAT(5F10.4)
30 CONTINUE
20 CONTINUE
10 CONTINUE
C
C
C   READ ANY SLENDER BODY CPS ADDED TO END OF ALL THIN BODIES
55
IF(NSB.EQ.0) GO TO 999
    
```

SUBROUTINE SYNC 73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.53.

PAGE 2

60

```
60 READ(DN) XC,CPS,CPR,CPL,XR
50 CONTINUE
60 TO 300
END
```

\*\*\*\*\* L03 \*\*\*\*\*

SUBROUTINE WOPSR				73/74	OPT=1	FTN 4.2+75060		07/29/81	16.31.57.	PAGE	9
VARIABLES	SN	TYPE	RELOCATION	REFS	2*159	DEFINED	89	108	127	142	151
2374 IS		INTEGER		203	214	228	287				
2353 J		INTEGER		REFS	2*26	2*27	2*51	2*170	3*175	3*176	2*177
				2*180	3*189	2*193	2*345	2*346	DEFINED	2*26	2*27
				2*51	169	174	2*177	2*180	18E	2*193	2*345
2375 JA		INTEGER		2*346							
				REFS	2*175	2*176	2*180	2*189	2*190	2*191	2*192
				2*193	202	213	DEFINED	90	109	128	143
16153 LRC		INTEGER	ARRAY	GENCOM	152	204	215	288			
544 LRVL		INTEGER	ARRAY	GENCOM	REFS	9	11	159			
2621 LTOT		REAL	ARRAY		REFS	8	11	177	242	243	244
					REFS	6	176	177	252	243	244
					REFS	249	250	251	2*253	255	256
					2*246	259	260	261	304	305	306
					257	259	260	261	304	305	306
					308	309	310	312	314	316	317
					318	320	321	322	325	326	327
					330	331	334	335	326	327	329
					173	240	247	248	DEFINED	171	172
					302	303	311	319	254	258	301
256 NC		INTEGER		GENCOM	REFS	8	11	33	324	328	332
2376 NF		INTEGER			REFS	168	DEFINED	91	110	129	144
					230	289					153
2377 NL		INTEGER			REFS	168	DEFINED	92	111	130	145
					231	290					154
2373 NSA		INTEGER			REFS	2*175	2*176	3*120	187	2*189	2*190
					2*192	3*193	226	236	DEFINED	88	107
					141	150	227	286			126
257 NSB		INTEGER		GENCOM	REFS	8	11				
2426 NSEQ		INTEGER	ARRAY		REFS	5	27	177	DEFINED	26	51
2367 PD		REAL			REFS	97	120	137	232	295	
					DEFINED	79					
1 POP		INTEGER		GENCOM	REFS	8	11				
2356 Q		REAL			REFS	62	171	172	173	190	191
					REFS	242	243	249	255	259	192
					304	305	306	312	316	320	263
					333	336	337	338	DEFINED	36	325
2370 QD		REAL	ARRAY		REFS	98	121	177	80		
2577 R		REAL			REFS	6	170	177	DEFINED	93	94
					96	97	98	99	100	101	102
					113	114	115	116	117	118	119
					121	131	132	133	134	135	136
					138	146	147	155	156	205	216
					232	233	291	292	293	294	295
260 RD		REAL	ARRAY	GENCOM	REFS	10	11	34	35	36	37
					39	40	41	42	43	44	3*65
					80	81	82				79
2 ROP		INTEGER		GENCOM	REFS	8	11				
16161 RS		LOGICAL		GENCOM	REFS	7	11				
16150 SCN		INTEGER	ARRAY	GENCOM	REFS	8	11				
3 SOP		INTEGER		GENCOM	REFS	8	11				
2343 SWT		REAL			REFS	24	69	171	172	173	190
					192	242	243	249	250	255	259
					263	304	305	306	312	316	320
					329	333	336	337	338	DEFINED	21
2400 TIT3		INTEGER	ARRAY		REFS	5	19	62	DEFINED	18	47
2357 V		REAL			REFS	45	65	79	80	81	82
					DEFINED	37	45				

\*\*\*\* L04 \*\*\*\*

NASA DFRC

SUBROUTINE GOPSR 73/74 OPT=1 FTN 4.2+75060 07/29/81 16.31.29. PAGE 5

```

230 400 READ(30) YIN,ZIN,YOUT,ZOUT,TN,
      1 (PC(M), (XA(L,M),YA(L,M),ZA(L,M),L=1,2),XA(3,M),XA(4,M),
      2 (XA(L,M),YA(L,M),ZA(L,M),L=5,6),XA(7,M),XA(8,M),
      3 AP(M),CB(M),TC(L,M),L=1,6),M=1,NCP)
C 4 SET UP MISSING REFERENCE SYSTEM COORDINATES
DO 40 K=1,NCP
235 YA(3,K) = YA(1,K)
      ZA(3,K) = ZA(1,K)
      YA(4,K) = YA(2,K)
      ZA(4,K) = ZA(2,K)
C TRANSFORM REFERENCE COORDINATES TO LOCAL SYSTEM
240 DO 41 J=1,6
      XN(J,K) = XA(J,K)-XZ
      YN(J,K) = (YA(J,K)-YZ)*COS(TN) + (ZA(J,K)-ZZ)*SIN(TN)
      41 ZN(J,K) = (ZA(J,K)-ZZ)*COS(TN) - (YA(J,K)-YZ)*SIN(TN)
245 C 40 CONTINUE
      GENERATE MISSING ROW DATA
      RN= 0
      DO 45 J=1,NCP
      IF(PC(J).NE.-1.0) GO TO 450
      RN= RN+1
      NP= 0
      AR= 0.0
      AY= 0.0
      450 NP= NP+1
      AR= AR+AP(J)
      255 AY= AY+AP(J)*YN(5,J)
      IF(PC(J).NE.-1.0) GO TO 45
      TNP(RN)= NP
      TYL(RN)= AY/AR
260 45 CONTINUE
      NR= RN
      TND= TND*57.2958
      PRINT 4500, NR,TND
C 4500 FORMAT(* NUMBER OF ROWS =*,I3,11X,*THETA =*,F7.2,* DEG*//)
      WRITE, PUNCH SURFACE/AXIS DATA
265 WRITE(20) N, (SNAME(L,N),L=1,4), (SABOD(L,N),L=1,2),
      BTC(N),SC(N),NR,SREF(N),BREF(N),CREF(N),CAVG
      IF(GOP.NE.4) GO TO 460
      PUNCH 3010, N, (SNAME(L,N),L=1,4), (SABODY(L,N),L=1,2),
      260 1 BTC(N),SC(N),NR,SREF(N),BREF(N),CREF(N)
C 450 READ AND PRINT INTEGRATION AXIS DATA
      450 READ(1,4600) XAZ,YAZ,LAD
      4600 FORMAT(3F10.0)
      PRINT 4601, XAZ,YAZ,LAD
275 4601 FORMAT(* INTEGRATION AXIS DEFINITION*,
      1 T42,*ORIGIN AT XN =*,F10.3/
      2 T42,* YN =*,F10.3/
      3 T42,*SWEEP ANGLE =*,F10.3,* DEG*//)
C TRANSFORM LOCAL COORDINATES TO AXIS SYSTEM
280 LA= -LAD/57.2958
      DO 47 K=1,NCP
      DO 48 J=1,6
      XA(J,K) = (XN(J,K)-XAZ)*COS(LA) + (YN(J,K)-YAZ)*SIN(LA)
      48 YA(J,K) = (YN(J,K)-YAZ)*COS(LA) - (XN(J,K)-XAZ)*SIN(LA)
285 C 47 CONTINUE
      PRINT ROW DATA

```

NASA DFRC

SUBROUTINE POPSR 73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.42.

PAGE 2

```
60      IF(SB)          GO TO 999
        SB=.TRUE.
        GO TO 100
999     RETURN
        END
```

## SYMBOLIC REFERENCE MAP (R=3)

ENTRY 3	POINTS SYNC	DEF LINE 1	REFERENCES 51																
VARIABLES	SN	TYPE	RELOCATION																
252	AC	INTEGER	ARRAY	GENCOM	REFS	6	18												
304	A1	REAL	ARRAY	POP COM	REFS	16	22	DEFINED	40										
1062	BARM	REAL		GOPCOM	REFS	12	20	DEFINED	33										48
705	BREF	REAL	ARRAY	GOPCOM	REFS	11	20	DEFINED	24										
456	BTC	INTEGER	ARRAY	GOPCOM	REFS	9	20	DEFINED	24										
315	B1	REAL	ARRAY	POP COM	REFS	16	22	DEFINED	40										
1072	C	REAL	ARRAY	GOPCOM	REFS	12	20												
1051	CAVG	REAL		GOPCOM	REFS	11	20	DEFINED	24										
1077	CL	INTEGER		GOPCOM	REFS	10	20												
1067	CN	INTEGER		GOPCOM	REFS	10	20												
351	CPBODY	INTEGER	ARRAY	POP COM	REFS	14	22	2*51	DEFINED	42									
364	CPL	REAL		POP COM	REFS	17	22	DEFINED	58										
363	CPR	REAL		POP COM	REFS	17	22	DEFINED	58										
362	CPS	REAL		POP COM	REFS	17	22	DEFINED	58										
767	CREP	REAL	ARRAY	GOPCOM	REFS	11	20	DEFINED	24										
1056	CROW	REAL		GOPCOM	REFS	11	20	DEFINED	31										46
1071	CT	INTEGER		GOPCOM	REFS	10	20												
0	DN	INTEGER		POP COM	REFS	14	22												
					REFS	40	42												
					REFS	55	58												
1	DUMMY	INTEGER	ARRAY	POP COM	REFS	14	22												
1053	ETA	REAL		GOPCOM	REFS	11	20	DEFINED	31										46
550	FAL	REAL	ARRAY	GENCOM	REFS	8	18												
5764	FCL	REAL	ARRAY	GENCOM	REFS	8	18												
0	GOP	INTEGER		GENCOM	REFS	6	18												
300	I	INTEGER			DEFINED	30	45		54										
16152	IC	INTEGER		GENCOM	REFS	18	38	4*40	41										
340	IMR	INTEGER	ARRAY	POP COM	REFS	14	22	DEFINED	41										
355	INAF	INTEGER		POP COM	REFS	15	22	54	DEFINED	53									
360	INPT	INTEGER		POP COM	REFS	15	22	57	DEFINED	56									
337	INTB	INTEGER		POP COM	REFS	14	22												
4	IOP	INTEGER		GENCOM	REFS	6	18												
301	J	INTEGER			REFS	38	DEFINED	32	38	47									57
277	L	INTEGER			REFS	2*24	DEFINED	2*24											
16153	LRC	INTEGER	ARRAY	GENCOM	REFS	7	18												
544	LRVL	INTEGER	ARRAY	GENCOM	REFS	6	18												
0	M	INTEGER		F. P.	REFS	26	27	28	DEFINED	1									
272	MR	REAL		GOPCOM	REFS	16	22	41	DEFINED	40									
366	MRN	INTEGER	ARRAY	POP COM	REFS	15	22												
273	M1	REAL	ARRAY	POP COM	REFS	16	22	DEFINED	40										
1	N	INTEGER		GOPCOM	REFS	9	20	7*24	26	27	28								2*51
					DEFINED	24													
353	NAF	REAL		POP COM	REFS	16	22												42
1065	NALD	INTEGER		GOPCOM	REFS	10	20	53	DEFINED	42									
256	NC	INTEGER		GENCOM	REFS	6	18												
1055	NP	INTEGER		GOPCOM	REFS	10	20	32	47	DEFINED	31								46
357	NPT	REAL		POP COM	REFS	16	22	56	DEFINED	55									
622	NR	INTEGER		GOPCOM	REFS	9	20	30	45	DEFINED	24								
0	NSAD	INTEGER		GOPCOM	REFS	9	20												
257	NSB	INTEGER		GENCOM	REFS	6	18												
1066	NT	INTEGER		GOPCOM	REFS	10	20												
271	NTB	REAL		POP COM	REFS	16	22	DEFINED	40										

\*\*\*\*\* M03 \*\*\*\*\*

SUBROUTINE WOPSR		73/74	OPT=1	FTN 4.2+75060		07/29/81	16.31.57.	PAGE	10
VARIABLES	SN	TYPE	RELOCATION	REFS					
16156 VBT		INTEGER	ARRAY GENCOM	9	11				
13200 WAL		REAL	ARRAY GENCOM	10	11	176	180	193	240
				244	245	247	248	251	252
				254	256	257	260	261	262
				2*266	2*267	2*268	2*269	301	302
				308	309	310	311	313	314
				318	319	321	322	324	326
				330	331	332	334	335	336
				2*342	2*343	2*344	345	346	DEFINED
				191	192	244	245	251	252
				266	267	307	308	309	313
				326	330	334	342	343	344
14564 WCL		REAL	ARRAY GENCOM	REFS	10	11	175	180	189
				192	193	2*264	2*265	2*268	2*269
				2*341	345	346	DEFINED	175	189
				264	265	336	337	338	339
				REFS	7	11			190
				REFS	7	11			189
				REFS	7	11			2*339
				REFS	7	11			262
				REFS	7	11			263
				REFS	7	11			341
152 WGI		LOGICAL	ARRAY GENCOM	REFS	7	11			191
6 WGR		LOGICAL	ARRAY GENCOM	REFS	7	11			2*340
70 WGS		LOGICAL	ARRAY GENCOM	REFS	7	11			263
234 WGW		LOGICAL	ARRAY GENCOM	REFS	7	11			264
				REFS	7	11	52	53	54
				REFS	57	58	187	226	237
				REFS	8	11			285
5 WOP		INTEGER	GENCOM	REFS	5	24	52	53	54
2342 WTN		INTEGER		REFS	57	58	72	2*75	76
				186	200	DEFINED	21	48	86
				REFS	5	24	69	DEFINED	21
2422 WTNAME		INTEGER	ARRAY	REFS	24	72	241	246	248
2346 XHT		REAL		DEFINED	21	48			253
				REFS	24	72	302	310	DEFINED
2350 XVT		REAL		REFS	138	DEFINED	81		21
2371 YD		REAL		REFS	24	72	319	322	323
2347 YHT		REAL		REFS	21	48	323		324
				DEFINED	21	48	303	310	DEFINED
2351 ZVT		REAL		REFS	24	72			21
									48
FILE NAMES	MODE								
OUTPUT	FMT		WRITES	62	65	69	72	76	157
				177	180	193	246	253	257
				269	300	310	318	322	327
				345	346				331
				18	21	26			159
TAPE1	FMT		READS	18	21	26			161
TAPE40	UNFMT		WRITES	19	24	27	READS	47	268
			MOTION	13	46			48	261
									335
EXTERNALS	TYPE	ARGS	REFERENCES						
EOF	REAL	1	23	49					
STATEMENT LABELS	DEF LINE	REFERENCES							
0 10	27	25							
1242 30	366	33	49						
0 40	51	50							
0 61	104	103							
0 62	123	122							
0 70	177	168							
0 72	170	169							
0 75	176	174							
0 77	189	188							
0 81	210	206							

\*\*\*\* MD4 \*\*\*\*

NASA DFRC

SUBROUTINE GOPSR 73/74 OPT=1 FTN 4.2+75060 07/29/81 16.31.29. PAGE 6

```

290 PRINT 4900
    FORMAT(* ROW DATA**/* NUMBER*,7X,*YN*,9X,*NUMBER OF PANELS*/)
    DO 49 J=1,NR
    49 PRINT 4901, J, TYL(J), TNP(J)
    4901 FORMAT(* *,15,5X,F10.3,I10)
    C GENERATE PANEL DATA
    PRINT 3502
    PRINT 4910
295 4910 FORMAT(* PANEL DATA**/* INDEX*,7X,*AREA-IN2*,8X,*BARM-IN*,8X,
    1 *1 AREA-IN*)
    RN= 0
    NLP= 28+NR
    DO 50 J=1,NCP
    C SET INDEXES AND WRITE,PUNCH ROW DATA IF LEADING EDGE PANEL
    300 IF(IPC(J).NE.1.0) GO TO 495
    RN= RN+1
    IPN(1)= RN
    IPN(2)= 0
    NLP= NLP+TNP(RN)+1
    305 C CHECK FOR NEW PAGE
    IF(NLP.LE.60) GO TO 497
    PRINT 3500
    PRINT 3501
    PRINT 4910
    310 NLP= 8+TNP(RN)
    497 PRINT 3501
    WRITE(20) RN,ETA,TYL(RN),TNP(RN),CROW
    IF(GOP.NE.4) GO TO 495
    PUNCH 3111, RN,TYL(RN),TNP(RN)
    315 495 PN(2)= PN(2)+1
    JJ= 0
    C CHECK FOR ENTIRE PANEL INBOARD OF BENDING AXIS
    IF(YA(1,J).LE.0.0.A.YA(2,J).LE.0.0.A.
    1 YA(3,J).LE.0.0.A.YA(4,J).LE.0.0) GO TO 660
    320 C CHECK FOR ENTIRE PANEL OUTBOARD OF BENDING AXIS
    IF(YA(1,J).GE.0.0.A.YA(2,J).GE.0.0.A.
    1 YA(3,J).GE.0.0.A.YA(4,J).GE.0.0) GO TO 670
    C PANEL CUT BY BENDING AXIS
    325 500 JJ= 90
    NV= 0
    DO 55 K=1,3
    ST(K)= 0.0
    XT(K)= 0.0
    55 YT(K)= 0.0
    330 C GENERATE NEW PANEL CORNER POINTS
    C TEST CORNER POINT 1
    IF(YA(1,J).LT.0.0) GO TO 510
    NV= NV+1
    335 X(NV)= XA(1,J)
    Y(NV)= YA(1,J)
    C TEST CORNER POINT 1 TO 2
    510 IF((YA(1,J)*YA(2,J)).GE.0.0) GO TO 520
    NV= NV+1
    340 X(NV)= (XA(1,J)*YA(2,J)-XA(2,J)*YA(1,J))/(YA(2,J)-YA(1,J))
    Y(NV)= 0.0
    C TEST CORNER POINT 2
    520 IF(YA(2,J).LT.0.0) GO TO 330
    
```



NASA DFRC

SUBROUTINE PPSR 73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.42.

PAGE 3

SYMBOLIC REFERENCE MAP (R=3)

ENTRY	POINTS	DEF LINE	REFERENCES									
1	PPSR	1	6,1									
VARIABLES												
252	AC	INTEGER	ARRAY	GENCOM	REFS	6	14					
304	A1	REAL	ARRAY	POPCOM	REFS	12	16	32	DEFINED	31		
315	B1	REAL	ARRAY	POPCOM	REFS	12	16	32	DEFINED	31		
351	CPBODY	INTEGER	ARRAY	POPCOM	REFS	10	16	39	DEFINED	38		
364	CPL	REAL		POPCOM	REFS	13	16	49	DEFINED	48		
363	CPR	REAL		POPCOM	REFS	13	16	49	DEFINED	48		
362	CPS	REAL		POPCOM	REFS	13	16	49	DEFINED	48		
0	DN	INTEGER		POPCOM	REFS	10	16	DEFINED	23	I/O REFS	25	27
						30	32	44	49			
1	DUMMY	INTEGER	ARRAY	POPCOM	REFS	10	16					
550	FAL	REAL	ARRAY	GENCOM	REFS	8	14					
5764	FCL	REAL	ARRAY	GENCOM	REFS	8	14					
0	GOP	INTEGER		GENCOM	REFS	6	14					
251	I	INTEGER			REFS	23	26	27	4*31	4*32	35	
					DEFINED	22						
16152	IC	INTEGER		GENCOM	REFS	14						
340	IMR	INTEGER	ARRAY	POPCOM	REFS	10	16	DEFINED	35			
355	INAF	INTEGER		POPCOM	REFS	11	16	42	DEFINED	41		
360	INPT	INTEGER		POPCOM	REFS	11	16	47	DEFINED	46		
337	INTR	INTEGER		POPCOM	REFS	10	16	37	DEFINED	34	36	
4	IOP	INTEGER		GENCOM	REFS	6	14					
153	J	* INTEGER			DEFINED	37						
254	K	* INTEGER			DEFINED	42						
255	L	* INTEGER			DEFINED	47						
16153	LRC	INTEGER	ARRAY	GENCOM	REFS	7	14					
544	LRVL	INTEGER	ARRAY	GENCOM	REFS	6	14					
252	M	INTEGER			REFS	26	27	DEFINED	26	27		
272	MR	REAL		POPCOM	REFS	12	16	32	35	DEFINED	31	
366	MRN	INTEGER	ARRAY	POPCOM	REFS	11	16					
273	M1	REAL	ARRAY	POPCOM	REFS	12	16	32	DEFINED	31		
353	NAF	REAL		POPCOM	REFS	12	16	39	41	DEFINED	38	
256	NC	INTEGER		GENCOM	REFS	6	14	22				
357	NPT	REAL		POPCOM	REFS	12	16	44	46	DEFINED	43	
257	NSB	INTEGER		GENCOM	REFS	6	14	36	57			
271	NTB	REAL		POPCOM	REFS	12	16	32	34	DEFINED	31	
1	POP	INTEGER		GENCOM	REFS	6	14					
326	Q1	REAL	ARRAY	POPCOM	REFS	12	16	32	DEFINED	31		
260	RD	REAL	ARRAY	GENCOM	REFS	8	14					
2	ROP	INTEGER		GENCOM	REFS	6	14					
16161	RS	LOGICAL		GENCOM	REFS	5	14					
370	SB	LOGICAL		POPCOM	REFS	9	16	24	36	58		
					DEFINED	18	59					
16150	SCN	INTEGER	ARRAY	GENCOM	REFS	6	14					
3	SOP	INTEGER		GENCOM	REFS	6	14					
354	THETA	REAL		POPCOM	REFS	12	16	39	DEFINED	38		
5	TI11	INTEGER	ARRAY	POPCOM	REFS	10	16	27	DEFINED	26		
247	TI12	INTEGER	ARRAY	POPCOM	REFS	10	16	30	DEFINED	29		
16156	VBT	INTEGER	ARRAY	GENCOM	REFS	7	14					
13200	WAL	REAL	ARRAY	GENCOM	REFS	8	14					
14564	WCL	REAL	ARRAY	GENCOM	REFS	8	14					
152	WGI	LOGICAL	ARRAY	GENCOM	REFS	5	14					

SUBROUTINE SYNC		73/74	OPT=1	FTN 4.2+75060		07/29/81	16.31.53.	PAGE	4
VARIABLES	SN	TYPE	RELOCATION	REFS					
1057	PN	INTEGER	ARRAY GOPCOM	10	20	DEFINED	33	48	
1	POP	INTEGER	GOPCOM	6	18				
326	Q1	REAL	ARRAY POPCOM	16	22	DEFINED	40		
260	RD	REAL	ARRAY GOPCOM	8	18				
1052	RN	INTEGER	GOPCOM	10	20	DEFINED	31	46	
2	ROP	INTEGER	GOPCOM	6	18				
16161	RS	LOGICAL	GENCOM	5	18				
0	R1	RETURNS		35		DEFINED	1		
0	R2	RETURNS		50		DEFINED	1		
312	SABODY	INTEGER	ARRAY GOPCOM	9	20	2*51	DEFINED	24	24
2	SANAME	INTEGER	ARRAY GOPCOM	9	20	DEFINED	24		
370	SB	LOGICAL	POPCOM	13	22				
540	SC	INTEGER	ARRAY GOPCOM	9	20	DEFINED	24		
16150	SCN	INTEGER	ARRAY GENCOM	6	18				
3	SOP	INTEGER	GENCOM	6	18				
1041	SP	REAL	GOPCOM	12	20	DEFINED	33	48	
623	SREF	REAL	ARRAY GOPCOM	11	20	DEFINED	24		
1063	TARM	REAL	ARRAY GOPCOM	12	20	DEFINED	33	48	
354	THETA	REAL	POPCOM	16	22	DEFINED	42		
5	TIT1	INTEGER	ARRAY POPCOM	14	22	DEFINED	38		
247	TIT2	INTEGER	ARRAY POPCOM	14	22	DEFINED	39		
16156	VBT	INTEGER	ARRAY GOPCOM	7	18				
13200	WAL	REAL	ARRAY GENCOM	8	18				
14564	WCL	REAL	ARRAY GENCOM	8	18				
152	WGI	LOGICAL	ARRAY GENCOM	5	18		28		
6	WGR	LOGICAL	ARRAY GENCOM	5	18		26		
70	WGS	LOGICAL	ARRAY GENCOM	5	18		27		
234	WGW	LOGICAL	ARRAY GENCOM	5	18				
5	WOP	INTEGER	GENCOM	6	18				
361	XC	REAL	POPCOM	17	22	DEFINED	58		
1064	XCN	REAL	GOPCOM	12	20	DEFINED	33	48	
365	XR	REAL	POPCOM	17	22	DEFINED	58		
1054	YL	REAL	GOPCOM	11	20	DEFINED	31	46	
356	YR	REAL	POPCOM	16	22	DEFINED	55		

FILE NAMES      MODE  
 TAPE20          UNFMT  
 VARIABLES USED AS FILE NAMES,      READS      24      31      33      46      48

EXTERNALS      TYPE      ARGS      REFERENCES  
 EOF          REAL          1              43

STATEMENT LABELS	DEF LINE	REFERENCES
0 10	34	30
0 20	33	32
0 30	49	45
0 40	48	47
0 50	59	54
0 60	58	57
55 200	37	26
102 300	42	60
124 400	51	43

LOOPS	LABEL	INDEX	FROM-TO	LENGTH	PROPERTIES
41	10	* I	30 34	12B	EXT REFS NOT INNER
44	20	* J	32 33	5B	EXT REFS
110	30	* I	45 49	12B	EXT REFS NOT INNER

SUBROUTINE WOPSR		73/74	OPT=1	FTN 4.2+75060				07/29/81	16.31.57.	PAGE	11
STATEMENT	LABELS	DEF LINE	REFERENCES								
0	82	223	218								
11	100	21	29								
45	300	33	14								
75	400	48	52	53	54	55	56	57	78	2*200 202	
			213	226	285	299	365				
153	500	69	58								
170	600	79	75								
222	610	88	86								
246	620	107	86								
273	630	126	2*86								
315	650	141	86								
325	660	150	86								
334	700	157	105	124	139	148	211	224	234	297	
562	800	200	186	187							
574	810	202	200								
611	820	213	200								
630	850	226	200								
643	860	236	200								
770	870	285	237								
1006	880	299	236								
1263	1000	FMT	20								
1302	1001	FMT	22								
1335	1002	FMT	28								
1377	4000	FMT	63								
1430	4001	FMT	66								
1460	5000	FMT	70								
1500	5001	FMT	73								
1514	5010	FMT	77								
1526	7000	FMT	158								
1534	7001	FMT	160								
1542	7002	FMT	162								
1573	7500	FMT	179								
1612	7600	FMT	181								
1634	7700	FMT	195								
1727	8600	FMT	270	300							
1740	8601	FMT	272								
1754	8602	FMT	274								
1770	8603	FMT	276								
2006	8604	FMT	278								
2024	8605	FMT	280								
2041	8606	FMT	282								
2157	8801	FMT	347								
2172	8802	FMT	349								
2206	8803	FMT	351								
2224	8804	FMT	353								
2240	8805	FMT	355								
2254	8806	FMT	357								
2270	8807	FMT	359								
2304	8808	FMT	361								
2320	8809	FMT	363								
LOOPS	LABEL	INDEX	FROM-TO	LENGTH	PROPERTIES						
20	10	* I	25 27	25B	EXT REFS						
46	30	* IC	33 366	1177B	EXT REFS NOT INNER						
103	40	* I	50 51	14B	EXT REFS						
244	61	I	103 104	2B	INSTACK						
271	62	I	122 123	2B	INSTACK						

\*\*\*\* NO4 \*\*\*\*

NASA DFRC

SUBROUTINE GOPSR

73/74 DPT=1

FTN 4.2+75060

07/29/81 16.31.29.

PAGE 7

```

NV= NV+1
X(NV)= XA(2,J)
Y(NV)= YA(2,J)
345 C TEST CORNER POINT 2 = 4
530 IF(XN(2,J).EQ.XN(4,J)) GO TO 560
C TEST CORNER POINT 2 TO 4
350 540 IF((YA(2,J)*YA(4,J)).GE.0.0) GO TO 550
NV= NV+1
X(NV)= (YA(2,J)+YA(4,J)-XA(4,J)+YA(2,J))/(YA(4,J)-YA(2,J))
Y(NV)= 0.0
C TEST CORNER POINT 4
355 550 IF(YA(4,J).LT.0.0) GO TO 560
NV= NV+1
X(NV)= XA(4,J)
Y(NV)= YA(4,J)
C TEST CORNER POINT 4 TO 3
360 560 IF((YA(4,J)*YA(3,J)).GE.0.0) GO TO 570
NV= NV+1
X(NV)= (XA(4,J)+YA(3,J)-XA(3,J)+YA(4,J))/(YA(3,J)-YA(4,J))
Y(NV)= 0.0
C TEST CORNER POINT 3 = 1
365 570 IF(XN(3,J).EQ.XN(1,J)) GO TO 600
C TEST CORNER POINT 3
580 IF(YA(3,J).LT.0.0) GO TO 590
NV= NV+1
X(NV)= XA(3,J)
Y(NV)= YA(3,J)
370 C TEST CORNER POINT 3 TO 1
590 IF((YA(3,J)*YA(1,J)).GE.0.0) GO TO 600
NV= NV+1
X(NV)= (YA(3,J)+YA(1,J)-XA(1,J)+YA(3,J))/(YA(1,J)-YA(3,J))
Y(NV)= 0.0
375 C CHECK NUMBER OF TRIANGLES IN POLYGON
600 IF(NV.GE.3.A.NV.LE.5) GO TO 610
JJ= 99
GO TO 660
C COMPUTE AREA AND CENTROID - FIRST TRIANGLE
380 610 ST(1)=-X(1)*Y(2)-Y(3)+X(2)*Y(3)+X(3)*(Y(1)-Y(2))/2.0
XT(1)= (X(1)+X(2)+X(3))/3.0
YT(1)= (Y(1)+Y(2)+Y(3))/3.0
IF(ST(1).LE.0.0) JJ=91
IF(YT(1).LE.0.0) JJ=91
385 IF(NV.EQ.3) GO TO 650
C COMPUTE AREA AND CENTROID - SECOND TRIANGLE
ST(2)=-X(1)*Y(3)-Y(4)+X(2)*Y(4)+X(3)*(Y(1)-Y(3))/2.0
XT(2)= (X(1)+X(2)+X(3))/3.0
YT(2)= (Y(1)+Y(3)+Y(4))/3.0
390 IF(ST(2).LE.0.0) JJ=92
IF(YT(2).LE.0.0) JJ=92
IF(NV.EQ.4) GO TO 650
C COMPUTE AREA AND CENTROID - THIRD TRIANGLE
395 ST(3)=-X(1)*Y(4)-Y(5)+X(4)*Y(5)+X(5)*(Y(1)-Y(4))/2.0
XT(3)= (X(1)+X(4)+X(5))/3.0
YT(3)= (Y(1)+Y(4)+Y(5))/3.0
IF(ST(3).LE.0.0) JJ=93
IF(YT(3).LE.0.0) JJ=93
C COMPUTE TOTAL EFFECTIVE PANEL AREA AND ARMS

```

NASA DFRC

SUBROUTINE POPSR 73/74 OPT=1

FTN 4.2+75060

07/29/81 16.31.42.

PAGE 4

VARIABLES	SN	TYPE	RELOCATION	REFS					
6	WGR	LOGICAL	ARRAY GENCOM	5	14				
70	WGS	LOGICAL	ARRAY GENCOM	5	14				
234	WGW	LOGICAL	ARRAY GENCOM	5	14				
5	WOP	INTEGER	GENCOM	6	14				
361	XC	REAL	POPCOM	13	16	49	DEFINED	48	
365	XR	REAL	POPCOM	13	16	49	DEFINED	48	
356	YR	REAL	POPCOM	12	16	44	DEFINED	43	

FILE NAMES	MODE	READS							
TAPE1	FMT	26	29	31	38	43	48		
VARIABLES USED AS FILE NAMES,	SEE ABOVE								

STATEMENT LABELS	DEF LINE	REFERENCES		
0 10	53	22		
0 20	52	37		
0 30	51	42		
0 40	49	47		
3 100	22	60		
57 200	36	24		
123 999	61	57	58	
135 1001	FMT	28	29	
171 1002	FMT	33		
207 1003	FMT	29		
224 1004	FMT	45		
248 1005	FMT	50		

LOOPS	LABEL	INDEX	FROM-TO	LENGTH	PROPERTIES
4	10	* I	22 53	113B	EXT REFS NOT INNER
63	20	* J	37 52	32B	EXT REFS NOT INNER
72	30	* K	42 51	20B	EXT REFS NOT INNER
101	40	* L	47 49	7B	EXT REFS

COMMON BLOCKS	LENGTH	MEMBERS -	BIAS	NAME(LENGTH)						
GENCOM	7282	0	GOP	(1)	1	POP	(1)	2	ROP	(1)
		3	SOP	(1)	4	IOP	(1)	5	WOP	(1)
		6	WGR	(50)	56	WGS	(50)	106	WGI	(50)
		156	WGW	(14)	170	AC	(4)	174	NC	(1)
		175	NSB	(1)	176	RL	(180)	356	LRVL	(4)
		360	FAL	(2700)	3060	FCL	(2700)	5760	WAL	(756)
		6516	WCL	(756)	7272	SGN	(2)	7274	IC	(1)
		7275	LRC	(3)	7278	VBT	(3)	7281	RS	(1)
POPCOM	249	0	DN	(1)	1	DUMMY	(4)	5	TIT1	(162)
		167	TIT2	(18)	185	NTB	(1)	186	MR	(1)
		187	H1	(9)	196	A1	(9)	205	B1	(9)
		214	Q1	(9)	223	INTB	(1)	224	THR	(9)
		233	CPBODY	(2)	235	NAF	(1)	236	THETA	(1)
		237	INAF	(1)	238	YR	(1)	239	NPT	(1)
		240	INPT	(1)	241	XC	(1)	242	CPS	(1)
		243	CPR	(1)	244	CPL	(1)	245	XR	(1)
		244	MRN	(2)	248	SB	(1)			

STATISTICS			
PROGRAM LENGTH	2568	174	
CM LABELED COMMON LENGTH	16553B	7531	

SUBROUTINE SYNC 73/74 OPT=1 FTN 4.2+75060 07/29/81 16.31.53. PAGE 5

LOOPS	LABEL	INDEX	FROM-TO	LENGTH	PROPERTIES	EXT REFS	EXT REFS	NOT INNER
113	40	* J	47 48	5B				
135	50	* I	54 59	14B				
142	60	* J	57 58	5B				

COMMON	BLOCKS	LENGTH	MEMBERS	- BIAS	NAME(LENGTH)			
	GENCOM	7282	0	GOP	(1)	1	POP	(1)
			3	SOP	(1)	4	IOP	(1)
			6	WGR	(50)	56	WGS	(50)
			156	WGW	(14)	170	AC	(4)
			175	NSB	(1)	176	RD	(180)
			360	FAL	(2700)	3060	FCL	(2700)
			6516	WCL	(756)	7272	SCN	(2)
			7275	LRC	(3)	7278	VBT	(3)
	GOPCOM	573	0	NSAD	(1)	1	N	(1)
			202	SABODY	(100)	302	BTC	(50)
			402	NR	(1)	403	SREF	(50)
			503	CREF	(50)	553	CAVG	(1)
			555	ETA	(1)	556	YL	(1)
			558	CROW	(1)	559	PN	(2)
			562	BARM	(1)	563	TARM	(1)
			565	NALD	(1)	566	NT	(1)
			568	CL	(1)	569	CT	(1)
	POFCOM	249	0	DN	(1)	1	DUMMY	(4)
			167	TIT2	(18)	185	NTB	(1)
			187	M1	(9)	196	A1	(9)
			214	Q1	(9)	223	INTB	(1)
			233	CPBODY	(2)	235	NAF	(1)
			237	INAF	(1)	238	YR	(1)
			240	INPT	(1)	241	XC	(1)
			243	CPR	(1)	244	CPL	(1)
			246	MRN	(2)	248	SB	(1)
						2	ROP	(1)
						5	WOP	(1)
						106	WGI	(50)
						174	NC	(1)
						356	LRVL	(4)
						5760	WAL	(756)
						7274	IC	(1)
						7281	RS	(1)
						2	SANAME	(200)
						352	SC	(50)
						453	BREF	(50)
						554	RN	(1)
						557	NP	(1)
						561	SP	(1)
						564	XCN	(1)
						567	CN	(1)
						570	C	(3)
						5	TIT1	(162)
						186	MR	(1)
						205	B1	(9)
						224	IMR	(9)
						236	THETA	(1)
						239	NPT	(1)
						242	CPS	(1)
						245	XR	(1)

STATISTICS

PROGRAM LENGTH	302B	194
CM LABELED COMMON LENGTH	17650B	8104

SUBROUTINE WOPSR

73/74

OPT=1

FTN 4.2+75060

07/29/81 16.31.57.

PAGE 12

LOOPS	LABEL	INDEX	FROM-TO	LENGTH	PROPERTIES	EXT REFS	NOT INNER
350	70	* I	168 177	50B			
354	72	* J	169 170	2B	INSTACK		
372	75	* J	174 176	11B	OPT		
422		* J	180	14B		EXT REFS	
437		* J	180	14B		EXT REFS	
465	77	* J	188 189	11B	OPT		
530		* J	193	14B		EXT REFS	
545		* J	193	14B		EXT REFS	
604	81	I	206 210	4B	INSTACK		
623	82	I	218 223	5B	INSTACK		
1166		* J	345	11B		EXT REFS	
1200		* J	345	11B		EXT REFS	
1215		* J	346	11B		EXT REFS	
1227		* J	346	11B		EXT REFS	

COMMON BLOCKS	LENGTH	MEMBERS - BIAS	NAME(LENGTH)				
GENCOM	7282	0	GOP (1)	1	POP (1)	2	ROP (1)
		3	SOP (1)	4	IOP (1)	5	WOP (1)
		6	WGR (50)	56	WGS (50)	106	WGI (50)
		156	WGH (14)	170	AC (4)	174	NC (1)
		175	NSB (1)	176	RD (180)	356	LRLV (4)
		340	FAL (2700)	3060	FCL (2700)	5760	WAL (756)
		6516	WCL (756)	7272	SCN (2)	7274	IC (1)
		7275	LRC (3)	7278	VBT (3)	7281	RS (1)

## STATISTICS

PROGRAM LENGTH	2624B	1428
CM LABELED COMMON LENGTH	16162B	7282