


## Thunderbolt 3 to 10GbE NIC Chassis + Card

Product ID: BNDTB10GI



This Thunderbolt™ 3 to 10GbE NIC lets you connect your Thunderbolt 3 enabled device to a 10 GbE network. This adapter combines the StarTech.com Thunderbolt 3 PCIe Expansion Chassis (TB31PCIEX16) and the PCI Express 10G NIC (ST10000SPEXI), giving you one DisplayPort output, one additional Thunderbolt 3 port and one RJ45 (10GbE) port.

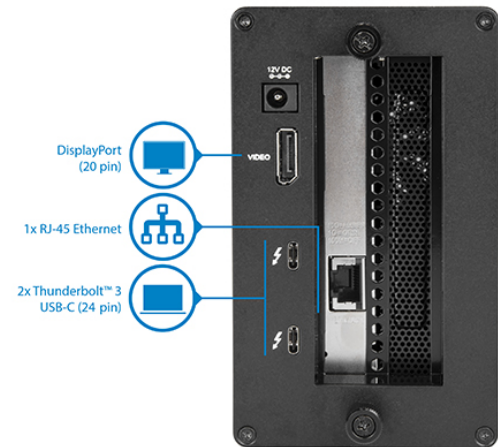

## Reliable, high-performance and versatile multimode connectivity

This 10G network card utilizes the Intel® X550 chipset with Intel® Virtualization Technology for connectivity, delivering the power, performance and enhanced capabilities you need for dependable network connections.

## Install and assemble with ease

Requiring only a Phillips type screwdriver, this Thunderbolt 3 to 10GbE NIC can be assembled and connected in minutes. It connects easily through a single Thunderbolt 3 port on your computer.

## Change up your chassis

The Thunderbolt 3 chassis not only pairs well with the 10GbE NIC--you can swap the NIC out for other PCIe cards, to help support other functionality and performance. With the extra TB3 port and DP output built into the chassis, you will always have the ability to hook up extended displays to effortlessly multitask.

The TB31PCIEX16 and ST10000SPEXI are backed by a StarTech.com 2-year warranty.

### Certifications, Reports and Compatibility



### Applications

- Upgrade your workstation to provide enhanced performance, advanced features and greater reliability
- Upgrade a 10/100/1000 Ethernet port on your computer to 10GbE networking
- Ideal for high-demand database servers and mission-critical systems that need redundant network connectivity
- Add networking capabilities to an old system with no Ethernet port

### Features

- Add 10GbE connectivity to your Thunderbolt 3 desktop or laptop computer
- Upgrade your peripherals without having to upgrade your chassis by just switching out your PCIe card
- Assemble and install easily with just a screwdriver

<b>Hardware</b>	Warranty	2 Years
	Bus Type	PCI Express
	Chipset ID	Intel - Alpine Ridge DSL6540
	Fan(s)	Yes
	Industry Standards	IEEE 802.3an (10GBASE-T), IEEE 802.3ab (1GBASE-T), IEEE 802.3u (100BASE-T) NBASE-T (Linux only)
		Thunderbolt 3
		PCI Express Rev 2.0
		IEEE 802.1Q VLAN Tagging
		IEEE 802.3x Full Duplex Flow Control
		Interface
	Port Style	Integrated on Card
	Ports	5
<b>Performance</b>	Auto MDIX	Yes
	Compatible Networks	10 Gbps/5G/2.5G/1G/100 Mbps
	Full Duplex Support	Yes
	Jumbo Frame Support	9K max.
	Maximum Data Transfer Rate	40 Gbps (Thunderbolt 3)
	Promiscuous Mode	Yes
	Supported Protocols	IEEE 802.3x (Flow Control Support) IEEE 802.1Q (VLAN tagging)
	Type and Rate	Thunderbolt 3 - 40 Gbit/s
<b>Connector(s)</b>	Connector Type(s)	1 - PCI Express x4 Male
	Internal Ports	1 - RJ-45 Female
<b>Software</b>	OS Compatibility	Windows® 7, 8, 8.1, 10 (64-bit only) macOS 10.12 - 10.13
<b>Special Notes / Requirements</b>	<b>Note</b>	The expansion chassis does not support video cards.
		This expansion chassis does not provide full power delivery but will provide 15W of power, resulting in a slow charge to some laptops, such as MacBook Pro. When the dock is connected to your host laptop, a charging icon may appear on your laptop's screen. This is only sufficient enough to charge your laptop in sleep state, and charging will require an extended time period.

5K support can only be achieved using a Thunderbolt 3 5K monitor. DisplayPort 5K monitors will not work with this expansion chassis.

A 4K-capable display is required to achieve 4K x 2K resolution (4K is also known as 4K x 2K).

Certain monitors may be limited to 4K at 30Hz when connecting through DisplayPort. These monitors include the following models: Dell P2715Q, Viewsonic VX2475Smhl-4K, Philips 288P6LJEB, LG 31MU97C-B, Asus PB287Q (these models will need to be set to 4K at 30Hz).

When connecting a display to one of the Thunderbolt 3 USB-C ports, a USB-C video adapter might be required depending on the input of your display.

Secondary Thunderbolt 3 port can also be used to connect USB 3.1 (10Gbps) USB-Type C devices, such as USB 3.1 Hubs. Backwards compatible with USB 3.0 (USB 3.1 Gen 1), and USB 2.0.

	System and Cable Requirements	Thunderbolt 3 equipped computer with a Thunderbolt 3 port.
<b>Power</b>	Center Tip Polarity	Positive
	Input Current	2A
	Input Voltage	100 ~ 240 AC
	Output Current	5.417A
	Output Voltage	12 DC
	Plug Type	N
	Power Consumption (In Watts)	65
	Power Source	AC Adapter Included
<b>Environmental</b>	Humidity	Chassis & PCIe Card: 20-80%RH
	Operating Temperature	Chassis & PCIe Card: 5°C to 35°C (41°F to 95°F)
	Storage Temperature	Chassis: -20°C to 50°C (-4°F to 122°F) PCIe Card: -20°C to 60°C (-4°F to 140°F)
<b>Physical Characteristics</b>	Cable Length	19.7 in [500 mm]
	Color	Black
	Enclosure Type	Aluminum and Steel
	Product Height	3.2 in [82 mm]
	Product Length	11 in [280 mm]
	Product Weight	3.6 lb [1.6 kg]

	Product Width	5.6 in [142 mm]
<b>Packaging Information</b>	Shipping (Package) Weight	8 lb [3.6 kg]
<b>What's in the Box</b>	Included in Package	<ul style="list-style-type: none"> <li>1 - Thunderbolt 3 PCIe expansion box</li> <li>1 - Thunderbolt 3 cable</li> <li>4 - rubber feet</li> <li>1 - 10G network card</li> <li>1 - universal power adapter (NA/JP, UK, EU, ANZ)</li> <li>1 - low-profile bracket</li> <li>2 - quick-start guides</li> </ul>
	Air Flow Rate	14.06 CFM
	Bandwidth	3.94 GB/s (x4 PCIe 3.0 )
	Bus Type	Thunderbolt 3
	Card Type	Standard Profile
	External Ports	<ul style="list-style-type: none"> <li>2 - Thunderbolt™ 3 USB-C (24-pin) Female</li> <li>1 - DisplayPort (20 pin) Female</li> </ul>
	Fan Bearing Type	Sleeve Bearing
	Fans	1 - 92 mm
	Interface	Thunderbolt
	Internal Ports	1 - PCI Express x16 Female
	Noise Level	24.55 dB

Product appearance and specifications are subject to change without notice.