## PERMALITE<sup>™</sup> XT HEAVY DUTY VEHICLE LIGHTING



## ALL PERMALITE<sup>™</sup> XT LIGHTING

- Superior durability and impact resistance
- Resistance to corrosion, harsh chemicals & UV exposure



## **BOARDFREE® LIGHTING**

- Patented in-mold LED lighting solution eliminates the need for a printed circuit board
- No printed circuit board means no hazardous waste
- Optimal heat management leads to a longer life expectancy



## HARD WIRED LIGHTING

- Hard wired LED lighting
- For applications with space restrictions
- Available with AMP and bullet connections



## LIGHTING ACCESSORIES

- Mounting grommets
- Mounting brackets
- Trim rings

For more information about these products, visit www.phillipsind.com

Manufactured for exclusive distribution by Phillips Industries - A California Corporation BOARDFREE® is a registered trademark of Innotec Group

12070 Burke Street, Santa Fe Springs, CA 90670

## 800.423.4512 Fax 800.597.7757

# 3-HDVL-AFT-ENG) REV8 2-7-18

## 4.0" Round Flange Mount Stop-Tail-Turn Light

E BARDFREE Technology



51-40202	4.0" round flange mount stop-tail-turn light, red	Qty. 1
51-40202-16	4.0" round flange mount stop-tail-turn light, red	Qty. 16

• ABS and acrylic construction

- Sealed and greased integrated male 3 pin AMP connector
- BOARDFREE® technology with 9 diodes
- Meets SAE S2 and T2 specifications
- Slotted low stress mounting holes with standard mounting dimensions
- Can be mounted any direction and meets DOT specifications
- Optional stainless steel trim ring available (P/N: 51-40904)

## 4.0" Round Anti-Theft Stop-Tail-Turn Light

🔁 BOARDFREED Technology



51-40122	4.0" round stop-tail-turn light, with black anti-theft overmold, for 3/16" trailer plate thickness, red	Qty. 1
51-40122-16	4.0" round stop-tail-turn light, with black anti-theft overmold, for 3/16" trailer plate thickness, red	Qty. 16
51-40132	4.0" round stop-tail-turn light, with silver anti-theft overmold, for 3/16" trailer plate thickness, red	Qty. 1
51-40132-16	4.0" round stop-tail-turn light, with silver anti-theft overmold, for 3/16" trailer plate thickness, red	Qty. 16
51-40142	4.0" round stop-tail-turn light, with black anti-theft overmold, for 1/4" trailer plate thickness, red	Qty. 1
51-40142-16	4.0" round stop-tail-turn light, with black anti-theft overmold, for 1/4" trailer plate thickness, red	Qty. 16
51-40152	4.0" round stop-tail-turn light, with silver anti-theft overmold, for 1/4" trailer plate thickness, red	Qty. 1
51-40152-16	4.0" round stop-tail-turn light, with silver anti-theft overmold, for 1/4" trailer plate thickness, red	Qty. 16

• ABS and acrylic construction

- Sealed and greased integrated male 3 pin AMP connector
- BOARDFREE® technology with 8 diodes
- Meets SAE S2 and T2 specifications
- Molded anti-theft ring is designed to be installed in a
- 4.5 in. mounting hole with a trailer plate thickness of 3/16 in. or 1/4 in.
- Patent pending

## 4.0" Round Grommet Mount Stop-Tail-Turn Light

51-40212	4.0" round grommet mount stop-tail-turn light, red*	Qty. 1
51-40212-16	4.0" round grommet mount stop-tail-turn light, red*	Qty. 16
51-40500	Mounting grommet for 4.0" round light*	Qty. 1
51-40500-25	Mounting grommet for 4.0" round light*	Qty. 25
51-40212K	Kit - 4.0" round grommet mount stop-tail-turn light, red (51-40212) and grommet (51-40500)	Qty. 1

\*Light and grommet sold separately. Select kit 51-40212K to purchase both the light and grommet together.

#### Grommet Mount Light

- ABS and acrylic construction
- Sealed and greased intergrated male 3 pin AMP connector
- BOARDFREE<sup>®</sup> technology with 9 diodes

#### Grommet

- Grommet provides additional protection to the light against vibration and shock
- Fits in standard 4.5 in. openings
- Grommet mounts up to a 1/4 in. plate


- Meets SAE S2 and T2 specifications
- Can be mounted any direction and meets DOT specifications
- Sold separately from grommet
- Made of UV protected EPDM
- Sold separately from light
- For use with round grommet
- mount lights only



#### Kit

- Includes: 51-40212 (1) 4.0 in. round grommet mount stop-tail-turn light
  - 51-40500 (1) Mounting grommet for 4.0 in. round light

## 4.0" Round Flange Mount Reverse Light

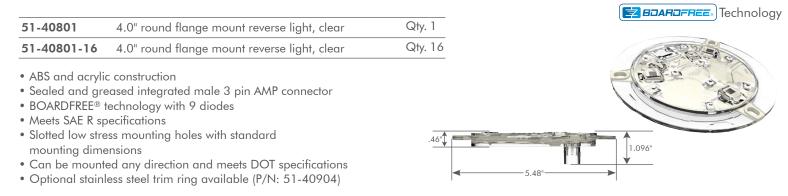

## 4.0" Round Grommet Mount Reverse Light

51-40811	4.0" round grommet mount reverse light, clear*	Qty. 1
51-40811-16	4.0" round grommet mount reverse light, clear*	Qty. 16
51-40500	Mounting grommet for 4.0" round light*	Qty. 1
51-40500-25	Mounting grommet for 4.0" round light*	Qty. 25
51-40811K	Kit - 4.0" round grommet mount reverse light, clear, (51-40811) and grommet (51-40500)	Qty. 1

\*Light and grommet sold separately. Select kit 51-40811K to purchase both the light and grommet together.

#### Grommet Mount Light

- ABS and acrylic construction
- Sealed and greased integrated male 3 pin AMP connector
- BOARDFREE<sup>®</sup> technology with 9 diodes

#### Grommet

- Grommet provides additional protection to the light against vibration and shock
- Fits in standard 4.5 in. openings
- Grommet mounts up to a 1/4 in. plate

- Meets SAE R specifications
- Can be mounted any direction and meets DOT specifications
- Sold separately from grommet

Made of UV protected EPDM

- Sold separately from light
- For use with round grommet mount lights only



#### Kit

- Includes: 51-40811
- 51-40500

(1) 4.0 in. round grommet mount reverse light (1) Mounting grommet for 4.0 in. round light

🔁 BOARDFREE Technology

## 6.5" Oval Grommet Mount Side Turn/Marker & Stop-Tail-Turn Lights

E BOARDFREE Technology











51-60312	6.5" oval grommet mount stop-tail-turn light, red*	Qty. 1
51-60312-16	6.5" oval grommet mount stop-tail-turn light, red*	Qty. 16
51-60313	6.5" oval grommet mount side turn/ marker light, amber*	Qty. 1
51-60313-16	6.5" oval grommet mount side turn/ marker light, amber*	Qty. 16
51-60500	Mounting grommet for 6.5" oval light*	Qty. 1
51-60500-25	Mounting grommet for 6.5" oval light*	Qty. 25
51-60312K	Kit - 6.5" oval grommet mount stop-tail-turn light, red (51-60312) and grommet (51-60500)	Qty. 1
51-60313K	Kit - 6.5" oval grommet mount side turn/ marker light, amber (51-60313) and grommet (51-60500)	Qty. 1

\*Light and grommet sold separately. Select kit 51-60312K/51-60313K to purchase both the light and grommet together.

#### Grommet Mount Light

- ABS and acrylic construction
- BOARDFREE® technology with 9 diodes
- Sealed and greased integrated male 3 pin AMP connector
- Side turn light meets SAE I6, P2 and P3 for turn signals and side markers
- Stop-tail-turn light meets SAE S2 and T2 specifications
- Sold separately from grommet

#### Grommet

- Grommet provides additional protection to the light against vibration and shock
- Fits in standard openings
- Grommet mounts up to a 1/4 in. plate
- Made of UV protected EPDM
- Sold separately from light
- For use with oval grommet mount lights only

#### Kits

- 51-60312K Includes:
- (1) 6.5 in. oval grommet mount light, red
- (1) Mounting grommet for 6.5 in. oval light
- 51-60313K Includes:
  - 51-60313 51-60500


51-60312

51-60500

- (1) 6.5 in. oval grommet mount light, amber
- (1) Mounting grommet for 6.5 in. oval light

## 6.5" Oval Side Turn/Marker & Stop-Tail-Turn Lights

🔁 BOARDFREED Technology




51-60302	6.5" oval stop-tail-turn light, red	Qty. 1
51-60302-16	6.5" oval stop-tail-turn light, red	Qty. 16
51-60303	6.5" oval side turn/marker light, amber	Qty. 1
51-60303-16	6.5" oval side turn/marker light, amber	Qty. 16

• ABS and acrylic construction

- BOARDFREE® technology with 9 diodes
- Sealed and greased integrated male 3 pin AMP connector
- Side turn light meets SAE 16, P2 and P3 for turn signals and side markers
- Stop-tail-turn light meets SAE S2 and T2 specifications
- Low stress mounting holes
- Optional stainless steel trim ring available (P/N: 51-60904)

## 5.5" J2039 Side Turn/Marker Light

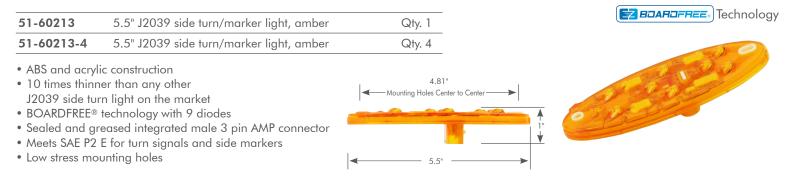

## 4.0" Low Profile Marker/Clearance Lights

51-18312	4.0" low profile marker/clearance light, red	Qty. 1
51-18312-10	4.0" low profile marker/clearance light, red	Qty. 10
51-18313	4.0" low profile marker/clearance light, amber	Qty. 1
51-18313-10	4.0" low profile marker/clearance light, amber	Qty. 10

• ABS and acrylic construction

- BOARDFREE® technology with 4 diodes
- Sealed and greased integrated male 2 pin AMP connector
- Meets SAE PC standards for marker lights
- Meets FMVSS 108
- Slotted low stress mounting hole
- Optional mounting gasket available (P/N: 51-18500)



## 3/4" PC2 Rated Round Marker/Clearance Light


51-34302	3/4" PC2 rated round marker/clearance light, red	Qty. 1
51-34302-10	3/4" PC2 rated round marker/clearance light, red	Qty. 10
51-34303	3/4" PC2 rated round marker/clearance light, amber	Qty. 1
51-34303-10	3/4" PC2 rated round marker/clearance light, amber	Qty. 10
51-34500	Mounting grommet for 3/4" PC2 rated round	Qty. 1
51-04500	marker/clearance light*	
51-34500-10	Mounting grommet for 3/4" PC2 rated round marker/clearance light*	Qty. 10
51-34550	Anti-theft mounting ring for 3/4" PC2 rated round marker/clearance light	Qty. 1
51-34550-10	Anti-theft mounting ring for 3/4" PC2 rated round marker/clearance light	Qty. 10

Acrylic construction

- Sealed and greased integrated male 2 pin AMP connector
- BOARDFREE® technology with a single diode
- Meets SAE PC2 standard for marker lights
- Anti-theft mounting ring or mounting grommet available
- Optional trim ring available\* (P/N: 51-34904)
- Optional adapter plates available\* (P/N: 51-34020 or 51-34025)







## 3/4" Round Single Function Marker/Clearance Light

Hard Wired



**AMP** Connections



Bullet Connections





#### **AMP** Connections

51-34312	3/4" PC rated round single function light, 2 pin AMP connector, red	Qty. 1
51-34312-25	3/4" PC rated round single function light, 2 pin AMP connector, red	Qty. 25
51-34313	3/4" PC rated round single function light, 2 pin AMP connector, amber	Qty. 1
51-34313-25	3/4" PC rated round single function light, 2 pin AMP connector, amber	Qty. 25
51-34412	3/4" PC rated round single function light, 2 pin AMP connector, clear lens, red	Qty. 1
51-34412-25	3/4" PC rated round single function light, 2 pin AMP connector, clear lens, red	Qty. 25
51-34413	3/4" PC rated round single function light, 2 pin AMP connector, clear lens, amber	Qty. 1
51-34413-25	3/4" PC rated round single function light, 2 pin AMP connector, clear lens, amber	Qty. 25

• Polycarbonate lens with sealed housing and hard wired connection

- 3 diodes
- 16 ga., 8 in. wire leads with sealed 2 pin male AMP connection
- Meets SAE J592 standards for P2/PC marker/clearance lights
- IP65 rated
- Includes mounting grommet (P/N: 51-34501)
- Optional adapter plates available (P/N: 51-34020 or 51-34025)

#### **Bullet Connections**

51-34322	3/4" PC rated round single function light, (2) .180 bullet connectors, red	Qty. 1
51-34322-25	3/4" PC rated round single function light, (2) .180 bullet connectors, red	Qty. 25
51-34323	3/4" PC rated round single function light, (2) .180 bullet connectors, amber	Qty. 1
51-34323-25	3/4" PC rated round single function light, (2) .180 bullet connectors, amber	Qty. 25
51-34422	3/4" PC rated round single function light, (2) .180 bullet connectors, clear lens, red	Qty. 1
51-34422-25	3/4" PC rated round single function light, (2) .180 bullet connectors, clear lens, red	Qty. 25
51-34423	3/4" PC rated round single function light, (2) .180 bullet connectors, clear lens, amber	Qty. 1
51-34423-25	3/4" PC rated round single function light, (2) .180 bullet connectors, clear lens, amber	Qty. 25

• Polycarbonate lens with sealed housing and hard wired connections

- 3 diodes
- 16 ga., 8 in. wire leads with .180 male bullet connections
- Meets SAE J592 standards for P2/PC marker/clearance lights
- IP65 rated
- Includes mounting grommet (P/N: 51-34501)
- Optional adapter plates available (P/N: 51-34020 or 51-34025)

## 3/4" Round Dual Function Marker/Clearance Light

#### **AMP** Connections

51-35312	3/4" PC rated round dual function light, 3 pin AMP connector, red	Qty. 1
51-35312-25	3/4" PC rated round dual function light, 3 pin AMP connector, red	Qty. 25
51-35313	3/4" PC rated round dual function light, 3 pin AMP connector, amber	Qty. 1
51-35313-25	3/4" PC rated round dual function light, 3 pin AMP connector, amber	Qty. 25
51-35412	3/4" PC rated round dual function light, 3 pin AMP connector, clear lens, red	Qty. 1
51-35412-25	3/4" PC rated round dual function light, 3 pin AMP connector, clear lens, red	Qty. 25
51-35413	3/4" PC rated round dual function light, 3 pin AMP connector, clear lens, amber	Qty. 1
51-35413-25	3/4" PC rated round dual function light, 3 pin AMP connector, clear lens, amber	Qty. 25

• Polycarbonate lens with sealed housing and hard wired connection

• 3 diodes

• 16 ga., 8 in. wire leads with sealed 3 pin male AMP connection

• Meets SAE J592 standards for P2/PC marker/clearance lights in low mode

• IP65 rated

• Includes mounting grommet (P/N: 51-34501)

• Optional adapter plates available (P/N: 51-34020 or 51-34025)

#### **Bullet Connections**

51-35322	3/4" PC rated round dual function light, (3) .180 bullet connectors, red	Qty. 1
51-35322-25	3/4" PC rated round dual function light, (3) .180 bullet connectors, red	Qty. 25
51-35323	3/4" PC rated round dual function light, (3) .180 bullet connectors, amber	Qty. 1
51-35323-25	3/4" PC rated round dual function light, (3) .180 bullet connectors, amber	Qty. 25
51-35422	3/4" PC rated round dual function light, (3) .180 bullet connectors, clear lens, red	Qty. 1
51-35422-25	3/4" PC rated round dual function light, (3) .180 bullet connectors, clear lens, red	Qty. 25
51-35423	3/4" PC rated round dual function light, (3) .180 bullet connectors, clear lens, amber	Qty. 1
51-35423-25	3/4" PC rated round dual function light, (3) .180 bullet connectors, clear lens, amber	Qty. 25

• Polycarbonate lens with sealed housing and hard wired connections

• 3 diodes

- 16 ga., 8 in. wire lead with .180 male bullet connections
- Meets SAE J592 standards for P2/PC marker/clearance lights in low mode

• IP65 rated

• Includes mounting grommet (P/N: 51-34501)

• Optional adapter plates available (P/N: 51-34020 or 51-34025)



Hard Wired

**AMP** Connections




**Bullet Connections** 





## 4.0" Low Profile License Light

E BOARDFREE Technology



## 3/4" Round License Light

Hard Wired



## 3/4" Round Auxiliary Light

Hard Wired







51-18701	4.0" low profile license	e light, clear	Qty. 1
51-18701-10	4.0" low profile license	e light, clear	Qty. 10
51-18701K	Kit - 4.0" low profile license light, (51-18701), mounting bracket (51-18900) and pigtail AMP connector (51-96210)		Qty. 1
<ul> <li>ABS and acryli</li> <li>Sealed and gravely gravely and the sealed and gravely gravely and the sealed and the sealed acryling and the sealed acryling and the sealed acryling and the sealed acryling acryl</li></ul>	eased integrated male nector	<ul> <li>Meets SAE L standard for license light by FMVSS</li> <li>Slotted low stress mounti</li> <li>Optional mounting brack (P/N: 51-18900)</li> </ul>	ng holes
Kit • 51-18701K Ind			
51-18701 (1) 4 0 in low profile license light			

51-18701 (1) 4.0 in. low profile license light

51-18900 (1) 4.0 in. low profile license light mounting bracket

51-96210 (1) Pigtail, 2 pin female AMP connector to (2) .180

male bullet connections

#### **AMP** Connections

51-34711	3/4" round license light, 2	2 pin AMP connector, clear	Qty. 1
51-34711-10	3/4" round license light, 2 pin AMP connector, clear		
<ul> <li>Polycarbonate lens with sealed housing and hard wired connection</li> <li>3 diodes</li> <li>16 ga., 8 in. wire leads with sealed 2 pin male AMP connection</li> <li>Meets SAE L standard for use license light when mounted a</li> <li>Includes hooded mounting g</li> </ul>			
Bullet Conne	ctions		
51-34721	3/4" round license light, (2	) .180 bullet connectors, clear	Qty. 1
51-34721-10	3/4" round license light (2	) 180 bullet connectors clear	Qtv. 10

	, 0,		- /
51-34721-10	3/4" round license light,	(2) .180 bullet connectors, clear	Qty. 10
<ul> <li>Polycarbonate l and hard wired</li> </ul>	ens with sealed housing connections	Meets SAE L standard for us license light when mounted	

- 3 diodes
- 16 ga., 8 in. wire lead with .180 male bullet connections
- license light when mounted correctly
- Includes hooded mounting grommet

## AMP Connections

51-34011	3/4" round auxilary ligh	t, 2 pin AMP connector, clear	Qty. 1
51-34011-10	3/4" round auxilary ligh	t, 2 pin AMP connector, clear	Qty. 10
and hard wirec • 3 diodes	ire leads with sealed	<ul> <li>Includes mounting grommet (P/N: 51-34501)</li> <li>Optional adapter plates avail (P/N: 51-34020 or 51-34025)</li> </ul>	able
Bullets Conn	ections		
Bullets Conn 51-34021		(2) .180 bullet connectors, clear	Qty. 1
	3/4" round auxilary light,	<ul><li>(2) .180 bullet connectors, clear</li><li>(2) .180 bullet connectors, clear</li></ul>	Qty. 1 Qty. 10

- 16 ga., 8 in. wire lead with .180 male bullet connections
- (P/N: 51-34020 or 51-34025)

## BRACKET AND MOUNTING ACCESSORIES

## Side Turn Light Mounting Bracket

51-60900	Mounting bracket for side turn lights	Qty. 1	
51-60900-10	Mounting bracket for side turn lights	Qty. 10	·
<ul> <li>with 90 degree</li> <li>6.25 in. mount</li> <li>0.365 in. mount</li> <li>Accommodates</li> <li>6 in. oval side</li> <li>Surface mount</li> </ul>	strength 12 ga. 304 stainless steel construction e flange for mounting ting hole spacing inting holes is standard grommet or flange mounted turn lighting products on the market t PERMALITE™ XT side turn lights (P/N: 51-60303 and 51- ck plate adapter (P/N: 51-60910) for installation	60213)	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0


Light pictured sold separately

## **Back Plate Adapter**

51-60910	Back plate adapter for side turn lights	Qty. 1
51-60910-10	Back plate adapter for side turn lights	Qty. 10

- Features high-strength 12 ga. 304 stainless steel construction
- Designed to mount PERMALITE<sup>™</sup> XT side turn lights (P/N: 51-60103 and 51-60213) on standard industry mounting brackets (Phillips mounting bracket P/N: 51-60900)


# ... ...



## 4.0" Low Profile License Light Bracket

51-18900	4.0" low profile license light mounting bracket	Qty. 1

- Adds additional protection to the PERMALITE<sup>™</sup> XT 4.0 in. low profile license light
- Made of UV resistant non-corrosive polycarbonate material
- The 2 pin AMP connector without a sealed boot must be used to accommodate for spacing within the bracket for the pigtail wiring (Phillips P/N: 51-96210)



Light and pigtail pictured sold separately

## 4.0" Mounting Grommet

For 4.0" Round Grommet Mount Lights



Light pictured sold separately

## 6.5" Mounting Grommet

For 6.5" Oval Grommet Mount Lights



51-40500	Mounting grommet for 4.0" round grommet mount lights	Qty. 1
51-40500-25	Mounting grommet for 4.0" round grommet mount lights	Qty. 25

• Grommet provides additional protection to the light against vibration and shock

• Fits in standard 4.5 in. openings

• Grommet mounts up to a 1/4 in. plate

• Made of UV protected EPDM

51-60500	Mounting grommet for 6.5" oval grommet mount stop-tail-turn and side turn/marker lights	Qty. 1
51-60500-25	Mounting grommet for 6.5" oval grommet mount stop-tail-turn and side turn/marker lights	Qty. 25

- Grommet provides additional protection to the light against vibration and shock
- Fits in standard openings
- Grommet mounts up to a 1/4 in. plate
- Made of UV protected EPDM

## 3/4" PC2 Mounting Grommet

For 3/4" PC2 Rated Round Marker/Clearance Lights



51-34500	Mounting grommet for 3/4" PC2 rated round marker/clearance lights	Qty. 1
51-34500-10	Mounting grommet for 3/4" PC2 rated round marker/clearance lights	Qty. 10

- For use with the PERMALITE<sup>™</sup> XT 3/4 in. PC2 rated round marker/clearance light only
- Constructed of EPM rubber and is resistant to the weather elements

## 3/4" PC2 Anti-Theft Mounting Ring

Light pictured sold separately

For 3/4" PC2 Rated Round Marker/Clearance Lights



51-34550	Anti-theft mounting ring for 3/4" PC2 rated round marker/clearance lights	Qty. 1
51-34550-10	Anti-theft mounting ring for 3/4" PC2 rated round marker/clearance lights	Qty. 10

• For use with the PERMALITE™ XT 3/4 in. PC2 rated round marker/clearance lights

• Constructed of high-strength POM material which is abrasion and heat resistant

## 3/4" Mounting Grommet

For 3/4" Round Hard Wired Lights

#### 51-34501 Mounting grommet for 3/4" round hard wired lights Qty. 5

- For use with 3/4 in. round hard wired single function, dual function and auxiliary lights (Not for use with 3/4 in. round hard wired license lights)
- Constructed of EPM rubber and is resistant to the weather elements
- Fits trailer plate thickness of 1/8 in. 1/4 in.



Light pictured not included with purchase of 51-34501

## 2.0" Mounting Adapter Plate

For 3/4" Round Lights

51-34020	2.0" adapter plate for 3/4" PC and PC2 lights	Qty. 1
51-34020-10	2.0" adapter plate for 3/4" PC and PC2 lights	Qty. 10

- For use with PERMALITE™ XT 3/4 in. round lights
- Light must be mounted with grommet to the adapter plate
- Adapter plate comes with installation holes for riveting to the surface around the light
- Constructed of non-corrosive polycarbonate material
- Used to upgrade traditional 2.0 in. flange style lights to smaller more efficient LED lights
- Universal mounting pattern




## 2.5" Mounting Adapter Plate

For 3/4" Round Lights

51-34025	2.5" adapter plate for 3/4" PC and PC2 lights	Qty. 1
51-34025-10	2.5" adapter plate for 3/4" PC and PC2 lights	Qty. 10


- For use with PERMALITE™ XT 3/4 in. round lights
- Light must be mounted with grommet to the adapter plate
- Adapter plate comes with installation holes for riveting to the surface around the light
- Constructed of non-corrosive polycarbonate material
- Used to upgrade traditional 2.5 in. flange style lights to smaller more efficient LED lights
- Universal mounting pattern



Light and grommet pictured sold separately

## LIGHTING TRIM RINGS


## Trim Ring For 4.0" Flange Mount Lights



51-40904	Trim ring for 4.0" flange mount lights	Qty. 1
• For use with F	PERMALITE™ XT 4.0 in. round	

- stop-tail-turn light (P/N: 51-40202) and reverse light (P/N: 51-40801)
- Can also be used on similar flanged lights
- Install using 1/4 in. rivets for additional protection against theft

## Trim Ring For 6.5" Oval Lights




51-60904	Trim ring/adapter plate for 6.5" oval lights	Qty. 1
turn/marker l 6.5 in. oval s • Can be used opening with 1. Riveting th	PERMALITE <sup>™</sup> XT 6.5 in. oval side light (P/N: 51-60103) and PERMALITE <sup>™</sup> XT top-tail-turn light (P/N: 51-60102) to install the light in a standard out the use of an additional adapter plate by: e light directly to the trim ring ng the trim ring to the mounting surface around th	e opening

## Trim Ring For 3/4" PC2 Rated Round Lights

Mounting Holes .14*	51-34904	Trim ring for 3/4" PC2 rated round marker/clearance light	Qty. 1
	(P/N: 51-343 • Light must be	PERMALITE <sup>™</sup> XT PC2 rated round marker/clearance lig 302; red and 51-34303; amber) e mounted with (P/N: 51-34500) grommet against trim nes with installation holes for optional riveting to the su ght	ring
Lights and grommet pictured sold separately			

## LIGHTING GASKET

## 4.0" Low Profile Marker/Clearance Light Mounting Gasket



51-18500	Mounting gasket for low profile marker/ clearance lights	Qty. 1
51-18500-10	Mounting gasket for low profile marker/ clearance lights	Qty. 10

• Helps prevent water intrusion and corrosion

- For use with the PERMALITE™ XT 4.0 in. low profile
- marker/clearance lights (P/N: 51-18312; red and 51-18313; amber)
- Constructed of PE foam with adhesive back