

LOAD RITE

5 STARR SERIES

NMMA
CERTIFIED
TRAILER



5S-192800VT

2022 MARINE

AUGUST 16, 2021
REV 101921



5S-AC23T5200102TB1

Shown with optional Sideguides and
aluminum wheels.

**LED LIGHTS NOW
STANDARD ON
ALL 5 STARR**




5S-213600RTB

FEATURING

- ☆ GALVANIZED BUNK PG.3
- ☆ GALVANIZED ROLLER PG.4
- ☆ ALUMINUM BUNK PG.5
- ☆ ALUMINUM ROLLER PG.6
- ☆ OPTIONS PGS. 7 & 8

Typical Boat Hull Types

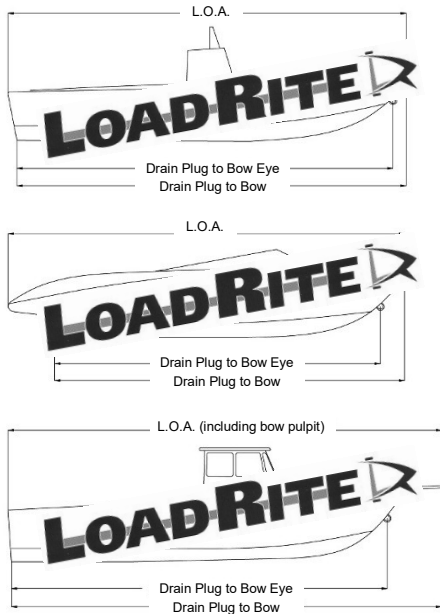


Schematics are a visual representation of a generic trailer and not drawn to a particular scale.

Most of our model listings include columns of specifications including "Bow Eye to Transom Minimum", "Bow Eye to Transom Maximum", and "Width Between Fenders", and "Overall Width". This information should help our dealers better *approximate* how a boat will sit on a trailer.


The diagrams display the correlation between the boat hull and trailer dimensions.

The Drain Plug to Bow Eye measurement as shown in the accompanying diagrams is critical in sizing a trailer for boat length. Bow pulpit, windlass, outboard motor and bracket, and Euro transom are generally not supported by the trailer. Including these in length measurements could result in a trailer that does not fit well. Bow pulpit or windlass may require a longer tongue for proper clearance.

Bunk Model Trailers

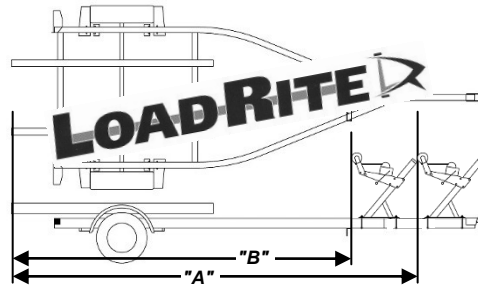

Roller Model Trailers

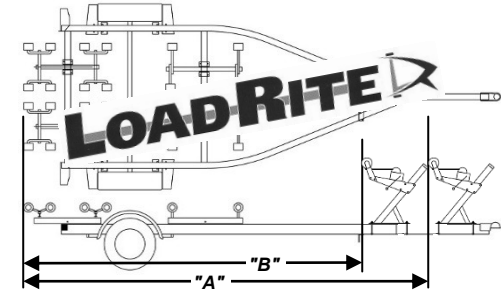

Important trailer fit specifications

| Model | Capacity | Bow Eye To Transom Maximum | Bow Eye To Transom Minimum |
|--------------------|----------|----------------------------|----------------------------|
| 5S-AC202800102T | 2,800 | 18' | 14' 6" |
| 5S-AC21T4200102TB1 | 4,200 | 18' | 15' 10" |
| 5S-AC223100102TB1 | 3,100 | 21' | 16' 4" |

© 2009 Load Rite Trailers, Inc.

These trailer schematics are provided to illustrate the dimensions displayed on many of the product charts that follow.

Many trailers have a great amount of adjustment in the support structure. Adjustment to either extreme may require moving the axles to maintain tongue weight in the 5% to 7% ideal range for most trailers.

© 2009 Load Rite Trailers, Inc.

Bunk Information

Bunk Type
 V = Traditional V-bunks
 C = All wood Continuous bunks

Target Type
 - = None
 K = Keel pad
 T = Target bunks

**TANDEM
OVERALL
WIDTH NOW**

**INCLUDES
STANDARD
LED LIGHTS**

**KENDACARE -
LOADSTAR TIRE
ROADSIDE
ASSISTANCE
PROGRAM
NOW INCLUDED WITH
EACH TRAILER PURCHASE.**

| Galvanized Bunk Models | Capacity | S u s | Bow Eye To Transom | Bow Eye To Transom | Bunk Type | Brakes | Tire Size | Overall Width | Between Fenders | Overall Length | Dealer Price |
|------------------------|----------|-------|--------------------|--------------------|-----------|--------|-----------|---------------|-----------------|----------------|--------------|
| 5S-172200VT | 2,200 | T | 17' 4" | 13' 8" | V | 0 | ST175/13C | 89" | 73" | 19' 10" | |
| 5S-172450VT | 2,450 | T | 17' 4" | 13' 8" | V | 0 | ST205/14C | 89" | 73" | 19' 10" | |
| 5S-19245090VT | 2,450 | T | 17' 1" | 15' 3" | V | 0 | ST205/14C | 89" | 73" | 19' 11" | |
| 5S-192450VT | 2,450 | T | 17' 2" | 14' 5" | V | 0 | ST205/14C | 96" | 77" | 20' | |
| 5S-192800VT | 2,800 | T | 17' 2" | 14' 5" | V | 0 | ST205/14C | 96" | 77" | 20' | |
| 5S-193100VTB | 3,100 | T | 17' 2" | 14' 5" | V | 1 | ST215/14C | 96" | 77" | 20' 8" | |
| 5S-213600VT | 3,600 | T | 19' 7" | 17' 5" | C | 0 | ST225/15D | 96" | 78" | 23' 2" | |
| 5S-213600VTB | 3,600 | T | 19' 7" | 17' 5" | C | 1 | ST225/15D | 96" | 78" | 23' 2" | |
| 5S-22T3800102TV1 | 3,800 | T | 20' 1" | 17' 1" | C | 1, 2 | ST175/13C | 102" | 82" | 24' | |
| 5S-22T4400102TV1 | 4,400 | T | 20' 1" | 17' 1" | C | 1, 2 | ST205/14C | 102" | 82" | 24' 3" | |
| 5S-22T4700102TV1 | 4,700 | T | 20' 1" | 17' 1" | C | 1, 2 | ST205/14C | 102" | 82" | 24' | |
| 5S-22T5000102TV1 | 5,000 | T | 20' 1" | 17' 1" | C | 1, 2 | ST205/14C | 102" | 82" | 24' 10" | |
| 5S-22T5400102TV1 | 5,400 | T | 20' 1" | 17' 1" | C | 1, 2 | ST215/14C | 102" | 82" | 24' 10" | |
| 5S-24T5000102TV1 | 5,000 | T | 22' 4" | 19' | C | 1, 2 | ST205/14C | 102" | 82" | 26' | |
| 5S-24T5400102TV1 | 5,400 | T | 22' 4" | 19' | C | 1, 2 | ST215/14C | 102" | 82" | 26' | |
| 5S-25T6000102TV1 | 6,000 | T | 23' | 19' 6" | C | 1, 2 | ST215/14C | 102" | 82" | 27' | |
| 5S-25T6400102TV1 | 6,400 | T | 23' | 19' 6" | C | 1, 2 | ST205/15D | 102" | 82" | 27' | |
| 5S-26T6600102TV1 | 6,600 | T | 25' | 19' 8" | C | 1, 2 | ST205/15D | 102" | 82" | 28' | |
| 5S-26T7700102TV1 | 7,700 | T | 25' | 19' 8" | C | 1, 2 | ST225/15D | 102" | 82" | 28' | |
| 5S-28T8000102TV2 | 8,000 | T | 26' 3" | 23' 5" | C | 2 | ST225/15D | 102" | 82" | 30' | |



5S-22T4400102TV2

Standard Features

- Galvanized steel frame
- Torsion axles with galvanized hub and trailing arm
- Bead-balanced bias-ply tires on galvanized wheels
- Disc brakes where installed
- LED lights
- Heat shrunk wire splices
- Carpeted wood bunks
- One-piece aluminum diamondplate fenders
- Tongue jack

Popular Options

- Second axle disc brakes
- Radial tires
- Aluminum wheels
- Electric Over Hydraulic brakes
- Stainless disc brake options
- Stainless brakelines
- Drop-style tongue jack
- Plastic bunk covers - recommended for all metal hull boats
- Swing tongue
- Sideguides

Important Safety Issue - Brake Requirements
 Brake laws vary by state and require dealers to sell trailers that comply with the brake laws of the state where the trailer will be registered. *This is a very important safety issue.* For full information contact the appropriate state Motor Vehicle Department. As always, Load Rite recommends brakes on all axles where available.

GALVANIZED ROLLER TRAILERS

| Galvanized Roller Models | Capacity | Susp | Bow Eye To Transom Maximum | Bow Eye To Transom Minimum | # Rollers | Brakes | Tire Size | Overall Width | Between Fenders | Overall Length | Dealer Price |
|--------------------------|----------|------|----------------------------|----------------------------|-----------|--------|-----------|---------------|-----------------|----------------|--------------|
| 5S-172200RT | 2,200 | T | 16' | 14' 1" | 16 | 0 | ST175/13C | 90.5" | 73" | 19' 4" | |
| 5S-172450RT | 2,450 | T | 17' 8" | 14' 1" | 16 | 0 | ST205/14C | 90.5" | 73" | 19' 4" | |
| 5S-192450RT | 2,450 | T | 17' 11" | 15' 1" | 16 | 0 | ST205/14C | 96" | 77" | 20' 8" | |
| 5S-192800RT | 2,800 | T | 18' 2" | 15' 1" | 20 | 0 | ST205/14C | 96" | 77" | 21' | |
| 5S-193000RT | 3,000 | T | 18' 2" | 15' 1" | 20 | 0 | ST215/14C | 96" | 77" | 21' | |
| 5S-193100RTB | 3,100 | T | 18' 2" | 15' 1" | 20 | 1 | ST215/14C | 96" | 77" | 21' 8" | |
| 5S-213600RT | 3,600 | T | 19' 1" | 16' | 24 | 0 | ST225/15D | 96" | 78" | 21' 4" | |
| 5S-213600RTB | 3,600 | T | 19' 1" | 16' | 24 | 1 | ST225/15D | 96" | 78" | 22' 8" | |
| 5S-22T3800102TG1 | 3,800 | T | 20' 9" | 15' 10" | 24 | 1, 2 | ST175/13C | 102" | 82" | 24' 3" | |
| 5S-22T4400102TG1 | 4,400 | T | 20' 9" | 15' 10" | 28 | 1, 2 | ST205/14C | 102" | 82" | 24' 3" | |
| 5S-22T4700102TG1 | 4,700 | T | 20' 9" | 15' 10" | 32 | 1, 2 | ST205/14C | 102" | 82" | 24' 3" | |
| 5S-22T5000102TG1 | 5,000 | T | 20' 9" | 15' 10" | 32 | 1, 2 | ST205/14C | 102" | 82" | 24' 3" | |
| 5S-22T5400102TG1 | 5,400 | T | 20' 9" | 15' 10" | 36 | 1, 2 | ST215/14C | 102" | 82" | 24' 3" | |
| 5S-24T5000102TG1 | 5,000 | T | 23' 6" | 18' 4" | 32 | 1, 2 | ST205/14C | 102" | 82" | 26' 10" | |
| 5S-24T5400102TG1 | 5,400 | T | 24' 2" | 18' 10" | 36 | 1, 2 | ST215/14C | 102" | 82" | 27' 4" | |
| 5S-25T6000102TG1 | 6,000 | T | 25' | 19' | 40 | 1, 2 | ST215/14C | 102" | 82" | 28' | |
| 5S-25T6400102TG1 | 6,400 | T | 25' | 19' | 56 | 1, 2 | ST205/15D | 102" | 82" | 28' | |
| 5S-26T6600102TG1 | 6,600 | T | 24' 2" | 19' 6" | 56 | 1, 2 | ST205/15D | 102" | 82" | 29' 4" | |
| 5S-26T7700102TG1 | 7,700 | T | 24' 2" | 19' 6" | 60 | 1, 2 | ST225/15D | 102" | 82" | 29' 4" | |
| 5S-28T8000102TG2 | 8,000 | T | 26' 3" | 23' 5" | 64 | 2 | ST225/15D | 102" | 82" | 30' | |

**TANDEM
OVERALL
WIDTH NOW**

**INCLUDES
STANDARD
LED LIGHTS**

**KENDACARE -
LOADSTAR TIRE
ROADSIDE
ASSISTANCE
PROGRAM
NOW INCLUDED WITH
EACH TRAILER PURCHASE.**



5S-25T6000102TG1

Popular Options

- Second axle disc brakes
- Radial tires
- Aluminum wheels
- Electric Over Hydraulic brakes
- Stainless disc brake options
- Stainless brakelines
- Drop-style tongue jack
- Swing tongue

Standard Features

- Galvanized steel frame
- Torsion axles with galvanized hub and trailing arm - most models
- Bead-balanced bias-ply tires on galvanized wheels
- Disc brakes where installed
- LED lights
- Heat shrunk wire splices
- TPR rollers
- One-piece aluminum diamondplate fenders (except 5S-17200090R)
- Tongue jack
- 2 Plus 3 Years Limited Warranty

Important Safety Issue - Brake Requirements

Brake laws vary by state and require dealers to sell trailers that comply with the brake laws of the state where the trailer will be registered. ***This is a very important safety issue.*** For full information contact the appropriate state Motor Vehicle Department. As always, Load Rite recommends brakes on all axles where available.

Prices and specifications subject to change without notice. August 16, 2021


| Aluminum I-Beam Bunk Model | Capacity | S u s | Bow Eye To Transom | Bow Eye To Transom | Bunk Type | Target Type | Brakes | Tire Size | Overall Width | Between Fenders | Overall Length | Dealer Price |
|----------------------------|----------|-------|--------------------|--------------------|-----------|-------------|--------|-----------|---------------|-----------------|----------------|--------------|
| 5S-AC17220090T | 2,200 | T | 17' | 13' | C | - | 0 | ST175/13C | 92" | 74" | 20' 4" | |
| 5S-AC17245090T | 2,450 | T | 18' 9" | 13' 9" | C | - | 0 | ST205/14C | 92" | 74" | 21' 3" | |
| 5S-AC182800102T | 2,800 | T | 20' 2" | 15' | C | - | 0 | ST205/14C | 101" | 83" | 23' 2" | |
| 5S-AC183100102T | 3,100 | T | 20' 2" | 15' | C | - | 0 | ST215/14C | 101" | 83" | 23' 2" | |
| 5S-AC183100102TB1 | 3,100 | T | 20' 2" | 15' | C | - | 1 | ST215/14C | 101" | 83" | 23' 2" | |
| 5S-AC183600102TB1 | 3,600 | T | 20' 2" | 15' | C | K | 1 | ST225/15D | 102" | 82" | 23' 2" | |
| 5S-AC202200102T | 2,200 | T | 20' 10" | 17' 1" | C | K | 0 | ST175/13C | 102" | 84" | 24' 4" | |
| 5S-AC202800102T | 2,800 | T | 20' 10" | 17' 1" | C | K | 0 | ST205/14C | 102" | 84" | 24' 4" | |
| 5S-AC203100102T | 3,100 | T | 20' 10" | 17' 1" | C | K | 0 | ST215/14C | 102" | 84" | 25' | |
| 5S-AC203100102TB1 | 3,100 | T | 20' 10" | 17' 1" | C | K | 1 | ST215/14C | 102" | 84" | 25' | |
| 5S-AC203600102TB1 | 3,600 | T | 21' 3" | 16' 10" | C | K | 1 | ST225/15D | 102" | 84" | 25' | |
| 5S-AC21T5200102TB1 | 5,200 | T | 20' 3" | 15' 5" | C | T | 1, 2 | ST205/14C | 102" | 84" | 23' 6" | |
| 5S-AC23T5200102LTB1 | 5,200 | T | 21' 5" | 15' 5" | C | T | 1, 2 | ST205/14C | 102" | 84" | 25' 8" | |
| 5S-AC25T5600102LTB1 | 5,600 | T | 23' 9" | 19' | C | T | 1, 2 | ST205/14C | 102" | 82" | 27' 5" | |
| 5S-AC25T6000102LTB1 | 6,000 | T | 23' 10" | 18' 10" | C | T | 1, 2 | ST215/14C | 102" | 82" | 27' 9" | |
| 5S-AC25T6300102LTB1 | 6,300 | T | 23' 7" | 18' 10" | C | T | 1, 2 | ST205/15D | 102" | 82" | 27' 5" | |
| 5S-AC26T6700102LTB1 | 6,700 | T | 24' 5" | 19' 9" | C | T | 1, 2 | ST205/15D | 104" | 85" | 28' 11" | |
| 5S-AC26T7300102LTB1 | 7,300 | T | 24' 5" | 19' 9" | C | T | 1, 2 | ST225/15D | 102" | 82" | 28' 11" | |
| 5S-AC26T8400102LTB2 | 8,400 | T | 24' 5" | 19' 9" | C | T | 2 | ST225/15D | 102" | 82" | 28' 11" | |
| 5S-AC27T6100102LTB1 | 6,100 | T | 25' 7" | 19' 9" | C | T | 1, 2 | ST215/14C | 102" | 82" | 29' 7" | |
| 5S-AC28T8400102LTB2 | 8,400 | T | 26' 3" | 22' 10" | C | T | 2 | ST225/15D | 102" | 84" | 31' | |
| 5S-AC28T10000102TB2* | 10,000 | T | 28' | 21' 6" | C | T | 2 | ST235/16D | 102" | 82" | 32' 4" | |
| 5S-AC28R10400102TB3* | 10,400 | T | 28' | 21' 6" | C | T | 3 | ST205/15D | 102" | 82" | 32' 4" | |
| 5S-AC28R12000102TB3 | 12,000 | T | 26' 3" | 21' 4" | C | T | 3 | ST225/15D | 102" | 82" | 31' 3" | |
| 5S-AC32R10400102TB3 | 10,400 | T | 29' 2" | 24' 1" | C | T | 3 | ST205/15D | 102" | 82" | 33' 9" | |
| 5S-AC32R12000102TB3 | 12,000 | T | 30' | 24' 11" | C | T | 3 | ST225/15D | 102" | 82" | 34' 10" | |

INCLUDES STANDARD LED LIGHTS

KENDACARE - LOADSTAR TIRE ROADSIDE ASSISTANCE PROGRAM NOW INCLUDED WITH EACH TRAILER PURCHASE.

- Popular Options**
- Second axle disc brakes
 - Radial tires
 - Aluminum wheels
 - Electric Over Hydraulic brakes
 - Stainless disc brake options
 - Stainless brakelines
 - Stainless frame fasteners
 - Plastic bunk covers - recommended for all metal hull boats
 - Target bunks - single axle
 - Drop-style tongue jack
 - Swing tongue
 - Sideguides
 - Step Hull bunks

- Patented I-beam frame
- Torsion axles with galvanized hub and trailing arm - most models
- Bead-balanced bias-ply tires on galvanized wheels
- Disc brakes where installed
- LED lights
- Heat shrunk wire splices
- Carpeted wood bunks
- Target bunks - tandem and tri-axle
- One-piece aluminum diamondplate fenders
- Tongue jack
- Drop-style tongue jack (tri-axle)

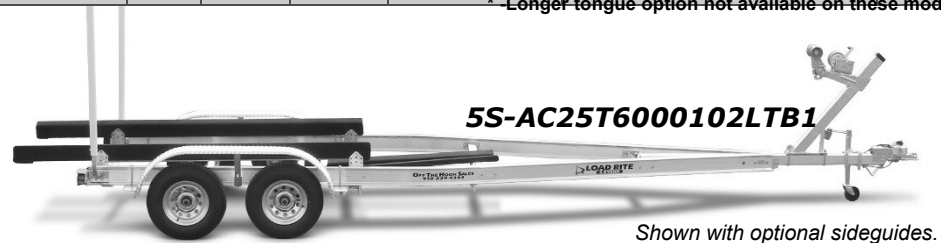

Shown with optional sideguides.

Important Safety Issue - Brake Requirements
 Brake laws vary by state and require dealers to sell trailers that comply with the brake laws of the state where the trailer will be registered. **This is a very important safety issue.** For full information contact the appropriate state Motor Vehicle Department. As always, Load Rite recommends brakes on all axles where available.

Not responsible for printing errors.

| Aluminum I-Beam Roller Models | Capacity | Susp | Bow Eye To Transom Maximum | Bow Eye To Transom Minimum | # Rollers | Brakes | Tire Size | Overall Width | Between Fenders | Overall Length | Dealer Price |
|-------------------------------|----------|------|----------------------------|----------------------------|-----------|--------|-----------|---------------|-----------------|----------------|--------------|
| 5S-AR17245090T | 2,450 | T | 18' | 13' | 20 | 0 | ST205/14C | 90" | 74" | 20' 4" | |
| 5S-AR182800102T | 2,800 | T | 18' 6" | 14' 6" | 20 | 0 | ST215/14C | 102" | 82" | 21' 4" | |
| 5S-AR183100102TB1 | 3,100 | T | 18' 6" | 14' 6" | 20 | 1 | ST215/14C | 102" | 82" | 21' 10" | |
| 5S-AR203100102TB1 | 3,100 | T | 19' 11" | 14' 6" | 20 | 1 | ST215/14C | 102" | 82" | 21' 9" | |
| 5S-AR20T4600102TB1 | 4,600 | T | 19' 7" | 13' 6" | 28 | 1, 2 | ST205/14C | 102" | 82" | 21' 9" | |
| 5S-AR22T5200102TB1 | 5,200 | T | 21' 8" | 17' 8" | 40 | 1, 2 | ST205/14C | 102" | 82" | 23' 9" | |
| 5S-AR24T6000102TB1 | 6,000 | T | 23' 7" | 19' 10" | 48 | 1, 2 | ST215/14C | 102" | 82" | 26' 3" | |
| 5S-AR26T6000102TB1 | 6,000 | T | 25' | 23' | 48 | 1, 2 | ST215/14C | 102" | 82" | 28' | |



5S-AR22T5200102TB1
Shown with optional double-hump fenders.

ONE-PIECE FENDERS NOW STANDARD ON ALL TANDEM AND TRIAXLE MODELS

Standard Features

- ☑ Patented I-beam frame
- ☑ Torsion axles with galvanized hub and trailing arm - most models
- ☑ Bead-balanced bias-ply tires on galvanized wheels
- ☑ Disc brakes where installed
- ☑ LED lights - roller models
- ☑ Heat shrunk wire splices
- ☑ TPR rollers
- ☑ One-piece aluminum diamondplate fenders
- ☑ Tongue jack
- ☑ 2 Plus 3 Years Limited Warranty

Popular Options

- ☑ Second axle disc brakes
- ☑ Radial tires
- ☑ Aluminum wheels
- ☑ Electric Over Hydraulic brakes
- ☑ Stainless disc brake options
- ☑ Stainless brakelines
- ☑ Stainless frame fasteners
- ☑ Plastic bunk covers - recommended for all metal hull boats
- ☑ Drop-style tongue jack
- ☑ Swing tongue
- ☑ Sideguides

INCLUDES STANDARD LED LIGHTS

KENDACARE - LOADSTAR TIRE ROADSIDE ASSISTANCE PROGRAM NOW INCLUDED WITH EACH



Optional Split-Star aluminum wheel available for most models. See page 8 for pricing by size.

Important Safety Issue - Brake Requirements

Brake laws vary by state and require dealers to sell trailers that comply with the brake laws of the state where the trailer will be registered. This is a very important safety issue. For full information contact the appropriate state Motor Vehicle Department. As always, Load Rite recommends brakes on all axles where available.

Prices and specifications subject to change without notice. August 16, 2021

BRAKE OPTIONS

| LR Part # | Description | Dealer |
|--|---|--------|
| Add Disc Brakes | add to 2nd axle when 1 brake std. -13" & 14" pontoon | |
| | add to 2 nd or 3 rd axle when 1 brake std. - 3,750 lb. axle | |
| | add to 2 nd or 3 rd axle when 1 brake std. - 4,200 lb. axle | |
| | add to 2 nd or 3 rd axle when 1 brake std. - 6,000 lb. axle | |
| Stainless Disc Brake Options <i>(N/A on pontoon, 4,200 or 7,000 lb. axles)</i> | 3,750 lb., per axle, Knott axle | |
| | 6,000 lb., per axle, UFP axle | |
| Electric Over Hydraulic Brakes | < 9,000 lb. capacity | |
| | > 9,000 lb. capacity | |
| Stainless Steel Brakelines | Upgrade Single Axle | |
| | Upgrade Tandem Axle | |
| | Upgrade Triaxle | |

TONGUE JACK OPTIONS

| LR Part # | Description | Dealer |
|--|------------------------------------|--------|
| Tongue Jack | 1,200 lb., 6" swivel wheel | |
| | 1,200 lb., 8" swivel wheel | |
| Upgrade | 6" swivel wheel to 8" swivel wheel | |
| 6" or 8" Wheel to Drop Jack Upgrade | 2,000 lb. domestic | |
| | 2,500 lb. import | |

FENDER OPTIONS

| LR Part # | Description | Dealer |
|-------------------------------------|--|--------|
| Carpeted Inner Fender Skirts | Single axle | |
| | Tandem axle | |
| Plastic Fender Swap | From aluminum Single axle - 13" & 14" wheels | |
| Rubber Fender Swap | Per wheel | |

FRAME AND TONGUE OPTIONS

| LR Part # | Description | Dealer |
|---|------------------------|--------|
| Longer Tongue | 3x3, per foot | |
| | 4x3, per foot | |
| | 5x3, per foot | |
| | 6x3, per foot | |
| Swing Away Tongue | < 4,000 lb. | |
| | 4,001 lb. to 5,200 lb. | |
| | 5,201 lb. to 6,000 lb | |
| Stainless Steel Main Frame Fasteners | Single I-Beam Models | |
| | Tandem I-Beam Models | |
| | Triaxle I-Beam Models | |
| Stainless Bunk Tube Fasteners | LR-AB Bunk Tubes | |

**Stainless hardware option excludes winchstand, roller and bunk pivot bar, and upper bunk fastening hardware.*

BUNK OPTIONS

| LR Part # | Description | Dealer |
|----------------------------|--|--------|
| Plastic Bunk Covers | Watercraft - single | |
| | Watercraft - double | |
| | Jon / Skiff - 2 bunk | |
| | Jon / Skiff - 4 bunk | |
| | Single axle < 16' | |
| | Single Axle > 16' | |
| | Target bunks - AB, AC single axle >18' | |
| | Tandem SA | |
| | Tandem - AB, AC (incl. target bunks) | |
| | Tandem - 4 bunk | |
| | Triaxle - AB, AC (incl. target bunks) | |
| | Triaxle - no targets | |
| | Pontoon | |
| | Tri-Toon | |
| Extended Bunks | Bunks to front crossbar | |
| Step Hull Bunks | AB-Style bunks | |
| | AC>AB-Style bunks | |
| | AC-Style bunks | |

OPTIONS

MISCELLANEOUS OPTIONS

| LR Part # | Description | Dealer |
|---------------------------------|------------------|--------|
| Engraved VIN | In frame | |
| Custom Graphics | One color | |
| Aluminum License Bracket | Replaces plastic | |

WINCH OPTIONS

| LR Part # | Description | Dealer |
|----------------------------------|-------------------------------------|--------|
| Cable Winch | Upgrade from strap, 2,000 lb winch. | |
| Cable Winch | Upgrade from strap, 2,500 lb winch. | |
| Cable Winch | Upgrade from strap, 3,200 lb winch | |
| Stoltz Poly Winch Rollers | Skiff-style, (2) 6" | |
| | Skiff-style, (2) 8" | |

KEEL SUPPORT OPTIONS

| LR Part # | Description | Dealer |
|---------------------------------|---|--------|
| Keel Roller Assembly | 8" | |
| | 10" | |
| | 12" | |
| Bumper Strip | 18" | |
| Add Target Bunks | on alum < 8,000 lb cap. | |
| | on alum > 8,000 lb cap. | |
| Low Independent Bow Stop | Carpeted, standard duty Stoltz pads, | |
| Bow Roller | Heavy duty | |

SPARE TIRE OPTIONS

| LR Part # | Description | Dealer |
|-------------|---------------------------------|--------|
| 7073.26SK | 4.80x12B, Alum. Wheel Assy. | |
| 7073.07SK | ST215/75D14C, Alum. Wheel Assy. | |
| 7073.15SK | ST205/75D14C, Alum. Wheel Assy. | |
| 7073.21SK | ST225/75D15D, Alum. Wheel Assy. | |
| 7073.33SK | ST205/75D15D, Alum. Wheel Assy. | |
| 7073.31RSK | LT145/R12E, Alum. Wheel Assy. | |
| 7073.15ARSK | ST205/75R14C, Alum. Wheel Assy. | |
| 7073.07ARSK | ST215/75R14C, Alum. Wheel Assy. | |
| 7073.21ARSK | ST225/75R15D, Alum. Wheel Assy. | |
| 7073.30ARSK | ST235/80R16D, Alum. Wheel Assy. | |
| 1087.02G | 4.80x8B, Galv 5B, Bias-ply | |
| 1435.15 | 4.80x12C, Galv 5B, Bias-ply | |
| 1431.03 | 5.70x8B, Galv 5B, Bias-ply | |
| 1436.07 | 5.30x12C, Galv 5B, Bias-ply | |
| 6100.71 | 20.5x10C, Galv 5B, Bias-ply | |
| 6100.75 | 20.5x10D, Galv 5B, Bias-ply | |
| 6100.77 | 20.5x10E, Galv 5B, Bias-ply | |
| 1450.10 | ST175/D13C, Galv 5B, Bias-ply | |
| 1450.11 | ST175/D13D, Galv 5B, Bias-ply | |
| 6100.02 | ST185/D13D, Galv 5B, Bias-ply | |
| 6100.66 | ST205/D14C, Galv 5B, Bias-ply | |
| 6100.64 | ST215/D14C, Galv 5B, Bias-ply | |
| 1450.05 | ST205/D15C, Galv. 5B, Bias-ply | |
| 6100.39 | ST205/D15D, Galv 5B, Bias-ply | |
| 6100.83 | ST225/D15D, Galv 6B, Bias-ply | |
| 1087.11 | LT145/R12E, Galv 5B, Radial | |
| 1450.10AR | ST175/R13C, Galv 5B, Radial | |
| 6100.02AR | ST185/R13D, Galv 5B, Radial | |
| 6100.66AR | ST205/R14C, Galv 5B, Radial | |
| 6100.64AR | ST215/R14C, Galv 5B, Radial | |
| 1450.05R | ST205/R15C, Galv 5B, Radial | |
| 6100.39AR | ST205/R15D, Galv 5B, Radial | |
| 6100.83AR | ST225/R15D, Galv 6B, Radial | |
| 6100.89AR | ST235/R16D, Galv 6B, Radial | |

WHEEL OPTIONS

| LR Part # | Description | Dealer |
|--------------------------------|-------------------------------|--------|
| Radial Tire Upgrade | Per tire, 13" & 14" | |
| | Per tire, 15" | |
| Aluminum Wheel Upgrades | Upgrade 12" (per wheel) | |
| | Upgrade 13" & 14" (per wheel) | |
| | Upgrade 15" (per wheel) | |
| | Upgrade 16" (per wheel) | |

SPARE TIRE CARRIER OPTIONS

| LR Part # | Description | Dealer |
|-----------|---|--------|
| 1480.00 | Spare Tire Carrier - u bolt | |
| 1480.01 | Spare Tire Carrier - u bolt w/ lock | |
| 1480.03 | Spare Tire Carrier - welded, fits 14" wheels and smaller, boxed, LD | |
| 1480.043 | Spare Tire Carrier - welded 3" frame | |
| 1480.044 | Spare Tire Carrier - welded 4" frame | |
| 1480.045 | Spare Tire Carrier - welded 5" frame | |
| 1480.046 | Spare Tire Carrier - welded 6" frame | |
| 1480.13 | Spare Tire Carrier - I-beam frames | |
| 1480.07 | Spare Tire Carrier - spindle/hub, steel frame - 5B | |
| 1480.14 | Spare Tire Carrier - spindle/hub, steel frame - 6B | |
| 1480.16 | Spare Tire Carrier - spindle/hub, alum frame - 5B | |
| 1480.15 | Spare Tire Carrier - spindle/hub, alum frame - 6B | |

SIDEGUIDE OPTIONS

| LR Part # | Description | Dealer |
|-----------|------------------------------------|--------|
| G2 | Heavy Duty - 2X4X60 - 3x2 frame | |
| G3 | Heavy Duty - 2X4X60 - 3x3 frame | |
| G5 | Extreme Duty - Large frames | |
| G6 | Heavy Duty - 2X4X60 - 4x3 frame | |
| G10 | Skiff style - 18.5" - 4x3 frame | |
| G11 | Skiff style - 18.5" - 3x2 frame | |
| G12 | Skiff style - 18.5" - 3x3 frame | |
| G38 | Carpeted - 2x6x60 - Aluminum frame | |
| G200AS | PVC - Aluminum models | |
| G994X3 | PVC - 4" Galvanized frame | |
| G995X3 | PVC - 5" Steel frame | |
| G996X3 | PVC - 6" Steel frame | |
| G999 | PVC - Boxed kit, universal 48" | |