



[→ See All Eaton 5SC UPS Documentation](#)

[→ See all Eaton 5SC models](#)

5SC1500IR

Eaton 5SC 1500 VA Rack 2U

General

Topology	Line-interactive high frequency with booster + fader, pure sinewave output
Configuration	Rack 2U
Part Number	5SC1500IR
Color	Black
Rating (VA/Watts)	1500/1050
Dimensions (H x W x D, mm)	86.2 x 440 x 405
Weight (kg)	17.78
Warranty	2 years

Electrical Input

Connection	(1) IEC-320-C14
------------	-----------------



Input Voltage Range	184V-276V
Nominal Voltage	230V
Input frequency Range Without Using Batteries	45–55Hz (50Hz system), 55–65Hz (60Hz system)

Electrical Output

Voltages	230V (+6/–10 %) (Adjustable to 220V/230V/240V)
----------	--

Outlets	(8) IEC-320-C13
---------	-----------------



Output Frequency	50/60Hz +/-0.1 % (autosensing)
------------------	--------------------------------

Battery


160

140

120

 Standard Runtime

Mouseover graph for detailed runtime values

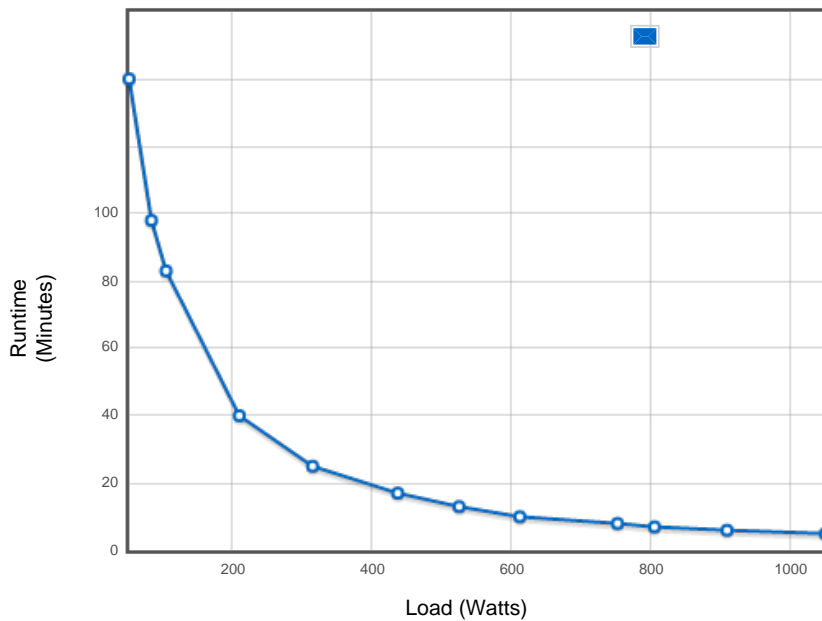

Battery runtimes are approximate and may vary with equipment, configuration, battery age, temperature, etc.

Battery Management

ABM®, Automatic battery test, deep discharge protection

Communications

Communication Ports 1 USB port + 1 RS232 serial port and relay contacts (USB and RS232 ports cannot be used simultaneously) + 1 mini terminal block for remote ON/OFF and Remote Power Off

Communication Slot 1 slot for Network management card or Relay card

Environmental & Standards

Audible Noise <45 dB

Operating Temperature 0 to 40°C

Safety markings IEC/EN 62040-1, UL 1778

EMC Markings IEC/EN 62040-2

Approvals CE, CB report (TUV)

In the interests of continuous product improvement, all specifications are subject to change without notice.

[Privacy Policy](#)
[Terms & Conditions](#)
[Copyright](#)

© 2017 Eaton
 All Rights Reserved