DS-LEDTK Models

Universal Trim Kit

FOR dvLED VIDEO WALLS 89mm TO 150mm DEEP

Perfect your next dvLED video wall installation by adding the Peerless-AV® Universal Trim Kit. This sleek accessory is designed to cover the unsightly sides of dvLED displays and give the video wall a completely finished appearance. The Trim Kit's universal and depth adjustable design attaches to the wall, allowing it to go all the way around the border of any video wall that is 89mm to 150mm deep. The Trim Kit also comes in multiple size options and can be cut to length in the field, providing a custom fit to the specific video wall being installed. This accessory is lightweight and easy to install, providing installers with a simple solution to create a SEAMLESS dvLED video wall.

- Aesthetically pleasing Trim Kit finishes off the video wall by covering the unsightly sides of the dvLED display
- Trim section options, that are solid and 70% vented, allow you to select the perfect combination for your video wall install*
- Universal and depth adjustable design attaches to the wall, allowing it to go around any video wall that is 89mm to 150mm deep
- The Trim Kit can be cut to length in the field, allowing it to be stocked and ready for immediate shipment
- Sections measuring 5', 6' and 8' are packaged in easy to handle cardboard tubes
 - * Customer is responsible for making sure the ventilation selected is right for their video wall requirements.





















Visit Peerless-AV.com/SEAMLESS to get your project started!



DS-LEDTK Models Universal Trim Kit for dvLED Video Walls 89mm to 150mm Deep


Product Specifications


		DIMENSIONS (W x H x D)	PRODUCT WEIGHT		FINISH	AVAILABLE COLORS
DS-LEDTK-C DS-LEDTK-5S DS-LEDTK-6S DS-LEDTK-8S DS-LEDTK-5V DS-LEDTK-6V DS-LEDTK-8V	5' Solid: 6' Solid: 8' Solid: 5' Vented: 6' Vented:	1.5" x 2.9" x 2.9" (38 x 74 x 74mm) 1.5" x 3.5-5.9" x 60" (38 x 89-150 x 1524mm) 1.5" x 3.5-5.9" x 72" (38 x 89-150 x 1829mm) 1.5" x 3.5-5.9" x 96" (38 x 89-150 x 2438mm) 1.5" x 3.5-5.9" x 60" (38 x 89-150 x 1524mm) 1.5" x 3.5-5.9" x 72" (38 x 89-150 x 1829mm) 1.5" x 3.5-5.9" x 96" (38 x 89-150 x 2438mm)	5' Solid: 6' Solid: 8' Solid: 5' Vented: 6' Vented:	4.0lb (1.8kg) 7.3lb (3.3kg) 8.7lb (4.0kg) 11.6lb (5.3kg) 5.8lb (2.6kg) 6.2lb (2.8kg) 7.7lb (3.5kg)	Powder Coat	Magic Black II


Package Specifications


	PACKAGE SIZE (Cardboard Tube)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
DS-LEDTK-C DS-LEDTK-5S DS-LEDTK-6S DS-LEDTK-8S DS-LEDTK-5V DS-LEDTK-6V DS-LEDTK-8V	Corner: 5.25" x 20.0" (133 x 508mm) 5' Solid: 5.25" x 63.5" (133 x 1612mm) 6' Solid: 5.25" x 75.5" (133 x 1917mm) 8' Solid: 5.25" x 99.5" (133 x 2527mm) 5' Vented: 5.25" x 81.5" (133 x 2070mm) 6' Vented: 5.25" x 85.0" (133 x 2159mm) 8' Vented: 5.25" x 113.0" (133 x 2870mm)	Corner: 5.0lb (2.3kg) 5' Solid: 8.7lb (4.0kg) 6' Solid: 10.8lb (4.9kg) 8' Solid: 14.5lb (6.6kg) 5' Vented: 8.0lb (3.6kg) 6' Vented: 8.4lb (3.8kg) 8' Vented: 11.5lb (5.2kg)	735029338888 735029338802 735029338826 735029338833 735029338819 735029338864 735029338871	Trim and Corner Kit	1 Kit


All dimensions = inch (mm)









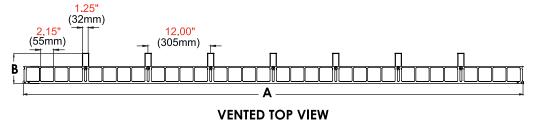

SOLID TOP VIEW

Architect Specifications

The Universal Trim Kit shall be a Peerless-AV model DS-LEDTK Models and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV 2300 White Oak Circle

2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

Peerless-AV EMEA

Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101

Peerless-AV Latin America

Av. de las Industrias 413 Parque Industrial Escobedo General Escobedo, N.L., México, 66062

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360

