SS 1033335 Actia Instruments to Ametek (AMI) Instruments

Service Solution Title: 1033335 Actia Instruments to Ametek (AMI) Instruments

Applicable Vehicles: FCCC step vans built between 2002 and 2010.

Symptoms: After-market purchasing has incurred numerous issues in obtaining service replacement parts at a reasonable price from current vendor Actia. FCCC Engineering developed the attached service parts and installation instructions from Ametek to serve as replacement service parts when a replacement instrument panel is needed.

<u>Issue</u>: If/When replacement service parts are no longer available, it would require to follow the attachments in order to know what replacement parts need to be ordered.

Case Study: N/A


Solution: See the attachments. **D66-03190** shows you the cross-over list from your current Actial panel to the replacement Ametek panel for units built between 2002 to 2007. Then the **D06-84989** MUST be used to see ALL the other parts that will be need **IN ADDITION** to the replacement panel. This document also gives the installation instructions. The G06-84733 shows the new wiring schematics IF needed to reference. **You will also have to know if the vehicle has hydraulic or air brakes in order to know which parts list to use. IF air, you will also need to know if unit has Standard or Metric gauges in order to know which air gauges you will need.**


The D66-03139 attachment shows the cross-over for units built between 2007 to 2010 with Cummins ISB07 engines. These would be units that do NOT show a complete instrument panel assembly part number in BOM 732, as only the individual gauge part numbers are shown such as ATY 109494 or ATY 109493 for example in BOM 844. One should also reference BOM 810 to obtain unit of measure such as ATY 109496 for English or ATY 109495 for Metric for example, in order to determine what the replacement W22 part number will be.

***Basically, to determine which D66 Cross-over list to use for replacement of any gauges such as 22-58310-000, 22-58309-000, 22-58307-000, 22-58307-001, ATY 109494, ATY 109493, ATY 109495, or ATY 109496, you MUST know if these parts are called out in BOM 732 under a panel assembly number use (D66-03190), or if these gauges are called out in separate BOM's without a complete panel assembly shown in BOM 732, use (D66-03139) cross-over list.

The **D66-03368** attachment **MUST** be referenced to show the programming on the new Ametek that will be needed whenever the replacement panels are the **A22-69693** or **A22-69698** families of panels are used as replacements as seen on the **(D66-03190)** cross-over list.

This programming will **NOT** be needed when the replacement Ametek panels are the **W22** families (**D66-03139**)of panels being used as replacements for units built between 2007 to 2010 as seen on the D66-03139 cross-over list.

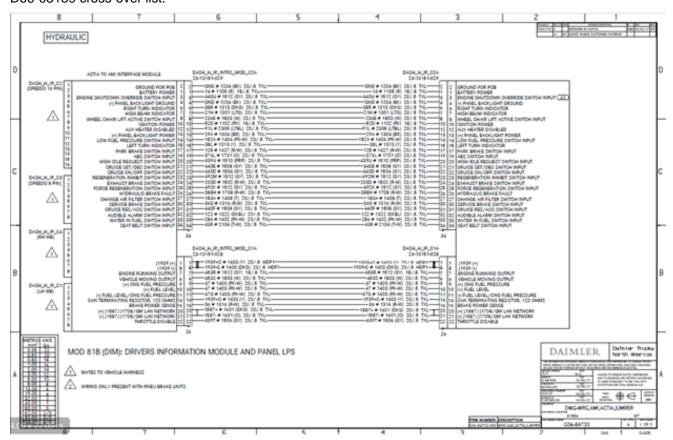

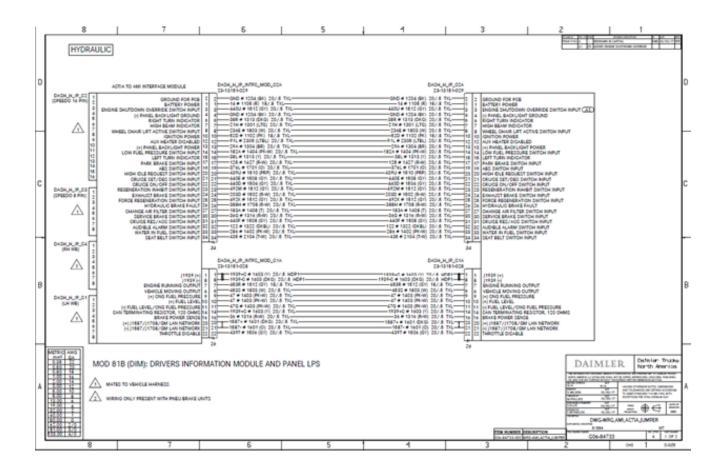



| RELEASE NUMBER | REV | REVISION DESCRIPTION | BY | DATE | APP |
|-------------------|-------------|--|-------|--|--|
| P42905-01 | - | INITIAL RELEASE | KMD | 08/16/11 | EP |
| | | | | | |
| | | | | | _ |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | DELIVERY MUST CONFORM EXACTLY TO DRAWING SPECIFICATIONS AND, | ٦ | | |
| | | WHERE REQUIRED BY Q.A., WITH APPROVED Q.A. SAMPLES. ABSOLUTELY NO CHANGES ARE PERMITTED WITHOUT PRIOR APPROVAL BY DTNA. THIS INCLUDES CHANGES TO: SOFTWA IR. | | | |
| | | MATERIALS, INTERNAL COMPONENTS, AND MANUFACTURING PROCESSES. | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| г | _ | DAIMIED | Dain | nler Trucks | |
| П | ENT | DAIMLER THE MORAL CONCANGE HEILER SE PROPRIE AUTO- | Nort | th America | |
| 398-000 | RESE | THE MODINA TONCONCANDO HEREIN B PROPRESAINT DOCCOOKER, IN WHICH CICK IN FART TOO ANY PURPOSE SEARCH TOO ANY PURPOSE SEARCH TOO ANY PURPOSE IN THE PROPERTY OF THE PURPOSE IN THE PURPOSE I | North | th America FOR DESIMAN THAT FORMHOUT THAT FORMHOUT THAT FORMHOUT THAT FORMHOUT THAT FORMHOUT THAT TO ASME STAN 4. WITH EXCEPT | ON OR F B DTNA MENSIO MED DARID YON |
| | | THE MODISA TONCONTANDO LETELS IS INCOME SATING DECIDIORS, IN WHOLE OF A NATIO TOO ARE ALREADY AND ALBORIDADES AND TOO ARE ALREADY AND TOO ALREADY AND TOO ALREADY SATING TOO ALREADY SATING TO THE ALBORIDADES AND TOO ALREADY SATING TO ALREADY SATING TOO ALREADY | North | th America I for presentation I | ON OR F 6 DTNA MENSIO MED DARD YON |
| | INSTL-PANEL | Dec NOTES CONTINUE CENTER CONTINUE CENTER CEN | North | th America From Desembars From Desem | ONOR (S CONA) MENSION MENSI |


Service Work Instructions

For Vehicles WITHOUT air brakes, use parts and follow instructions below:

| <u>Item</u> | <u>Name</u> | Part Number | Quantity |
|-------------|--------------------|------------------------|----------|
| 1 | Module | 06-84694-000 | 1 |
| 2 | Instrument Cluster | Refer to service notes | 1 |
| 3 | Jumper Harness | A06-84704-000 | 1 |
| 4 | Mounting Plate | 06-84700-000 | 1 |
| 5 | Tie band | 23-09796-629 | 2 |








- 1. Remove existing IP from dash and save existing hardware for later use.
- 2. Install and secure module (1) to existing harness under dash using tie bands (5).
- Connect existing dash IP harnesses to the module respectively and make any adjustments as needed.
 - The speedometer 16-pin connector mates to the module 16-pin connector.
 - The speedometer 8-pin connector mates to the module 8-pin connector labeled speedo 8-pin.
 - The 8-pin RH warning bank connector mates to the module 8-pin connector labeled RH
 - The 8-pin LH warning bank connector mates to the module 8-pin connector labeled LH we
- Secure the new instrument cluster (2) to the mounting plate (4) using hardware provided with instrument cluster.
- 5. Connect the jumper harness (3) to the module (1) and the new instrument cluster (2).
- Secure the instrument cluster (2) and panel (4) to the vehicle dash using hardware removed from step 1. Dash modifications may be required.


Hardware provided with Instrument Cluster for mounting


| THE INFORMATION CONTRINED HEREIN IS PROPRIETARY DATA, AND IS NOT FOR DESCRIPANTION OF DESCRIPANT, INWINOUS OF INVARITY FOR ANY PURPOSE OTHER THAN | Daimler Trucks | ITEM DRAWING NUMBER | REVISION | PAGE |
|---|----------------|---------------------|----------|--------|
| THAT FORWARDHIT IS SUBMITTED, OCCUPACION/LIGHTLD INVESTING IN DAMLER TREES NORTHANDROA LLC (CTM.) | North America | D06-84898 | - | 2 of 6 |




For Vehicles WITH air brakes, use parts and TOIIOW INSTRUCTIONS below:

| <u>Item</u> | <u>Name</u> | Part Number | Quantity |
|-------------|---|------------------------|----------|
| 1 | Module | 06-84694-000 | 1 |
| 2 | Instrument Cluster | Refer to service notes | 1 |
| 3 | Jumper Harness | A06-84704-001 | 1 |
| 4 | 1/4 Inch Connector | SMCKV2HO7 34S | 2 |
| 5 | 5/ ₃₂ Inch Connector | SMCKV2H03 34S | 2 |
| 6 | Primary Air Gauge | A22-63139-400 (US) | 1 |
| | Primary Air Gauge | A22-63139-410 (Metric) | 1 |
| 7 | Secondary Air Gauge | A22-63139-401(US) | 1 |
| | Secondary Air Gauge | A22-63139-411 (Metric) | 1 |
| 8 | Tee-Pipe | 23-09311-001 | 2 |
| 9 | Low Air Switch | FSC1749 9192 | 2 |
| 10 | Mounting Plate | 06-84700-001 | 1 |
| 11 | Tie Band | 23-09796-629 | 2 |
| 12 | Gauge Jumper | A06-41592-007 | 1 |
| 14 | ⁵ / ₃₂ Air Line (Red) | 48-00100-512 | 1.5 FT |
| 15 | ⁵ / ₃₂ Air Line (Green) | 48-00100-515 | 1.5 FT |







THE INCOME TOW CONTRIBUTION IS PROPRIETARY CASH, AND IS NOT FOR DESCRIPTION OF THE PROPRIETARY CASH, AND IS NOT FOR DESCRIPTION OF THE PROPRIETARY CASH, AND IS NOT FOR THE PROPRIETARY CASH, AND IS

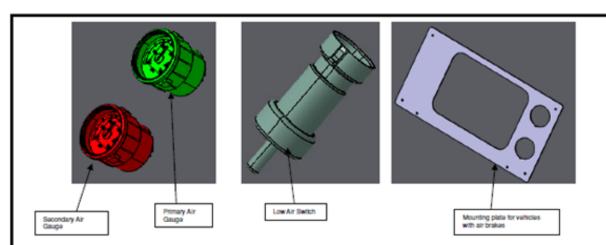

- 1. Remove existing IP from dash and save existing hardware for later use.
- Connect the ¼ inch connector (4) and the 5/32 inch connector (5) to the tee-pipe (8).
 Connectors to be 1 ½ to 2 turns past finger tight. (VIEW B)
- Connect the low air switch (9) to the bottom end of the tee-pipe (8). Twist 1 ½ to 2 turns past finger tight. (VIEW C)
- Connect the ¼ inch primary air line from vehicle to one of the ¼ inch connectors (4). (VIEW C)
- Connect the ¼ inch secondary air line from vehicle to the other ¼ inch connector (4). (VIEW D)
- 6. Install and secure module (1) to existing harness under dash using tie bands (11).
- Connect existing dash IP harnesses to the module respectively and make any adjustments as needed.
 - The speedometer 16-pin connector mates to the module 16-pin connector.
 - The speedometer 8-pin connector mates to the module 8-pin connector labeled speedometer 8-pin.
 - The 8-pin RH warning bank connector mates to the module 8-pin connector labeled RH WB.
 - The 8-pin LH warning bank connector mates to the module 8-pin connector labeled LH WB.
- 8. Secure primary (6) and secondary (7) air gauges to mounting plate (10). (VIEW E)
- 9. Connect primary and secondary air gauges together via gauge harness jumper (12).
- Secure the new instrument cluster to the mounting plate (10) using hardware provided with instrument cluster. (VIEW E)
- Connect the 5/32 inch primary air line, green (15) from the connector (5) to the primary air gauge (6). (VIEW C)
- Connect the 5/32 inch secondary air line, red (14) from the connector (5) to the secondary air gauge (7). (VIEW D)
- Connect the jumper harness (3) to the module, the new instrument cluster (2), the primary air gauge (6), and low air switches (9).

| THE INFORMATION CONTAINED HEREIN IS PROPRIETABLY DATA. AND IS NOT FOR | Daiming Touris | ITEMORAWING NUMBER | REVISION | PAGE |
|---|---------------------------------|--------------------|----------|--------|
| DESIMPATION OF DECLOSIVE, INVINCE OF INTERFOR ANY PURPOSE OTHER THAN THAT FORWHIGH IT IS SUMMITTED, DECENT ASSUMPTION OF INVINITING OF DAMLER TREDGE MORTH-AMERICA LIC (STM). | Daimler Trucks North America | D06-84898 | - | 4 of 6 |

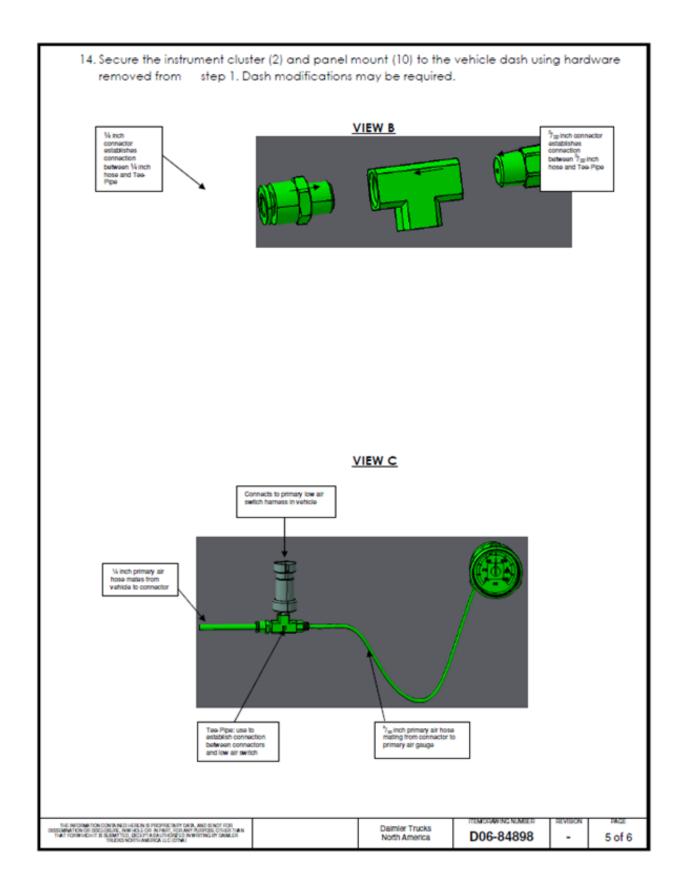

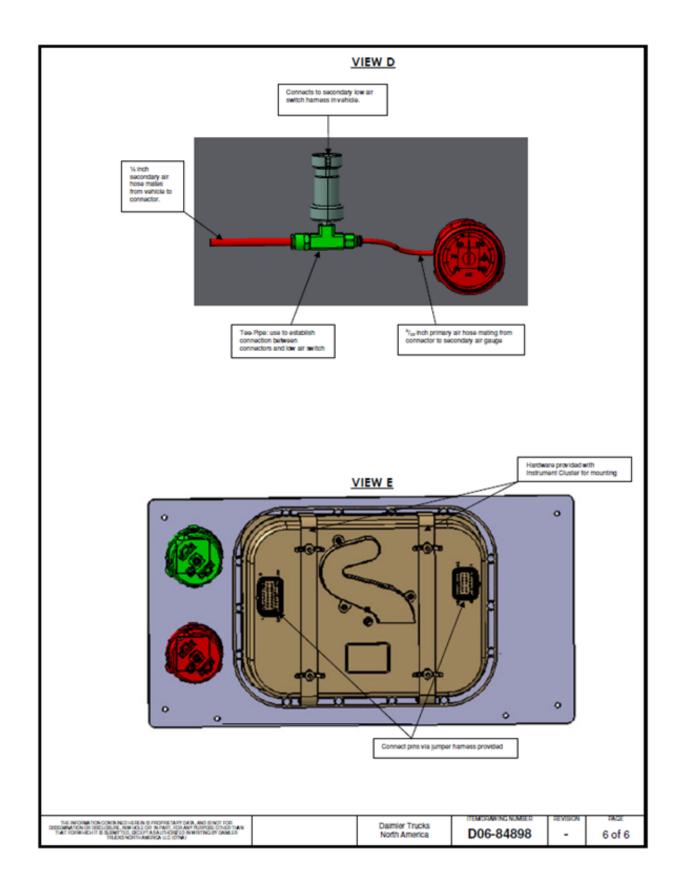

| DELIVERY MUST CONFORM EXACTLY WITH DRAWING SPECIFICATIONS AND, WHERE REQUIRED BY Q.A., WITH APPROVED Q.A. SAMPLES, ABSOLUTELY NO CHANGES ARE PERMITTED WITHOUT PRIOR APPROVAL BY D'INA. THIS INCLUDES CHANGES TO: SOFTWARE, MATERIALS, INTERNAL COMPONENTS, MANUFACTURING PROCESSES. | | | | | PRICE NUMBER PRICE | BER | REV REVISION DESCRIPTION - INITIAL RELEASE | GVH CVH | DATE 10/17/14 | APPO |
|--|---------------|-------------------------------|---------------|--------------------------------|--|----------------------------------|---|--|--|---------|
| | D66-03139-002 | NST-ACTIA RPLCANT, LPG, XOVER | D66-03139-001 | INST-ACTIA RPLCANT, CNG, XOVER | D66-03139-000 | INST-ACTIA RPLCMNT, DIESL, XOVER | DAIMLER THE INFORMATION CONTAINED SERVICE SHAPE AND A PROPERTIES OF THE ADMINISTRATION | North / Notable Tollage Control of State And State Control of State And State Control of State Tollage Control of State Addition of Tollage Addition Tollage Control Addition Tollage Control Addition Tollage Control Addition Tollage Control Tollage Contro | MITTEL DECEPT AS STINU. WOTED, DIMENSIS ETIMED ACCOORD WITH EXCEPT OF ENG-WEST. OVER | ONS AND |

-000 Diesel Crossover Chart:

| Old IP Part # | New IP Part # | Engine Type |
|---------------|---------------|-------------|
| A22-58212-X00 | A22-69698-000 | Diesel |
| A22-58212-X01 | A22-69698-001 | Diesel |
| A22-58212-X02 | A22-69698-000 | Diesel |
| A22-58212-X03 | A22-69698-001 | Diesel |
| A22-58212-X04 | A22-69698-002 | Diesel |
| A22-58213-X00 | A22-69693-000 | Diesel |
| A22-58213-X01 | A22-69693-001 | Diesel |
| A22-58213-X02 | A22-69693-000 | Diesel |
| A22-58213-X03 | A22-69693-001 | Diesel |
| A22-58213-X04 | A22-69693-000 | Diesel |
| A22-58213-X05 | A22-69693-001 | Diesel |
| A22-58213-X06 | A22-69693-000 | Diesel |
| A22-58213-X07 | A22-69693-001 | Diesel |

| THE INFORMATION CONTAINED HEREIN IS PROPRIETARY DATA, AND IS NOT FOR DISSEMINATION OR | DAIMIED | Daimler Trucks | ITEMORAWING NUMBER | REVISIONLETTER | PAGE |
|---|---------|----------------|--------------------|----------------|--------|
| THE INFORMATION CONTAINED HEREIN IS PROPRIETARY DATA, AND IS NOT FOR DISSEMBLITION OR DISCUSSINE, IN INFOLICE OR IN PRIFT, FOR ANY PURPOSE OTHER THAN THAT FOR INFOLICE ISSUEMITTED, EXCEPT AS AUTHORIZED IN WRITING BY DAMLER TRUCKS NORTH AMERICA LLC (DTNA). | DAIMLER | North America | D66-03190 | - | 2 of 4 |

-001 CNG Crossover Chart:

| Old IP Part # | New IP Part # | Engine Type |
|---------------|---------------|-------------|
| A22-58213-X08 | A22-69693-002 | CNG |
| A22-58213-X10 | A22-69693-002 | CNG |
| A22-58213-X12 | A22-69693-002 | CNG |
| A22-58213-X14 | A22-69693-002 | CNG |

| THE INFORMATION CONTAINED HEREIN IS PROPRIETARY DATA, AND IS NOT FOR DISSEMINATION OR | DATACTER | Daimler Trucks | ITEMORWING NUMBER | REVISION LETTER | PAGE |
|--|----------|----------------|-------------------|-----------------|--------|
| THE INFORMATION CONTAINED HEREIN IS PROPRIETARY DATA, AND IS NOT FOR DISSIMILATION OR DISCLOSLIFE, IN BHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR BHHOLH IT ISSUIGNITIES, DICIOT AS AUTHORISES IN WRITING BY CAMALER TRUCKS MORTH MISSIFCALLE (DTM). | DAIMLER | North America | D66-03190 | | 3 of 4 |

-002 LPG Crossover Chart:

| Old IP Part # | New IP Part # | Engine Type |
|---------------|---------------|-------------|
| A22-58213-X16 | A22-69693-003 | LPG |
| A22-58213-X18 | A22-69693-003 | LPG |
| A22-58213-X20 | A22-69693-003 | LPG |

THE INFORMATION CONTANDO LEGEN IS PROPRIETARY DATA, AND IS NOT FOR DISSEMBLATION OR DISSEMBLATION OR DISSEMBLATION OR DISSEMBLATION OR DISSEMBLATION OR NOT FUND OR THUCKS NOT THAN THAT TORNHOCHT SOURMITTED, EXCEPT AS AUTHORIZED INVINITING BY DAMLER TRUCKS NORTHAMBIRCA LLC (C)TING

DATMLER

Dailinfor Trucks
North America

D66-03190

- 4 of 4

| | RELEAS NUMBE | E RI | REVISION DESCRIPTION | BY | DATE | APPD |
|---|-----------------|--------|--|---|---------------------|---------|
| | P43045- | 12 | INITIAL RELEASE | QVH | 11/05/14 | EPR |
| | | \pm | | | | |
| | | + | | | | |
| DELIVERY MUST CONFORM EXACTLY WITH DRAWING SPECIFICATIONS AND, WHERE REQUIRED BY Q.A., WITH APPROVED Q.A. SAMPLES. ABSOLUTELY NO CHANGES ARE PERMITTED WITHOUT PRIOR APPROVAL BY DINA. THIS INCLUDES CHANGES TO: SOFTWARE, MATERIALS, INTERNAL COMPONENTS, MANUFACTURING PROCESSES. | | | | | | |
| | П | OVER | DAIMLER | North | r Trucks America | |
| | | 2 | THE INFORMATION CONTAINED HEREIGH IS PROPRIETARY CAT INVENIOUS OR IN HART, FOR ANY PURPOSE OTHER THAN AUTHORISTIC NAMED BY CAMALIFITY. | AND THE PROPERTY AND ADDRESS OF THE AND ADDRESS OF THE ADDRESS OF | MITTED DECEMBER | BUNK. |
| | 03139-0 | Q NTC | N/A 19/15 IN HEERDEN 11/05/14 | UNLESS OTHERWISE TOLERANCESARE D ASME Y145M 1994 DTNA 0 | EFINED ACCORD | DING TO |
| | D66-0 | S.EL | NEDBY 9ATE DYNOLDS 11/05/14 | MOSE TON | (| MM |
| | g 5 | NST-AC | INST-ACTIA RPLCMI | | OVER | |
| | AN ALL | TOM | D66-03139 | REVISION LETT | 1 1 | of 2 |

ISB07 Crossover Chart:

| Mod 844: Panel Configuration | Mod 840: Brake Type | Mod 810: Unit of Measure | IP part # | Jumper Part # | Module Part # | Panel Part # |
|---|------------------------------------|--|---------------|---------------|---------------|--------------|
| 4 Gauge (ATY109494 OR 22-58310-000) | Hydraulic (N/A) | Metric (ATY109495 OR 22-58307-001) | W22-00022-008 | A06-84704-000 | 06-84694-000 | 06-84700-000 |
| 4 Gauge (ATY109494 OR 22-58310-000) | Hydraulic (N/A) | English (ATY109496 OR 22-58307-000) | W22-00022-013 | A06-84704-000 | 06-84694-000 | 06-84700-000 |
| 6 Gauge (ATY109493 OR 22-58309-000) | Hydraulic (N/A) | Metric (ATY109495 OR 22-58307-001) | W22-00022-023 | A06-84704-000 | 06-84694-000 | 06-84700-000 |
| 6 Gauge (ATY109493 OR 22-58309-000) | Hydraulic (N/A) | English (ATY109496 OR 22-58307-000) | W22-00022-019 | A06-84704-000 | 06-84694-000 | 06-84700-000 |
| 6 Gauge (ATY109493 OR 22-58309-000) | Air (ATY109501 OR 22-58310-002) | Metric (ATY109495 OR 22-58307-001) | W22-00022-021 | A06-84704-001 | 06-84694-000 | 06-84700-001 |
| 6 Gauge (ATY109493 OR 22-58309-000) | Air (ATY109502 OR 22-58310-001) | English (ATY109496 OR 22-58307-000) | W22-00022-020 | A06-84704-001 | 06-84694-000 | 06-84700-001 |

| THE INFORMATION CONTAINED HEREIN IS PROPRIETARY DATA, AND IS NOT FOR DISSEMMENTION OR DISCLOSIFIE, IN WHOLE OR IN WART, YOU ANY PURPOSE OTHER THAN THAT FOR WHICH IT SIDEMENTED, DESIGN ASSESSMENT RECORD WITH ASSESSMENT OF DEMA. | DAIMLER | Daimler Trucks North America | D66-03139 | REVISIONLETTER | 2 of 2 |
|--|---------|---------------------------------|-----------|----------------|--------|
|--|---------|---------------------------------|-----------|----------------|--------|

| P40045-01 - INITIAL RELEASE QVH | 12/18/14 | EPR |
|--|---|----------------------------|
| | _ | |
| | | |
| DELMERY MUST CONFORM EXACTLY TO DRIVING SPECIFICATIONS AND, WHERE REQUIRED BY CA, WITH APPROVED OA, SMAPLES, ARE PERMATTER WITHOUT PRIOR APPROVAL BY OTHAT, HES INCLUDES OF APPROVAL BY OTHAT, HES INCLUDES OF ATTRIBUTE, INTERNAL COMPONENTS, AND MANUFACTURING PRIOCESSES. DAIMLER. | imler Truck | 5 |
| THE INFORMATION CONTAINED HEREIN IS PROPRIETARY DATA, AND ISS DESCRIBED, INVENTIGATION OF IN PART, FOR ANY PURPOSE OFFICE TO | rth America | ì |
| SUBMITTED, DIEDPT ASAUTHORES NORTHWATTING IT DAMA, ER TRUDES WITCHER AND TOLE AND TO | WISE NOTED, DI VANCES ARE DE TO ASME STAN | MENSIONS FINED VOADO |
| SELIS 12/18/14 11/00 | M WITH EXCEP | UNT OF MASSIFE |
| SECRETION INSTR-ACTIA RPLCMNT CL | | ММ |
| THE DESCRIPTION OF THE PROPERTY OF THE PROPERT | | of 3 |

Purpose

This document will give brief instructions on the configuration of the Ametek retrofit clusters that are to replace the Actia instrument panels that are in use in ISB02's, MB904's and CNG's.

Configuration menu

All retrofit clusters need to be configured before use. The configuration menu is entered by pressing and holding the right \implies and down \Im arrows on the instrument panel while turning the ignition on. The menu is shown in Figure 1.

The down arrow can be used in order to scroll through the options on the configuration menu and the right arrow can be used to select the option that is highlighted.




Figure 1: Configuration menu

The configuration menu consists of 3 options. Upon entering the menu the transmission type, brake type and ABS communication type will be able to be set.

Transmission Type

Selecting option 1 from the configuration menu displays the transmission type setup screen shown in Figure 2. The user will have a choice between the 3 different transmission types: Automatic transmissions, Manual transmissions, or Hybrid Electric transmissions.




Figure 2: Transmission type setup screen

The automatic transmission type will be used as default at all times. The user should use the down and right arrow to select the appropriate transmission type that is used on the vehicle.

Brake System Type

Selecting option 2 from the configuration menu displays the brake type setup screen shown in Figure 3. This menu allows a choice between the 2 different types of braking systems. The user will have the option of choosing between hydraulic and pneumatic brakes.




Figure 3: Brake type setup screen

| THE INFORMATION CONTAINED HEREIN IS PROPRIETABLY DATA, AND IS NOT FOR | Mariantes Warrates | ITEM/DRAWING NUMBER | REVISION | PAGE |
|---|---------------------------------|---------------------|----------|--------|
| DESIGNATION OF DESCRIPE, NIM-LOCAL OF INTRAFF FOR ANY PLEFORS OTHER THAN SHAT FORWHICH IT IS SERMITTED, DOCETY ANALYTICATED IN WRITING IT DAMLER TRADES NOTTH AMERICA LIC (STIM). | Daimler Trucks North America | D66-03368 | - | 2 of 3 |

