

AV1000 2-port Gigabit Passthrough Powerline Starter Kit

Smooth HD Streaming on Multiple Devices










Highlights

HomePlug AV2 Standard Compliant


The HomePlug AV2 standard creates high-speed data transfer rates of up to 1000Mbps to support all your online activities.

Gigabit Ethernet for Fast Connections

Two Gigabit Ethernet ports provide reliable high-speed wired connections for game consoles, smart TVs, STB and more.

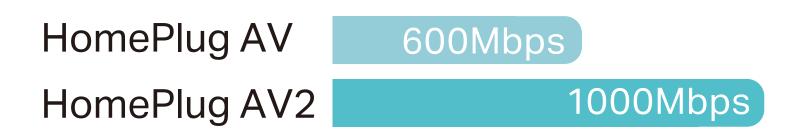



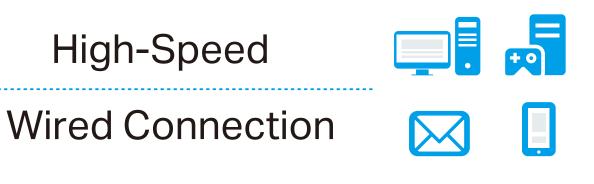


Highlights

Plug, pair and Play!


Internet from Any Outlet

(((())

The AV1000 2-port Gigabit Passthrough Powerline Starter Kit brings internet to any area with a power outlet using your home's electrical wiring.

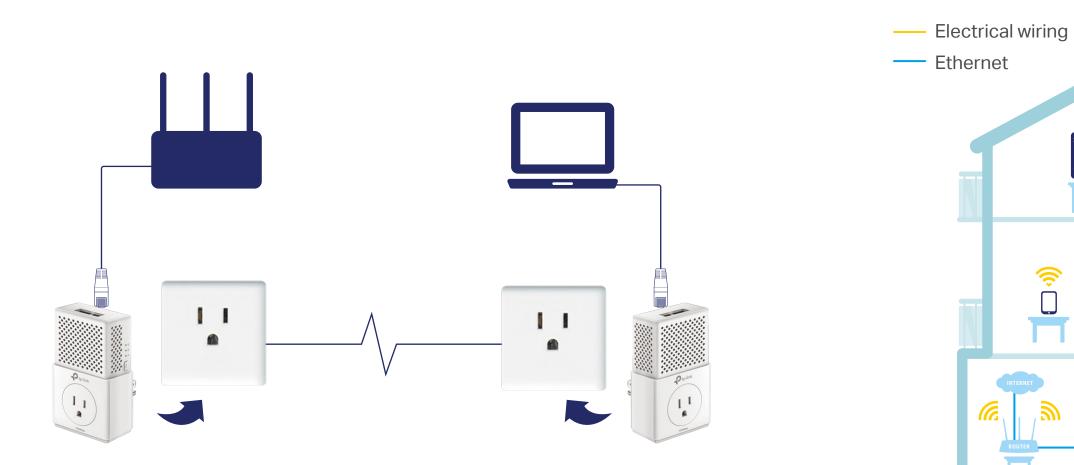

Powerline adapters and extenders must be deployed in a set of two or more.

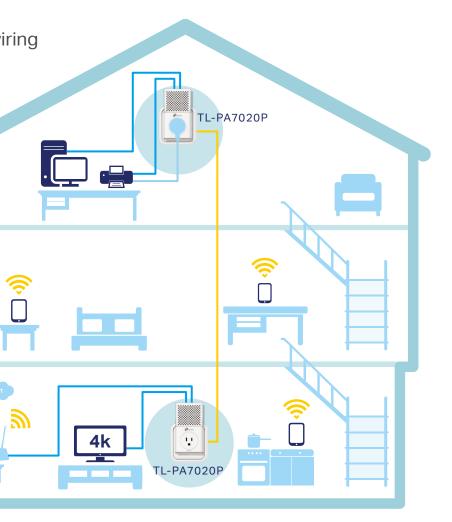

Features



- Ultra-fast Powerline Speed HomePlug AV2 standard compliant, high-speed data transfer rate of up to 1000Mbps, ideal for Ultra HD streaming and online gaming
- Multiple Gigabit Ports 2 Gigabit Ethernet Ports allow your TVs, game consoles or PCs to connect to the internet at high speeds




• 300-meter Range – Up to 300-meter range over the household power circuit.



- Plug, pair and play Plug, pair and play, no configuration required
- No new wires No new wires, use existing electrical wiring to expand your home network
- Keep your outlet An integrated socket lets you power regular devices as normal, and a built-in noise filter prevents them from interrupting the powerline signal.
- TP-Link tpPLC Allows you to easily manage your network using the tpPLC Utility



 Pair Button – 128-bit AES encryption easily at a push of "Pair" button



• Mains Filter – Mains Filter inside the outlet reduces electrical noise interference and improves powerline communication performance



• Power Saving – Power Saving Mode helps reducing power consumption by up to 85%


Specifications

Hardware

- · Plug Type: US
- Standards and Protocols: HomePlug AV2, HomePlug AV, IEEE 1901, IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Power Consumption: Maximum: 3.32W Typical: 3.02W

Standby: 0.473W

- Range: 300 Meters over electrical circuit
- Interface: 2 * Gigabit Ethernet Port, Power Socket
- Button: Pair Button
- · LED Indicator: Power, Powerline, Ethernet
- Dimensions (W x D x H): 5.0*2.8*1.7 in. (126 x 71x 42 mm)

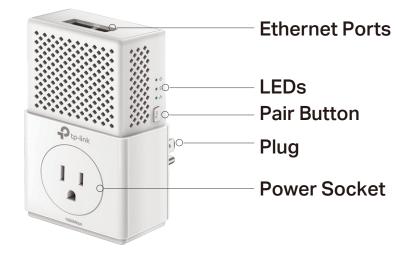

Software

- Modulation Technology: OFDM (PLC)
- Encryption: Powerline Security: 128-bit AES

Others

- · Certification: FCC, RoHS
- · Package Contents:

Powerline Ethernet Adapter 2-meter Ethernet cable (RJ45) Quick Installation Guide

- · System Requirements:
- System Requirements for PLC Utility:
- Environment:

Operating Temperature: 0°C~40°C (32°F ~104°F) Storage Temperature: -40°C~70°C (-40°F ~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing



For more information, please visit

http://www.tp-link.com/us/products/details/cat-18_TL-PA7020P-KIT.html

or scan the QR code left

Specifications are subject to change without notice. TP-Link is a registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-Link Technologies Co., Ltd.

* Compatible with all HomePlug AV & AV2 Standard Powerline adapters.

* Listed AV and Wi-Fi speeds refer to the theoretical maximum physical-layer data transfer rate. Actual data speeds vary and are influenced by the home's Wi-Fi/electrical/physical environment, and if adapters are placed on the same home circuit.

* Utility supports Windows 10/8.1/8/7/Vista/XP and Mac OS X (10.7 or later) operating system for the present.

Windows 2000/XP/2003/Vista, Windows 7/8/8.1/10, Mac, Linux

Windows XP/Vista/7/8/8.1/10 and Mac, OS X (10.7 or later)

www.tp-link.com

TP-Link AV1000 2-port Gigabit Passthrough Powerline Starter Kit TL-PA7020P KIT