

IBM TS4300 Tape Library for Lenovo

Product Guide

IBM TS4300 Tape Library for Lenovo (Machine Type 6741) combines IBM enterprise tape automation and reliability with open system affordability. It is a high-density, highly scalable, easy-to-manage solution designed to keep data securely stored long-term, while helping reduce the costs associated with data center space and utilities.

The TS4300 utilizes modular design to meet growing long-term storage requirements. Starting with a single 3U base module, customers can scale the tape library by adding up to six 3U expansion modules for the overall capacity of up to 280 LTO cartridges. Each 3U base or expansion module can house up to 40 cartridges in two removable magazines.

Each 3U module can accommodate up to three half-high tape drives or a combination of one half-high tape drive and one full-high tape drive. The choice of the tape drives includes IBM LTO Ultrium 8, Ultrium 7, and Ultrium 6 tape drives with SAS or Fibre Channel host connectivity interfaces.

The TS4300 is an ideal solution if you need a larger capacity or higher performance tape backup. This library is an excellent choice for tape automation for Lenovo servers running Windows and Linux operating systems.



Figure 1. IBM TS4300 Tape Library for Lenovo: Base module (bottom) with one expansion module (top)

Did you know?

Featuring the latest LTO Ultrium 8 technology, the TS4300 Tape Library provides up to 3.36 PB of native backup storage.

With IBM LTO Tape offerings that are available from Lenovo, Lenovo can be your trusted partner that offers "one stop shop" and single point of contact for delivery of leading edge technologies and innovations from Lenovo and other leading IT vendors. These offerings can satisfy the wide range of your end-to-end IT infrastructure needs, including end-user devices, servers, storage, networking, services, management software, and financing.

Key features

The TS4300 tape library offers the following features:

- Scalable tape library that is designed for high capacity, high performance, and high reliability.
- Adherence to LTO specifications.
- Support for half-high (HH) or full-high (FH) LTO Ultrium 8, Ultrium 7, or Ultrium 6 tape drives with 6 Gb SAS or 8 Gb Fibre Channel interfaces.
- Support for up to three half-high tape drives or a combination of one full-high tape drive and one half-high tape drive in each 3U module. The maximum number of drives in the tape library ranges from up to 7 full-high and up to 7 half-high to up to 21 half-high tape drives.
- Native data transfer rate of up to 360 MB/s (Ultrium 8 FH), 300 MB/s (Ultrium 8 HH or Ultrium 7), or up to 160 MB/s (Ultrium 6) per tape drive.
- Native cartridge capacity of up to 12 TB (Ultrium 8), 9 TB (Ultrium 7 initialized LTO 8 Type M), 6 TB (Ultrium 7), or 2.5 TB (Ultrium 6).
- Two removable magazines in each 3U module that can house up to 20 data cartridges each for a total of up to 280 cartridges in the tape library to enable quick population of the tape library and ease the storage needs for media.
- Flexibility in configuring a 5-slot I/O Station for each module, or one I/O Station can be accessed by several modules to help support continuous library operations, while importing and exporting media with little or no disruption to library operation.
- A standard high-speed bar code reader with which you can operate the TS4300 in random access mode. Sequential mode is not currently supported.
- Mixed media support, including IBM LTO Ultrium 8, 7, and 6 WORM (Write Once Read Many) media (not available from Lenovo).
- Remote management capabilities to allow for remote administration of the TS4300 through a web interface.
- Multi-path feature to allow sharing of the library robotics across heterogeneous applications independently of each other. The library can be partitioned into up to 21 logical libraries (each partition must have at least one drive). It also can provide each logical library its own separate and distinct drives, storage slots, and control paths.
- Optional Library Managed Encryption on LTO Ultrium 8, Ultrium 7, and Ultrium 6 tape drives by using the IBM Security Key Lifecycle Manager software (not available from Lenovo).
- Optional Path Failover that enables the host device driver to transparently switch to an alternative path if there is a communication path failure to the application.
- Extra power supplies for redundant operations.
- 6 Gb SAS or 8 Gb Fibre Channel attachments for connection to Lenovo servers that run Microsoft Windows or Linux server operating systems.
- Support from an extensive ecosystem of backup software vendors.

The IBM LTO Ultrium Tape Drives includes the following other IBM LTO Ultrium features:

- Dual-stage head actuator
The 16-channel actuator (LTO Ultrium 6) or 32-channel actuator (LTO Ultrium 7 and Ultrium 8) provides precision head alignment to help support higher track density and improved data integrity.
- Independent tape loader and threader motors and positive pin retention
These technologies help improve the reliability of loading and unloading a cartridge, and to retain the pin even if tension is dropped. An independent loader motor, coupled with the positive pin retention, causes the tape to thread with a higher level of reliability.

- Graceful dynamic braking
If there is a power failure, reel motors maintain tension and gradually decelerate instead of stopping abruptly, which helps reduce tape breakage, stretching, or loose tape wraps during a sudden power outage.
- Servo and track layout technology
There are 6656 data tracks in Ultrium 8, 3584 data tracks in Ultrium 7, and 2176 data tracks in Ultrium 6. The high-bandwidth servo system features a low mass servo to help more effectively track servo bands and improve data throughput with damaged media in less-than-optimal shock and vibration environments.
- Surface Control Guiding Mechanism
The IBM patented Surface Control Guiding Mechanism guides the tape along the tape path in the Ultrium 8, 7, and 6 Tape Drives. This method uses the surface of the tape (rather than the edges) to control tape motion. This configuration helps reduce tape damage (especially to the edges of the tape) and tape debris, which comes from the damaged edges and can accumulate in the head area.
- Giant magnetoresistive (GMR) head design (LTO Ultrium 7 and 6 tape drives)
IBM LTO Ultrium 7 and 6 Tape Drives use GMR head technology with beveled contouring for reducing striction and friction. This head design was demonstrated in enterprise tape products to help minimize contact, edge damage, debris accumulation, and wear on the tape as it moves over the read/write heads.
- Tunneling magnetoresistive (TMR) head technology (LTO Ultrium 8 tape drives)
IBM LTO Ultrium 8 Tape Drives use TMR head technology, which helps achieve increased storage capacity and high data integrity.
- Digital speed matching
The LTO Ultrium Tape Drives perform dynamic speed matching to adjust the drive's native data rate as closely as possible to the net host data rate (after data compressibility is factored out). This matching helps reduce the number of backhitch repositions and improve throughput performance.
- Robust drive components optimized for automation environments
To help enhance reliability and prolong the life of the drives, some of the most robust components available are used such as an all metal clutch, steel ball bearings in loader, robust leader block design, and a single circuit card.
- Power management
The power management function of the Ultrium 8, 7, and 6 Tape Drives controls the drive electronics to be completely turned off or in a low-power mode when the circuit functions are not needed for drive operation.
- Adaptive read equalization
This equalization automatically compensates for dynamic changes in readback signal response.
- Dynamic amplitude asymmetry compensation
This compensation dynamically optimizes readback signals for linear readback response from MR read head transducers.
- Separate writing of multiple filemarks
Separate writing of multiple filemarks evokes any write command of two or more filemarks to cause a separate data set to be written that contains all filemarks after the first. It helps improve performance if a subsequent append overwrites somewhere after the first filemark. This change helps prevent having to rewrite data sets that contain customer data and the first filemark, if such an append occurs.

- **LTO Data Compression (LTO-DC)**
The Ultrium LTO uses LTO-DC, which is an implementation of a Lempel-Ziv class 1 (LZ-1) data compression algorithm. LTO-DC is an extension of Adaptive Lossless Data Compression (ALDC) and an improvement over previous IBM lossless compression algorithms. IBM patented "Scheme-Swapping" compression looks ahead at incoming data and determines the most efficient storage method (ALDC or pass-through mode) to help optimize data compression and increase data throughput. The compression ratio is up to 2.5 to 1 for LTO Ultrium 8, 7, and 6.
- **LTO Cartridge Memory (LTO-CM)**
Contained within the LTO Ultrium data cartridge is the LTO-CM, which is a passive, contactless silicon storage device that is physically a part of the cartridge. The LTO-CM holds information about that specific cartridge, the media in the cartridge, and the data on the media. The storage capacity of the Generation 8, 7, and 6 LTO-CM is 16320 bytes. Communication between the drive and the LTO-CM is via a low-level RF field transmitted by the drive to the cartridge.
- **Statistical Analysis and Reporting System (SARS)**
The Ultrium Tape Drive uses SARS to help isolate failures between media and hardware. SARS uses the cartridge performance history that is saved in the CM module and the drive performance history that is kept in the drive flash EEPROM to help determine the likely cause of failure. SARS causes the drive to request a cleaner tape, mark the media as degraded, and indicate that the hardware degraded.
- **Highly integrated electronics that uses IBM engineered copper technology**
This technology reduces the total number of components in the drive, helps lower chip temperatures, and reduces power requirements to deliver a more reliable drive. The sixth-generation drive electronics provide error correction of soft errors in the memory arrays in data and control paths.

Components and connectors

The following figure shows the front of the TS4300 Tape Library base module.

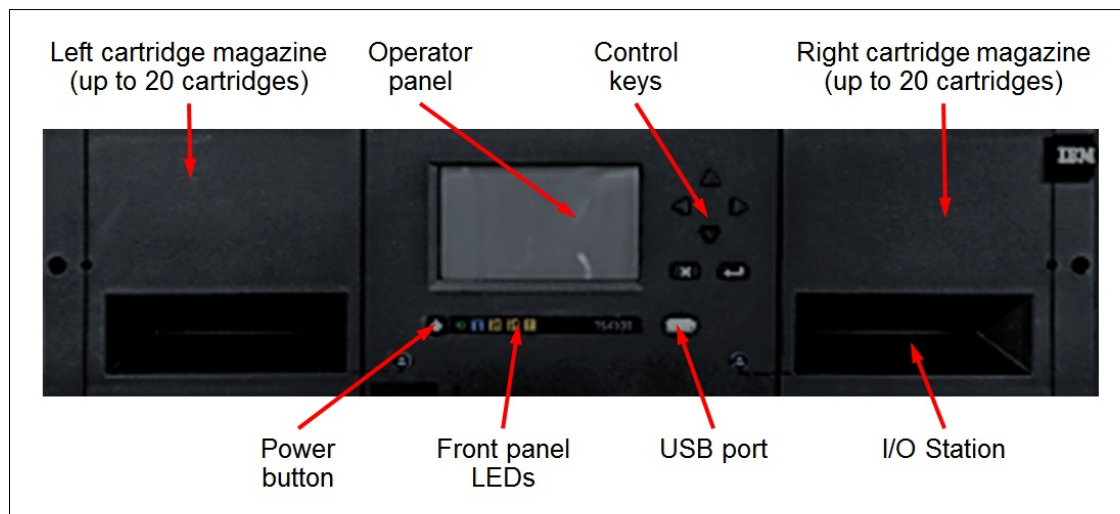


Figure 2. Front view of the TS4300 Tape Library base module

The following figure shows the front of the TS4300 Tape Library expansion module.

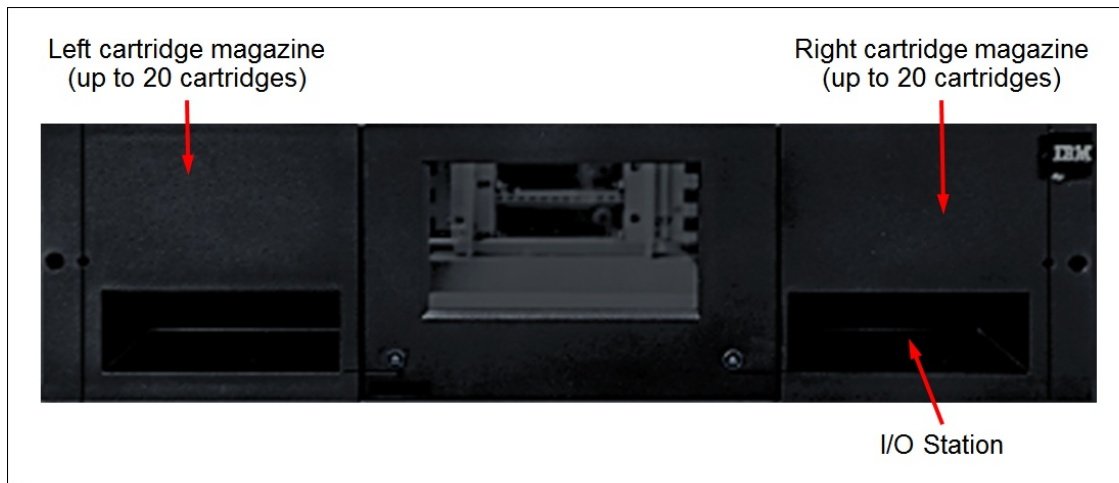


Figure 3. Front view of the TS4300 Tape Library expansion module

The following figure shows the rear of the TS4300 Tape Library base module with the half-high Fibre Channel drive sled and half-high SAS drive sled.

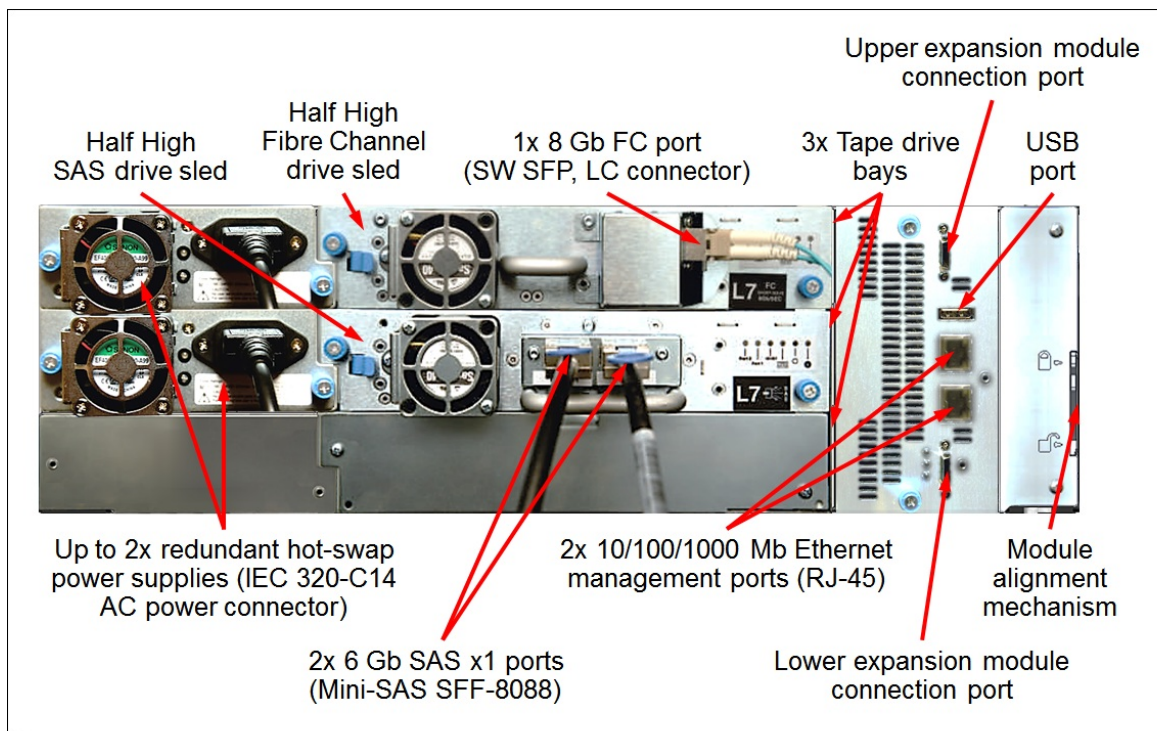


Figure 4. Rear view of the TS4300 Tape Library base module

The following figure shows the rear of the TS4300 Tape Library expansion module with the full-high Fibre Channel drive sled.

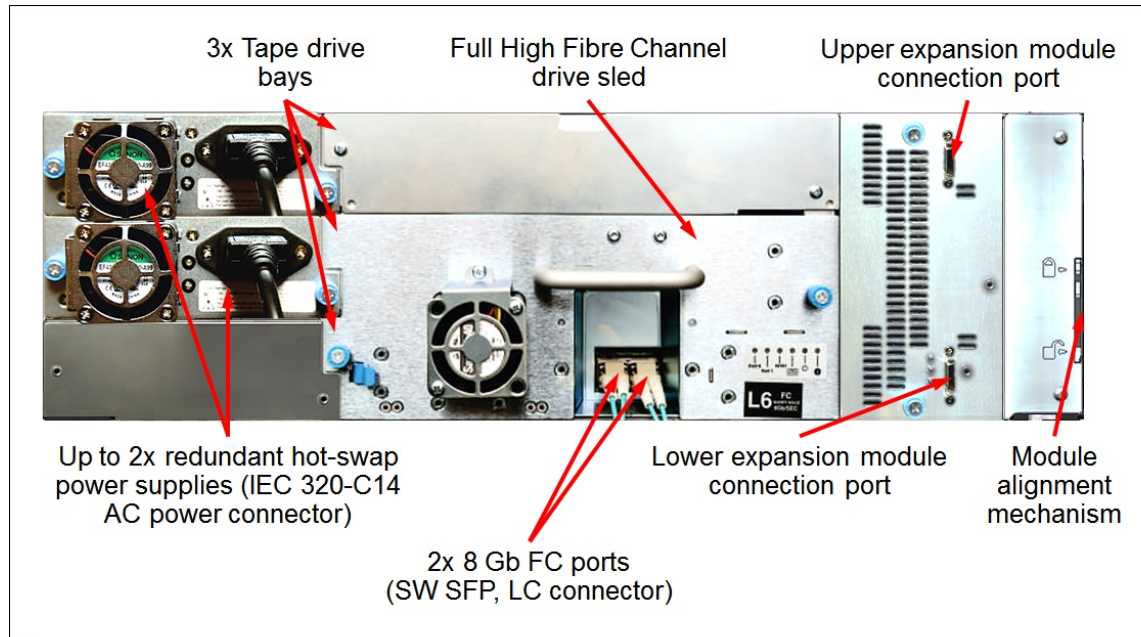


Figure 5. Rear view of the TS4300 Tape Library expansion module

System specifications

The following table lists the TS4300 Tape Library system specifications.

Table 1. System specifications

Attribute	Specification
Form factor	<ul style="list-style-type: none"> ● Base module: 3U rack-mount or stand-alone. ● Expansion module: 3U rack-mount; up to 6 expansion modules. ● 7-module library: 21U rack-mount.
Drive technology	LTO Ultrium 8, LTO Ultrium 7, and LTO Ultrium 6 Full-High (FH) and Half-High (HH) tape drives.
Drive interface	<ul style="list-style-type: none"> ● Half-High SAS tape drive: 2x 6 Gb SAS x1 ports (Mini-SAS SFF-8088). ● Half-High FC tape drive: 1x 8 Gb FC port (short-wave [SW], LC connector). ● Full-High FC tape drive: 2x 8 Gb FC ports (short-wave, LC connector).
Maximum number of drives	<ul style="list-style-type: none"> ● Per module: Up to 1x full-high and 1x half-high tape drives, or up to 3x half-high tape drives. ● Per 7-module library: From up to 7x full-high and 7x half-high tape drives to up to 21x half-high tape drives.
Number of cartridge slots	<ul style="list-style-type: none"> ● Per module: 40. ● Per 7-module library: 280.
Configurable I/O station slots	<ul style="list-style-type: none"> ● Per module: 5. ● Per 7-module library: 35.
Native cartridge capacity	<ul style="list-style-type: none"> ● LTO 8 (L8): 12 TB. ● LTO 7 initialized LTO 8 Type M (M8): 9 TB. ● LTO 7 (L7): 6 TB. ● LTO 6 (L6): 2.5 TB.

Attribute	Specification
Native backup storage capacity	Per module: <ul style="list-style-type: none"> • LTO 8 (L8): Up to 480 TB. • LTO 7 (M8): Up to 360 TB. • LTO 7 (L7): Up to 240 TB. • LTO 6 (L6): Up to 100 TB. Per 7-module library: <ul style="list-style-type: none"> • LTO 8 (L8): Up to 3.36 PB. • LTO 7 (M8): Up to 2.52 PB. • LTO 7 (L7): Up to 1.68 PB. • LTO 6 (L6): Up to 700 TB.
Native data transfer rate	Per drive: <ul style="list-style-type: none"> • LTO 8 FH: Up to 360 MB/s. • LTO 8 HH, LTO7: Up to 300 MB/s. • LTO 6: Up to 160 MB/s.
Software features	Library partitioning, Path Failover (optional), Library Managed Encryption (optional).
Security features	Secure Socket Layer (SSL), user level security, LDAP, LTO encryption (optional).
Management interfaces (Base module)	<ul style="list-style-type: none"> • Operator panel. • 2x 10/100/1000 Mb Ethernet ports (UTP, RJ-45) for remote management: Web-based GUI; SNMP and email notifications. • 2x USB ports (service technician use only).
Cooling	Fixed fans on the tape drives and power supplies.
Power supplies	Up to two redundant hot-swap 230 W AC 80 PLUS Silver power supplies (IEC 320-C14 power connector): <ul style="list-style-type: none"> • Base module: The first power supply is included; the second power supply is optional. • Expansion module: The first power supply is optional; the second power supply is optional. The first power supply is required if the expansion module contains a tape drive.
Hot-swap parts	SAS and Fibre Channel drive sleds, power supplies.
Dimensions	Base or expansion module: <ul style="list-style-type: none"> • Width: 446 mm (17.6 in.). • Depth: 873 mm (34.4 in.). • Height: 133 mm (5.2 in.).
Weight	<ul style="list-style-type: none"> • Base module: 21 kg (46.3 lb). • Expansion module: 13 kg (28.7 lb).
Warranty	Three-year customer-replaceable unit (CRU) limited warranty with 9x5 next business day parts delivered.
Service and support	Optional warranty service upgrades are available through Lenovo Services: onsite coverage, 24x7 coverage, 2-hour or 4-hour response time, 6-hour or 24-hour committed service repair (select countries), 1-year or 2-year warranty extensions.
Host operating systems*	Microsoft Windows Server 2012, 2012 R2, and 2016; Red Hat Enterprise Linux (RHEL) 6 and 7; SUSE Linux Enterprise Server (SLES) 12.
ISV backup software compatibility	Arcserve Backup, ASG Time Navigator, CommVault Simpana, Dell NetVault Backup, EMC NetWorker, IBM Spectrum Protect, HPE/Micro Focus Data Protector, Microsoft System Center Data Protection Manager, and Symantec NetBackup

* The operating systems shown are for Lenovo servers. The TS4300 might support other operating systems. For a full list of supported operating systems, refer to the System Storage Interoperation Center: <http://ibm.com/systems/support/storage/ssic>.

Models

The following table lists the ordering information for the TS4300 Tape Library models.

Table 2. TS4300 models

Description	Part number	Machine Type-Model	Feature code
IBM TS4300 3U Tape Library-Base Unit	6741A1F	6741L1U	B16H
IBM TS4300 3U Tape Library-Expansion Unit	6741A3F	6741L3U	B16J

The TS4300 Tape Library models include the following items:

- One TS4300 module with the following components:
 - Power supply (base module only)
 - Bar code reader (base module only)
 - Expansion cable (expansion module only)
- Two removable 20-cartridge magazines
- Documentation package

Notes:

- Tape drives are not included; at least one tape drive must be ordered with the TS4300 unit (See [Tape drives](#) for details).
- A cleaning cartridge is not included. See [Tape media](#) for ordering information.
- A power cable is not included. A rack power cable or a line cord must be ordered with the TS4300 unit (See [Power supplies and cables](#) for details).
- Rack mount kit is not included; it should be ordered with the TS4300 unit, if required (see the following table for details). Rack mount kit is required for each module if the configuration contains more than one module.

The following table lists the rack mount kit for the TS4300 units.

Table 3. Rack mount kit

Description	Part number	Feature code	Maximum quantity per module
Rack Mount Kit	01KP930	B16N	1

The following figure shows connectivity topology for the TS4300 tape library.

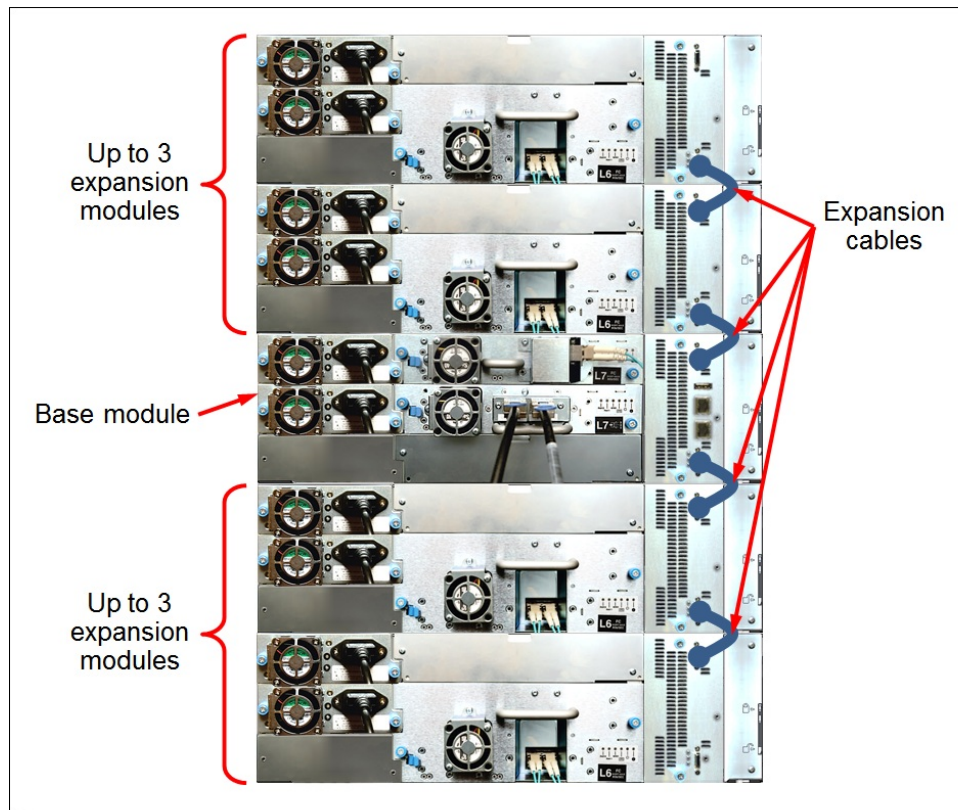


Figure 6. TS4300 tape library connectivity topology

Tape drives

Each TS4300 module (base or expansion) can accommodate up to three LTO Ultrium half-high tape drives or a combination of one LTO Ultrium half-high tape drive and one LTO Ultrium full-high tape drive.

The following table lists the supported tape drives for the TS4300.

Table 4. Tape drive options

Description	Part number	Feature code	Maximum quantity per module
Full High 8 Gb Fibre Channel			
LTO 8 FH Fibre Channel Drive	01KP954	B1ET	1
LTO 7 FH Fibre Channel Drive	01KP938	B16Y	1
LTO 6 FH Fibre Channel Drive	01KP935	B16V	1
Half High 8 Gb Fibre Channel			
LTO 8 HH Fibre Channel Drive	01KP952	B1ER	3
LTO 7 HH Fibre Channel Drive	01KP936	B16W	3
LTO 6 HH Fibre Channel Drive	01KP933	B16T	3
Half High 6 Gb SAS			
LTO 8 HH SAS Drive	01KP953	B1ES	3

Description	Part number	Feature code	Maximum quantity per module
LTO 7 HH SAS Drive	01KP937	B16X	3
LTO 6 HH SAS Drive	01KP934	B16U	3
Tape drive support (Wrap tool)			
Fibre Tape Drive Support (Wrap Tool)	01KP939	B16R	7
SAS Tape Drive Support (Wrap Tool)	01KP940	B16S	7

Configuration note: Tape drive support options provide wrap tools (loopback connectors) to isolate drive sled issues. The Fibre Tape Drive Support is required when at least one Fibre Channel tape drive is installed in the tape library, and the SAS Tape Drive Support is required when at least one SAS tape drive is installed in the tape library.

A SAS cable or Fibre Channel cable is required to attach a tape drive in the TS4300 Tape Library to a host. The following table lists supported cable options.

Table 5. Cable options

Description	Part number	Feature code	Maximum quantity per drive
SAS connectivity cables - Mini-SAS (SFF-8088 host) to Mini-SAS (SFF-8088 tape)			
Mini-SAS/Mini-SAS 4x Interposer (from HBA with SFF-8088 to max 4 cables with SFF-8088)	00NA077	AS0Y	1*
2 m Mini-SAS/Mini-SAS 1x Cable (host SFF-8088 to target SFF-8088)	00NA009	AS0Z	2
SAS connectivity cables - Mini-SAS HD (SFF-8644 host) to Mini-SAS (SFF-8088 tape)			
HD-SAS Cable to Mini-SAS (4 m)	00NV419	AS10	2
Y SAS HD to Mini-SAS Cable (3 m)	00NV420	AS12	2**
Fibre Channel connectivity cables			
10 m LC-LC Fibre Cable	01KP929	B16M	2
25 m LC-LC Fibre Cable	00NA087	6025	2

* The interposer is used on the host side to connect up to four SAS tape drives to a single Mini-SAS x4 port on a SAS HBA with up to four 2 m Mini-SAS to Mini-SAS cables (part number 00NA009).

** The Y SAS HD cable is used to connect up to two SAS tape drives to a single Mini-SAS HD x4 port on a SAS HBA.

Tape media

The TS4300 3U module supports up to 40 data cartridges and comes standard with two removable tape magazines with 20 cartridge slots each. More removable tape magazines can be ordered for the TS4300, if needed.

Note: The first release of the TS4300 tape library supported up to 32 cartridge slots, including up to four I/O station slots, in the single-module configurations and in the lowest module in the multi-module configurations. The second release of the TS4300 tape library supports up to 40 cartridge slots, including up to five I/O station slots, in the single-module configurations and in the lowest module in the multi-module configurations. Please contact a Lenovo service representative in your area for additional details.

The following table lists tape media options and extra magazines that can be ordered for the TS4300.

Table 6. Tape media and extra magazines

Description	Part number	Feature code	Supported tape drive types
Cleaning cartridge			
Ultrium Cleaning Cartridge (universal)	00NA017	AS1E	LTO 8, LTO 7, LTO 6
Data cartridges			
Ultrium 8 Data Cartridges 5-Pack	01KP955	B1EW	LTO 8
LTO M8 Uninitialized Data Cartridges 5-Pack	02JH005	B5XL	LTO 8
Ultrium 7 Data Cartridges 5-Pack	00WF771	ATNZ	LTO 8, LTO 7
Ultrium 6 Data Cartridges 5-Pack	00NA025	AS24	LTO 7, LTO 6
Optional magazines			
Right Side Magazine	01KP931	B16P	LTO 8, LTO7, LTO6
Left Side Magazine	01KP932	B16Q	LTO 8, LTO7, LTO6

LTO Ultrium tape drives support the following backward compatibility for previous generations of tape media:

- LTO Ultrium 8 tape drives can read and write LTO Ultrium 8, LTO Ultrium 7, and LTO 7 initialized LTO 8 Type M data cartridges.
- LTO Ultrium 7 tape drives can read and write LTO Ultrium 7 and Ultrium 6 data cartridges, and can read Ultrium 5 data cartridges.
- LTO Ultrium 6 tape drives can read and write LTO Ultrium 6 and Ultrium 5 data cartridges, and can read Ultrium 4 data cartridges.

Configuration notes:

- A 5-Pack of the Ultrium 6, 7, or 8 Data Cartridges includes five unattached barcode labels.
- An LTO 7 initialized LTO 8 Type M data cartridge is a new (unused) LTO 7 data cartridge labelled and initialized to support 9 TB native storage capacity in the LTO 8 tape drive. Once initialized, an LTO 8 Type M cartridge cannot be used in the LTO 7 tape drives, and it cannot be changed back to a 6 TB LTO 7 cartridge.
- LTO M8 Uninitialized Data Cartridges 5-Pack (02JH005) includes five uninitialized LTO 7 data cartridges and five M8 barcode labels. These cartridges will be automatically initialized by the tape library firmware while under the control of ISV applications that recognize the M8 barcode label.

Software

The functionality of the TS4300 can be expanded with the following optional software features:

- Path Failover
- Library Managed Encryption

The TS4300 offers an optional path failover feature that enables the host device driver to resend the command to an alternative control path for the same logical library to ensure smooth library operations if there is a communication error. With control path failover, the alternative control path can include another HBA, SAN, or library control path drive. The device driver starts error recovery and continues the operation on the alternative control path without interrupting the application.

IBM Ultrium 8, Ultrium 7, and Ultrium 6 tape drives are encryption-capable, and they support the following modes of encryption management:

- Library Managed: Available for Linux and Windows; requires the IBM Security Key Lifecycle Manager (SKLM).
- Application Managed: Available with third-party software such as IBM Spectrum Protect.

Library Managed Encryption requires an optional encryption license. Application Managed Encryption does not require a license.

The following table lists ordering information for optional software features for the TS4300.

Table 7. Optional software features for TS4300

Description	Part number	Feature code	Maximum quantity per library
6741 Path Failover	01KP984	B21P	1
6741 LTO Library Managed Encryption	01KP985	B21Q	1

Power supplies and cables

The TS4300 modules support up to two redundant hot-swap 230 W AC power supplies. The base module comes with one power supply, and the second power supply can be ordered for redundancy. The expansion module comes without power supplies, and the first power supply is required when at least one tape drive is installed in the expansion module.

The following table lists the power supply options for the TS4300.

Table 8. Power supply options for TS4300

Description	Part number	Feature code	Maximum quantity per module
First Power Supply	01KP928	B16L	1
Additional Power Supply	01KP927	B16K	1

The TS4300 modules and the power supply options ship without power cables. The power cables for the TS4300 are listed in the following table.

Table 9. Power cables

Description	Part number	Feature code	Maximum quantity per module
Line cords			
2.8m, 10A/120V, C13 to NEMA 5-15P (US) Line Cord	00NA027	AS29	2
2.8m, 10A/230V, C13 to CEE7-VII (Europe) Line Cord	00NA029	AS2A	2
2.8m, 10A/230V, C13 to DK2-5a (Denmark) Line Cord	00NA031	AS2B	2
2.8m, 10A/230V, C13 to BS 1363/A (UK) Line Cord	00NA033	AS2C	2
2.8m, 10A/230V, C13 to SI 32 (Israel) Line Cord	00NA035	AS2D	2
2.8m, 10A/230V, C13 to SEV 1011-S24507 (Sws) Line Cord	00NA037	AS2E	2
2.8m, 10A/230V, C13 to SABS 164 (South Africa) Line Cord	00NA039	AS2F	2
2.8m, 10A/230V, C13 to CEI 23-16 (Italy) Line Cord	00NA041	AS2G	2
2.8m, 10A/230V, C13 to AS/NZS 3112 (Aus/NZ) Line Cord	00NA043	AS2H	2
2.8m, 10A/208V, C13 to NEMA 6-15P (US) Line Cord	00NA045	AS2J	2
2.8m, 10A/220V, C13 to IRAM 2073 (Argentina) Line Cord	00NA047	AS2K	2
2.8m, 10A/220V, C13 to CNS 10917-3 (Taiwan) Line Cord	00NA049	AS2L	2
2.8m, 10A/220V, C13 to GB 2099.1 (China) Line Cord	00NA051	AS2M	2
2.8m, 10A/110V, C13 to CNS 10917-3 (Taiwan) Line Cord	00NA053	AS2N	2
2.8m, 12A/100V, C13 to JIS C-8303 (Japan) Line Cord	00NA055	AS2P	2
2.8m, 12A/220V, C13 to KSC 8305 (S. Korea) Line Cord	00NA057	AS2Q	2
2.8m, 10A/240V, C13 to IS 6538 (India) Line Cord	00NA059	AS2R	2
2.8m, 10A/220V, C13 to NBR 6147 (Brazil) Line Cord	00NA061	AS2T	2
Rack power cord			
4.3m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable	00NA063	AS2U	2

Physical specifications

The 3U module of the TS4300 Tape Library has the following dimensions and weight (approximate):

- Width: 446 mm (17.6 in.)
- Depth: 873 mm (34.4 in.)
- Height: 133 mm (5.2 in.)
- Weight:
 - Base module: 21 kg (46.3 lb)
 - Expansion module: 13 kg (28.7 lb)

Operating environment

The TS4300 Tape Library is supported in the following environment:

- Air temperature:
 - Operating: 15 °C - 32 °C (59 °F - 90 °F)
 - Non-operating: 5 °C - 45 °C (41 °F - 113 °F)
 - Maximum altitude: 3,050 m (10,000 ft)
- Humidity:
 - Operating: 20% - 80%
 - Non-operating: 8% - 80%
- Electrical power:
 - 100 V AC - 240 V AC (5.0 A to 3.5 A)
 - Frequency: 50 Hz / 60 Hz
 - Power consumption: 350 watts

Warranty services and upgrades

The TS4300 Tape Library has a three-year Customer Replaceable Unit (CRU) warranty with 9x5/next business day (NBD) parts delivered.

Some countries might have different warranty terms and conditions than the standard warranty. This is due to local business practices or laws in the specific country. Local service teams can assist in explaining country-specific terms when needed. Examples of country-specific warranty terms are second or longer business day parts delivery or parts-only base warranty.

If warranty terms and conditions include onsite labor for repair or replacement of parts, Lenovo will dispatch a service technician to the customer site to perform the replacement. Onsite labor under base warranty is limited to labor for replacement of parts that have been determined to be field-replaceable units (FRUs). Parts that are determined to be customer-replaceable units (CRUs) do not include onsite labor under base warranty.

If warranty terms include parts-only base warranty, Lenovo is responsible for delivering only replacement parts that are under base warranty (including FRUs) that will be sent to a requested location for self-service. Parts-only service does not include a service technician being dispatched onsite. Parts must be changed at customer's own cost and labor and defective parts must be returned following the instructions supplied with the spare parts.

Also available are Lenovo Services warranty upgrades and post-warranty maintenance agreements, with a well-defined scope of services, including service hours, response time, term of service, and service agreement terms and conditions.

Lenovo warranty service upgrade offerings are country-specific. Not all warranty service upgrades are available in every country. For information about Lenovo warranty service upgrade offerings that are available in your country or area, refer to the following resources:

- Service part numbers in Lenovo Data Center Solution Configurator (DCSC):
<http://dcsc.lenovo.com/#/services>
- Lenovo Services Availability Locator
<https://lenovolocator.com/>

In general, the following Lenovo warranty service upgrades are available:

- Warranty and maintenance service upgrades:
 - 3, 4, or 5 years of warranty service coverage
 - 1-year or 2-year post-warranty extensions
 - Foundation Service: 9x5 service coverage with next business day onsite response

- Essential Service: 24x7 service coverage with 4-hour onsite response or 24-hour committed repair (available only in select countries)
- Advanced Service: 24x7 service coverage with 2-hour onsite response or 6-hour committed repair (available only in select countries)
- Premier Support
Premier Support service offers single point of contact for end-to-end problem resolution and collaborative third-party software support with direct access to Lenovo's most advanced technicians for faster troubleshooting.

For service definitions, country-specific details, and service limitations, please refer to the following documents:

- Lenovo Statement of Limited Warranty for Infrastructure Solutions Group (ISG) Servers and System Storage
<http://datacentersupport.lenovo.com/us/en/solutions/ht503310>
- Lenovo Data Center Services Agreement
<http://support.lenovo.com/us/en/solutions/ht116628>

Regulatory compliance

The TS4300 Tape Library conforms to the following regulations:

- FCC: Verified to comply with Part 15 of the FCC Rules, Class A
- Canada ICES-003/NMB-03, Class A
- CISPR 32, Class A
- EN 55032, Class A
- Japan VCCI Class A statement
- People's Republic of China Class A Electronic Emission statement
- Taiwan Class A compliance statement
- Korea KCC Class A statement
- Russia Electromagnetic Interference (EMI) Class A Statement

Interoperability

Lenovo provides end-to-end storage compatibility testing to deliver interoperability throughout the network. The TS4300 Tape Library supports attachment to Lenovo servers by using SAS or Fibre Channel connectivity.

Note: End-to-end storage configuration support (including adapters, network switches, and operating systems) *must* be verified through the System Storage Interoperation Center (SSIC) for the TS4300:
<http://ibm.com/systems/support/storage/ssic>

Fibre Channel SAN switches

Lenovo offers the ThinkSystem DB Series of Fibre Channel SAN switches for high-performance storage expansion. See the DB Series product guides for models and configuration options:

- ThinkSystem DB Series SAN Switches:
<https://lenovopress.com/storage/switches/rack#rt=product-guide>

Operating systems

For the list of supported operating systems, refer to the IBM System Storage Interoperation Center (SSIC):
<https://www-03.ibm.com/systems/support/storage/ssic/interoperability.wss>

Note: The LTO tape drives are supported when attached and run from the host operating system, however, in virtualization environments (for example, Hyper-V, KVM, Xen), the tape drives are not supported in the guest operating systems.

ISV backup software compatibility

The Independent Software Vendors (ISVs) indicate support for the TS4300 Tape Library for the following backup software:

- Acronis Backup Advanced
- Arcserve Backup
- ASG Time Navigator
- CommVault Simpana
- Dell/EMC NetWorker
- HPE/Micro Focus Data Protector
- IBM Spectrum Archive
- IBM Spectrum Protect
- Microsoft System Center Data Protection Manager
- Veritas Backup Exec
- Veritas NetBackup
- Quest NetVault
- Veeam Backup and Retention

For more information, see the ISV matrix for IBM LTO that is available at this website:

<https://www.ibm.com/downloads/cas/ORLZ7EMG>

Lenovo Financial Services

Lenovo Financial Services reinforces Lenovo's commitment to deliver pioneering products and services that are recognized for their quality, excellence, and trustworthiness. Lenovo Financial Services offers financing solutions and services that complement your technology solution anywhere in the world.

We are dedicated to delivering a positive finance experience for customers like you who want to maximize your purchase power by obtaining the technology you need today, protect against technology obsolescence, and preserve your capital for other uses.

We work with businesses, non-profit organizations, governments and educational institutions to finance their entire technology solution. We focus on making it easy to do business with us. Our highly experienced team of finance professionals operates in a work culture that emphasizes the importance of providing outstanding customer service. Our systems, processes and flexible policies support our goal of providing customers with a positive experience.

We finance your entire solution. Unlike others, we allow you to bundle everything you need from hardware and software to service contracts, installation costs, training fees, and sales tax. If you decide weeks or months later to add to your solution, we can consolidate everything into a single invoice.

Our Premier Client services provide large accounts with special handling services to ensure these complex transactions are serviced properly. As a premier client, you have a dedicated finance specialist who manages your account through its life, from first invoice through asset return or purchase. This specialist develops an in-depth understanding of your invoice and payment requirements. For you, this dedication provides a high-quality, easy, and positive financing experience.

For your region-specific offers, please ask your Lenovo sales representative or your technology provider about the use of Lenovo Financial Services. For more information, see the following Lenovo website:

<https://www.lenovo.com/us/en/landingpage/lenovo-financial-services/>

Related publications and links

For more information, see the following resources:

- Lenovo Tape Storage product page:
<https://www.lenovo.com/us/en/c/data-center/storage/storage-tape>
- Lenovo Data Center Solution Configurator (DCSC):
<https://dcsc.lenovo.com>
- System Storage Interoperation Center (SSIC):
<https://ibm.com/systems/support/storage/ssic>

Related product families

Product families related to this document are the following:

- [Tape Autoloaders and Libraries](#)
- [Backup Units](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2022. All rights reserved.

This document, LP0773, was created or updated on September 3, 2021.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.com/LP0773>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.com/LP0773>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

Lenovo Services

ThinkSystem

The following terms are trademarks of other companies:

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Hyper-V®, Microsoft®, Surface®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.