

SAMSUNG





Samsung Professional Displays







Versatech International Inc. 2023 Product Catalog

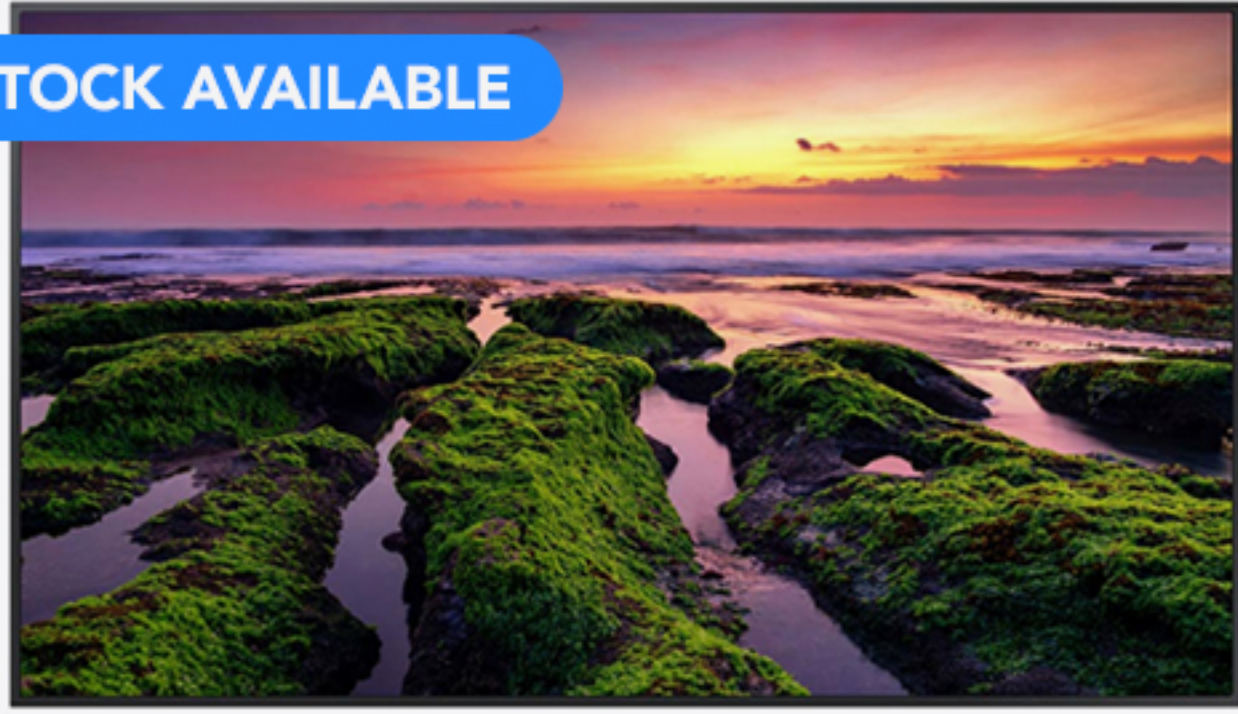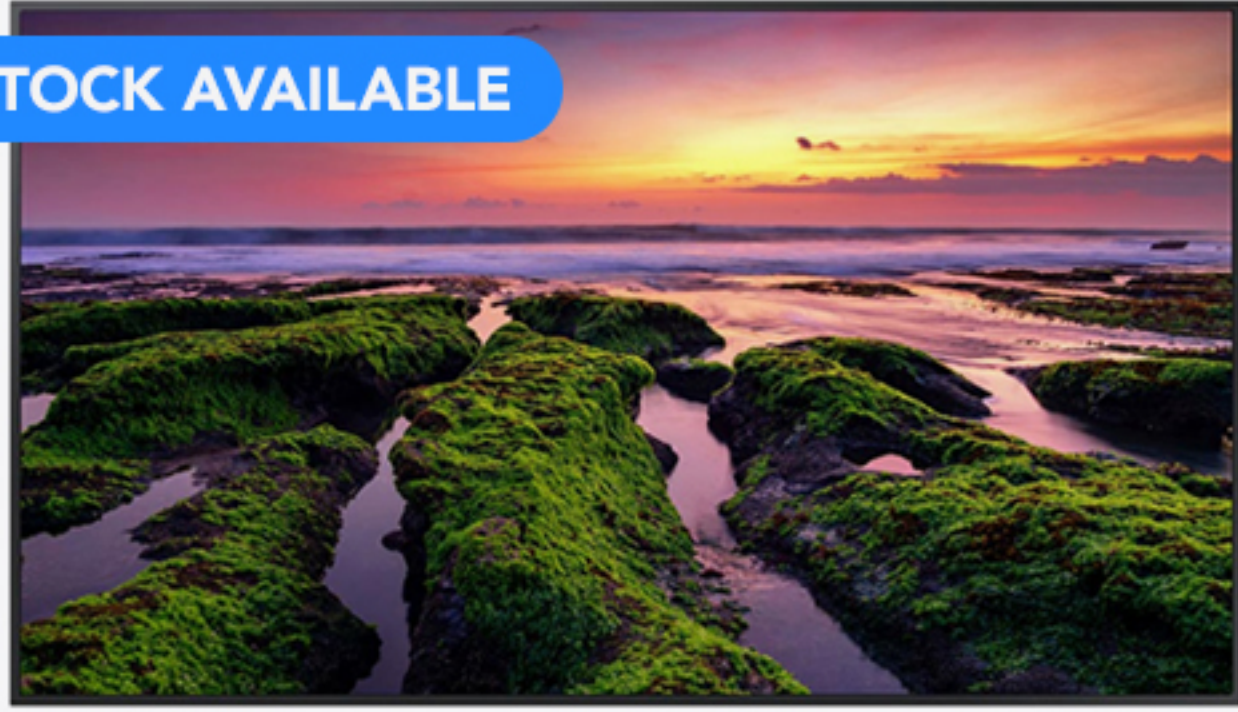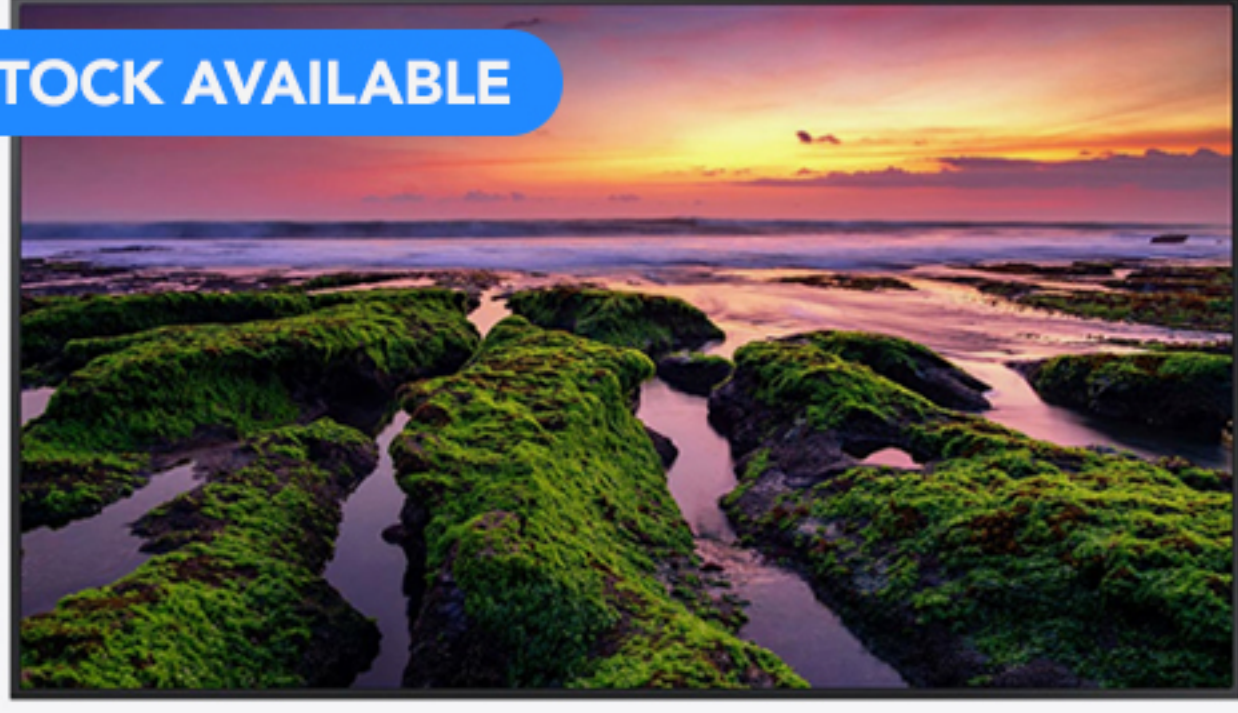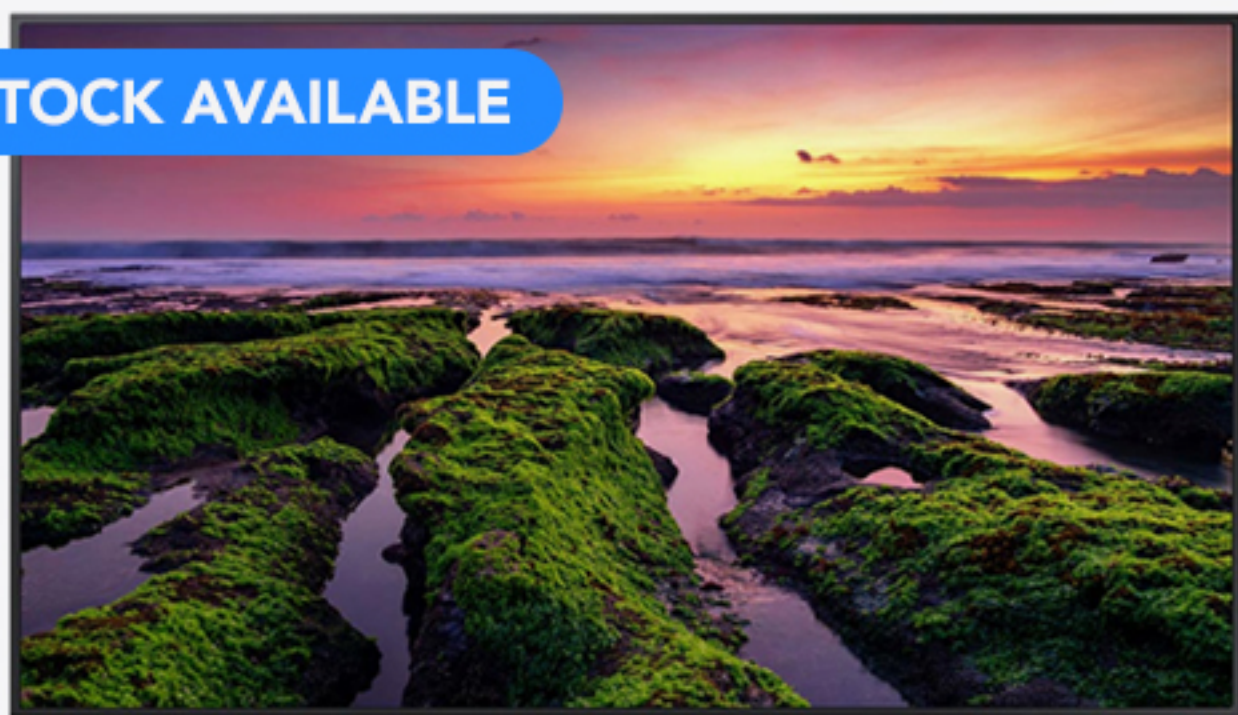

Samsung Basic & Entry Displays

	MODEL	SIZE	RESOLUTION	SPECIFICATIONS	SRP
	LH43QBBEBGCXXP	43"	UHD	350nit, 16/7, Haze 2%, 10kg, VESA 200x200, Built-in MagicInfo S6, SSSP 6.0, IP5x Rating, Wi-Fi/BT, Tizen 4.0, WMN4070SE	P52,999
	LH50QBBEBGCXXP	50"	UHD	350nit, 16/7, Haze 2%, Glare, 17.6 kg, VESA 200x200, MagicInfo 6, Connectivity: DVI-D, HDMI 2.0 (2), Stereo Mini Jack, DVI/HDMI/Audio(Common), USB 2.0 x 2, Tizen 4.0 (VDLinux), ENERGY STAR 8.0, Epeat, WMN4070SE (Land Only) WMN750ME	P59,999
	LH55QBBEBGCXXP	55"	UHD	350nit, 16/7, Haze 2%, 18.1kg, VESA 200X200, Built-in MagicInfo S6, SSSP 6.0, IP5x Rating, Wi-Fi/BT, Tizen 4.0, WMN4070SE	P76,999
	LH65QBBEBGCXXP	65"	UHD	350nit, 16/7, Haze 2%, 24.9kg, VESA 400x400, Built-in MagicInfo S6, SSSP 6.0, IP5x Rating, Wi-Fi/BT, Tizen 4.0, WMN6575SD	P91,999

Samsung Mainstream Displays

	MODEL	SIZE	RESOLUTION	SPECIFICATIONS	SRP
 <p>STOCK AVAILABLE</p>	LH32QMBEBGCXXP	32"	UHD	400nit, TBA, Haze 2%, TBA, VESA 200 X 200, UHD Signage Display, Slim & Light Signage, Built-in MagicInfo S6, SSSP 6.0, Tizen 4.0 (VDLinux), STN-L4355F, WMN4070SE, CML400XK	P41,999
 <p>STOCK AVAILABLE</p>	LH43QMBEBGCXXP	43"	UHD	500nit, 24/7, Haze 44%, 10kg, VESA 200x200, Built-in MagicInfo S6, SSSP 6.0, IP5x Rating, Wi-Fi/BT, Tizen 4.0 (VDLinux), WMN4070SE	P57,999
 <p>STOCK AVAILABLE</p>	LH50QMBEBGCXXP	50"	UHD	500nit, 24/7, Haze 25%, Non-Glare, 17.6 kg, VESA 200x200, MagicInfo 6, Connectivity: DVI-D Display Port 1.2 (1), HDMI 2.0 (2), Stereo Mini Jack, DVI/HDMI/Audio(Common), USB 2.0 x 2, Tizen 4.0 (VDLinux)	P64,999
 <p>STOCK AVAILABLE</p>	LH55QMBEBGCXXP	55"	UHD	500nit, 24/7, Haze 25%, 18.1kg, VESA 200x200, Built-in MagicInfo S6, SSSP 6.0, IP5x Rating, Wi-Fi/BT, Tizen 4.0, WMN4070SE	P95,999

Samsung Mainstream Displays

MODEL

SIZE

RESOLUTION

SPECIFICATIONS

SRP

STOCK AVAILABLE



LH65QMBEBGCXXP


65"

UHD

500nit, 24/7, Haze 25%, 24.9kg, VESA 400x400, Built-in MagicInfo S6, SSSP 6.0, Tizen 4.0, WMN4277SE

P179,999

STOCK AVAILABLE

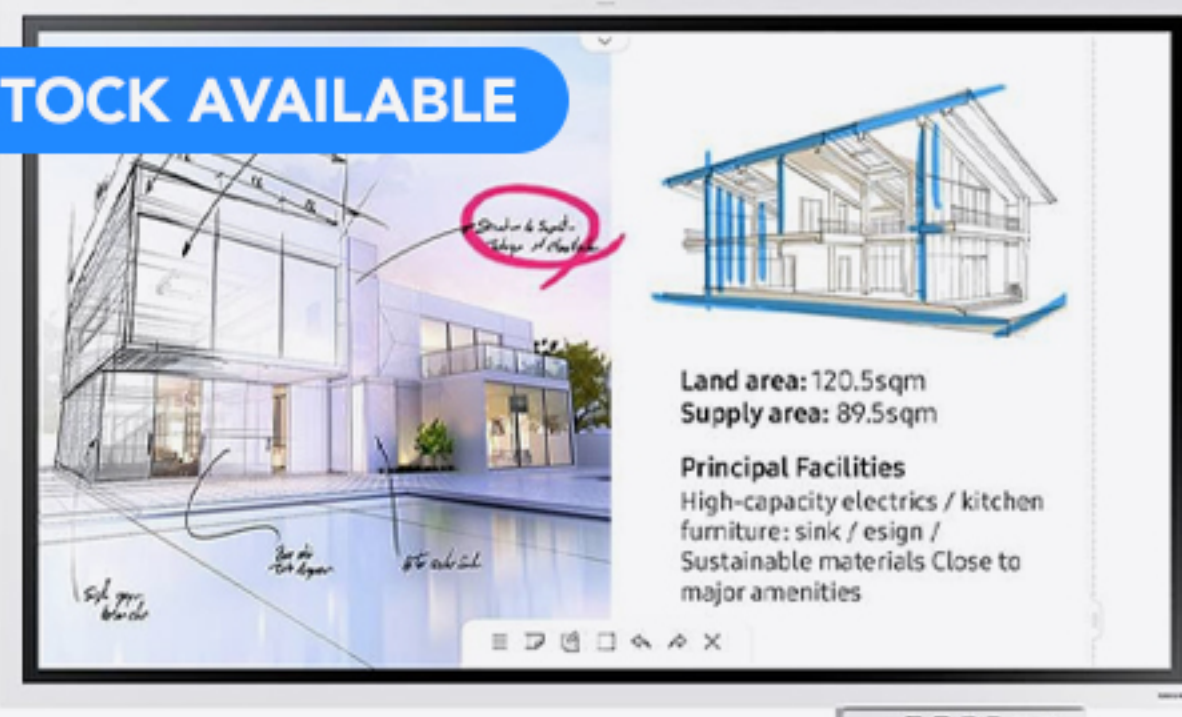

LH55WMRWBGXXP


55"

UHD

350nit (without glass), 220 (with glass), 16/7, 28.2kg, VESA 400 x 400, w/ Passive Pen with magnet, WiFi Module Embedded, Samsung Proprietary OS(VDLinux), STN-WM55R, Moving Stand / Wallmount (WMN4277SE), Flip Tray CY-TF65BRC

P195,999

STOCK AVAILABLE

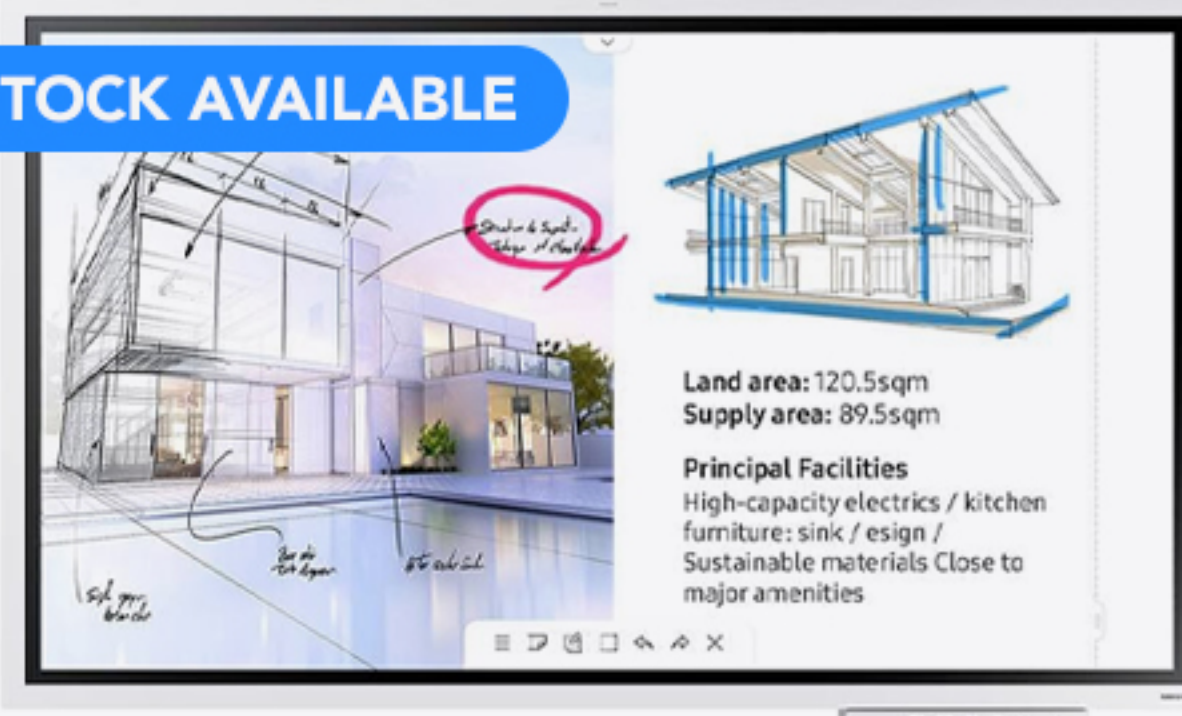

LH65WMRWBGXXP

65"

UHD

350nit (without glass), 220nit (with glass), 50.6kg., VESA 400x400, UHD, Inglass™ Touch, UX Upgrade, Enhanced Compatibility, UHD (3840x2160), Landscape only with Flip No-Gap

P201,999

MODEL IMAGE



DISPLAY PANEL	Diagonal Size	Class	50	50	55
		Measured	49.5" / 125.7cm	49.5" / 125.7cm	54.6" / 138.7cm
	Resolution		3840x2160(16:9)	3840x2160(16:9)	3840x2160(16:9)
	Brightness (Typ.)		350 nit	500 nit	500 nit
	Orientation		Landscape / Portrait	Landscape / Portrait	Landscape / Portrait
	Haze		Glare	Non-Glare	Non-Glare
	Contrast Ratio (Typ.)		4000:1	4000:1	4000:1
	Type		VA	VA	VA
	Active Display Area		1095.84(H) x 616.41(V)	1095.84(H) x 616.41(V)	1209.6(H) x 680.4(V)
	Pixel Pitch (mm)		0.285 x 0.285	0.285 x 0.285	0.315 x 0.315
	Color Gamut		92% (DCI-P3, CIE 1976)	92% (DCI-P3, CIE 1976)	92% (DCI-P3, CIE 1976)
	Operation Hour		16/7	24/7	24/7

CONNECTIVITY / SOUND	Input	Video	HDMI 2.0 (3)	DP 1.2 (1), HDMI 2.0 (3)	DP 1.2 (1), HDMI 2.0 (3)
		HDCP	HDCP2.2	HDCP2.2	HDCP2.2
		Audio	N/A	N/A	N/A
		USB	USB 2.0 x 2	USB 2.0 x 2	USB 2.0 x 2
		Tuner	N/A	N/A	N/A
	Output	Video	N/A	N/A	N/A
		Audio	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack
		USB	N/A	N/A	N/A
	WiFi / Bluetooth		O / O	O / O	O / O
	External Control		RS232C(in/out), RJ45	RS232C(in/out), RJ45	RS232C(in/out), RJ45
Speaker		10W 2ch	10W 2ch	10W 2ch	

MECHANICAL SPECIFICATION	Dimension (mm)	Set	1121.4 x 643.9 x 46.3	1121.4 x 643.9 x 46.3	1235.1 x 707.9 x 46.3
		Package	1269 x 784 x 152	1269 x 784 x 152	1402 x 858 x 163
	Weight (kg)	Set	13.4	13.4	18.1
		Package	17.6	17.6	23.6
	Vesa Mount		400x400	400x400	400x400
	Bezel Width (mm)		9.2mm(U/L/R), 11.2mm(B)	9.2mm(U/L/R), 11.2mm(B)	9.2mm(U/L/R), 11.2mm(B)

FEATURES	Internal Player	OS	Tizen 3.0 (VDLinux)	Tizen 6.5	Tizen 6.5
		Processor	1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU	Cortex A72 1.7GHz Quad-Core CPU
		Storage	8GB	16 GB	16 GB
	Special	H / W	Symmetric Design (same with QxR), Center IR, Temperature Sensor Auto Level, Wi-Fi(2.4/5.0GHz dual) & BT	Symmetric Design (same with QxR), Center IR, Temperature Sensor, Auto Level, Wi-Fi(2.4/5.0GHz dual) & BT	Symmetric Design (same with QxR), Center IR, Temperature Sensor, Auto Level, Wi-Fi(2.4/5.0GHz dual) & BT
		S / W	Workspace (Microsoft365/VMWare/RDP) Custom Home, Auto Source Switching & Recovery, Dicom Simulation Mode, Director Mode, SmartView+(PC)	Workspace (Microsoft365/VMWare/RDP) Custom Home, Auto Source Switching & Recovery, Dicom Simulation Mode, Director Mode, SmartView+(PC)	Workspace (Microsoft365/VMWare/RDP) Custom Home, Auto Source Switching & Recovery, Dicom Simulation Mode, Director Mode, SmartView+(PC)
			Upgradable Web-Engine, Tizen Enterprise Platform, Smart Calibration SmartView+(mobile), Video Conference Solution	Upgradable Web-Engine, Tizen Enterprise Platform, Smart Calibration SmartView+(mobile), Video Conference Solution	Upgradable Web-Engine, Tizen Enterprise Platform, Smart Calibration SmartView+(mobile), Video Conference Solution

CERTIFICATION	Safety		60950-1 / 62368-1	60950-1 / 62368-1	60950-1 / 62368-1
	EMC		Class B	Class B	Class B
	Environment		ENERGY STAR 8.0, EPEAT	ENERGY STAR 8.0, EPEAT	ENERGY STAR 8.0, EPEAT
	IP Rating		Glare	Non-Glare	Non-Glare
	Security		4000:1	4000:1	4000:1
POWER	Power Supply		AC 100 - 240 V, 50/60 Hz	AC 100 - 240 V, 50/60 Hz	AC 100 - 240 V, 50/60 Hz
	Power Consumption	Max[W/h]	143	171	143
		Typical[W/h]	91	91	108
		Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
OPERATING CONDITION	Temperature		0°C~ 40°C	0°C~ 40°C	0°C~ 40°C
	Relative Humidity		10~80%	10~80%	10~80%
ACCESSORIES	Included		Quick Setup Guide, Warranty Card, Power Cord, RS232C(IN) Gender Remote Controller & Batteries	Quick Setup Guide, Warranty Card, Power Cord, RS232C(IN) Gender Remote Controller & Batteries	Quick Setup Guide, Warranty Card, Power Cord, RS232C(IN) Gender Remote Controller & Batteries
	Optional	Stand	STN-L4355G	STN-L4355G	Non-Glare
		Mount	WMN4070SG (Land Only) WMN750ME	WMN4070SG (Land Only) WMN750ME	WMN4070SG (Land Only) WMN750ME
		Specialty	CML400XR	CML400XR	CML400XR

Services Versatech Offer

- Design Consultation Services
 - Ocular Inspection
- Current System Evaluation



SAMSUNG Professional Displays 2023. All prices are subject to change without prior notice.

This Product Catalog is created by the Marketing team of Versatech International Inc.

1803 18/F East Tower, Philippine Stock Exchange Center, Exchange Road, Ortigas Center, San Antonio, Pasig City 1605, Metro Manila, Philippines.

www.versatech.com.ph