

SONY



PCS-XC1

HD Visual Communication System

IPELA *Exmor*

View-DR



PCS-XC1

Full HD
1080



IPELA Exmor View-DR

Compact, Lightweight, Mobile - Affordable Visual Communication, Anytime, Anywhere

- Full HD 1080p 60 fps^{*1} smooth and fine video image with View-DR
- Superb audio quality with new echo canceller
- Convenient RFZ Remote Commander™
- Wireless LAN connectivity^{*2} backed by Sony's Intelligent QoS

Stunning 1080/60p^{*1} HD Video Images with View-DR

The PCS-XC1 adopts the H.264 high-efficiency video codec to bring you smooth and natural HD 1920 x 1080/60p broadcast-quality images.

Stunning HD video enhances your videoconferencing with lifelike images, and gives you a wider range of ways to use visual communication. The PCS-XC1 also enables simultaneous 30-fps transmission of HD conference video and an H.239-complaint PC screen image, both at 1,920x1,080^{*1} resolution.

Furthermore, this unit incorporates Sony's Exmor CMOS sensor and View-DR technology. These features optimize the brightness of each pixel, enabling the PCS-XC1 to deliver clear images even in dimly lit rooms when using a projector, or in rooms with poor backlighting conditions.



1080/30p



1080/60p



Without View-DR function



With View-DR function

Simulated images

Superb MPEG4 AAC Audio Quality with New Echo Canceller

The PCS-XC1 supports a new and sophisticated echo canceller. By further evolving conventional echo-cancelling technology, Sony has achieved a solution capable of adjusting properly collected sound levels according to their distance from the system and according to the installation environment.

With these capabilities, the unit captures clear voices even when the people who are speaking are a distance away from the microphone, ensuring comfortable communication.

Wireless LAN Connectivity^{*2} Backed by Sony's Intelligent QoS

To activate the wireless function of the PCS-XC1, simply install an optional PCSA-WXC1 wireless software license and a wireless LAN module in the USB port. Then whenever you carry this unit into wireless LAN range, you can instantly access video and audio communication.



The PCS-XC1 incorporates an enhanced Intelligent QoS system. This works optimally even in an unstable wireless network environment, controlling and greatly reducing video artifacts caused by packet loss, regardless of the transmission distance. The following three methods are applied adaptively in accordance with the network condition: Adaptive FEC (Forward Error Correction), Real-time ARQ (Automatic Repeat reQuest), and ARC (Adaptive Rate Control).



Without Intelligent QoS



With Intelligent QoS

Simulated images


^{*1} The PCS-XC1 requires an optional PCSA-RXC1 HD upgrade software license.

^{*2} The PCS-XC1 requires an optional PCSA-WXC1 wireless software license. This will be supported with version 1.1 or later.

Other Features and Benefits

Multiple Display Layout


Users can select the following display layouts: Full Screen, Picture-in-Picture (PinP), Picture-and-Picture (PandP), Picture-and-Picture-and-Picture (PandPandP), and a Side-by-Side split screen. By selecting any of these flexible display patterns, both videoconferencing images and presentation data can be displayed in ways that are effective and pleasing to the eye.

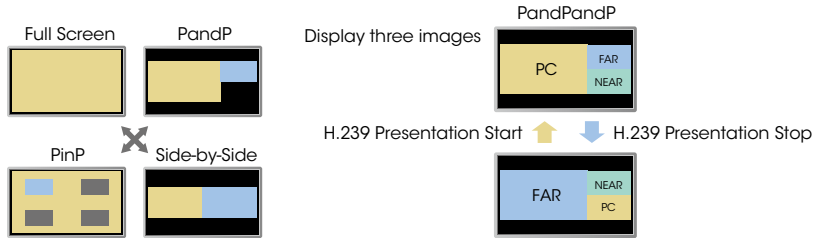

Video Annotation Function*

For effective communication, the PCS-X1 supports a video annotation function. Conference participants can clearly point out specific parts of shared data, including live images and presentation data, by simply writing on a tablet. This function can help you minimize time and effort in your communication, and allow you to deliver a clear and strong message. This function works from both local and remote sites bi-directionally.

* A commercially available third-party tablet device is required.

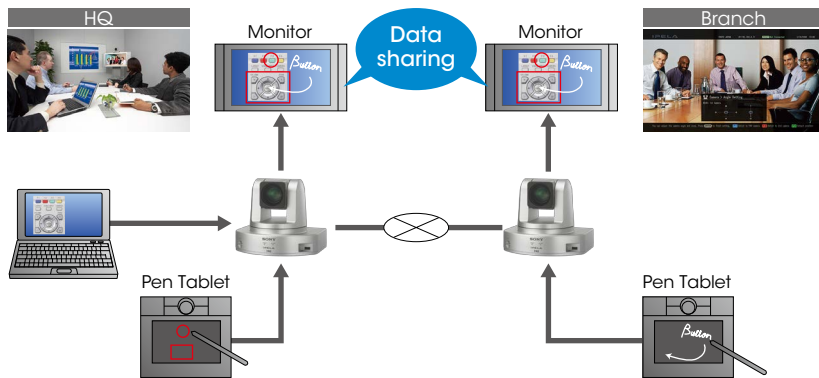

HD Recording Via USB Port and Multicast Streaming Via a Web Interface

The PCS-XC1 is equipped with two USB ports – one on the front panel and one on the rear panel – which are for HD recording to USB 2.0 memory. HD video and audio can be streamed out as multicast streaming (up to 10 sites) or unicast streaming via a web interface.



Direct Connection Between Mobile Endpoint Devices and the PCS-XC1

By installing an optional PCSA-SAG1 mobile access software license, the system can connect directly from a smartphone and a tablet installed with IPELA Communication Mobile software (both Android and iOS versions are available).

Intuitive GUI and Convenient RF Remote Commander

An ergonomically designed RF remote commander makes dialing easy – just press the button to specify the thumbnail image of any contact registered on the menu GUI. Unlike an IR (infrared ray) remote commander, an RF (radio frequency) commander is omnidirectional, and can transmit a command from any direction.



Simulated images

Other Features

- Microsoft Lync support with future upgrade
- One-touch dialing with Kiosk mode
- Far End Camera Control (FECC)
- Intuitive GUI: translucent cascading menu keeps video always in view
- Kensington Security Slot offers protection against theft

Specifications

| | | | |
|-----------------------------|---|--|---|
| Camera | Sensor | 1/2.8 Exmor CMOS | |
| | Image Sensor (Number of Effective Pixels) | Approx. 2.1 Megapixels | |
| | Output Pixels (H x V) | 1920 x 1080 | |
| | Frame Rate | 60 fps | |
| | S/N Ratio | 50 dB | |
| | Exposure Control | Auto/Manual | |
| | Optical Zoom | 12x | |
| | Digital Zoom | 12x | |
| | Focusing System | Auto/Manual | |
| | Horizontal Viewing Angle | 71 degree (Wide) | |
| | Focal Length | f=3.9mm(wide) to 46.8 mm(Tele) F1.8 to 2.0 | |
| | Minimum Object Distance | ~1500 mm(Tele) | |
| | Pan/Tilt Angle | Pan ±100°/Tilt ±25° | |
| | Preset Position | 100 positions | |
| | Other Features | Auto Gain Control, Auto White Balance, Exposure Compensation View-DR function | |
| | Key Features | Data Sharing | PC images up to 1080p resolution is supported with optional software PCSA-RXC1. PC images up to SXGA resolution is supported. (standard) Video annotation function is available. |
| | | Lip Synchronization | AUTO/OFF |
| Mic Off Function | | ON/OFF | |
| Streaming/Recording Feature | | Audio: 64 kbps Video: 512 kbps to 1 Mbps (2-step) | |
| Maximum Frame Rate | | H.263 QCIF 30 fps, CIF 30 fps, 4CIF 30 fps H.264 QCIF 30 fps, CIF 30 fps, 4CIF 30 fps, wCIF 30 fps, w432p 30 fps, w4CIF 30 fps, 720p 60 fps, 1080p 60 fps | |
| Video | Communication Protocol Standards | H.263, H.263+, H.263++, H.264, H.264 High Profile, MPEG-4 SP@L3 | |
| | Resolution | 4:3 QCIF (176 x 144), CIF (352 x 288), 4CIF (704 x 576) 16:9 wCIF/w288p (512 x 288), w432p (768 x 432), w4CIF (1024 x 576), 720p (1280 x 720), 1080p (1920 x 1080) | |
| | Bit Rate | 64 kbps to 4,096 kbps | |
| | Screen Layout | Full Screen, PinP, PandP, SideBySide, PandPandP | |
| | Bandwidth and Coding | MPEG-4 AAC Mono: 11 kHz at 64 kbps, 96 kbps MPEG-4 AAC Mono: 22 kHz at 64 kbps, 96 kbps G.711: 3.4 kHz at 56 kbps, 64 kbps G.722: 7.0 kHz at 48 kbps, 56 kbps, 64 kbps G.728: 3.4 kHz at 16 kbps | |
| Audio | Other Features | Mono echo-cancelling (ON/OFF), Auto Gain Control, Noise Reduction | |


| | | |
|------------------------|---|---|
| Network | Protocols | TCP/IP, UDP/IP, DHCP, DNS, HTTP, TELNET, SSH, SNMP, NTP, ARP, RTP/RTCP |
| | QoS (Quality of Service) | Adaptive FEC (Forward Error Correction), Real-time ARQ (Auto Repeat reQuest), ARC (Adaptive Rate Control), IP Precedence, DiffServe |
| Interface | Video Input | External video inputs (HDMI x 1) |
| | Video Output | HDMI x 1 |
| | Control Input | Mini-USB x 1 |
| | Audio Input | External analog microphone input Mini-jack (Plug in power) x 1 |
| | Audio Output | HDMI (video, audio) x 1 |
| | Network Port | 10BASE-T/100BASE-TX/1000BASE-T x 1 |
| | Maintenance Interface | Mini-USB x 1 |
| Standard | Communication Protocol Standards | ITU-T H.323 ² , IETF SIP |
| | ITU-T (excluding audio/video standards) | H.241, H.243, H.245, H.460.18, H.460.19 |
| | IETF | RFC2190, RFC3016, RFC3047, RFC3261, RFC3264, RFC3550, RFC3984, RFC4573, RFC4587, RFC4629, RFC4856, RFC4628, RFC5168 |
| General | Encryption | H.235 ver.3 |
| | Far End Camera Control | H.281 |
| | Frame Format | H.225.0 |
| | Dual Stream | H.239 (video and presentation data) |
| | Power Requirements | DC 19.5 V (AC Adapter : AC 100 V to 240 V, 50/60 Hz) |
| | Power Consumption | 24W |
| | Power Consumption (Standby) | 18W |
| | Operating Temperature | 5°C to 35°C (41°F to 95°F) |
| | Storage Temperature | -20°C to +60°C (-4°F to +140°F) |
| | Operating/Storage Humidity | 20% to 80% (no condensation) |
| Dimensions (W x H x D) | Approx. 206 x 175 x 152 mm (excluding projections) | |
| | Approx. 8 1/8 x 7 x 6 inches (excluding projections) | |
| Mass | Approx. 1.8 kg (Approx. 3 lb 15 oz) | |
| Supplied Accessories | PCS-A1 microphones (1) AC adapter (1) HDMI cable (3m) (1) RF Remote Commander Unit (1) Before using this unit (1) Installation Guide (1) Warranty booklet (1) | |

*1 It is unavailable depending on the model.

*2 Interoperable with other manufacturer's endpoint which is compliant to H.323. It does not mean that all connections are guaranteed.

| Optional Accessories | |
|----------------------|--|
| Model Name | Descriptions |
| PCSA-RXC1 | Full HD upgrade software license |
| PCSA-WXC1 | Wireless network software license and dongle |
| PCSA-SAG1 | Mobile access software license |

Dimensions

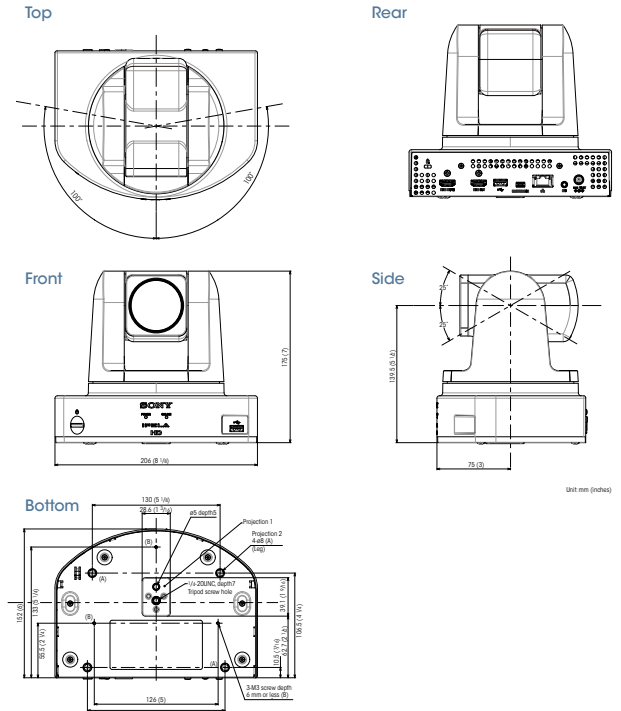

Distributed by

MK11156V1Y114SEP

©2014 Sony Corporation. All rights reserved.
 Reproduction in whole or in part without written permission is prohibited.
 Features and specifications are subject to change without notice.
 Screen images are simulated.
 The values for mass and dimension are approximate.
 "SONY", "IPELA", "Exmor", and "Remote Commander" are trademarks of Sony Corporation.
 All other trademarks are the property of their respective owners.