

04 Recessed Spots Adjustable LED > The COB Round Classic Spots

## 11107A/W/W



7W recessed adjustable spot LED. Suitable for residential and commercial applications, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




### Downloads



### Dimensions



### Gallery

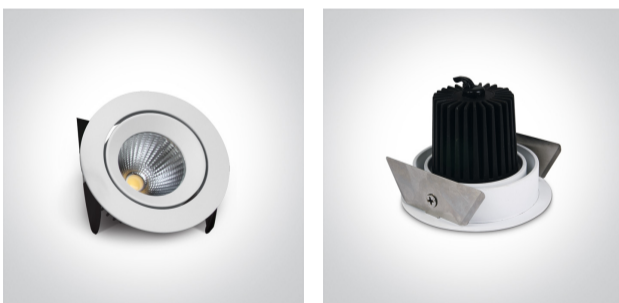

### Physical Specification

Product Type

Item Group

Family

Order Code

Colour

Material

Shape

Fitting

04 Recessed Spots Adjustable LED

The COB Round Classic Spots

11107A/W/W



White


Die Cast

Circular

Height	60mm
Diameter	85mm
Cutout Hole Diameter	74mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	1 Direction


## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	180mA
Voltage	30V
Safety Class	
Power(Watts)	5,4W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Epistar
LED Number	1
F Mark	

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	6W
Power Factor	0,5
Constant Current	Yes
Output	180mA
Voltage Range	30V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	75°C
Housing Material	Plastic
Output Terminal	Cable


## Illumination Data

Colour Temperature	3000K
Lumen Output	420lm
Light Efficiency	70lm/W
CRI	80
Beam Angle	24°
Illumination Diagram	

## Packing Info

Box Length	12,5cm
Box Width	6cm
Box Height	11,5cm
Box Weight	0,300Kg
Pcs/Carton	24
Barcode	5291889036029
HS Code	9405409900

## Energy Label

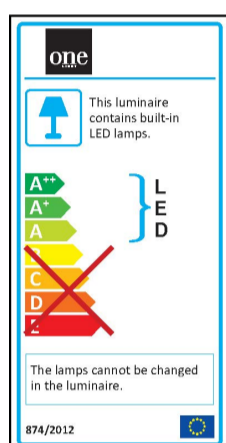

## Certification & Warranty

Warranty	2 Years
Average Lifetime	30000hrs
Wee Directive	Yes

switch to  
**one light!**

**one**  
LIGHT

