

ThinkSystem SR550 7X04A00AEA

TopSeller
TopSeller

Region
EMEA

Machine Type
7X04

Processor
1xXeon Silver 4114
10C/2.2GHz/13.75MB/85W/DDR4-2400

Memory
1x16GB RDIMM DDR4-2666

Storage Controller
1x930-8i 2GB flash

Chassis
16x2.5"

Disk Bays
8x2.5" SATA/SAS HS

Disks
Open

M.2 Drives
None

Networking (LOM/ML2/PCIe)
None

Available PCIe Slots
1xLP x8

Front VGA
Front VGA

Security
TPM 1.2

System Management
XClarity Advanced

Power Supply
1x750W Platinum

Base Warranty
3-year

Ann Date (mm/yy)
07/17

Note:

Country Code "US" is for United States, "++" is for EMEA countries (e.g. AD - Saudi, Arabia, AT - Austria, BM - Bulgaria, etc.), "xx" is for EAST countries (e.g. BM - Bulgaria, CX - Hungary, CY - Cyprus, etc.), and "***" is for MEA countries (e.g. AD - Saudi, Arabia, ED - Egypt, EQ - Sweden, etc.). Please be aware that the EMEA/ EAST/MEA models listed above might not be available in all countries

 www.lenovo.com

This publication was developed for products and services offered in the United States and E.M.E.A countries. Lenovo may not offer the products, services or features discussed in this document in other countries. Lenovo may withdraw an offering at any time. Information is subject to change without notice. Consult your local representative for information on offerings available in your area. Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. Lenovo provides this publication "as is" without warranty of any kind, either express or implied, including the implied warranties of merchantability or fitness for a particular purpose.



<http://psref.lenovo.com>

Visit psref website for the latest version of Product Specifications Reference.

© Lenovo, 2017. All rights reserved.




ThinkSystem SR550 Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification																																																																																																			
Form factor	2U rack																																																																																																			
Dimensions	Height: 86.5 mm (3.4 in). Width: 482 mm (19.0 in) with rack latches. Depth: 763.7 mm (30.1 in)																																																																																																			
Weight	Maximum configuration: 57.32 lb (26 kg)																																																																																																			
Processor	Up to two 125W Intel Xeon Scalable family processors, Bronze, Silver, Gold, or Platinum. Up to 20 cores at 2.0GHz, up to 3.6GHz with 4 cores. Two processors are connected with two UPI (Ultra Path Interconnect) links up to 10.4GT/s																																																																																																			
Chipset	Intel C622 Platform Controller Hub																																																																																																			
Memory	Up to 12 DIMM sockets. Each processor supports up to 6 DIMM sockets with 6 channels. DDR4-2666. RDIMMs and LRDIMMs are supported, but memory types cannot be intermixed																																																																																																			
Memory capacity	With RDIMMs: Up to 384GB with 12 x 32 GB RDIMMs and two processors With LRDIMMs: Up to 768GB with 12 x 64 GB LRDIMMs and two processors																																																																																																			
Memory protection	ECC, memory mirroring, and memory sparing																																																																																																			
Storage controllers	Supports the following RAID/HBA adapters:																																																																																																			
	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>Interface</th> <th>Drive type</th> <th>RAID levels</th> <th>JBOD</th> <th>Cache</th> <th>Cache protection</th> <th>FastPath</th> <th>Max qty</th> </tr> </thead> <tbody> <tr> <td>For SS bays</td> <td>Onboard SATA</td> <td>6Gb SATA</td> <td>SATA</td> <td>0/1/10/5</td> <td>Yes</td> <td>None</td> <td>No</td> <td>-</td> </tr> <tr> <td></td> <td>530-8i</td> <td>12Gbs SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50</td> <td>Yes</td> <td>None</td> <td>Yes</td> <td>2</td> </tr> <tr> <td></td> <td>730-8i</td> <td>12Gbs SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50</td> <td>Yes</td> <td>1GB</td> <td>No</td> <td>2</td> </tr> <tr> <td></td> <td>930-8i</td> <td>12Gbs SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50/6/60</td> <td>Yes</td> <td>2GB</td> <td>Flash backup</td> <td>2</td> </tr> <tr> <td></td> <td>930-16i</td> <td>12Gbs SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50/6/60</td> <td>Yes</td> <td>4GB</td> <td>Flash backup</td> <td>1</td> </tr> <tr> <td>For HS bays</td> <td>430-8i</td> <td>12Gbs SAS</td> <td>SATA/SAS</td> <td>-</td> <td>Yes</td> <td>None</td> <td>-</td> <td>2</td> </tr> <tr> <td></td> <td>430-16i</td> <td>12Gbs SAS</td> <td>SATA/SAS</td> <td>-</td> <td>Yes</td> <td>None</td> <td>-</td> <td>1</td> </tr> <tr> <td></td> <td>430-8e</td> <td>12Gbs SAS</td> <td>SATA/SAS</td> <td>-</td> <td>Yes</td> <td>None</td> <td>-</td> <td>6</td> </tr> <tr> <td></td> <td>430-16e</td> <td>12Gbs SAS</td> <td>SATA/SAS</td> <td>-</td> <td>Yes</td> <td>None</td> <td>-</td> <td>6</td> </tr> <tr> <td></td> <td>930-8e</td> <td>12Gbs SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50/6/60</td> <td>Yes</td> <td>4GB</td> <td>Flash backup</td> <td>6</td> </tr> </tbody> </table>	RAID adapter	Interface	Drive type	RAID levels	JBOD	Cache	Cache protection	FastPath	Max qty	For SS bays	Onboard SATA	6Gb SATA	SATA	0/1/10/5	Yes	None	No	-		530-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50	Yes	None	Yes	2		730-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50	Yes	1GB	No	2		930-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	2GB	Flash backup	2		930-16i	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	4GB	Flash backup	1	For HS bays	430-8i	12Gbs SAS	SATA/SAS	-	Yes	None	-	2		430-16i	12Gbs SAS	SATA/SAS	-	Yes	None	-	1		430-8e	12Gbs SAS	SATA/SAS	-	Yes	None	-	6		430-16e	12Gbs SAS	SATA/SAS	-	Yes	None	-	6		930-8e	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	4GB	Flash backup	6
RAID adapter	Interface	Drive type	RAID levels	JBOD	Cache	Cache protection	FastPath	Max qty																																																																																												
For SS bays	Onboard SATA	6Gb SATA	SATA	0/1/10/5	Yes	None	No	-																																																																																												
	530-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50	Yes	None	Yes	2																																																																																												
	730-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50	Yes	1GB	No	2																																																																																												
	930-8i	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	2GB	Flash backup	2																																																																																												
	930-16i	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	4GB	Flash backup	1																																																																																												
For HS bays	430-8i	12Gbs SAS	SATA/SAS	-	Yes	None	-	2																																																																																												
	430-16i	12Gbs SAS	SATA/SAS	-	Yes	None	-	1																																																																																												
	430-8e	12Gbs SAS	SATA/SAS	-	Yes	None	-	6																																																																																												
	430-16e	12Gbs SAS	SATA/SAS	-	Yes	None	-	6																																																																																												
	930-8e	12Gbs SAS	SATA/SAS	0/1/10/5/50/6/60	Yes	4GB	Flash backup	6																																																																																												
	Note: 730-8i is available in China only. All RAID/HBA adapters should be placed in slot 4 firstly.																																																																																																			
Disk drive bays	Support 8 front 3.5" SATA simple-swap bays, or 8 front 3.5" SATA/SAS HS bays, or 12 front 3.5" SATA/SAS HS bays, or 8 front 2.5" SATA/SAS HS bays, or 16 front 2.5" SATA/SAS HS bays. Optional one or two internal M.2 SSD for boot, dual M.2 SSD supports mirroring																																																																																																			
Internal storage	For 3.5" SS bay	3.5" HDD, SATA6Gbs, 7.2K	1TB/2TB/4TB/6TB/8TB/10TB																																																																																																	
		3.5" HDD, SATA6Gbs, 7.2K	1TB/2TB/4TB/6TB/8TB/10TB																																																																																																	
	For 3.5" bay (3.5" disks or 2.5" disks with 3.5" tray)	3.5" HDD, SAS12Gbs, 7.2K	1TB/2TB/4TB/6TB/8TB/10TB																																																																																																	
		2.5" HDD, SAS12Gbs, 15K	300GB/600GB																																																																																																	
		2.5" SSD, SATA6Gbs	240GB/480GB																																																																																																	
		2.5" HDD, SATA6Gbs, 7.2K	1TB/2TB																																																																																																	
		2.5" HDD, SAS12Gbs, 7.2K	1TB/2TB																																																																																																	
		2.5" HDD, SAS12Gbs, 10K	300GB/600GB/900GB/1.2TB/1.8TB																																																																																																	
		2.5" HDD, SAS12Gbs, 15K	300GB/600GB																																																																																																	
		2.5" SSD, SAS12Gbs	400GB/800GB/3.84TB																																																																																																	
For 2.5" bay	2.5" SSD, SATA6Gbs	240GB/480GB																																																																																																		
	M.2 SATA SSD	32GB/128GB																																																																																																		
Optical	No internal optical bay. Optional USB DVD±RW optical drive																																																																																																			
Network interfaces	Integrated one dedicated management port plus two GbE ports. One LOM slot for customized LOM with two RJ-45 or SFP+ ports, up to 10GbE. Optional ML2 or PCIe adapters are supported. ML2 adapter requires riser card with ML2 slot. Up to two ports supports Wake-on-LAN and NC-SI (see right)																																																																																																			
Security features	Power-on and admin password. Trusted Platform Module, TCG 1.2 compliant, upgrade to 2.0 via UEFI setting. Optional TCM in China only. Optional lockable security bezel																																																																																																			
Operating systems supported	Microsoft Windows Server 2016/2012 R2. Red Hat Enterprise Linux 7.3/6.9. SUSE Linux Enterprise Server 12 SP2/11 SP4. VMware vSphere (ESXi) 6.5/6.0 U3																																																																																																			
Systems management	XClarity Controller Standard, optional upgrades to Advanced or Enterprise are available. Energy Manager. XClarity Administrator. Lenovo Capacity Planner. Provisioning Manager. Essentials. Light Path Diagnostics																																																																																																			
GPU support	None																																																																																																			

Components	Specification	
Base warranty	MT 7X03: 1-year limited onsite service with 9x5/NBD MT 7X04: 3-year limited onsite service with 9x5/NBD	
Power supply	Up to two redundant hot-swap 550W and 750W 80 PLUS Platinum qualified AC power supplies. Or up to two redundant hot-swap 750W Titanium qualified AC power supplies. 750W Titanium is 200V - 240V, others are 100V - 240V	
Video	Integrated Matrox G200 in XClarity Controller	
Cooling	Three fans (2+1) for single processor model, four fans (3+1) for dual processor model	
Front ports	One XClarity Controller USB, one USB 3.0, one optional VGA	
Rear ports	One VGA, two USB 3.0, two ethernet (RJ-45) one XClarity Controller connector. Optional COM port	
Environmental specification	Supports ASHRAE A4 with limitations.	
	Temperature - operating	A4: 5°C to 45°C (41°F to 113°F) A3: 5°C to 40°C (41°F to 104°F) A2: 10°C to 35°C (50°F to 95°F)
	Temperature - non operating (no package)	-10°C to 60°C (14°F to 140°F)
	Temperature - non operating (with package)	-40°C to 70°C (-40°F to 158°F)
	Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
Humidity - operating, non-condensing	A4: 8%-90%. A3:8%-85%. A2:20%-80%	
Humidity - storage (with package), non-condensing	8%-90%	
	Models should meet the following requirements to support A3 and A4: • Redundant power supplies required • No system fan fails	
Environmental certification	Energy Star Server 2.1 certified. More environmental information please see: www.lenovo.com/social_responsibility/us/en/environment/	

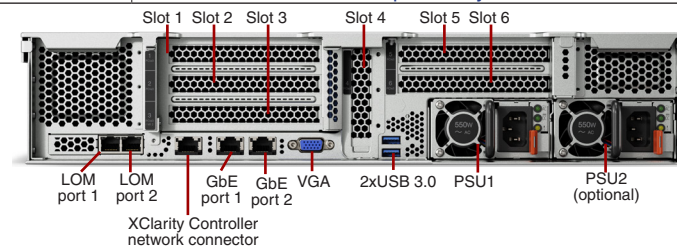

Note: GbE port 1 and LOM port 1 support Wake-on-LAN and NC-SI. Riser cards, expansion cards, and LOM adapters are optional.

Expansion slots

Slot 1-3 (riser card 1)	Supports one of the following for riser card 1: Option 1: PCIe 3.0 x8/x8/x8 (slot 1-3). Full height, half length. Option 2: PCIe 3.0 x16/x8 (slot 1 and 3). Full height, half length Option 3: PCIe 3.0 x8/x8/x8 ML2 (slot 1-3). Full height, half length
Slot 4 (onboard)	PCIe 3.0 x8, low profile
Slot 5 (riser card 2)	PCIe 3.0 x16, full height, half length, requires 2nd CPU
Slot 6 (riser card 2)	PCIe 3.0 x8, full height, half length

System unique options

7XH7A02680	Lenovo SR550/SR590/SR650 x8/x8/x8ML2 PCIe FH Riser 1 Kit
7XH7A02679	Lenovo SR550/SR590/SR650 (x16/x8)/(x16/x16) PCIe FH Riser 2 Kit
7XH7A02678	Lenovo SR550/SR590/SR650 x16/x8 PCIe FH Riser 1 Kit
7XH7A02677	Lenovo SR550/SR590/SR650 x8/x8/x8 PCIe FH Riser 1 Kit
7Z17A02578	Lenovo SR550/SR590/SR650 EIA Latch w/ VGA Upgrade Kit
7XH7A06254	Lenovo SR550/SR650 2.5" SATA/SAS 8-Bay Backplane Kit
7Z17A02580	Lenovo 2U Security Bezel
7Z17A02577	Lenovo COM Port Upgrade Kit

ThinkSystem SR550

