

# MS Cloud Managed Switches



## Overview

The Cisco Meraki MS is the world's first cloud-managed switch, bringing the benefits of the cloud to enterprise networks: simplified management, reduced complexity, network wide visibility and control, and lower cost for branch and campus deployments.

Cisco Meraki access switching is available in two product lines — the MS220 and MS320 families. Mission-critical features — like deep, Layer 7 application visibility, network topology, virtual stacking, QoS for business critical applications, 802.1X access control, and more — are present in both families.

**The MS320** is the flagship Meraki layer 3 access switch, designed for high-speed connectivity and high availability, with optional redundant power supplies. In addition, the MS320's full-PoE models are ideal for next generation 802.11ac wireless AP, including the Meraki MR34 — with plenty of budget to spare for other PoE clients.

**The MS220** family provide layer 2 access switching, is ideal for deploying to branch locations, and supports an optional, rack-mountable remote PSU(1).

(1) Except MS220-8/P models.

## A Fresh Approach

Meraki switches are built from the ground up to be easy to manage without compromising any of the power and flexibility traditionally found in enterprise-class switches.

Cisco Meraki switches are managed through an elegant, intuitive cloud interface, rather than a cryptic command line. To bring up a Meraki switch, just plug it in; there's no need for complicated configuration files — or pre-staging.

In addition, Meraki's centralized management system gives administrators deep visibility into the network and how it's used. See which switches are near capacity across hundreds of sites. Find all configuration changes made by a certain person with instant search.


## Industry-Leading Cloud Management

Cloud management has a number of benefits that make it easier to build networks large and small:

- Single pane of glass management of distributed switch deployments, wireless APs, and firewalls across multiple sites through the browser.
- Virtual stacking: manage up to tens of thousands of ports from a single pane of glass.
- Layer 7 OS, client, and hostname fingerprinting.
- Powerful Live Tools such as cable test to isolate physical layer issues.
- E-mail and SMS (text) alerts upon power loss, downtime, or configuration changes.
- Role-based administration and automatic, scheduled firmware upgrades over the web.
- Regular feature updates and enhancements delivered on demand from the Meraki cloud.
- No staging deployments

## Inside the Meraki MS

MS220-48LP shown, features vary by model

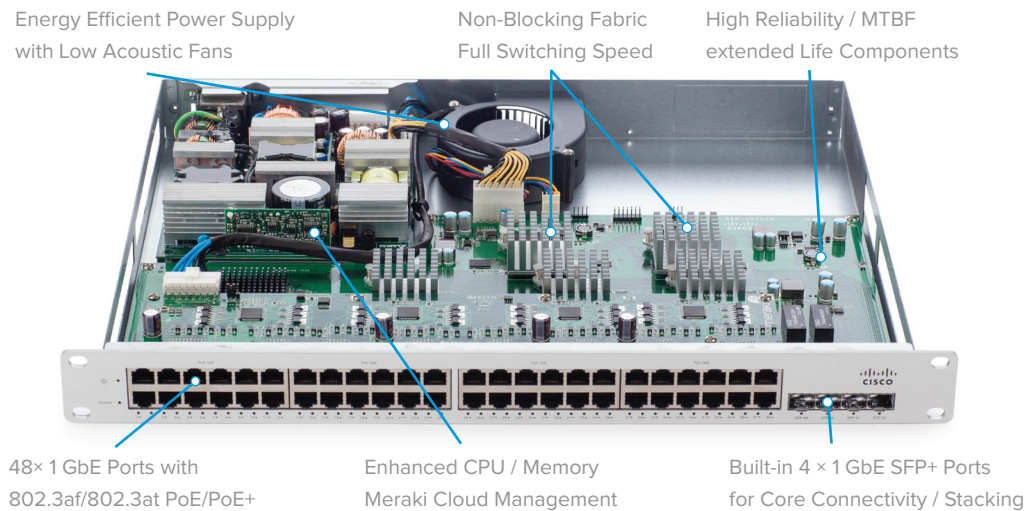

### Enterprise-Class Hardware


Meraki switches feature high-end hardware without the high-end price, including:

- Four built-in small form-factor pluggable transceivers (SFP / SFP+), two transceivers for MS220-8/P
- GbE and 10 GbE uplink ports for high-speed connectivity to aggregation layer switches or other upstream devices
- Wire-speed switch fabric (up to 176 Gbps) and QoS queues per port for converged voice, video, and data deployments
- Low power consumption, quiet acoustic designs, and shallow rack depth, which enable flexible deployment in wiring closets as well as offices and classrooms
- Fanless design on select models
- Up to 740 watt PoE budget with PoE+ support for powering APs, phones, cameras, and other PoE enabled devices (124W for MS220-8/P)
- Lifetime hardware warranty and advanced replacement at no additional cost
- Field-replaceable, hot-swappable power supplies and RPS option for mission-critical applications

### Full Enterprise Feature Set

Meraki switches include all of the traditional Ethernet features found on the highest end products, including:

- Quality-of-Service (QoS) to prioritize mission critical traffic such as voice and video
- IEEE 802.1X support for port based network access control
- MAC-based RADIUS auth and MAC whitelisting
- Voice VLAN support for simplified VoIP deployments
- Port Mirroring to monitor network traffic
- DHCP snooping to prevent users from adding unauthorized DHCP servers on the network
- IGMP Snooping to optimize network performance with multicast traffic
- Link Aggregation Control Protocol (LACP) for high-capacity trunking, stacking, and increased availability
- Broadcast storm protection, spanning tree, BPDU guard, root guard, and other safeguards to guard against misconfigurations and reduce convergence time
- Per port VLAN configuration
- Multiple administrative roles with sophisticated security policy management
- Layer 3 on MS320 series extends routing down to the network edge

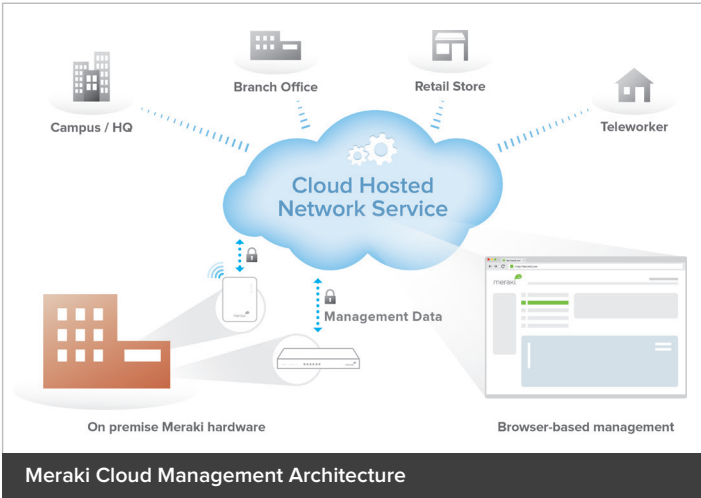

**Switch ports** for the last week

Edit Aggregate Split Tag VOIP 1-5 link:"100 Mbps" help 31 switch ports

Switch / Port	Type	VLAN	Tags	Port#	Link
4 A10 Amit / 4	access	108, voice 104	VOIP	4	Auto negotiate (100 Mbps)
4 A10 Amit / 5	access	108, voice 104	VOIP	5	Auto negotiate (100 Mbps)
4 A9 Amit / 2	access	108, voice 104	VOIP	2	Auto negotiate (100 Mbps)
4 A9 Amit / 3	access	108, voice 104	VOIP	3	Auto negotiate (100 Mbps)
4 A9 Amit / 4	access	108, voice 104	VOIP	4	Auto negotiate (100 Mbps)
4 A9 Amit / 5	access	108, voice 104	VOIP	5	Auto negotiate (100 Mbps)
FD 4.1.10 / 1	access	108, voice 104	VOIP	1	Auto negotiate (100 Mbps)
FD 4.1.10 / 2	access	108, voice 104	VOIP	2	Auto negotiate (100 Mbps)
FD 4.1.10 / 3	access	108, voice 104	VOIP	3	Auto negotiate (100 Mbps)
FD 4.1.10 / 4	access	108, voice 104	VOIP	4	Auto negotiate (100 Mbps)
FD 4.1.3 / 2	access	108, voice 104	VOIP	2	Auto negotiate (100 Mbps)
FD 4.1.3 / 3	access	108, voice 104	VOIP	3	Auto negotiate (100 Mbps)
FD 4.1.3 / 4	access	108, voice 104	VOIP	4	Auto negotiate (100 Mbps)
FD 4.1.3 / 5	access	108, voice 104	VOIP	5	Auto negotiate (100 Mbps)
FD 4.1.4 / 2	access	108, voice 104	VOIP	2	Auto negotiate (100 Mbps)

**Combined Views of Thousands of Ports**

**Firmware upgrades**

Try beta firmware  [What is this?](#)

Upgrade window   [What is this?](#)

Switches upgrade The switches in this network are configured to run the latest available firm...  
Last upgraded on Wednesday, July 31, 2013 at 22:21 PDT.

**Scheduled Firmware Updates**

**Network alerts**

Enabled alerts

Send an email alert if:

- A switch goes offline for more than  minutes
- A switch port tagged "uplink" goes down for more than  minutes
- Any switch port detects a cable error
- A switch port tagged "uplink" changes link speed
- Configuration settings are changed

Switch port alerts can be restricted to certain ports based on the tags associated with a port. You can add tags on the [Switch ports](#) page.

**Automatic E-mail Alerts**

## Simplified Management and Operations


Meraki's cloud managed architecture makes it simpler than ever to quickly provision and reconfigure switch ports with security, QoS, and other parameters. The Meraki dashboard provides unified policies, event logs, and monitoring, which make it easy to manage and grow large network deployments.

By providing a complete, powerful set of management functions over the web, Meraki's cloud-based management eliminates the need for proprietary command line configuration interfaces which require expensive and time consuming certifications. Meraki MS switches can be fully deployed and provisioned in minutes, without requiring any local configuration or staging. Additional or replacement switches can be sent to remote offices and installed by non-technical staff, saving thousands of dollars in time and travel expenses.

The Meraki MS family also includes several remote diagnostic features, from network connectivity and cable integrity tests to latency measurement tools. For deep client troubleshooting, administrators can even perform per-port remote pcap packet captures without any additional probes or hardware on site.

## Layer 7 Visibility

Meraki is the only switch to include integrated Layer 7 fingerprinting. Identify hundreds of applications from business apps to BitTorrent and YouTube. User fingerprinting with Google-like search allows administrators to easily identify and control individual users, PCs, iPads, Androids, and other devices. This unprecedented visibility allows you to optimize network resources and maintain optimal network performance.

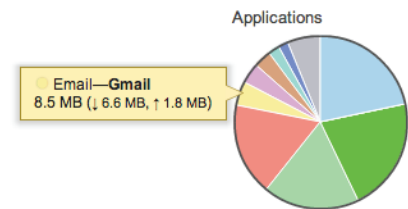

Applications details

#	Description	Group	Usage	% Usage	Group usage	Group % usage
1	Dropbox	Online backup	272.27 GB	5.7%	291.65 GB	6.2%
2	Gmail	Email	69.94 GB	1.5%	125.05 GB	2.6%
3	YouTube	Video	27.19 GB	0.6%	32.09 GB	0.7%
4	Netflix	Video	4.21 GB	0.1%	32.09 GB	0.7%
5	Non-web TCP	---	454.98 GB	9.6%	454.98 GB	9.6%
6	Miscellaneous web	---	307.19 GB	6.5%	307.19 GB	6.5%
7	Dropbox	Online backup	272.27 GB	5.7%	291.65 GB	6.2%

## Cable test

**Warning:** this test will disrupt traffic to 100 or 10 Mbit devices.


Ports (eg. 1 or 1,2,3 or 1 - 3):  ▶

Port ^	Link speed	Length	Status	Pair 1	Pair 2	Pair 3	Pair 4
5	down	33 m	-	open	open	open	open
6	100fdx	36 m	OK	ok	ok	abnorm	abnorm
7	100fdx	72 m	OK	ok	ok	short	short
8	100fdx	27 m	OK	ok	ok	abnorm	ok

Integrated Remote, Live Tools

## Network Topology

Cisco Meraki switches include integrated network topology, which automatically maps the network, shows direct and redundant links across wired and wireless infrastructure, and is essential for troubleshooting network issues that would otherwise require manual mapping, overlay monitoring software, or keeping track of MAC address tables.

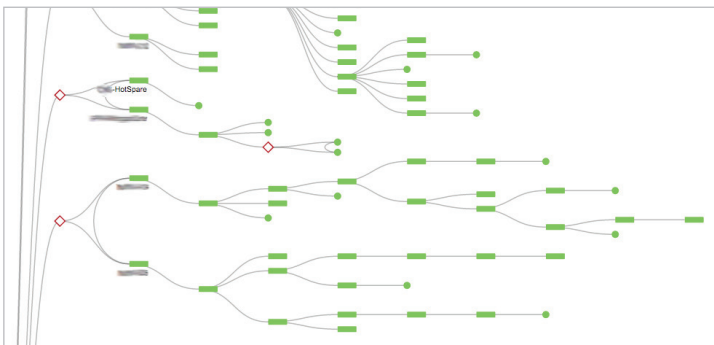

Detail of a typical network topology view

## Converged Voice, Video and Data Environments

The Meraki switch family is designed to unify data, voice, and video onto a single IP backbone. All Meraki switches support rich quality-of-service (QoS) functionality for prioritizing data, voice, and video traffic. The switches support eight class-of-service (CoS) queues on every port, enabling them to maintain end-to-end traffic prioritization.

PoE models provide 15.4 watts of power per port for VoIP telephones, IP security cameras, wireless access points (APs), and other IP devices. The Meraki MS switches also support standards-based 25.5 watt (30 watt max per port) IEEE 802.3at for powering networked devices like multiple radio IEEE 802.11n APs and video phones that may require more power than available with IEEE 802.3af. In addition, using LLDP, PoE power is intelligently budgeted to maximize the number of PoE clients supported.

To ease deployment, Meraki switches support the industry-standard Link Layer Discovery Protocol (LLDP) and Cisco Discovery Protocol (CDP), enabling switches to automatically discover Ethernet-enabled devices, determine their power requirements and join the correct virtual LAN (VLAN).

Device Information

Port Information

Historical Usage

Detailed Views of Individual Devices

## Meraki's Unified Software Architecture

Meraki switches run the same Meraki operating system used by Meraki's firewalls and wireless LAN products. The use of a common operating system allows Meraki to deliver a consistent experience across all product lines.

## Layer 3

Cisco Meraki MS320 series switches augment security and performance with built-in layer 3 benefits. Large network deployments can create scalable network architectures and manage routing between VLANs through Meraki's intuitive, web-based dashboard.

Name	Subnet	VLAN	Interfaces
Infrastructure	10.13.0.0/20	13	<a href="#">Eng copper Distribution</a>
Guest	10.12.0.0/24	12	<a href="#">Eng copper Distribution</a>
Eng network	10.4.0.0/20	4	<a href="#">Eng copper Distribution</a>
Marketing	10.20.0.0/20	20	<a href="#">Eng copper Distribution</a>
HR	10.3.0.0/20	3	<a href="#">Eng copper Distribution</a>

Subnet	Next hop	Switches
10.1.58.219/32	10.3.13.243	<a href="#">Eng copper Distribution (new) x</a>
192.150.1.0/24	10.3.10.239	<a href="#">Eng copper Distribution (new) x</a>
192.123.24.0/24	10.3.15.229	<a href="#">Eng copper Distribution (new) x</a>

[Add a static route to all acting layer 3 switches](#)

Specifying Layer 3 subnets and routes

## Designed for Reliability & Environmental Efficiency

The Meraki switch family was designed for reliable, long-lived operation in wiring closet environments, which may be prone to high temperatures and limited ventilation. By minimizing total component count and only using proven switching silicon, Meraki is able to deliver mean time between failure (MTBF) ratings of over 750,000 hours on products such as the Meraki MS220-8.

Each Meraki switch also operates with a split-plane architecture, where silicon-based switching and data forwarding are separated from software-based control and management. By decoupling the

underlying switching logic from control, each unit is able to deliver wire-speed switching even when advanced software features such as Layer 7 host and OS fingerprinting are enabled.

Finally, the highly integrated designs of Meraki switches result in power and cooling savings in large deployment environments of 30-60% when compared with similar managed Gigabit switches.

### Distributed Branches & Remote Sites



Meraki's cloud-based system makes it easy to manage a single switch, or thousands of distributed switches, from a single interface.

- Troubleshoot problems remotely, e.g., find which port has a bad cable attached.
- Add or replace switches without having to send a technician onsite. Switches automatically download their current configuration as soon as they are connected to the network.
- Receive email alerts or SMS messages whenever there's a problem at a remote site.

### Campus Edge

MS switches are ideal for small and large scale campus deployments, where reliability, scalability, and managability are top priorities.

- Virtual Stacking lets administrators manage up to tens of thousands of ports in a single interface without having to physically connect stack members.
- 10GbE cable SFP+ ports with link aggregation provide high speed connectivity to aggregation switches such as the MS420.
- Get alerts when any switch fails or goes offline, before users complain.

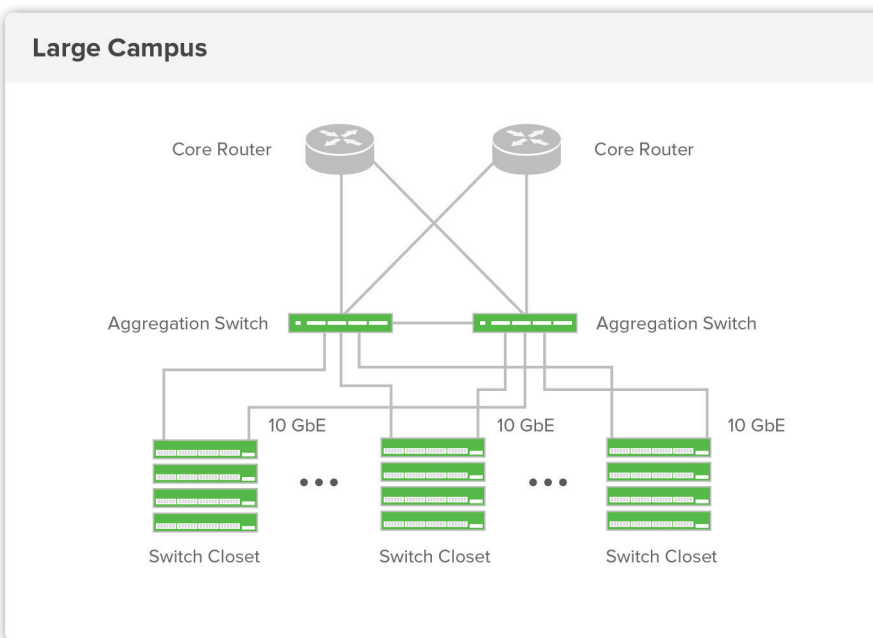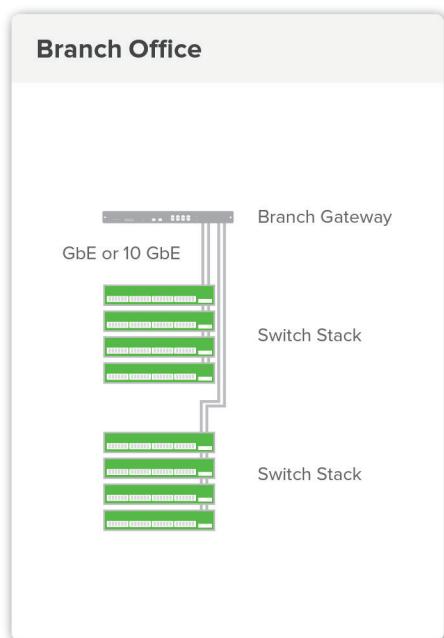

## Accessories / Optics

The Meraki MS support pluggable optics for high-speed connectivity. Meraki offers several standards-based Gigabit and 10 Gigabit pluggable modules.

Supported Meraki accessory modules for MS Switches (no lock-out of third-party optics):

Model	Description	Standard	Range	Compatibility
MA-SFP-1GB-TX	Meraki 1GbE Module for Category 5 Copper Wire, RJ-45	1000BASE-T	100m	MS220/320/420 Family
MA-SFP-1GB-SX	Meraki 1 GbE SFP SX Multi-Mode Fiber Module	1000BASE-SX	550m	MS220/320/420 Family
MA-SFP-1GB-LX10	Meraki 1 GbE SFP LX10 Single-Mode Fiber Module	1000BASE-LX10	10km	MS220/320/420 Family
MA-SFP-10GB-SR	Meraki 10 GbE SFP+ SR Multi-Mode Fiber Module	10GBASE-SR	400m	MS320/420 Family
MA-SFP-10GB-LRM	Meraki 10GbE SFP+ LRM Multi-Mode Fiber Module	10GBASE-LRM	220m	MS320/420 Family
MA-SFP-10GB-LR	Meraki 10 GbE SFP+ LR Single-Mode Fiber Module	10GBASE-LR	10km	MS320/420 Family
MA-CBL-TA-1M	Meraki 10 GbE Twinax Cable with SFP+ Connectors	10GSFP+Cu	1m	MS320/420 Family

Note: Meraki SFPs use LC connectors. Meraki does not guarantee third-party optic and support.

# Power Options

Back end of MS320-24P shown, highlighting redundant power supplies.



## MS220 FAMILY

Model	Description	Available PoE/ PoE+ Power	Default Power Supply	Optional Redundant Power Supply
MS220-8-HW	Cloud-Managed L2 8 Port Gigabit Switch	–	Internal	–
MS220-8P-HW	Cloud-Managed L2 8 Port Gigabit 124W PoE Switch	124W	Internal	–
MS220-24-HW	Cloud-Managed L2 24 Port Gigabit Switch	–	Internal	External Redundant Power Option
MS220-24P-HW	Cloud-Managed L2 24 Port Gigabit 370W PoE Switch	370 W	Internal	External Redundant Power Option
MS220-48-HW	Cloud-Managed L2 48 Port Gigabit Switch	–	Internal	External Redundant Power Option
MS220-48LP-HW	Cloud-Managed L2 48 Port Gigabit 370W PoE Switch	370 W	Internal	External Redundant Power Option
MS220-48FP-HW	Cloud-Managed L2 48 Port Gigabit 740W PoE Switch	740 W	Internal	External Redundant Power Option

## MS320 FAMILY

Model	Description	Available PoE/ PoE+ Power	Default Power Supply	Optional Redundant Power Supply
MS320-24-HW	Cloud-Managed L3 24 Port Gigabit Switch	–	PWR-MS320- 250WAC	PWR-MS320-250WAC
MS320-24P-HW	Cloud-Managed L3 24 Port Gigabit 370W PoE Switch	370W	PWR-MS320- 640WAC	PWR-MS320-640WAC
MS320-48-HW	Cloud-Managed L3 48 Port Gigabit Switch	–	PWR-MS320- 250WAC	PWR-MS320-250WAC
MS320-48LP-HW	Cloud-Managed L3 48 Port Gigabit 370W PoE Switch	370 W	PWR-MS320- 640WAC	PWR-MS320-640WAC
MS320-48FP-HW	Cloud-Managed L3 48 Port Gigabit 740W PoE Switch	740 W	PWR-MS320- 1025WAC	PWR-MS320-1025WAC

## Ordering Information: Software Licenses and Support

### MS220 FAMILY

Model	1 Year	3 Years	5 Years	7 Years	10 Years
MS220-8	LIC-MS220-8-1YR	LIC-MS220-8-3YR	LIC-MS220-8-5YR	LIC-MS220-8-7YR	LIC-MS220-8-10YR
MS220-8P	LIC-MS220-8P-1YR	LIC-MS220-8P-3YR	LIC-MS220-8P-5YR	LIC-MS220-8P-7YR	LIC-MS220-8P-10YR
MS220-24	LIC-MS-220-24-1YR	LIC-MS-220-24-3YR	LIC-MS-220-24-5YR	LIC-MS-220-24-7YR	LIC-MS-220-24-10YR
MS220-24P	LIC-MS220-24P-1YR	LIC-MS220-24P-3YR	LIC-MS220-24P-5YR	LIC-MS220-24P-7YR	LIC-MS220-24P-10Y
MS220-48	LIC-MS220-48-1YR	LIC-MS220-48-3YR	LIC-MS220-48-5YR	LIC-MS220-48-7YR	LIC-MS220-48-10YR
MS220-48LP	LIC-MS220-48LP-1YR	LIC-MS220-48LP-3YR	LIC-MS220-48LP-5YR	LIC-MS220-48LP-7YR	LIC-MS220-48LP-10Y
MS220-48FP	LIC-MS220-48FP-1YR	LIC-MS220-48FP-3YR	LIC-MS220-48FP-5YR	LIC-MS220-48FP-7YR	LIC-MS220-48FP-10Y

### MS320 FAMILY

Model	1 Year	3 Years	5 Years	7 Years	10 Years
MS320-24	LIC-MS320-24-1YR	LIC-MS320-24-3YR	LIC-MS320-24-5YR	LIC-MS320-24-7YR	LIC-MS320-24-10YR
MS320-24P	LIC-MS320-24P-1YR	LIC-MS320-24P-3YR	LIC-MS320-24P-5YR	LIC-MS320-24P-7YR	LIC-MS320-24P-10YR
MS320-48	LIC-MS320-48-1YR	LIC-MS320-48-3YR	LIC-MS320-48-5YR	LIC-MS-320-48-7YR	LIC-MS-320-48-10YR
MS320-48LP	LIC-MS320-48LP-1YR	LIC-MS320-48LP-3YR	LIC-MS320-48LP-5YR	LIC-MS320-48LP-7YR	LIC-MS320-48LP-10Y
MS320-48FP	LIC-MS320-48FP-1YR	LIC-MS320-48FP-3YR	LIC-MS320-48FP-5YR	LIC-MS320-48FP-7YR	LIC-MS320-48FP-10Y

### Lifetime Warranty with Next-day Advanced Replacement

Meraki MS switches include a limited lifetime hardware warranty that provides next-day advance hardware switch replacement as long as the original purchaser owns the product. Meraki's simplified software and support licensing model also combines all software upgrades, centralized systems management and phone support under a single, easy-to-understand model.

For complete details, please [visit meraki.cisco.com/support](https://meraki.cisco.com/support)



# Specifications

## Management

Managed via the Web via the Meraki cloud management platform

Integrated with Meraki wireless, security appliance, and device management

Zero-touch remote deployment (no staging needed)

Detailed historical per-port and per-client usage statistics

DHCP, client, and hostname fingerprinting

SNMPD allows integration with third party network management solutions

Automatic firmware upgrades

## Remote Diagnostics

Email and SMS (text) alerts <sup>1</sup>

Cable testing

Live remote packet capture

Aggregated event and configuration change logs with instant search

## Scalable Stacking

Unified configuration and monitoring of all switches

Virtually Stacking supports thousands of switch ports in a single logical stack for unified management, monitoring, and configuration

## Ethernet Switching Capabilities

802.1p Quality of Service prioritization

802.1Q VLAN tagging for up to 4,095 VLANs

802.1D Spanning Tree Protocol (STP) and 802.1w Rapid Spanning Tree

Broadcast storm control

802.1ab Link Layer Discovery Protocol (LLDP)

802.3ad Link aggregation with up to 8 ports per aggregate

Port mirroring

IGMP snooping for multicast filtering

MAC forwarding entries: MS220-8/24: 8,000, MS220-48: 16,000, MS320 family: 32,000 (applies to PoE and non-PoE models).

Cisco Discovery Protocol (CDP)

## Security

Integrated two-factor authentication

Role-based administration

Corporate wide password policy enforcement

IEEE 802.1X port-based security

MAC-based RADIUS authentication

Sticky MAC

MAC whitelisting

BPDU guard

Root guard

IPv4 ACLs

## Performance

Non-blocking fabric

2.5 microsecond latency

Jumbo frame support (9600 byte Ethernet frame)

## Layer 3 (MS320 series)

Static routing

DHCP Helper

OSPFv2

Warm Spare for L3 gateway redundancy

DHCP server

Automatic DHCP failover in warm spare mode

## Power

Power input: 100 - 240 VAC, 47-63 Hz

Power consumption: 5-885W

## Mounting

Rack-mountable with included rack mount hardware (except MS220-8/P)

Desktop-mountable with included feet

Wall-mountable on MS220-8/P

Kensington lock on MS220-8/P

## Environment

Operating temperature: 32 °F to 104 °F (0 °C to 40 °C)

Humidity: 5 to 95% non-condensing

Low acoustic noise for office environments; fanless for MS220-8/P and MS220-24

## Regulatory

CSA (US)

IC (Canada)

CE (Europe)

C-Tick (Australia/New Zealand)

RoHS

## Warranty

Full lifetime hardware warranty with next-day advanced replacement included

## MS220 FAMILY

Model	MTBF
MS220-8	756,000
MS220-8P	421,000
MS220-24	541,400
MS220-24P	329,440
MS220-48	329,440
MS220-48FP	329,440

## MS320 FAMILY

Model	MTBF
MS320-24	490,820
MS320-24P	474,570
MS320-48	291,960
MS320-48LP	282,970
MS220-48FP	282,970

<sup>1</sup> Requires carrier-supported email to SMS gateway. For more information visit: <http://bit.ly/LikOSQ>.

## MS220 FAMILY

Model	Physical Dimensions	Interface	Idle/Full Load Power (W)	Switching Capacity
220-8 	WEIGHT: 2.37 lb. (1.08 kg)  SIZE: 9.06" (w) x 8.66" (l) x 1.79" (h) (23 x 22 x 4.54 cm)	<ul style="list-style-type: none"> <li>8x 10/100/1000BASE-T Ethernet RJ45</li> <li>2x SFP for 1GbE uplink</li> <li>Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	5/10	20 Gbps
220-8P 	WEIGHT: 2.97 lb. (1.35 kg)  SIZE: 9.06" (w) x 8.66" (l) x 1.79" (h) (23 x 22 x 4.44 cm)	<ul style="list-style-type: none"> <li>8x 10/100/1000BASE-T Ethernet RJ45</li> <li>2x SFP for 1GbE uplink</li> <li>Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	13/159	20 Gbps
220-24 	WEIGHT: 5.97 lb. (2.71 kg)  SIZE: 19.08" (w) x 10.12" (l) x 1.75" (h) (48.46 x 25.7 x 4.4 cm)	<ul style="list-style-type: none"> <li>24 x 10/100/1000BASE-T Ethernet RJ45 (4 shared with SFP)</li> <li>4x SFP for 1GbE uplink</li> <li>Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	9/18	48 Gbps
220-24P 	WEIGHT: 8.6 lb. (3.9 kg)  SIZE: 19.08" (w) x 10.12" (l) x 1.75" (h) (48.46 x 25.7 x 4.4 cm)	<ul style="list-style-type: none"> <li>24x 10/100/1000BASE-T Ethernet RJ45 (4 shared with SFP)</li> <li>4x SFP for 1GbE uplink</li> <li>Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	30/447	48 Gbps
220-48 	WEIGHT: 8.47 lb. (3.84 kg)  SIZE: 19.08" (w) x 14.17" (l) x 1.75" (h) (48.46 x 36 x 4.44 cm)	<ul style="list-style-type: none"> <li>48x 10/100/1000BASE-T Ethernet RJ45</li> <li>4x SFP for 1GbE uplink</li> <li>Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	28/51	104 Gbps
220-48LP 	WEIGHT: 10.88 lb. (4.94 kg)  SIZE: 19.08" (w) x 14.17" (l) x 1.75" (h) (48.46 x 36 x 4.44 cm)	<ul style="list-style-type: none"> <li>48x 10/100/1000BASE-T Ethernet RJ45</li> <li>4x SFP for 1GbE uplink</li> <li>Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	45/505	104 Gbps
220-48FP 	WEIGHT: 10.9 lb. (4.95 kg)  SIZE: 19.08" (w) x 14.17" (l) x 1.75" (h) (48.46 x 36 x 4.44 cm)	<ul style="list-style-type: none"> <li>48x 10/100/1000BASE-T Ethernet RJ45</li> <li>4x SFP for 1GbE uplink</li> <li>Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	49/903	104 Gbps

## MS320 FAMILY

Model	Physical Dimensions	Interface	Idle/Full Load Power (W)	Switching Capacity
320-24 	WEIGHT: 8.22 lb. (3.73 kg)  SIZE: 19.08" (w) x 17.32" (l) x 1.75" (h) (48.46 x 44 x 4.44 cm)	<ul style="list-style-type: none"> <li>• 24x 10/100/1000BASE-T Ethernet RJ45</li> <li>• 4x SFP+ for 10GbE uplink</li> <li>• Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	24/39	128 Gbps
320-24P 	WEIGHT: 8.93 lb. (4.05 kg)  SIZE: 19.08" (w) x 17.32" (l) x 1.75" (h) (48.46 x 44 x 4.44 cm)	<ul style="list-style-type: none"> <li>• 24x 10/100/1000BASE-T Ethernet RJ45</li> <li>• 4x SFP+ for 10GbE uplink</li> <li>• Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	32/454	128 Gbps
320-48 	WEIGHT: 8.92 lb. (4.04 kg)  SIZE: 19.08" (w) x 17.32" (l) x 1.75" (h) (48.46 x 44 x 4.44 cm)	<ul style="list-style-type: none"> <li>• 48x 10/100/1000BASE-T Ethernet RJ45</li> <li>• 4x SFP+ for 10GbE uplink</li> <li>• Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	34/55	176 Gbps
320-48LP 	WEIGHT: 9.7 lb. (4.4 kg)  SIZE: 19.08" (w) x 17.32" (l) x 1.75" (h) (48.46 x 44 x 4.44 cm)	<ul style="list-style-type: none"> <li>• 48x 10/100/1000BASE-T Ethernet RJ45</li> <li>• 4x SFP+ for 10GbE uplink</li> <li>• Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	46/480	176 Gbps
320-48FP 	WEIGHT: 9.7 lb. (4.4 kg)  SIZE: 19.08" (w) x 17.32" (l) x 1.75" (h) (48.46 x 44 x 4.44 cm)	<ul style="list-style-type: none"> <li>• 48x 10/100/1000BASE-T Ethernet RJ45</li> <li>• 4x SFP+ for 10GbE uplink</li> <li>• Auto negotiation and crossover detection (auto-MDIX crossover)</li> </ul>	52/885	176 Gbps