



Allied Telesis™

NETWORK SMARTER



2019/20

PRODUCT CATALOG

Allied Telesis

SMART NETWORK MANAGEMENT

AMF
AMF Security
AT-VISTA Manager EX
Secure SD-WAN

3

SWITCHES

Core Chassis Switches
Core and Distribution
Distribution and Intelligent Edge
Intelligent Edge
Intelligent SMB
WebSmart and Unmanaged SMB
Industrial
Key Solution

7

SECURITY APPLIANCES

Firewalls and Routers

23

WIRELESS

Wireless Access Points
Wireless Controllers

25

MULTISERVICE ACCESS

Intelligent Multiservice Gateways (IMG)

29

MEDIA CONVERTERS

Unmanaged (Standalone & Desktop Powered)
Mounting Hardware
PoE & Industrial
Convertion
Chassis-Based

31

NETWORK ADAPTERS

Desktop/Workstation
10G Adapters

37

TRANSCEIVER MODULES

Pluggable Transceivers

41

Allied Telesis have been serving the needs of the network communications industry for over 30 years. Although the technology we design and build has evolved significantly over time, our hard-earned reputation for standards-based performance, product reliability and value has remained a constant, highly respected value to our customers and partners around the globe.

Our solutions-based philosophy of producing products that deliver value to our customers, together with high-quality service and support, has resulted in a very extensive worldwide customer base.

Allied Telesis continuously enhances its products. As a result, this catalog may not correctly represent all products currently available. Products may also vary by geographic region. Product specifications can change without notice, and while Allied Telesis makes every effort to ensure the accuracy of information presented in this catalog, the Company does not accept liability for errors or changes in the stated specifications.

For current product availability by region, full and complete product specifications and warranty information, please contact your regional sales manager or visit alliedtelesis.com.

Environmental Policy

As a major industry developer and manufacturer of networking equipment, Allied Telesis is committed to providing our customers with products designed and built to the highest quality, while minimizing the impact to the environment during both manufacturing and product operation.

Our Philosophy

Allied Telesis recognizes the importance of protecting the global environment and promoting conservation of biodiversity. We creatively utilize technology for sustainable social progress and for protecting the environment. Allied Telesis is committed to passing down a healthy global environment to the next generation.

For more information on our initiatives please visit alliedtelesis.com/about-us/eco-friendly

NETWORK SMARTER

Smart Network Management

Administering a network is no easy feat.

Rapid troubleshooting and the ability to monitor network performance is critical. Allied Telesis offers software tools to help visualize and plan for network growth, while maintaining the health and performance of your network. Allied Telesis understands that enterprise customers want simplicity, security and automation. Customers are well-placed to enjoy a variety of network automation tools that make networking easy. Our powerful network management solutions deliver many benefits at an affordable price.

Intent-Based Networking (IBN) promises to deliver more agile networks that are easier to manage, as administrators move away from esoteric device-specific command lines, and instead use natural language or a graphical interface to express their intent. Device and network configuration are then automatically updated to meet the expected outcomes in performance and application operation.

Supporting the move to IBN, centralized management and network automation tools remove the need for constant administrative input, and the network becomes self-managing and self-healing, resulting in an improved online experience for users, and greatly reduced management time and effort.

Powerful network automation and management

Allied Telesis have developed tools for autonomous networking for several years. Our Autonomous Management Framework™ (AMF) and Autonomous Wave Controller™ (AWC) automate and optimize wired and wireless networks, saving time and cost by reducing the amount of manual administration effort required for network operation.

Vista Manager EX is our single-pane-of-glass graphical management dashboard for central control of AMF and AWC networks. These tools accomplish the day-to-day heavy lifting of running a network, using powerful built-in automation to free up skilled network administrators for more useful tasks. The integration of AMF Security, and addition of a Software-Defined WAN dashboard continue to add further centralized management capabilities to Vista Manager EX, making it a one-stop solution for monitoring and managing your entire network infrastructure.

Allied Telesis continue to innovate in making network management both natural and easy, meeting business intent.



AUTONOMOUS MANAGEMENT FRAMEWORK


AMF is an intelligent and scalable network management platform. It supports Allied Telesis switching, firewall, and wireless products, as well as a wide range of third-party devices—including video surveillance cameras and IP phones—for truly inclusive network automation. Reducing network running costs by automating and simplifying many day-to-day tasks, AMF allows skilled staff to be better utilized.

Business Value Through Automation


AMF delivers immediate value to businesses of all sizes, with centralized network management able to treat a network of any size as a single, converged entity. This reduces cost and complexity by delivering:

Save time and reduce costs by up to 60% with AMF


CENTRALIZED MANAGEMENT Manage the entire network as a single virtual device.

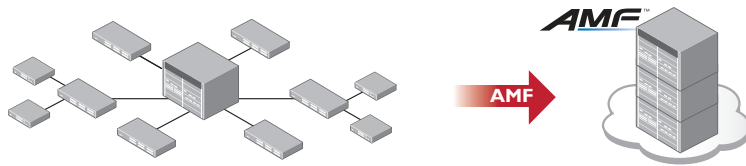


AUTO-BACKUP Automatically backup the entire network daily for peace-of-mind networking.

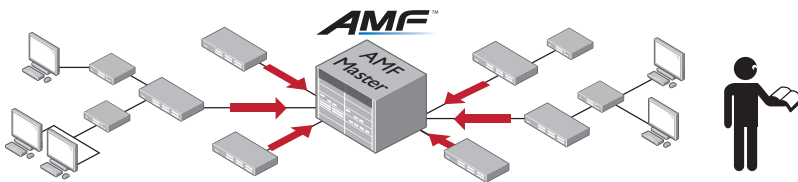

AUTO-UPGRADE Upgrade the network with a single command.

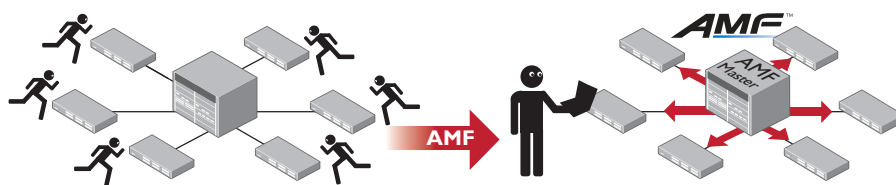

AUTO-PROVISIONING AND AUTO-RECOVERY Plug-and-Play additions or replacements.

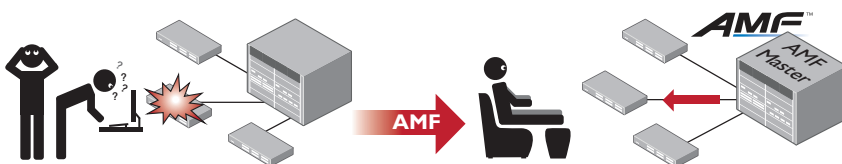

- ▶ **Centralized management** of many or all devices right across the network—locally or world-wide.
- ▶ **Network automation**, with zero-touch or one-touch backup, provisioning, upgrade, and recovery.
- ▶ **Network intelligence** reacts to changes in the network and automatically changes the topology.
- ▶ **Smart commands** allow network problems to be quickly identified and issues resolved.

AMF saves time and money!

Simplify Your Network

Software Defined Networking (SDN) is moving networking towards the ideal combination of optimal network utilization and centralized management. An integral part of the Allied Telesis SDN solution, AMF delivers powerful management capabilities that are easy to use, and reduce the time and skill required to maintain the network. Configuration and firmware files are regularly backed up, network expansion is automated, and device recovery is fully zero-touch.


ENHANCE NETWORK SECURITY AND REDUCE ADMINISTRATION EFFORTS

AMF Security (AMF-Sec) is a state-of-the-art network management and security solution. It provides what enterprises consistently tell us they need: reduced network management costs, increased security and an improved end-user experience. Our award-winning innovative SDN solution works with security applications to instantly respond to alerts and block the movement of threats anywhere within your wired or wireless network.

- ▶ Automatic security threat isolation and remediation
- ▶ Blocks any offending wired or wireless user device
- ▶ Open and flexible SDN solution


Block Threats at the Source

Most IPS solutions are only capable of blocking suspicious traffic as it passes through the IPS device. Since this tends to be near the gateway to the Internet, only external threats can be detected and blocked—this is the traditional “secure border” model. However, AMF-Sec can isolate traffic anywhere in the network, so it can prevent threats not only on the border, but threats inside the network too, such as those introduced inadvertently by staff with USB sticks, BYOD and so on.

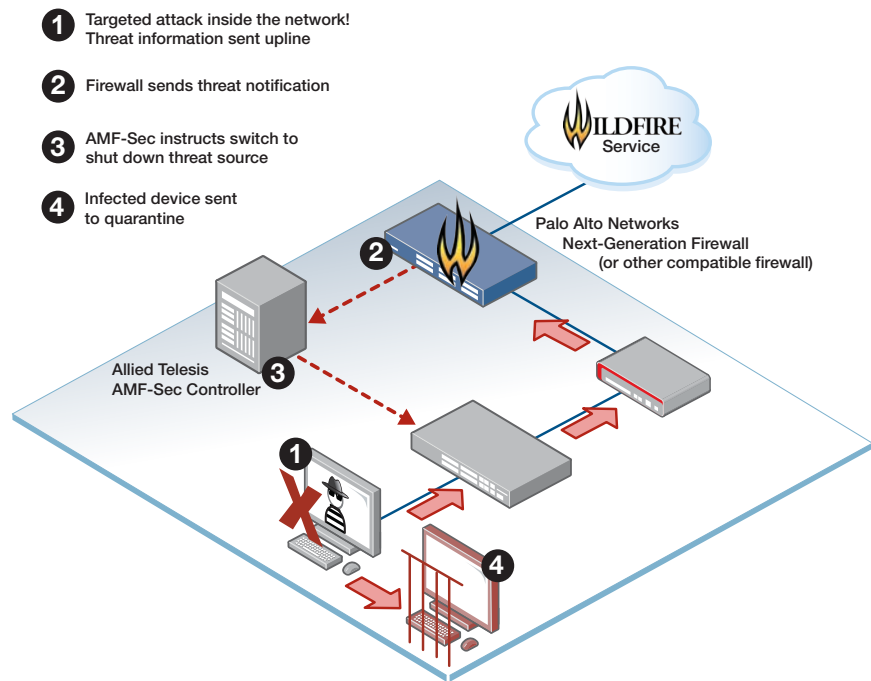

Business Application Integration

The AMF-Sec controller includes powerful northbound APIs that collect real-time data from business applications. AMF-Sec analyzes this data to decide if network configurations need to be altered to reflect new business rules. For example, when new employees join the company, their details are entered into the HR system. AMF-Sec detects this, and automatically instructs the network to grant the new users the appropriate level of network access.

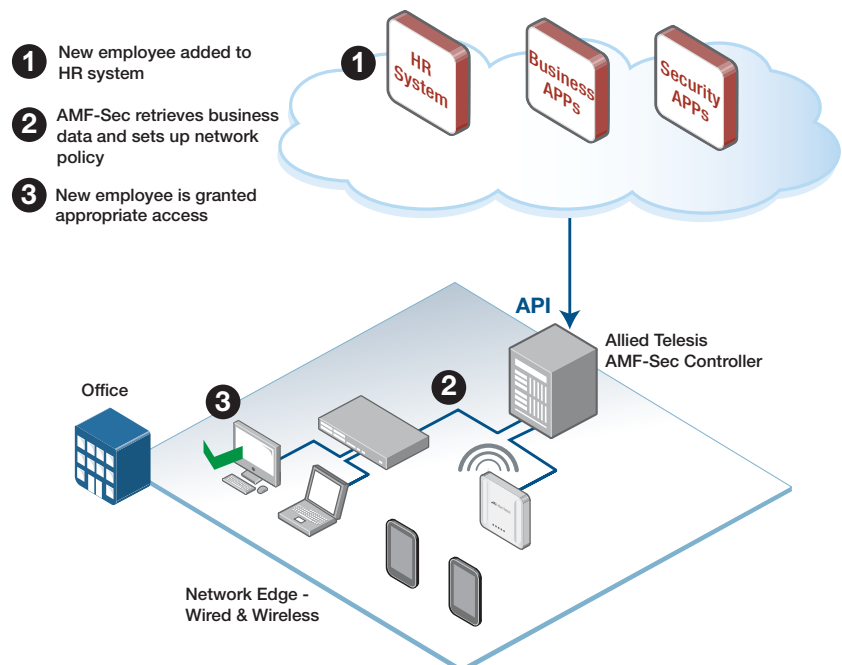

AT-VISTA Manager EX



POWERFUL NETWORK MONITORING AND MANAGEMENT

Vista Manager EX is the intelligent way to monitor and manage your Autonomous Management Framework (AMF) network, as well as your wireless APs using Autonomous Wave Control (AWC) technology. Single-pane-of-glass visibility enables pro-active management.

Enjoy complete network monitoring from the dashboard—including network details, status, event information and a topology map, where critical issues are highlighted for timely resolution. Intuitive access to powerful features like service and performance monitoring, control of wired and wireless devices, and automation tools, makes networking easy right across your LAN and WAN.

VISTA MANAGER EX

- ▶ Intuitive single-pane-of-glass interface
- ▶ Centralized network and device management
- ▶ Manage Allied Telesis switches, firewalls, wireless APs, as well as third-party devices
- ▶ Automatically created topology maps
- ▶ Real-time traffic, protocol, and service monitoring
- ▶ Simplified VLAN creation and management
- ▶ Integrated security alerts from the AMF Security controller
- ▶ Secure SD-WAN dashboard for inter-branch network optimization

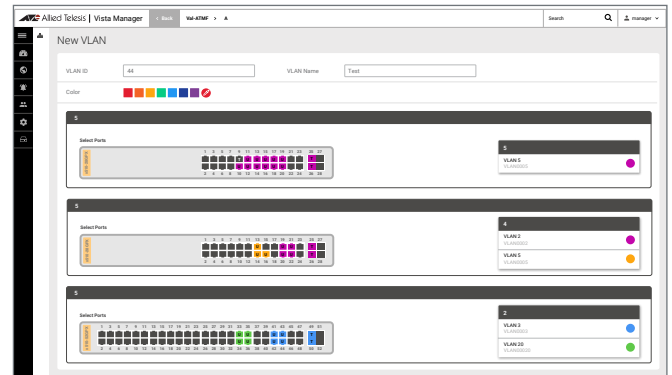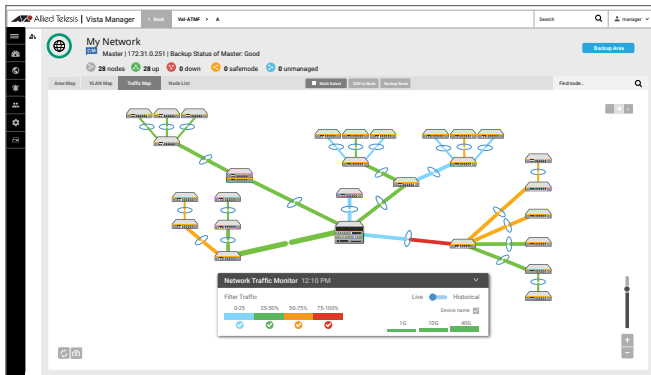

Secure SD-WAN

Today's organizations are increasingly adopting cloud-based services with the ability to rapidly deploy new services and adopt the latest functionality with minimal effort. The same is true of the adoption of software-defined technologies with the ability to deliver greater performance and flexibility, while at the same time reducing cost.

SD-WAN

Secure SD-WAN simplifies your branch office connections for more reliable and secure application delivery. Our solution improves WAN performance, flexibility and agility, with the added benefits of built-in security and reduced operating costs.



Better Performance

Build higher-performance, more secure WANs.



More Value

Improve productivity while reducing complexity and cost.



Less Risk

WAN automation reduces the need for skilled resources at the branch.

Switches

Feature-rich, dependable switching - from edge to core.


Allied Telesis engineers high-performance, high-quality, future-proof products to meet requirements for enterprise, campus, branch, and private cloud networks of various sizes.

Allied Telesis SwitchBlade® and xSeries switches, with the AlliedWare Plus™ operating system, provide scalable and versatile switching solutions for today's enterprise and service provider networks from edge to core. These switches, featuring Allied Telesis Autonomous Management Framework (AMF), decrease network operating expenses by automating and simplifying many day-to-day tasks. Allied Telesis also produces top-of-rack switches for the enterprise data center market, extended temperature products for industry, and unmanaged and WebSmart switches for small and medium business.



Core Chassis Switches


SWITCHBLADE

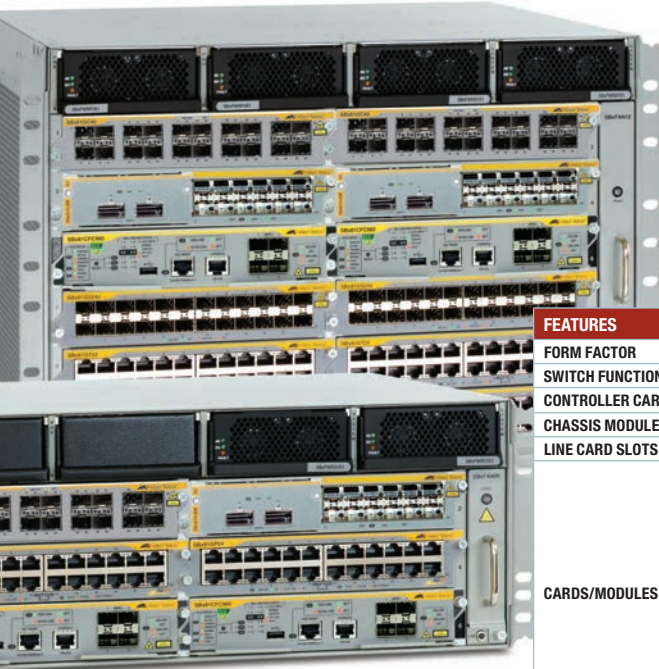

SwitchBlade x908 GEN2

Following on from the incredible success of the SwitchBlade x908, the Generation 2 builds on the popular modular design, with performance to satisfy the most demanding network applications and traffic requirements.


New expansion modules (XEMs) support today's fastest Ethernet standards, with 100G, 40G and 10G/IG options. The ability to use any combination of XEMs, as well as stack up to four units, make the SwitchBlade x908 GEN2 the most flexible and powerful 3RU switching solution available.

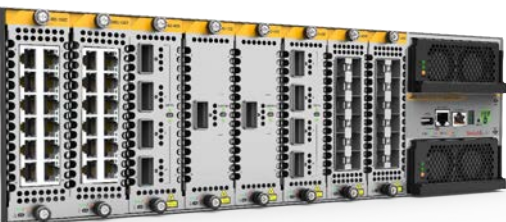

SwitchBlade x8100 Series

The SwitchBlade x8100 Series core chassis switches are primarily engineered for medium to large enterprise networks — but are equally at home in the enterprise data center. They are designed to deliver high availability, maximum performance, future scalability, and high port count in compact, eco-friendly packages.

FEATURES		SBx908 GEN2	SBx8112	SBx8106
FORM FACTOR		Rackmount / stack	Rackmount	
SWITCH FUNCTIONALITY		Advanced Layer 3		
CONTROLLER CARD		CFC960		
CHASSIS MODULE SLOTS		8	12	6
LINE CARD SLOTS			10	4 (5 with one CFC)
CARDS/MODULES	10/100/1000T ports		24 x RJ-45 (SBx81GT24) 24 x PoE+ (SBx81GP24) 8 x RJ-45 (SBx81XLEM + GT8) 24 x SFP (SBx81GS24a) 12 x SFP (SBx81XLEM)	
	100/1000X SFP ports			
	100M/1G/10G ports	12 x 100M/1G/10G RJ-45 (XEM2-12XT)		
	1/2.5/5/10G ports	12 x 1/2.5/5/10G RJ-45 (XEM2-12XTm)		
	1G/10G ports	12 x 1G/10G SFP+ (XEM2-12XS)	4 x RJ-45 (SBx81XLEM + XT4) 40 x CSFP (SBx81GC40)	
	1G ports		8 x SFP+ (SBx81XLEM + XS8)	
	10G ports		2 x 40G QSFP+ (SBx81XLEM + Q2)	
	40G ports	4 x 40G QSFP+ (XEM2-40S)		
100G ports	1 x 100G QSFP28 (XEM2-10Q)			
POWER SUPPLY	PSU type	Dual hot-swappable internal		
	-48VDC PSU option	■	■	
	Additional PSU	SBxPWRSYS2	SBxPWRSYS2 / SBxPWRPOE1	
SCALABILITY	MAC address table size	96K	32K / 128K	
	Stacking (VCSStack)	■ (4)	■ (2)	
	Stacking bandwidth	400G	160G	
POWER OVER ETHERNET	IEEE 802.3at (PoE+)		■	
	PoE+ enabled ports		240	120
	Max PoE+ power		2400W	
	Max full power ports (30W)		80	
ENVIRONMENTAL	Cooling	Hot-swappable fan modules		Hot-swappable fan tray
	Temperature range	0°C to 50°C		0°C to 40°C
MANAGEMENT	Web GUI	■		
	CLI / Telnet / SNMP	■		
	IPv6 management	■		
	DHCPv4 / v6 server	■		
	AMF Master	■		
	AMF Controller	■		
NETWORK RESILIENCE	Spanning Tree	■		
	Link aggregation (LACP)	■		
	EPSRing	■		
	ISSU	■		
	VRRPv3	■		
QoS	IEEE 802.1p priority queues	8	8	
SECURITY	IEEE 802.1Q VLANs	4K	4K	
	RADIUS / TACACS+	■		
	SSH / SSL	■		
	IEEE 802.1x	■		
	DoS protection	■		
	DHCP snooping	■		
ROUTING	Static routes v4 / v6	■		
	RIP / RIPng	■		
	OSPFv2 / v3	■		
	VRF Lite	■		
	Policy-based routing	■		
	BGP4 / BGP4+	■		
MULTICASTING	IGMPv1 / v2 / v3	■		
	MLDv1 / v2	■		
	PIMv4 / PIMv6	■		
	PIM-SSM	■		

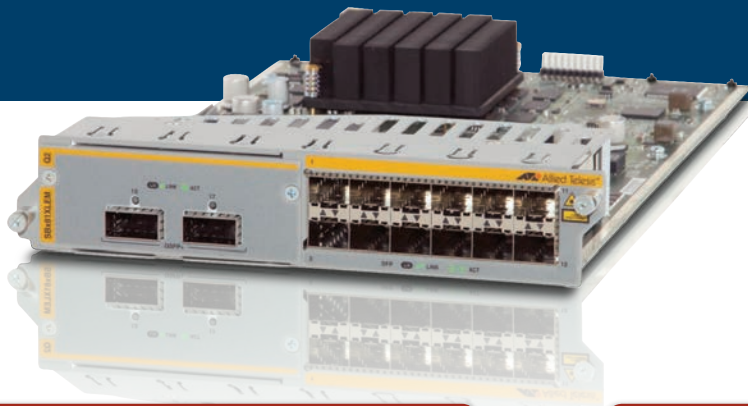

SwitchBlade x908 GEN2 Components

- ▶ **SBx908 GEN2**
High capacity Layer 3+ modular switch chassis with 8 x high-speed expansion bays, fans included
- ▶ **SBxPWRSYS2**
Hot-swappable load-sharing power supply
- ▶ **SBxPWRSYS1**
1200W DC system power supply
- ▶ **FAN08**
Spare hot-swappable fan module
- ▶ **XEM2-12XTm**
12 x 100M/1/2.5/5/10G RJ-45 ports
- ▶ **XEM2-12XT**
12 x 100M/1G/10G RJ-45 ports
- ▶ **XEM2-12XS**
12 x 1G/10G SFP+ ports
- ▶ **XEM2-4QS**
4 x 40G QSFP+ ports
- ▶ **XEM2-1CQ**
1 x 100G QSFP28 port
- ▶ **FL-GEN2-OF13***
OpenFlow v1.3 license
- ▶ **FL-GEN2-AWC40***
Wireless Controller license for up to 40 access points
- ▶ **FL-GEN2-AWC80***
Wireless Controller license for up to 80 access points
- ▶ **FL-GEN2-AWC120***
Wireless Controller license for up to 120 access points
- ▶ **FL-GEN2-AWC250***
Wireless Controller license for up to 250 access points
- ▶ **FL-GEN2-CB40***
AWC-Channel Blanket license for up to 40 access points
- ▶ **FL-GEN2-CB80***
AWC-Channel Blanket license for up to 80 access points
- ▶ **FL-GEN2-CB120***
AWC-Channel Blanket license for up to 120 access points
- ▶ **FL-GEN2-CB250***
AWC-Channel Blanket license for up to 250 access points

* 1-year/5-year license

SwitchBlade x8100 Series Components

- ▶ **SBx8106**
Rackmount 6-slot chassis including fan tray
- ▶ **SBx8112**
Rackmount 12-slot chassis including fan tray
- ▶ **SBx81CFC960**
Control/fabric module with 960Gbps of switching performance and 4-port 10GbE SFP+
- ▶ **SBx81GT24**
24-port 10/100/1000T Ethernet line card
- ▶ **SBx81GP24**
24-port 10/100/1000T PoE+ Ethernet line card
- ▶ **SBx81GS24a**
24-port SFP Ethernet line card
- ▶ **SBx81GC40**
40-port CSFP Ethernet line card
- ▶ **SBx81XLEM**
Modular 40G line card with 12 x 100/1000X SFP
- ▶ **SBx81XLEM/XS8**
8 x 10G SFP+ module for the SBx81XLEM line card
- ▶ **SBx81XLEM/Q2**
2 x 40G QSFP+ module for the SBx81XLEM line card
- ▶ **SBx81XLEM/XT4**
4 x 1/10G RJ-45 module for the SBx81XLEM line card
- ▶ **SBx81XLEM/GT8**
8 x 10/100/1000T RJ-45 module for the SBx81XLEM line card
- ▶ **SBxPWRSYS2**
1200W AC system power supply
- ▶ **SBxPWRSYS1-80**
1200W DC system power supply
- ▶ **SBxPWRPOE1**
1200W AC PoE+ power supply
- ▶ **FL-CFC960-01**
Premium feature license for CFC960
- ▶ **FL-CF9-VCSP**
VCStack Plus license for CFC960



Core and Distribution



x950 Series

Allied Telesis x950 Series switches are ideal for high-performing modern enterprise network cores, with stacking to create a resilient local or distributed solution, and integrated management of wired and wireless network devices. These powerful switches have 100 Gigabit connectivity built-in, and are expandable, delivering the capacity to enable today's Smart City and IoT networks.

(COMING SOON) XTQm

FEATURES		x950-28XSQ x950-28XTQm	x930-28GTX x930-28GPX	x930-28GSTX	x930-52GTX x930-52GPX
FORM FACTOR		Rackmount / stack	Desktop / rackmount / stack	Desktop / rackmount / stack	Desktop / rackmount / stack
SWITCH FUNCTIONALITY		Advanced Layer 3	Advanced Layer 3	Advanced Layer 3	Advanced Layer 3
PORTS AND MEDIA SUPPORT	10/100/1000T ports	24 (1/2.5/5/10G) (XTQm)	24	24 combo	48
	100/1000X SFP ports			24 combo	
	1G/10G SFP+ ports	24 (XSQ)	4	4	4
	40G QSFP+ ports	4 (40G/100G)	2 (StackQS)	2 (StackQS)	2 (StackQS)
	Expansion module bays	1	1	1	1
Ethernet multi-gigabit support		■ (XTQm)			
POWER SUPPLY	PSU type	Dual internal hotswap	Dual internal hotswap	Dual internal hotswap	Dual internal hotswap
	-48VDC PSU option		■ (PWR250-80)	■ (PWR250-80)	■ (PWR250-80)
	Redundant power supply	N/A	N/A	N/A	N/A
	Additional PSU	PWR600	PWR150 PWR250 PWR800 PWR1200	PWR150 PWR250 PWR800 PWR1200	PWR150 PWR250 PWR800 PWR1200
POWER OVER ETHERNET	IEEE 802.3af (PoE)		■ (GPX)		■ (GPX)
	IEEE 802.3at (PoE+)		■ (GPX)		■ (GPX)
	PoE-enabled ports		24 (GPX)		48 (GPX)
	Max PoE+ power		720W (GPX)		1440W (GPX)
	Max full power PoE+ ports		24 (GPX)		48 (GPX)
Continuous PoE			■ (GPX)		■ (GPX)
SCALABILITY	MAC address table size	96K	64K	64K	64K
	Stacking (VCSStack)	■ 4	■ 8	■ 8	■ 8
	Long-distance VCSStack	■ 4	■ 8	■ 8	■ 8
	Stacking bandwidth	400G	40G (SFP+) 160G (StackQS)	40G (SFP+) 160G (StackQS)	40G (SFP+) 160G (StackQS)
ENVIRONMENTAL	Cooling	Fan	Fan	Fan	Fan
	Temperature range	0°C to 50°C	0°C to 45°C (GPX) 0°C to 50°C (GTX)	0°C to 50°C	0°C to 45°C (GPX) 0°C to 50°C (GTX)
MANAGEMENT	Web GUI	■	■	■	■
	CLI / Telnet / SNMP	■	■	■	■
	IPv6 management	■	■	■	■
	DHCPv4 / v6 server	■	■	■	■
	AMF Master	■	■	■	■
AMF Member		■	■	■	■
NETWORK RESILIENCE	Spanning Tree	■	■	■	■
	Link aggregation (LACP)	■	■	■	■
	EPSRing	■	■	■	■
VRRPv3		■	■	■	■
QoS	IEEE 802.1p priority queues	8	8	8	8
SECURITY	IEEE 802.1Q VLANs	4K	4K	4K	4K
	RADIUS / TACACS+	■	■	■	■
	SSH / SSL	■	■	■	■
	IEEE 802.1x	■	■	■	■
	DoS protection	■	■	■	■
	DHCP snooping	■	■	■	■
ROUTING	Static routes v4 / v6	■	■	■	■
	RIP / RIPng	■	■	■	■
	OSPFv2 / v3	■	■	■	■
	BGP4 / BGP4+	■	■	■	■
	Policy-based routing	■	■	■	■
VRF Lite		■	■	■	■
MULTICASTING	IGMPv1 / v2 / v3	■	■	■	■
	MLDv1 / v2	■	■	■	■
	PIMv4 / PIMv6	■	■	■	■
PIM-SSM / PIM-SSMv6		■	■	■	■
SDN	OpenFlow	■	■	■	■



x930 Series

Allied Telesis x930 Series switches are a high-performing and feature-rich choice for today's networks. With a range of 24- and 48-port models with 10 Gigabit uplink ports, the option of PoE+, and the power of Allied Telesis Virtual Chassis Stacking (VCStack™), the x930 Series has the flexibility and performance for demanding aggregation and distribution applications.

x550 Series

The x550 Series of compact 10 Gigabit switches provide an ideal solution for 10G aggregation with 40G uplinks in larger networks, or a resilient 10G network core for smaller networks with stacked units providing high availability.

FEATURES		x550-18XSQ x550-18XTQ	x550-18SPQm
FORM FACTOR		Desktop / rackmount / stack	Desktop / rackmount / stack
SWITCH FUNCTIONALITY		Advanced Layer 3	Advanced Layer 3
PORTS AND MEDIA SUPPORT	10/100/1000T ports	16 (1/10G) (XTQ)	8 (1/2.5/5/10G)
	100/1000X SFP ports		
	1G/10G SFP+ ports	16 (XSQ)	8
	40G QSFP+ ports	2	2
	Expansion module bays		
POWER SUPPLY	Ethernet multi-gigabit support		■
	PSU type	Internal	Internal
	-48VDC PSU option		
	Redundant power supply		
	Additional PSU		
POWER OVER ETHERNET	IEEE 802.3af (PoE)		■
	IEEE 802.3at (PoE+)		■
	PoE-enabled ports		8
	Max PoE+ power		240W
	Max full power PoE+ ports		8
SCALABILITY	Continuous PoE		■
	MAC address table size	16K	16K
	Stacking (VCStack)	■ 4	■ 4
	Long-distance VCStack	■ 4	■ 4
	Stacking bandwidth	160G	160G
ENVIRONMENTAL	Cooling	Fan	Fan
	Temperature range	0°C to 45°C	0°C to 45°C
MANAGEMENT	Web GUI	■	■
	CLI / Telnet / SNMP	■	■
	IPv6 management	■	■
	DHCPv4 / v6 server	■	■
	AMF Master	■	■
NETWORK RESILIENCE	AMF Member	■	■
	Spanning Tree	■	■
	Link aggregation (LACP)	■	■
	EPsRing	■	■
QoS	VRRPv3	■	■
	IEEE 802.1p priority queues	8	8
SECURITY	IEEE 802.1Q VLANs	4K	4K
	RADIUS / TACACS+	■	■
	SSH / SSL	■	■
	IEEE 802.1x	■	■
	DoS protection	■	■
ROUTING	DHCP snooping	■	■
	Static routes v4 / v6	■	■
	RIP / RIPng	■	■
	OSPFv2 / v3	■	■
	BGP4 / BGP4+	■	■
MULTICASTING	Policy-based routing	■	■
	VRF Lite		
	IGMPv1 / v2 / v3	■	■
SDN	MLDv1 / v2	■	■
	PIMv4 / PIMv6	■	■
	PIM-SSM / PIM-SSMv6	■	■
	OpenFlow	■	■



SFP/SFP+ Optics
Learn more about Allied Telesis pluggable optics on page 42.

Distribution and Intelligent Edge



x530 Series

The Allied Telesis x530 Series are powerful multi-gigabit switches with high capacity, resiliency and easy management, making them the ideal choice for demanding distribution and high-speed connectivity applications.

		(COMING SOON) GHXm	(COMING SOON)	(COMING SOON)	(COMING SOON)	(COMING SOON)
FEATURES		x530-28GPXm x530-28GTXm x530DP-28GHXm	x530-52GPXm x530-52GTXm x530DP-52GHXm	x530-28GSX	x530-10GHXm x530-18GHXm	x530L-28GTX x530L-28GPX
FORM FACTOR		Desktop / rackmount / stack	Desktop / rackmount / stack	Desktop / rackmount / stack	Desktop / rackmount / stack	Desktop / rackmount / stack
SWITCH FUNCTIONALITY		Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3
PORTS AND MEDIA SUPPORT	10/100/1000T ports	24 (4 x 100M/1/2.5/5G)	48 (8 x 100M/1/2.5/5G)	24 (100M/1G SFP)	8/16 (100M/1/2.5/5G)	24
	1G/10G SFP+ ports	4 (2 if stacked)	4 (2 if stacked)	4 (2 if stacked)	2	4 (2 if stacked)
	Ethernet multi-gigabit support	■	■		■	
POWER SUPPLY	PSU type	Dual fixed internal (dual hotswap GHXm only)	Dual fixed internal (dual hotswap GHXm only)	Dual fixed internal	Fixed internal	Dual fixed internal
	-48VDC PSU option					
POWER OVER ETHERNET	IEEE 802.3af (PoE)	■ (GPXm, GHXm)	■ (GPXm, GHXm)		■	■ (GPX)
	IEEE 802.3at (PoE+)	■ (GPXm, GHXm)	■ (GPXm, GHXm)		■ (90 Watts/port)	■ (GPX)
	IEEE 802.3bt (PoE++)	■ (60 Watts/port) (GHXm)	■ (60 Watts/port) (GHXm)			
	PoE-enabled ports	24 (GPXm, GHXm)	48 (GPXm & GHXm)		8/16	24 (GPX)
	Max PoE+ power	720W (GPXm) 1440W (GHXm)	720W (GPXm) 1440W (GHXm)		740/1480	720W (GPX)
	Max full power PoE+ ports	24 (GPXm & GHXm)	24 (GPXm & GHXm)		8/16 (90 Watts)	24 (GPX)
Continuous PoE	■ (GPXm & GHXm)	■ (GPXm & GHXm)		■	■ (GPX)	
SCALABILITY	MAC address table size	16K	16K	16K	16K	16K
	Stacking (VCSStack)	■ 4	■ 4	■ 4	■ 4	■ 4
	Long-distance VCSStack	■ 4	■ 4	■ 4	■ 4	■ 4
	Stacking bandwidth	40G	40G	40G	40G	40G
ENVIRONMENTAL	Cooling	Fan	Fan	Fan	Fan	Fan
	Temperature range	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C
MANAGEMENT	Web GUI	■	■	■	■	■
	CLI / Telnet / SNMP	■	■	■	■	■
	IPv6 management	■	■	■	■	■
	DHCPv4 / v6 server	■	■	■	■	■
	AMF Master	■	■	■	■	■
	AMF Member	■	■	■	■	■
NETWORK RESILIENCE	Spanning Tree	■	■	■	■	■
	Link aggregation (LACP)	■	■	■	■	■
	EPSRing	■	■	■	■	■
QoS	VRRPv3	■	■	■	■	■
	IEEE 802.1p priority queues	8	8	8	8	8
SECURITY	IEEE 802.1Q VLANs	4K	4K	4K	4K	4K
	RADIUS / TACACS+	■	■	■	■	■
	SSH / SSL	■	■	■	■	■
	IEEE 802.1x	■	■	■	■	■
	DoS protection	■	■	■	■	■
	DHCP snooping	■	■	■	■	■
ROUTING	Static routes v4 / v6	■	■	■	■	■
	RIP / RIPng	■	■	■	■	■
	OSPFv2 / v3	■	■	■	■	■
	BGP4 / BGP4+	■	■	■	■	■
	Policy-based routing	■	■	■	■	■
	VRF Lite	■	■	■	■	■
MULTICASTING	IGMPv1 / v2 / v3	■	■	■	■	■
	MLDv1 / v2	■	■	■	■	■
	PIMv4 / PIMv6	■	■	■	■	■
SDN	PIM-SSM / PIM-SSMv6	■	■	■	■	■
	OpenFlow	■	■	■	■	■



x510 Series

The Allied Telesis x510 Series of stackable Gigabit switches includes a full range of security and resiliency features. With a choice of 24- and 48-port models with 10 Gigabit uplinks, PoE+, and fiber, combined with the power of VCStack, they offer a versatile solution for applications at the network edge.

(COMING SOON) GTX

FEATURES	x530L-52GTX x530L-52GPX	x510-28GTX x510-28GPX x510DP-28GTX	x510-28GSX	x510-52GTX x510-52GPX x510DP-52GTX	x510L-28GT x510L-28GP	x510L-52GT x510L-52GP*	
FORM FACTOR	Desktop / rackmount / stack	Desktop / rackmount / stack	Desktop / rackmount / stack	Desktop / rackmount / stack	Desktop / rackmount / stack	Desktop / rackmount / stack	
SWITCH FUNCTIONALITY	Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3	
PORTS AND MEDIA SUPPORT	10/100/1000T ports	48	24	24 (100M/1G SFP)	48	48	
	1G/10G SFP+ ports	4 (2 if stacked)	4 (2 if stacked)	4 (2 if stacked)	4 (2 if stacked)	4 (2 if stacked)	
	Ethernet multi-gigabit support				10G license required	10G license required	
POWER SUPPLY	PSU type	Dual fixed internal	Dual fixed internal (dual hotswap x510DP only)	Dual fixed internal	Dual fixed internal (dual hotswap x510DP only)	Single fixed internal	
	-48VDC PSU option			■			
POWER OVER ETHERNET	IEEE 802.3af (PoE)	■ (GPX)	■ (GPX)	■ (GPX)	■ (GP)	■ (GP)	
	IEEE 802.3at (PoE+)	■ (GPX)	■ (GPX)	■ (GPX)	■ (GP)	■ (GP)	
	IEEE 802.3bt (PoE++)						
	PoE-enabled ports	48 (GPX)	24 (GPX)		48 (GPX)	24 (GP)	48 (GP)
	Max PoE+ power	720W (GPX)	370W (GPX)		370W (GPX)	185W (GP)	185W (GP)
	Max full power PoE+ ports	24 (GPX)	12 (GPX)		12 (GPX)	6 (GP)	6 (GP)
Continuous PoE	■ (GPX)						
SCALABILITY	MAC address table size	16K	16K	16K	16K	16K	
	Stacking (VCStack)	■ 4	■ 4	■ 4	■ 4	■ 4	
	Long-distance VCStack	■ 4	■ 4	■ 4	■ 4	■ 4	
	Stacking bandwidth	40G	40G (2 × SFP+)	40G (2 × SFP+)	40G (2 × SFP+)	40G (2 × SFP+)	40G (2 × SFP+)
ENVIRONMENTAL	Cooling	Fan	Fan	Fan	Fan	Fan	
	Temperature range	0°C to 50°C	0°C to 45°C	0°C to 45°C	0°C to 45°C	0°C to 45°C	
MANAGEMENT	Web GUI	■	■	■	■	■	
	CLI / Telnet / SNMP	■	■	■	■	■	
	IPv6 management	■	■	■	■	■	
	DHCPv4 / v6 server	■	■	■	■	■	
	AMF Master	■	■	■	■	■	
	AMF Member	■	■	■	■	■	
NETWORK RESILIENCE	Spanning Tree	■	■	■	■	■	
	Link aggregation (LACP)	■	■	■	■	■	
	EPSRing	■	■	■	■	■	
VRRPv3	■	■	■	■	■		
QoS	IEEE 802.1p priority queues	8	8	8	8	8	
SECURITY	IEEE 802.1Q VLANs	4K	4K	4K	4K	4K	
	RADIUS / TACACS+	■	■	■	■	■	
	SSH / SSL	■	■	■	■	■	
	IEEE 802.1x	■	■	■	■	■	
	DoS protection	■	■	■	■	■	
	DHCP snooping	■	■	■	■	■	
ROUTING	Static routes v4 / v6	■	■	■	■	■	
	RIP / RIPng	■	■	■	■	■	
	OSPFv2 / v3	■	■	■	■	■	
	BGP4 / BGP4+	■	■ (BGP4 only)	■ (BGP4 only)	■ (BGP4 only)	■ (BGP4 only)	■ (BGP4 only)
	Policy-based routing	■	■	■	■	■	
	VRF Lite	■	■	■	■	■	
MULTICASTING	IGMPv1 / v2 / v3	■	■	■	■	■	
	MLDv1 / v2	■	■	■	■	■	
	PIMv4 / PIMv6	■	■	■	■	■	
PIM-SSM / PIM-SSMv6	■	■	■	■	■		
SDN	OpenFlow	■	■	■	■	■	

* Not available in North America

Intelligent Edge



x320 Series

Allied Telesis x320 Series provide an intelligent smart building solution, with the high power model (90W/port) matched with the PoE pass-through model to support building automation.

x310 Series

Allied Telesis x310 Series provide high performing Fast Ethernet access for today's networks. The ability to stack up to four units, and PoE models that can power edge devices, ensures a flexible and scalable edge solution for enterprise networks.

COMING SOON

COMING SOON

FEATURES		IX5-28GPX	x320-10GH	x320-11GPT	x310-26FT x310-26FP	x310-50FT x310-50FP
FORM FACTOR		Desktop / rackmount / stack	Rackmount / DIN rail	Rackmount / DIN rail	Desktop / rackmount	Desktop / rackmount
SWITCH FUNCTIONALITY		Basic Layer 3	Basic Layer 3	Basic Layer 3	Basic Layer 3 upgradeable to advanced Layer 3	Basic Layer 3 upgradeable to advanced Layer 3
PORTS AND MEDIA SUPPORT	10/100/1000T	24	8	9	24 10/100TX	48 10/100TX
	100/1000X SFP ports		2	2	2	2
	1G/10G SFP+ ports	4 (2 if stacked)				
POWER SUPPLY	PSU type	Dual internal hotswap	External	External or PoE	Fixed internal	Fixed internal
	Additional PSU	PWR800				
POWER OVER ETHERNET	IEEE 802.3af (PoE)	■	■	■ (pass-through)		
	IEEE 802.3at (PoE+)	■	■	■ (pass-through)	■ (FP)	■ (FP)
	PoE+ enabled ports	24	8	8	24 (FP)	48 (FP)
	Max PoE+ power	720W	720W	46W	370W (FP)	370W (FP)
	Max full power ports (30W)	24	8 (90 Watts / port)	1	12 (FP)	12 (FP)
Continuous PoE		■	■			
SCALABILITY	MAC address table size	16K	16K	16K	16K	16K
	Stacking (VCSStack)	■ (4)			■ (4)	■ (4)
	Long-distance VCSStack	■ (4)				
	Stacking bandwidth	40G			4G (2 x SFP DAC)	4G (2 x SFP DAC)
ENVIRONMENTAL	Cooling	Fan	Fanless	Fanless	Fanless (FT), Fan (FP)	Fan
	Temperature range	0°C to 50°C	-10°C to 55°C	-10°C to 55°C	0°C to 40°C (FT) 0°C to 50°C (FP)	0°C to 50°C
MANAGEMENT	Web GUI	■	■	■	■	■
	CLI / Telnet / SNMP	■	■	■	■	■
	IPv6 management	■	■	■	■	■
	DHCPv4 / v6 server	■	■	■	■ (client only)	■ (client only)
	AMF Member	■	■	■	■	■
NETWORK RESILIENCE	Spanning Tree	■	■	■	■	■
	Link aggregation (LACP)	■	■	■	■	■
	EPSRing	■	■	■	■	■
	VRRPv3	■	■	■	■	■
QoS	IEEE 802.1p priority queues	8	8	8	8	8
SECURITY	IEEE 802.1Q VLANs	4K	4K	4K	4K	4K
	RADIUS / TACACS+	■	■	■	■	■
	SSH / SSL	■	■	■	■	■
	IEEE 802.1x	■	■	■	■	■
	DoS protection	■	■	■	■	■
	DHCP snooping	■	■	■	■	■
ROUTING	Static routes v4 / v6	■	■	■	■	■
	RIP / RIPng	■	■	■	■	■
	OSPFv2 / v3	■	■	■	■	■
MULTICASTING	IGMPv1 / v2 / v3	■	■	■	■	■
	MLDv1 / v2	■	■	■	■	■
	PIMv4 / PIMv6	■	■	■	■	■
	PIM-SSM / PIM-SSMv6	■	■	■	■	■
SDN	OpenFlow		■	■	■	■



x230 Series

Allied Telesis x230 Series switches provide an excellent access solution for today's networks, supporting Gigabit to the desktop for demanding applications. Compact PoE models enable easy deployment, while connecting and remotely powering devices such as wireless access points, and IP video surveillance cameras at the network edge.

x220 Series

The Allied Telesis x220 Series are fully managed high-performing Gigabit Layer 3 switches. Integrated security features, and 28 SFP or 48 Gigabit copper ports, enable long-distance fiber, or high-density copper connectivity at the edge of the network.

FEATURES	x230-10GT x230-10GP	x230-18GT x230-18GP	x230-28GT x230-28GP	x230L-17GT x230L-26GT	x220-28GS	x220-52GT x220-52GP
FORM FACTOR	Desktop / rackmount	Desktop / rackmount	Desktop / rackmount	Desktop / rackmount	Desktop / rackmount	Desktop / rackmount
SWITCH FUNCTIONALITY	Basic Layer 3	Basic Layer 3	Basic Layer 3	Basic Layer 3	Basic Layer 3	Basic Layer 3
PORTS AND MEDIA SUPPORT	10/100/1000T	8	16	24	16 (17) 24 (26)	48
	100/1000X SFP ports	2	2	4	1 (17) 2 (26)	4
	1G/10G SFP+ ports				28	
POWER SUPPLY	PSU type	Single fixed internal	Single fixed internal	Single fixed internal	Single fixed internal	Single fixed internal
	Additional PSU					
POWER OVER ETHERNET	IEEE 802.3af (PoE)	■ (GP)	■ (GP)	■ (GP)		■ (GP)
	IEEE 802.3at (PoE+)	■ (GP)	■ (GP)	■ (GP)		■ (GP)
	PoE+ enabled ports	8 (GP)	16 (GP)	24 (GP)		48 (GP)
	Max PoE+ power	124W (GP)	247W (GP)	370W (GP)		740W (GP)
	Max full power ports (30W)	4 (GP)	8 (GP)	12 (GP)		24 (GP)
Continuous PoE						■ (GP)
SCALABILITY	MAC address table size	16K	16K	16K	16K	16K
	Stacking (VCStack)					
	Long-distance VCStack					
	Stacking bandwidth					
ENVIRONMENTAL	Cooling	Fanless (GT), Fan (GP)	Fan	Fan	Fanless	Fan
	Temperature range	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 40°C	0°C to 50°C
MANAGEMENT	Web GUI	■	■	■	■	■
	CLI / Teinet / SNMP	■	■	■	■	■
	IPv6 management	■	■	■	■	■
	DHCPv4 / v6 server					
	AMF Member	■	■	■	■	■
NETWORK RESILIENCE	Spanning Tree	■	■	■	■	■
	Link aggregation (LACP)	■	■	■	■	■
	EP SRing	■	■	■	■	■
VRRPv3						
QoS	IEEE 802.1p priority queues	8	8	8	8	8
SECURITY	IEEE 802.1Q VLANs	4K	4K	4K	4K	4K
	RADIUS / TACACS+	■	■	■	■	■
	SSH / SSL	■	■	■	■	■
	IEEE 802.1x	■	■	■	■	■
	DoS protection	■	■	■	■	■
	DHCP snooping	■	■	■	■	■
ROUTING	Static routes v4 / v6	■ (v4 only)	■ (v4 only)	■ (v4 only)	■ (v4 only)	■ (v4 only)
	RIP / RIPng	■ (RIP only)	■ (RIP only)	■ (RIP only)	■ (RIP only)	■ (RIP only)
	OSPFv2 / v3					
MULTICASTING	IGMPv1 / v2 / v3	■ (snooping)	■ (snooping)	■ (snooping)	■ (snooping)	■ (snooping)
	MLDv1 / v2	■ (snooping)	■ (snooping)	■ (snooping)	■ (snooping)	■ (snooping)
	PIMv4 / PIMv6					
	PIM-SSM / PIM-SSMv6					
SDN	OpenFlow	■	■	■	■	

Intelligent SMB



XS900MX Series

The XS900MX Series are the ideal 10G access switches for enterprise networks or anywhere a relay switch with 10G uplink is required. The switches also make the ideal core or aggregation switch, to connect servers and storage in a small network. Available with a mix of copper and fiber 10G connectivity options, the XS900MX Series enable a highly flexible and reliable network, which can easily scale to meet increasing traffic demands.

GS900MX/MPX Series

Allied Telesis CentreCOM GS900MX/MPX Series switches are cost effective, fully managed, and provide scalable deployment options. With a choice of 24- and 48-port 10/100/1000T versions with 10G uplinks, Power over Ethernet (PoE), plus the ability to stack up to four units, the GS900MX/ GS900MPX Series switches are ideal for demanding applications at the edge of the network.

SFP/SFP+ Optics
Learn more about Allied Telesis pluggable optics on page 42.

FEATURES		XS916MXS XS916MXT	GS924MX GS924MPX	GS948MX GS948MPX	GS980M/52 GS980M/52PS
SWITCH FUNCTIONALITY		Basic Layer 3	Basic Layer 3	Basic Layer 3	Basic Layer 3
PORTS AND MEDIA SUPPORT	10/100TX				
	10/100/1000T		24 + 2 combo	48 + 2 combo	48
	100/1000X SFP ports		2 combo	2 combo	4
	SFP+		2 (if not stacked)	2 (if not stacked)	
	100M/1G/10G RJ-45	12 (MXT) 4 (MXS)			
1G/10G SFP/SFP+	4 (MXT) 12 (MXS)				
POWER SUPPLY		PSU type	Single fixed internal	Single fixed internal	Single fixed internal
POWER OVER ETHERNET	IEEE 802.3af (PoE)		■ (MPX)	■ (MPX)	■ (PS)
	IEEE 802.3at (PoE+)		■ (MPX)	■ (MPX)	■ (PS)
	PoE+ enabled ports		24 (MPX)	24 (MPX)	48 (PS)
	Max PoE+ power		370W (MPX)	370W (MPX)	740W (PS)
	Max full power ports (30W)		12 (MPX)	12 (MPX)	24 (PS)
Continuous PoE				■ (PS)	
SCALABILITY	MAC address table size	16K	16K	16K	16K
	Stacking (VStack)	■ (2)	■ (4)	■ (4)	
	Stacking bandwidth	40G	40G	40G	
ENVIRONMENTAL	Cooling	Fan	Fan	Fan	Fan
	Temperature range	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C
MANAGEMENT	Web GUI	■	■	■	■
	CLI / Telnet / SNMP	■	■	■	■
	IPv6 management	■	■	■	■
	AMF Member	Edge node	Edge node	Edge node	Edge node
NETWORK RESILIENCE	Spanning Tree	■	■	■	■
	Link aggregation (LACP)	■	■	■	■
	EPSRing	■	■	■	■
QoS	IEEE 802.1p priority queues	8	8	8	8
SECURITY	IEEE 802.1Q VLANs	4K	4K	4K	4K
	RADIUS / TACACS+	■	■	■	■
	SSH / SSL	■	■	■	■
	IEEE 802.1x	■	■	■	■
	DHCP snooping	■	■	■	■
ROUTING	Static routes v4 / v6	■ (v4 only)	■ (v4 only)	■ (v4 only)	■
	RIP / RIPng	■ (RIP only)	■ (RIP only)	■ (RIP only)	■ (RIP only)
MULTICASTING	IGMPv1 / v2 / v3	■ (snooping)	■ (snooping)	■ (snooping)	■ (snooping)
	MLDv1 / v2	■ (snooping)	■ (snooping)	■ (snooping)	■ (snooping)



GS980M Series

The GS980M Series of Layer 3 Gigabit switches enable a cost-effective and fully managed network. PoE+ connects and powers end points at the network edge.

GS970M Series

Allied Telesis CentreCOM GS970M Series switches provide an excellent access solution for today's networks, supporting Gigabit to the desktop for maximum performance. The Power over Ethernet Plus (PoE+) models are ideal solution for connecting and remotely powering wireless access points, IP video surveillance cameras, and IP phones.

FS980M Series

The FS980M Series switches provide high-performance Fast Ethernet connectivity right where you need it—at the network edge. Flexible and robust, this series provides total security and management features for enterprises of all sizes. Power over Ethernet (PoE) models enable connecting and powering edge devices in video surveillance and Point of Sale (POS) applications.

COMING SOON

FEATURES		GS970M/10 GS970M/18 GS970M/28	GS970M/10PS GS970M/18PS GS970M/28PS	FS980M/9 FS980M/18 FS980M/28 FS980M/52	FS980M/9PS FS980M/18PS FS980M/28PS FS980M/52PS	FS980M/28DP
SWITCH FUNCTIONALITY		Basic Layer 3		Basic Layer 3		Basic Layer 3
PORTS AND MEDIA SUPPORT	10/100TX			8 (9), 16 (18), 24 (28), 48 (52)		24
	10/100/1000T	8 (10), 16 (18), 24 (28)		8 (10), 16 (18), 24 (28)		
	100/1000X SFP ports	2 (10 & 18), 4 (28)		2 (10 & 18), 4 (28)		4
	SFP+					
	100M/1G/10G RJ-45 1G/10G SFP/SFP+					
POWER SUPPLY		Single fixed internal		Single fixed internal		Dual fixed internal
POWER OVER ETHERNET	IEEE 802.3af (PoE)			■		■
	IEEE 802.3at (PoE+)			■		■
	PoE+ enabled ports			8 (10), 16 (18), 24 (28)		24
	Max PoE+ power	124W (10), 247W (18), 370W (28)		150W (9), 250W (18) 375W (28 & 52)		375W
	Max full power ports (30W)	4 (10), 8 (18), 12 (28)		4 (9), 8 (18), 12 (28 & 52)		12
SCALABILITY		16K		16K		16K
	MAC address table size	16K		16K		16K
	Stacking (VCSStack)			■ (4 units) * (28 & 52)		■ (4)
	Stacking bandwidth			4G (2 x SFP) (28 & 52)		4G
ENVIRONMENTAL		Fanless (10) Fan (18 & 28)		Fanless (9, 18 & 28) Fan (52)		Fan
	Temperature range	0°C to 50°C		0°C to 50°C		0°C to 50°C
MANAGEMENT		■		■		■
	Web GUI	■		■		■
	CLI / Telnet / SNMP	■		■		■
	IPv6 management	■		■		■
	AMF Member	Edge node		Edge node		Edge node
NETWORK RESILIENCE		■		■		■
	Spanning Tree	■		■		■
	Link aggregation (LACP)	■		■		■
	EPSRing	■		■		■
QoS		8		8		8
	IEEE 802.1p priority queues	8		8		8
	IEEE 802.1Q VLANs	4K		4K		4K
SECURITY		■		■		■
	RADIUS / TACACS+	■		■		■
	SSH / SSL	■		■		■
	IEEE 802.1x	■		■		■
	DHCP snooping	■		■		■
ROUTING		■ (v4 only)		■ (v4 only)		■ (v4 only)
	Static routes v4 / v6	■ (v4 only)		■ (v4 only)		■ (v4 only)
	RIP / RIPv6	■ (RIP only)		■ (RIP only)		■ (RIP only)
MULTICASTING		■ (snooping)		■ (snooping)		■ (snooping)
	IGMPv1 / v2 / v3	■ (snooping)		■ (snooping)		■ (snooping)
	MLDv1 / v2	■ (snooping)		■ (snooping)		■ (snooping)

* 4 units stacking is supported in 5.4.7 or later

WebSmart and Unmanaged SMB



GS950 Series

The Allied Telesis GS950 Series of PoE+ power Gigabit WebSmart switches deliver up to 30 Watts per port to support video surveillance and security cameras, wireless access points, IP phones, and other PoE-powered devices. The GS950 Series also features IPv6 management and TACACS+ to add an extra layer of security.



GS920 Series

The Allied Telesis GS920 Series offers secure Gigabit switching solutions for the desktop and small networks. Front-panel DIP switches provide configuration of commonly used features – network device management made easy.



GS910 Series

The Allied Telesis GS910 Series offers unmanaged Gigabit switching. The GS910 Series delivers the Gigabit performance demanded by today's high-bandwidth applications, such as video, graphics and industrial design. Compact design and silent operation enable deployment in work areas.

		GIGABIT ETHERNET			
FEATURES		GS950/8 GS950/16 GS950/24 GS950/48	GS950/10PS GS950/16PS GS950/28PS GS950/48PS	GS920/8 GS920/16 GS920/24	GS920/8PS
PORTS AND MEDIA SUPPORT	10/100TX				
	10/100/1000T	6+2 (8), 14+2 (16) 20+4 (24), 44+4 (48)	8+2 (10), 14+2 (16), 24 (28), 44+4 (48)	8 (8), 16 (16), 24 (24)	8
	SFP	2 combo (8 & 16) 4 combo (24 & 48)	2 combo (10 & 16) 4 (28), 4 combo (48)		
	100FX SFP support	■	■		
POWER SUPPLY		Internal	Internal	Internal	Internal
POWER OVER ETHERNET	Power over Ethernet (PoE)		■		■
	PoE enabled ports		8 (10), 16 (16), 24 (28 & 48)		8
	IEEE 802.3af (PoE)		■		■
	IEEE 802.3at (PoE+)		■		■
	Max PoE power		75W (10), 185W (16 & 28), 370W (48)		62W
Max PoE+ enabled ports		2 (10), 6 (16), 4 (28), 12 (48)		2	
SCALABILITY					
	MAC address table size	8K	8K	4K (8), 8K	4K
ENVIRONMENTAL	Cooling	Fanless Fan (48)	Fanless (10) Fan	Fanless	Fanless
	Eco-friendly	■	■	■	■
	Temperature range	0°C to 40°C	0°C to 40°C	0°C to 50°C	0°C to 50°C
MANAGEMENT					
	Web	■	■		
	SNMPv1 / v2	■ v3	■ v3		
NETWORK RESILIENCE	Spanning Tree	■	■		
	Rapid Spanning Tree	■	■		
	Link aggregation (LACP)	■ (48 only)	■		
	IGMP snooping (v1 / v2)	■	■		
	Port setting (speed, availability, flow control)	■	■		
QoS					
	IEEE 802.1p priority queues	4	4		
SECURITY					
	IEEE 802.1Q VLANs	256	256		
	IEEE 802.1x	■	■		
	RADIUS / DHCP client	■	■		
OTHER	Jumbo frames (9K)	■	■	■	■
	Port mirroring	■	■		
	MAC filtering / ingress / egress rate limiting / broadcast storm control	■	■		
	EAP / BPDU pass through			■	■



FS750 Series

The FS750 Series Fast Ethernet WebSmart switches offer the simplicity of unmanaged switches with the performance and reliability of managed switches, providing an ideal solution for integrating management at the edge of the network. Minimizing power consumption through high efficiency power supplies and low power chipsets, the FS750 Series at the network edge are the ideal cost-effective solution for small businesses.

FS710 Series

The Allied Telesis CentreCOM FS710 Series is the ideal economical and eco-friendly solution for today's networks, providing an extensive range of cost-effective options. The FS710 Series switches provide easy set-up, with silent operation and simple connectivity for desktop and small to medium network environments.

FS700 Series

The FS700 Series is easy to set-up with simple connectivity for small to medium-sized networks—with an extensive range of cost-effective options.

FEATURES	GIGABIT ETHERNET			FAST ETHERNET			
	GS910/5 GS910/8 GS910/16 GS910/24	GS910/5E GS910/8E	FS750/20 FS750/28 FS750/52	FS750/28PS	FS710/5 FS710/8 FS710/16 FS710/24	FS710/5E FS710/8E FS710/16E	FS708LE/POE
PORTS AND MEDIA SUPPORT	10/100TX		16 (20), 24 (28), 48 (52)	24	5 (5), 8 (8), 16 (16), 24 (24)	5 (5), 8 (8), 16 (16)	8
	10/100/1000T	5 (5), 8 (8), 16 (16), 24 (24)	5 (5), 8 (8)	2+2 (combo)	2+2 (combo)		
	SFP		2 combo	2 combo			1
	100FX SFP support		■	■			
POWER SUPPLY		Internal	External (high efficiency)	Internal	Internal	External	Internal
POWER OVER ETHERNET	Power over Ethernet (PoE)			■			■
	PoE enabled ports			24			8
	IEEE 802.3af (PoE)			■			■
	IEEE 802.3at (PoE+)			■			
	Max PoE power				193W		65W
Max PoE+ enabled ports				4 (port 1-4)			
SCALABILITY	MAC address table size	2K (5), 4K (8), 8K (16 & 24)	2K (5), 4K (8)	8K	8K	2K (5 & 8), 8K (16 & 24)	2K (5 & 8), 8K (16)
ENVIRONMENTAL	Cooling	Fanless	Fanless	Fanless	Fan	Fanless	Fanless
	Eco-friendly	■	■	■	■	■	■
	Temperature range	0°C to 50°C	0°C to 50°C	0°C to 40°C	0°C to 40°C	0°C to 50°C	0°C to 50°C
MANAGEMENT	Web			■			
	SNMPv1 / v2			■	■		
NETWORK RESILIENCE	Spanning Tree			■	■		
	Rapid Spanning Tree			■	■		
	Link aggregation (LACP)			■	■		
	IGMP snooping (v1 / v2)			■	■		
	Port setting (speed, availability, flow control)			■	■		
QoS	IEEE 802.1p priority queues		4	4			
SECURITY	IEEE 802.1Q VLANs		256	256			
	IEEE 802.1x		■	■			
	RADIUS / DHCP client		■	■			
OTHER	Jumbo frames (9K)	■	■	■	■	■	■
	Port mirroring			■	■		
	MAC filtering / ingress / egress rate limiting / broadcast storm control			■	■		
	EAP / BPDU pass through	■	■			■	■

Industrial



Our ruggedized Industrial Ethernet switches are built for enduring performance in harsh environments, such as those found in manufacturing, transportation and physical security. Offering high throughput, rich functionality and advanced security features.

IE Series

The Allied Telesis IE Series is built for performance in harsh environments, and deliver the performance and reliability demanded by industrial deployments in the Internet of Things (IoT) age.

COMING SOON

COMING SOON

FEATURES	IE510-28GSX	IE340L-18GP	IE340-12GP IE340-12GT IE340-20GP	IE300-12GP IE300-12GT	IE210L-10GP IE210L-18GP	IE200-6FP IE200-6FT IE200-6GP IE200-6GT	
FORM FACTOR	Desktop / rackmount	DIN rail / wallmount	DIN rail / wallmount	DIN rail / wallmount	Desktop / rackmount	DIN rail / wallmount	
SWITCH FUNCTIONALITY	Basic Layer 3, upgradable	Basic Layer 3, upgradable	Basic Layer 3, upgradable	Basic Layer 3, upgradable	Basic Layer 2, upgradable	Basic Layer 2, upgradable	
PORTS AND MEDIA SUPPORT	10/100TX					4 (6FP & 6FT)	
	10/100/1000T		8 (12GP) 16 (20GP)	8	8 (10GP) 16 (18GP)	4 (6GP & 6GT)	
	100FX						
	100/1000X SFP	24	2	4	2	2	
	1G/10G SFP+	4 (2 if stacked)					
POWER SUPPLY	Input voltage	DC	DC	DC	AC, fixed internal	DC	
	Redundant power input	■	■	■		■	
POWER OVER ETHERNET	IEEE 802.3af (PoE)	■	■ (GP)	■ (GP)	■	■ (FP & GP)	
	IEEE 802.3at (PoE+)		■ (GP)	■ (GP)	■	■ (FP & GP)	
	Power budget		240W	240W (GP)	240W (GP)	124W (10) 247W (18)	120W (FP & GP)
	Enabled ports		16	8 (12GP) 16 (20GP)	8 (GP)	8 (10) 16 (18)	4 (FP & GP)
	Max port count @15W (PoE)		16	8 (12GP) 16 (20GP)	8 (GP)	8 (10) 16 (18)	4 (FP & GP)
	Max port count @30W (PoE+)		8	8 (GP)	8 (GP)	4 (10) 8 (18)	4 (FP & GP)
				4 (GP)			
			■ (GP)	■ (GP)		■ (FP & GP)	
SCALABILITY	MAC address table size	16K	16K	16K	16K	2K	
	Stacking (VCStack)	■ (4)					
	Long-distance VCStack	■ (4)					
	Stacking bandwidth	40G (2 x SFP+)					
ENVIRONMENTAL	Cooling	Fan	Fanless	Fanless	Fanless	Fanless	
	Temperature range	-40°C to 75°C	-40°C to 65°C	-40°C to 75°C	-40°C to 75°C	0°C to 65°C	-40°C to 75°C
MANAGEMENT	Web GUI	■	■	■	■	■	
	CLI / Telnet / SNMP	■	■	■	■	■	
	IPv6 management	■	■	■	■	■	
	DHCPv4/v6 server	■	■	■	■	■	
	AMF Member	■	■	■	■	■	
NETWORK RESILIENCE	Spanning Tree	■	■	■	■	■	
	Link aggregation (LACP)	■	■	■	■	■	
	EPSRing	■	■	■	■	■	
	ITU-T G.8032 with Ethernet CFM	■	■	■	■	■	
						■	
						■	
						■	
						■	
QoS	IEEE 802.1p priority queues	8	8	8	8	8	
SECURITY	IEEE 802.1Q VLANs	4K	4K	4K	4K	2K	
	RADIUS / TACACS+	■	■	■	■	■	
	SSH / SSL	■	■	■	■	■	
	IEEE 802.1x	■	■	■	■	■	
	DoS protection	■	■	■	■	■	
	DHCP snooping	■	■	■	■	■	
ROUTING	Static routes v4 / v6	■	■	■	■	■	
	RIP / RIPng	■	■	■	■	■	
	OSPFv2 / v3	■	■	■	■	■	
	Policy-based routing	■	■	■	■	■	
MULTICASTING	IGMPv1 / v2 / v3	■	■	■	■	■	
	MLDv1 / v2	■	■	■	■	■	
	PIMv4 / PIMv6	■	■	■	■	■	
	PIM-SSM / PIM-SSMv6	■	■	■	■	■	



IS Series

The Allied Telesis IS Series is engineered for its easy deployment and reliable operation and has the features, performance and operating characteristics for deployment in harsh environments.




IA Series

The Allied Telesis CentreCOM IA Series switches are a cost-effective solution for industrial environments. They provide enduring performance in harsh environments, such as those found in manufacturing, transportation and physical security.

FEATURES	IS230-10GP	IS130-6GP	IFS802SP/POE(W)	IA810M	IA708C	
FORM FACTOR	DIN rail / wallmount	DIN rail / wallmount	DIN rail / wallmount	DIN rail/wall mount	DIN rail/wall mount	
SWITCH FUNCTIONALITY	Layer 2	Layer 2, unmanaged	Layer 2	Layer 2	Layer 2, unmanaged	
PORTS AND MEDIA SUPPORT	10/100TX		8	8	8	
	10/100/1000T	8 + 2 combo	2 combo			
	100FX			2 (LC)		
	100/1000X SFP	2 combo	1	2 combo		
POWER SUPPLY	1G/10G SFP+					
	Input voltage	DC	DC	DC	DC	
POWER OVER ETHERNET	Redundant power input	■	■			
	IEEE 802.3af (PoE)	■	■	■		
	IEEE 802.3at (PoE+)	■	■			
	Power budget	120W	90W	123W		
	Enabled ports	8	4	8		
	Max port count @15W (PoE)	8	4	8		
	Max port count @30W (PoE+)	4	3			
SCALABILITY	Max port count @60W (Hi-PoE)					
	Continuous PoE					
	MAC address table size	8K	2K	8K	8K	16K
	Stacking (VCStack)					
ENVIRONMENTAL	Long-distance VCStack					
	Stacking bandwidth					
MANAGEMENT	Cooling	Fanless	Fanless	Fanless	Fanless	
	Temperature range	-40°C to 75°C	-40°C to 75°C	-40°C to 75°C	0°C to 60°C	-10°C to 70°C
NETWORK RESILIENCE	Web GUI	■		■		
	CLI / Telnet / SNMP	■		■		
	IPv6 management					
	DHCPv4/v6 server	■ (v4 only)		■ (v4 only)		
	AMF Member					
QoS	Spanning Tree	■		■		
	Link aggregation (LACP)	■		■ (static)		
	EPSSring	■ (aware)		■ (aware)		
	ITU-T G.8032 with Ethernet CFM	■ (future)				
SECURITY	VRRPv3					
	IEEE 802.1p priority queues	8		4	8	
	IEEE 802.1Q VLANs	256		256	256	
	RADIUS / TACACS+	■ (RADIUS only)		■ (RADIUS only)		
	SSH / SSL	■				
	IEEE 802.1x	■		■		
	DoS protection	■				
ROUTING	DHCP snooping					
	Static routes v4 / v6					
	RIP / RIPng					
	OSPFv2 / v3					
MULTICASTING	Policy-based routing					
	IGMPv1 / v2 / v3	■ (snooping)		■ (snooping v1, v2)	■ (snooping)	
	MLDv1 / v2	■ (snooping)				
	PIMv4 / PIMv6					
	PIM-SSM / PIM-SSMv6					

Distributed Network Core

KEY SOLUTION

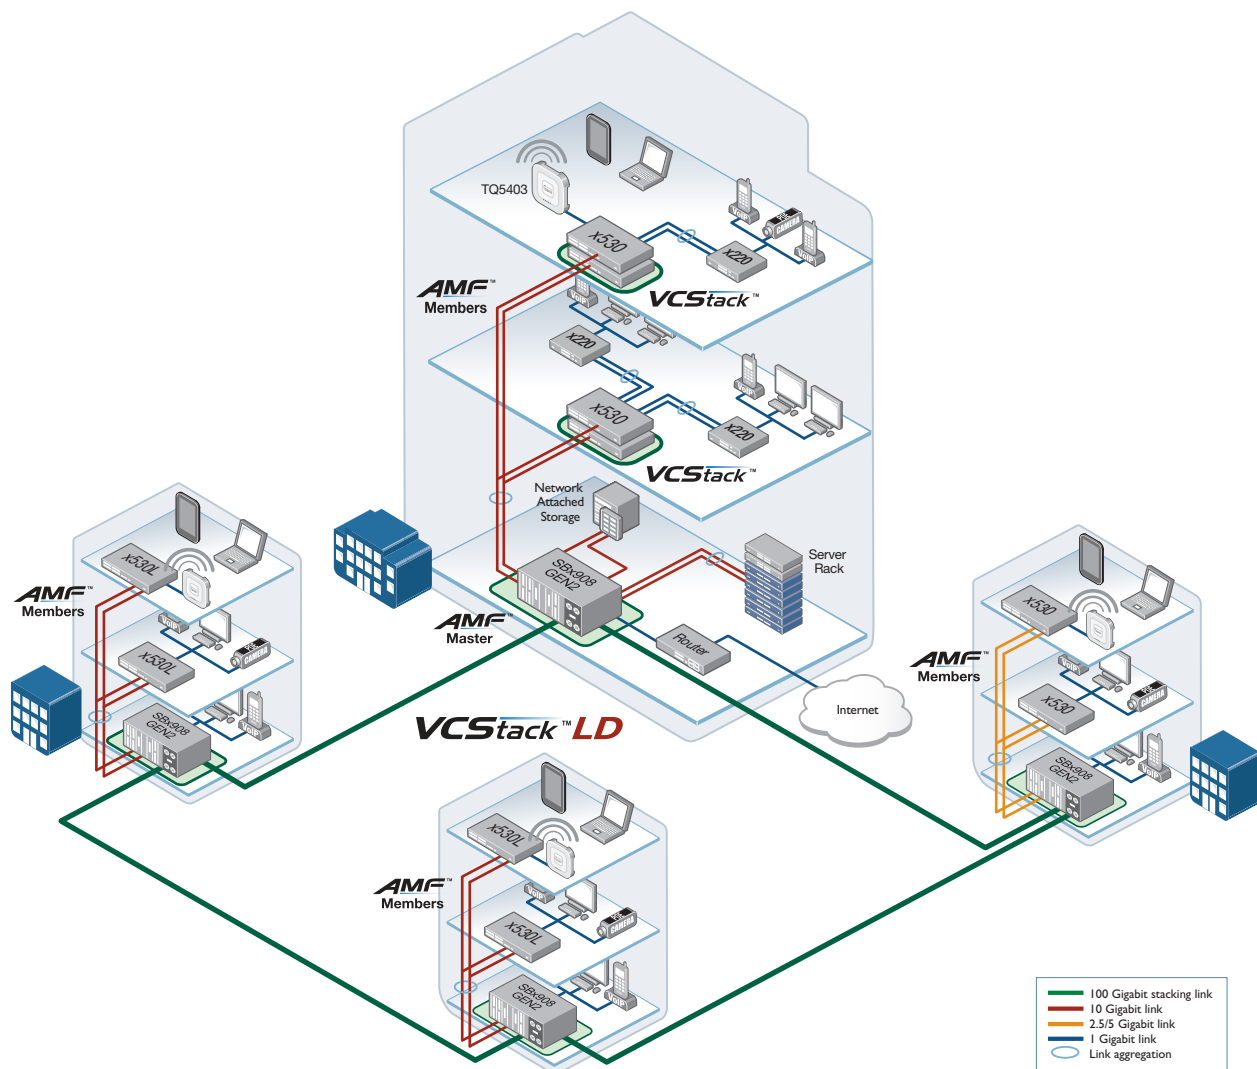

Today's large enterprises demand ready access to online resources and applications, and require a high-performing network that can seamlessly carry multiple converged services. This campus solution uses the SwitchBlade x908 GEN2 and long-distance Virtual Chassis Stacking (VCStack LD)—ideal for a distributed network core that provides high availability, increased capacity and ease of management.

Using VCStack at the core of the network allows multiple switches to appear as a single virtual chassis, simplifying management. In normal operation, the full bandwidth of the network is used, ensuring always-available online services. Seamless wireless access, and the convergence of business

data, voice, and video surveillance traffic on the network, are easily supported with this powerful solution.

AMF allows the entire network to be unified for ease of management. The SwitchBlade x908 GEN2 acts as the AMF Master, automatically backing up the entire network, and enabling plug-and-play networking with zero-touch expansion and recovery.

The SwitchBlade x908 GEN2 delivers a protocol-less and Active/Active campus backbone solution, with high performance and flexible scalability.

Security Appliances


Protection and security from the bottom to the top of your network stack.

The comprehensive, high-performance Allied Telesis AR Series features UTM firewalls and conventional secure VPN routers. Both product types offer functions such as advanced routing, QoS, IPv6, and advanced security, which includes firewall and VPN services. AR Series products are able to deliver the breadth of functionality that small- and medium-sized businesses require at a price point they can afford, and with a proven reliability that makes Allied Telesis a trusted networking partner.

Allied Telesis UTM (Unified Threat Management) firewalls and VPN (Virtual Private Network) routers are an ideal integrated security platform for today's networks. Application-aware firewall, threat protection and secure remote access is combined with routing and switching, to provide an innovative high-performance solution.

AMFTM

AlliedWare PlusTM
OPERATING SYSTEM

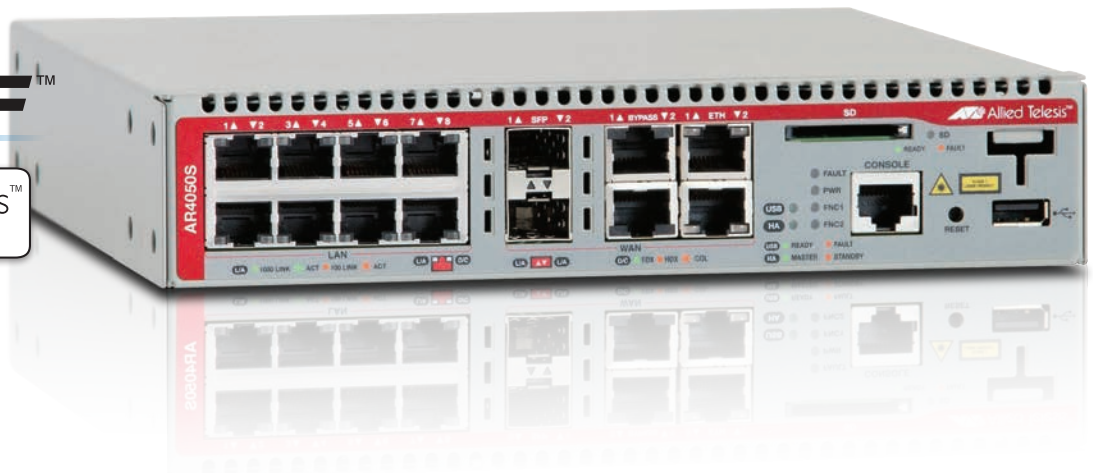

Firewalls and Routers



AR1050V

The Allied Telesis AR1050V Secure Virtual Private Network (VPN) router is the ideal secure gateway for modern businesses. Integrated firewall and VPN functionality is combined with routing and switching, providing an innovative solution that is easy to use and very secure.

		UTM FIREWALLS			VPN ROUTERS	
FEATURES		AR4050S	AR3050S	AR2050V	AR2010V	AR1050V
FORM FACTOR		Desktop / rackmount	Desktop / rackmount	Desktop / rackmount	Desktop / DIN rail	Desktop / rackmount
WAN PORTS	10/100/1000T	2 combo	2 combo	1	1	1
	100/1000X (SFP)	2 combo	2 combo			
	WAN bypass	2		1	1	
LAN PORTS		8	8	4	1	4
MEDIA SUPPORT	USB port	1	1	1	1	1
	SDHC slot	1	1			
POWER SUPPLY		Fixed internal	Fixed internal	Fixed internal	AC adapter or DC inlet	Fixed internal
ENVIRONMENTAL	Temperature range	0°C to 50°C	0°C to 50°C	0°C to 45°C	0°C to 50°C	0°C to 40°C
	Cooling	Speed-controlled fan	Speed-controlled fan	Fanless	Fanless	Fanless
PERFORMANCE	CPU	Quad-core 1.5GHz	Dual-core 800MHz	Dual-core 800MHz	Dual-core 800MHz	Single-core 1GHz
	RAM	2 GB	1 GB	512 MB	512 MB	512 MB
	Throughput	See table below	See table below	See table below	See table below	See table below
MANAGEMENT	Console port	RJ-45	RJ-45	RJ-45	RJ-45	RJ-45
	Web-based GUI	■	■	■	■	■
	CLI	■	■	■	■	■
	SNMP	■	■	■	■	■
	Telnet / SSH	■	■	■	■	■
	AMF	■ (Master support)	■	■	■	■
	AWC wireless device management	■	■	■	■	■
NETWORK RESILIENCE	VRRP and VRRPv3	■	■	■	■	
	Spanning Tree	■	■	■	■	
THREAT PROTECTION	Anti-virus	■				
	Anti-malware	■	■			
	IDS / IPS	■	■	■	■	■
	IP reputation	■	■			
SECURITY	Automatic threat updates	■	■			
	IEEE 802.1Q VLANs	■	■	■	■	■
QoS	RADIUS / TACACS+	■	■	■	■	
		■	■	■	■	
FIREWALL	Firewall	■	■	■	■	■
	Application control	■	■			
	URL filter (URL black list / white list)	■	■	■	■	■
	Web content control and IP reputation	■	■			
	Traffic shaping	■	■	■	■	
	DMZ	■	■	■	■	
	Port forwarding	■	■	■	■	■
TUNNELING	Dynamic NAT	■	■	■	■	■
	IPsec VPN tunnels	■	■	■	■	■
	SSL / TLS VPN tunnels	■	■	■	■	
	L2TPv3	■	■	■	■	
ROUTING	GRE	■	■	■	■	
	Static routing	■	■	■	■	■
	RIP / RIPng	■	■	■	■	
	OSPFv2 / OSPFv3	■	■	■	■	
	BGP4 / BGP4+	■	■	■	■	
	IGMP	■	■	■	■	
	PIMv4 / PIMv6	■	■	■	■	
	Bridging (LAN / WAN)	■	■	■	■	■
	PPPoE	■	■	■	■	■
DHCPv4/v6 client, server, relay	■	■	■	■	■	
PERFORMANCE		AR4050S	AR3050S	AR2050V	AR2010V	AR1050V
FIREWALL THROUGHPUT (RAW)		1.9Gbps	750Mbps	750Mbps	750Mbps	480Mbps
FIREWALL THROUGHPUT (APP CONTROL)		1.8Gbps	700Mbps			
CONCURRENT SESSIONS		300,000	100,000	100,000	100,000	100,000
NEW SESSIONS PER SECOND		12,000	3,600	3,600	3,600	3,600
IPS THROUGHPUT		750Mbps	220Mbps	200Mbps	200Mbps	135Mbps
IP REPUTATION THROUGHPUT		1Gbps	350Mbps			
MALWARE PROTECTION THROUGHPUT		1.3Gbps	300Mbps			
VPN THROUGHPUT		1Gbps	400Mbps	400Mbps	400Mbps	180Mbps

Wireless

Support the growing demands of your network with our innovative, high performance wireless solutions.

The broad portfolio of Allied Telesis wireless products provides customers with high performance and low operating costs. Optimized for deployment across most environments, Allied Telesis wireless solutions are ideal for every application — from offices to classrooms, from distributed retail stores to large hospitals and campuses, and from warehouses to convention centers and sports arenas/stadiums. Advanced software features and a broad range of accessories meet the demands of SOHO to enterprise-class networks.



Wireless Access Points

TQ Series

Allied Telesis TQ Series enterprise class wireless access points support the latest IEEE 802.11ac standards, doubling the raw wireless capacity available with an IEEE 802.11n access point. With flexible deployment modes: standalone, AP-cluster, or controlled by the AWC WLAN controller, TQ Series access points are suitable for a wide variety of environments — from small offices to large campuses.



TQ5403

The innovative Channel Blanket hybrid mode of the TQ5403 enables optimized wireless networking for all environments. By allowing simultaneous multi-channel and single-channel WLAN connectivity from the same access point, network administrators can combine the performance attributes of the two architectures to best suit their specific deployment requirements.



PoE MODE

A: Feeding and receiving power on data pairs
B: Feeding and receiving power on spare pairs

PSE

Power Sourcing Equipment feeding power to a Powered Device.

ENTERPRISE CLASS				
FEATURES	TQ5403e	TQ5403	TQ4600	TQ1402
FORM FACTOR	Pole / wallmount	Desktop / wallmount / ceiling mount	Desktop / wallmount / ceiling mount	Desktop / wallmount / ceiling mount
PORTS AND MEDIA SUPPORT	1 x 10/100/1000T Ethernet	2 x 10/100/1000T (1 x PoE - in port)	1 x 10/100/1000T	1 x 10/100/1000T
	Wireless radio 1 (2.4GHz)	Wi-Fi 4 @ 300Mbps (2x2:2 MIMO)	Wi-Fi 4 @ 450Mbps (3x3:3 MIMO)	Wi-Fi 4 @ 300Mbps (2x2:2 MIMO)
	Wireless radio 2 (5GHz)	Wi-Fi 5 Wave 2 @ 867Mbps (2x2:2 MU-MIMO)	Wi-Fi 5 @ 1300Mbps (3x3:3 MU-MIMO)	Wi-Fi 5 Wave 2 @ 867Mbps (2x2:2 MU-MIMO)
	Wireless radio 3 (5GHz)	Wi-Fi 5 Wave 2 @ 867Mbps (2x2:2 MU-MIMO)	Wi-Fi 5 Wave 2 @ 867Mbps (2x2:2 MU-MIMO)	
POWER SUPPLY	IEEE 802.3at PoE (PD)	IEEE 802.3at PoE (PD)	External or IEEE 802.3af/at PoE (PD)	IEEE 802.3at PoE (PD)
ENVIRONMENTAL	Indoor / outdoor usage	Outdoor	Indoor	Indoor
	Temperature range	-40°C to 65°C	0°C to 40°C	PoE: 0°C to 50°C AC adapter: 0°C to 45°C
SCALABILITY	Clustering		Up to 16 members (recommend: 10)	
MANAGEMENT	Operations management	Standalone / controlled mode	Standalone / controlled mode	Standalone / controlled mode
	Web-based GUI	HTTP, HTTPS	HTTP, HTTPS	HTTP, HTTPS
	SNMP	v1, v2c	v1, v2c	v1, v2c
	Vista Manager EX + AWC	■	■	■
	Vista Manager Lite + AWC	■	■	■
SECURITY	RADIUS / IEEE 802.1x / SSL	■	■	■
	Encryption AES	WEP - WPA/WPA2: CCMP (AES), TKIP	AES	WEP - WPA/WPA2: CCMP (AES), TKIP
	MAC filtering	■	■	■
BRIDGING	VLAN	■	■	■
WIRELESS	AWC-CB Channel Blanket	■	■	■
	AWC-SC Smart Connect	■	■	■
	IEEE 802.11e (WMM)	■	■	■
	IEEE 802.11i (enhanced security)	■	■	■
	Mode: infrastructure	Access point	Access point	Access point
	Wireless Distribution System (WDS)	■	■	■
	Captive portal	via Vista Manager EX	via Vista Manager EX	via Vista Manager EX
	Dynamic channel planning	■	■	■
	Virtual AP	8	32	8
	VLAN to Virtual AP mapping	■	■	■
	Regulatory domain compliance	■	■	■
	Rogue AP detection	■ through AWC	■ through AWC	■ through AWC
	Antenna	2 x 2.4GHz (5.2dBi) / 4 x 5GHz (6.91dBi), external antennas	2 x 2.4GHz (3.95dBi) / 4 x 5GHz (4.2dBi), embedded antennas	3 x 2.4GHz (3.17dBi) / 3 x 5GHz (4.15dBi), omni embedded
	Antenna diversity mode	■	■	■
	Wi-Fi certified	■	■	■
AMF			■ Guest node	
SDN / OPENFLOW			■ License: AT-TQ4600-OF13	
IDEAL ENVIRONMENT	Enterprise / campus	Enterprise / campus	Enterprise / campus	Enterprise / campus

MWS Series

Allied Telesis MWS Series wireless access points are a cost-effective solution for small to medium networks, with an intuitive GUI for easy management. They offer simultaneous dual-band support of the 2.4GHz and 5GHz frequencies, increasing bandwidth, and providing a high-quality network that prioritizes traffic to minimize interference.



PD
Powered Device receives power from Power Sourcing Equipment.

WMM
Wireless Multimedia is a Wi-Fi Alliance interoperability certification that provides basic Quality of Service (QoS) to applications running over Wi-Fi.

PoE Injector

Feeding protected PoE to any Fast and Gigabit Ethernet equipment without having to replace non-PoE switches.



FEATURES		6101GP
FORM FACTOR		Desktop
PORTS AND MEDIA SUPPORT	10/100/1000T	1
POWER SUPPLY	PSU type	Fixed internal
POWER OVER ETHERNET	IEEE 802.3af	■
	IEEE 802.3at	■
	PoE-enabled ports	1
	Max number of full power ports	1
	Mode	B
	PoE power	30W
	DC out (VDC)	
ENVIRONMENTAL	Cooling	Fanless
MANAGEMENT		Unmanaged

FEATURES	SMB		
	TQm5403	TQm1402	MWS2533AP*
FORM FACTOR	Desktop / wallmount / ceiling mount	Desktop / wallmount / ceiling mount	Desktop / wallmount / ceiling mount
PORTS AND MEDIA SUPPORT	Ethernet	2 x 10/100/1000T (1 x PoE - in port)	2 x 10/100/1000T
	Wireless radio 1 (2.4GHz)	Wi-Fi 4 @ 300Mbps (2x2:2 MIMO)	Wi-Fi 4 @ 300Mbps (2x2:2 MIMO)
	Wireless radio 2 (5GHz)	Wi-Fi 5 Wave 2 @ 867Mbps (2x2:2 MU-MIMO)	Wi-Fi 5 Wave 2 @ 867Mbps (2x2:2 MU-MIMO)
POWER SUPPLY	Wireless radio 3 (5GHz)	Wi-Fi 5 Wave 2 @ 867Mbps (2x2:2 MU-MIMO)	Wi-Fi 5 Wave 2 @ 1733Mbps (4x4:4 MU-MIMO)
		IEEE 802.3at PoE (PD)	IEEE 802.3at PoE (PD)
ENVIRONMENTAL	Indoor / outdoor usage	Indoor	Indoor
	Temperature range	PoE: 0°C to 50°C AC adapter: 0°C to 45°C	PoE: 0°C to 50°C AC adapter: 0°C to 45°C
SCALABILITY	Clustering		
MANAGEMENT	Operations management	Standalone / controlled mode	Standalone / controlled mode
	Web-based GUI	HTTP, HTTPS	HTTP, HTTPS
	SNMP	v1, v2c	v1, v2c
	Vista Manager EX + AWC	■	■
SECURITY	Vista Manager Lite + AWC	■	■
	RADIUS / IEEE 802.1x / SSL	■	■
	Encryption AES	WEP - WPA/WPA2: CCMP (AES), TKIP	WEP - WPA/WPA2: CCMP (AES), TKIP
BRIDGING	MAC filtering	■	■
	VLAN	■	■
WIRELESS	AWC-CB Channel Blanket	■	■
	AWC-SC Smart Connect	■	■
	IEEE 802.11e (WMM)	■	■
	IEEE 802.11i (enhanced security)	■	■
	Mode: infrastructure	Access point	Access point
	Wireless Distribution System (WDS)	■	■
	Captive portal	via Vista Manager EX	via Vista Manager EX
	Dynamic channel planning		
	Virtual AP	8	8
	VLAN to Virtual AP mapping	■	■
	Regulatory domain compliance	■	■
	Rogue AP detection	■ through AWC	■ through AWC
	Antenna	2 x 2.4GHz (3.95dBi) / 4 x 5GHz (4.2dBi), embedded antennas	2 x 2.4GHz (1.9dBi) / 4 x 5GHz (3.7dBi), embedded antennas
Antenna diversity mode	■	■	
Wi-Fi certified	■	■	
AMF			
SDN / OPENFLOW			
IDEAL ENVIRONMENT	Enterprise / campus	Enterprise / campus	Small / medium business

*Not available in NA/CSA

AUTONOMOUS WAVE CONTROL (AWC)

Allied Telesis AWC is an advanced network technology that utilizes Artificial Intelligence (AI) to deliver significant improvements in wireless network connectivity and performance while reducing deployment and operating costs. AWC regularly analyses coverage gaps and Access Point (AP) interference, and automatically optimizes the Wi-Fi network to deliver a high-quality user experience that responds to network configuration changes, and bandwidth demands from wireless devices.

No Compromise Wi-Fi


Commonly used multi-channel wireless APs offer high throughput, but complex deployment and radio interference can reduce overall effectiveness. Single-channel wireless networks provide reliable roaming, but less throughput.

Our world-first hybrid Wi-Fi solution enables multi-channel and single-channel wireless connectivity on the same APs for maximum performance where you need it, and seamless roaming for critical applications. Unified management of the hybrid APs by AWC enables self-optimization of the entire wireless network with no administrator input.

Identifying WiFi device technology

To help users identify devices that provide the latest Wi-Fi experience, Wi-Fi Alliance has introduced simplified generational names that may appear in device names and product descriptions. The latest generation of Wi-Fi devices, based on the IEEE 802.11ax standard, are known as Wi-Fi 6 devices. The majority of devices shipping today, based upon the IEEE 802.11ac standard, are identified as Wi-Fi 5.

NAMING CONVERSION	
LEGACY NAME	NEW NAME
IEEE 802.11n technology	Wi-Fi 4
IEEE 802.11ac technology	Wi-Fi 5
IEEE 802.11ax technology	Wi-Fi 6



AWC Smart Connect

AWC Smart Connect takes wireless automation to another level, with simple plug-and-play deployment requiring only a power connection to grow your wireless network. Our advanced APs communicate with each other wirelessly for optimal throughput back to the wired network. With only original APs needing a wired back-haul connection, while the others use a wireless uplink, a Wi-Fi network can easily expand to support business growth or for one-off events. Allied Telesis AWC Smart Connect makes zero-touch wireless deployment a reality.

Wireless Controllers

Centrally manage an innovative Allied Telesis wireless solution with the AWC plugin for Vista Manager EX, our single-pane-of-glass graphical network management tool. Or for smaller networks, AWC-Lite is built right into the Device GUI that runs on a number of our switches, firewalls, and routers.

Enjoy the power of AWC for industry-leading Wi-Fi optimization, automation, and performance.



Visualize AP deployment with wireless floor and heat maps

Multiservice Access

A smarter, feature-rich and flexible approach to delivering subscriber services.

IP is driving new, innovative services and applications. Converged services and real-time communications are changing lifestyles, along with the type of network required to deliver them. Service providers face the challenge of re-architecting the access network to meet today's IP-driven broadband service, such as IP Triple Play, and at the same time try to anticipate the requirements for the "next new service." Selecting the best platform and technology becomes critical to protecting investments and responding competitively to new service needs.

The rapid changes from broadcast to on-demand video and from surfing the Web to content sharing have not only increased demands for bandwidth, but created greater needs to manage converged IP services. If a service provider is to capitalize on the revenue opportunities derived from multimedia services and satisfied consumer needs, an intelligent home gateway approach becomes essential.



intelligent Multiservice Gateways (iMG)

The iMG family of full-featured indoor and outdoor gateways support xDSL and fiber (FTTH) options, all designed with the features, management, and IP functionality needed to deliver the “connected home.”

As the name implies, intelligent Multiservice Gateway products are fully featured for delivering multimedia services such as broadcast and streaming IP video, Internet data, analog voice, and VoIP from a single subscriber line to multiple devices in the home.

FEATURES		iMG1525	iMG1525RF	iMG2426F
ENVIRONMENTAL	Indoor usage	■	■	■
	Outdoor usage			■
UPLINK	Ethernet 100Mbps fiber (BiDi)	■	■	
	Ethernet 100Mbps fiber SFP module			■ SFP
	Ethernet 1000Mbps fiber (BiDi)	■ (20 km)	■ (20 km)	■ SFP
LAN INTERFACE	10/100/1000T	5	5	6
WAN PORT	Copper / fiber	Fiber	Fiber	Fiber
CATV RF OVERLAY	High output power		■	
PHONE INTERFACES	FXS	2	2	2
	PSTN lifeline	■	■	
VoIP PROTOCOLS	SIP / MGCP	■	■	■
CONSOLE INTERFACE	USB	■	■	■
QoS	IEEE 802.1p priority queues	■	■	■
	IEEE 802.1Q VLANs mgmt	■	■	■
	AlliedView NMS	■	■	■
MANAGEMENT	TR-069	■	■	■
	SNMPv1, v2 and v3	■	■	■
	Telnet, Web, GUI, CLI	■	■	■
	Remote software upgrade	■	■	■
	Fiber outlet kit iMG001	■	■	
ACCESSORY AVAILABLE	Battery backup iMG008	■	■	■
	Outdoor case EN-SFR-ONT			■



SFP/SFP+ Optics
Learn more about Allied Telesis pluggable optics on page 42.

MODEL	DEPLOYMENT		WAN				POTS	LAN	
	Outdoor	Indoor	100X	100/1000X	GE	EPON	FXO	10/100/1000	RF
iMG1525		■		■			2	5	
iMG1525RF		■		■			2	5	■
iMG2426F	■	■	■		■	■	2	6	



Media Converters

Solutions that let you extend and evolve your network.

Allied Telesis media converters extend network distances by adding fiber and VDSL (via coax and telephone-grade twisted pair) only where it is needed. This enables customers to keep pace with changing technology and to integrate high-bandwidth devices into the network without changing the entire network infrastructure. From standalone units to chassis-based blades, Allied Telesis media converters are highly configurable to meet every need.

Allied Telesis media converters enable the connection of disparate cabling types in networks where many cabling types exist. Network segments may also operate at different speeds, and media converters can be used to convert between speeds. Typically, media converters are used to connect copper and fiber-optic cabling that coexist in a network. Converters exist in a variety of standalone, multi-port, and modular forms. These different physical forms address the need for different applications and conversion densities.



Unmanaged



FAST AND GIGABIT ETHERNET STANDALONE MEDIA CONVERTERS

FEATURES		MC101XL	MC102XL	MMC6005	MMC6006
PORTS	Port 1	100TX	100TX	10/100/1000T	10/100/1000T
	Port 2	100FX (ST)	100FX (SC)	RJ-11 VDSL/2	BNC VDSL/2
	Type	MMF	MMF		
IEEE STANDARD		100FX	100FX		
Tx WAVELENGTH		1310 nm	1310 nm		
Rx WAVELENGTH		1310 nm	1310 nm		
MAX DISTANCE		2 km	2 km	3 km	2 km
FUNCTIONALITY	Rate and speed			■	■
	MissingLink support	■	■		
	Smart MissingLink support			■	■
	Max frame size	9KB	9KB	10KB	10KB
	Diagnostic LEDs	7	7	4	4
POWER SUPPLY	PSU type	External	External	External	External
	Multi-region	■	■	■	■
	Compatible with rackmount chassis	MMCR12 TRAY4	MMCR12 TRAY4	MMCR18 MMCTRAY6	MMCR18 MMCTRAY6

MMC Series

The Allied Telesis MMC Series of Fast Ethernet mini media converters leverages its smaller size to not only help the environment with a small carbon footprint, but also to save space in its working environment. Despite its compact size, the MMC Series delivers all the power and functionality of standard size media converters.

COMING SOON

FAST ETHERNET AND GIGABIT ETHERNET STANDALONE MINI MEDIA CONVERTERS

FEATURES		MMC200 /LC/SC/ST	MMC200LX	MMC2000 /LC/SC/ST	MMC2000/SP	MMC2000LX	MMC2000/T	MMC10G MMC10GT
PORTS	Port 1	10/100/1000T	10/100/1000T	10/100/1000T	10/100/1000T	10/100/1000T	10/100/1000T	10GT or SFP+
	Port 2	100FX (LC) 100FX (SC) 100FX (ST)	100FX (SC) 100FX (ST)	1000SX (LC) 1000SX (SC) 1000SX (ST)	100/1000 SFP	1000SX (LC) 1000SX (SC)	10/100/1000T	SFP+ or SFP
	Type	MMF	SMF	MMF	SMF / MMF	SMF		SMF / MMF
IEEE STANDARD		100FX	100FX	1000SX	100FX / 1000X	1000LX	Copper	10G
Tx WAVELENGTH		1310 nm	1310 nm	850 nm	Depends on SFP	1310 nm		Depends on SFP
Rx WAVELENGTH		1310 nm	1310 nm	850 nm	Depends on SFP	1310 nm		Depends on SFP
MAX DISTANCE		2 km	20 km	550 m	Depends on SFP	20 km	100 m	Depends on SFP
FUNCTIONALITY	Rate and speed	■	■	■	■	■	■	■
	Smart MissingLink support	■	■	■	■	■	■	■
	Max frame size	10KB	10KB	10KB	10KB	10KB	10KB	10KB
	Diagnostic LEDs	4	4	4	4	4	4	4
	Smart Link restoration	■	■	■	■	■	■	■
POWER SUPPLY	PSU type	External	External	External	External	External	External	External
	Multi-region	■	■	■	■	■	■	■
	Compatible with a rackmount chassis	MMCR18 MMCTRAY6	MMCR18 MMCTRAY6	MMCR18 MMCTRAY6	MMCR18 MMCTRAY6	MMCR18 MMCTRAY6	MMCR18 MMCTRAY6	MMCR18* MMCTRAY6

* limitations will apply

Desktop Powered

The Allied Telesis DMC100 and DMC1000 Series of Gigabit mini media converters are among the smallest media converters in the market today. At just 1.25 in wide x 3.6 in deep x 0.85 in high, these media converters can easily fit into the palm of your hand. In addition to being compact — with a small carbon footprint — the DMC Series can also be powered with the included micro USB to USB cable, and plugged directly into a laptop or PC. This saves installation time and cabling as there are no further power requirements necessary.

The UMC Series are powered and transfer data via the USB port. There is no need for copper cabling or a power cable to enable fiber to the desktop, workstation or laptop. Simply plug the fiber into the UMC200/2000 and the USB port into the PC.

FAST ETHERNET AND GIGABIT DESKTOP USB OR EXTERNAL POWERED

SUPERSPEED USB 3.1/USB-C TO FIBER MEDIA CONVERTERS

FEATURES		DMC100 /LC/SC/ST	DMC1000 /LC/SC/ST	UMC200 /SC/ST	UMC2000 /SC/ST
PORTS	Port 1	100TX	1000T	USB 3.1 / USB-C	USB 3.1 / USB-C
	Port 2	100FX (LC) 100FX (SC) 100FX (ST)	1000SX (LC) 1000SX (SC) 1000SX (ST)	100FX (SC) 100FX (ST)	1000SX (SC) 1000SX (ST)
	Type	MMF	MMF	MMF	MMF
IEEE STANDARD		100FX	1000SX	100FX	1000SX
Tx WAVELENGTH		1310 nm	850 nm	1310 nm	850 nm
Rx WAVELENGTH		1310 nm	850 nm	1310 nm	850 nm
MAX DISTANCE		2 km	550 m	2 km	550 m
FUNCTIONALITY	Smart MissingLink support	■	■	■	■
	Max frame size	16KB	16KB	16KB	16KB
	Diagnostic LEDs	4	4	4	4
	Smart Link restoration	■	■	■	■
	Wake-on-LAN			■	■
POWER SUPPLY	PSU type	External	External	USB 3.0/C	USB 3.0/C

Mounting Hardware

The majority of unmanaged Allied Telesis media converters can be mounted in a number of ways.

Desktop

All Allied Telesis media converters have the option to be fitted with rubber feet. These allow the product to be positioned on the desktop.

Wall

A standalone media converter or switch can be easily mounted on a wall or under a table using this wallmount fixture.

- ▶ **WLMT**
Wallmount fixture (supplied in packages of 10)



DIN Rail

This universal bracket allows a wide range of Allied Telesis media converters and media/rate converters to be mounted onto an industry-standard 35 mm DIN rail.

- ▶ **DINRAIL1-010**
Mounting kit (supplied in packages of 10)



Universal Power Supply

For customers already using Allied Telesis media converters, replacement power adapters are available.



- ▶ **MCPWR**
Universal, high-efficiency external power adapter

Rack

Larger multi-channel and modular media converters ship with 19" rackmount kits. Smaller media converters may also be rackmounted in a number of ways:



- ▶ **MCR1 chassis**
This small chassis can be rackmounted, and allows a single standalone media converter or 2-port switch to be powered by an internal power supply. It is available with either AC or -48VDC power supply.



- ▶ **MCR12 chassis**
This chassis allows mounting of up to 12 standalone media converters or switches. The chassis supports optional redundant power supplies and can be AC or DC powered.

- ▶ **TRAY1 and TRAY4**
These simple trays allow one to four standalone media converters to be mounted into a rack.




MMC Rack

- ▶ **MMCR18**
This chassis allows mounting of up to 18 standalone MMC Series media converters. The chassis supports optional redundant power supplies and can be AC or DC powered. Standard, 19-inch, rack.



- ▶ **MMCTRAY6**
This 1RU rackmount tray allows the mounting of up to six MMC Series media converters.



PoE & Industrial



PoE Series

Allied Telesis PC PoE Series media converters are the ideal solution for powering remote devices such as IP phones, video cameras, wireless access points, etc., which are more than 100 m from a Power over Ethernet switch.

FEATURES		POE GIGABIT ETHERNET STANDALONE		POE FAST ETHERNET STANDALONE
		PC2000 /LC/SC	PC2000/SP	PC200/SC
PORTS	Port 1	10/100/1000T	10/100/1000T	10/100TX
	Port 2	1000SX (LC) 1000SX (SC)	SFP 100/1000X	100FX
	Fiber type	LC or SC	LC*	SC
IEEE STANDARD		1000SX	100FX, 1000SX, 1000LX	100FX
Tx WAVELENGTH		850 nm	Depends on SFP	1310 nm
Rx WAVELENGTH		850 nm	Depends on SFP	1310 nm
MAX FIBER DISTANCE		550 m	Depends on SFP	2 km
FUNCTIONALITY	Rate and speed	■	■	■
	Smart MissingLink support	■	■	■
	Max frame size	10KB	10KB	10KB
	Diagnostic LEDs	6	6	6
	Smart Link restoration	■	■	■
POWER OVER ETHERNET	PoE-enabled ports	1	1	1
	Max no. of full power ports	1	1	1
	Mode	A	A	A
	PoE power	IEEE 802.3at (30W)	IEEE 802.3at (30W)	IEEE 802.3at (30W)
POWER SUPPLY	PSU type	Internal	Internal	Internal
	Multi-region	■	■	■

* Dependant on SFP

Allied Telesis industrial Ethernet media converters offer an operating range from -40° to 75°C. The temperature-hardened IMC Series features Plug-and-Play and auto-negotiation.



IMC Series

Allied Telesis industrial media converters are the perfect fit for networks needing an extended temperature range. They extend the distance of the network by converting data between twisted pair cabling and multi-mode or single-mode fiber-optic cabling.

These industrial rate and media converters are capable of accepting 100MB or Gigabit SFP modules (auto sensing). With Remote Power Cycle you do not need to be onsite to cycle the power on the end device, saving you time and money.

FEATURES		INDUSTRIAL MEDIA CONVERTERS			
		IMC2000TP /SC/SP	IMC2000T /SC/SP	IMC200TP/SC	IMC200T/SC
PORTS	Port 1	10/100/1000T	10/100/1000T	10/100TX	10/100TX
	Port 2	1000X SFP (SP), 1000SX (SC)	1000X SFP (SP), 1000SX (SC)	100FX	100FX
	Fiber type	SFP (SP) or SC	SFP (SP) or SC	SC	SC
IEEE STANDARD		100FX / 1000X SFP (SP) 1000SX (SC)	100FX / 1000X SFP (SP) 1000SX (SC)	100FX	100FX
Tx WAVELENGTH		Depends on SFP (SP), 850 nm (SC)	Depends on SFP (SP), 850 nm (SC)	1310 nm	1310 nm
Rx WAVELENGTH		Depends on SFP, (SP) 850 nm (SC)	Depends on SFP, (SP) 850 nm (SC)	1310 nm	1310 nm
MAX FIBER DISTANCE		Depends on SFP (SP), 550 nm (SC)	Depends on SFP (SP), 550 nm (SC)	2 km (SC)	2 km (SC)
FUNCTIONALITY	Rate and speed	■	■	■	■
	Max frame size	10KB	10KB	10KB	10KB
	Diagnostic LEDs	■	■	■	■
	IEEE 802.3at Class 4	■	■	■	■
POWER OVER ETHERNET	IEEE 802.3at PoE+ and LTPoE+,, 4-pair up to 70W	■	■	■	■
	PoE enabled ports	1	1	1	1
	Mode	A	A	A	A
POWER SUPPLY	PSU type	-48 to 57VDC	-12 to -48VDC	-48 to 57VDC	-12 to -48VDC



The Converteon™ family provides the next generation of managed media conversion. Expandable from a single unit to a modular 18-slot chassis, Converteon primarily provides Fast Ethernet and Gigabit-rate media conversion. Support for IEEE 802.3ah Ethernet in the First Mile (EFM) makes Converteon ideal for both service providers and the enterprise.



► **CV1000**

1-slot chassis

- » External power adapter
- » Silent, fanless design
- » Standalone or wallmount



► **CV1203**

2-slot chassis

- » External power adapters (one as standard)
- » Resilient power adapters (CV1200PSU)
- » Supports dying gasp
- » Standalone or wallmount



► **CV5001**

18-slot rackmount chassis

- » Optional redundant power supply
- » Optional Telnet and SNMP management (CV5M02)
- » Optional redundant management with the addition of a second management module (CV5M02)
- » Hot-swappable blades
- » Field-serviceable power supplies and fans
- » Hot-swappable power supply modules (CV5001AC-60 and CV5001DC-80)
- » Resilient power supply modules (maximum of two)

FEATURES		CONVERTEON MODULES	
		CM301/2	CM3K0S
PORTS	Port 1	10/100TX	10/100/1000T
	Port 2	100FX (ST) (CM301) 100FX (SC) (CM302)	100/1000X SFP
	Fiber type	MMF	Depends on SFP
IEEE STANDARD		100FX	1000X
Tx WAVELENGTH		1310 nm	
Rx WAVELENGTH		1310 nm	
MAX FIBER DISTANCE		2 km	Depends on SFP
FUNCTIONALITY	Media type	■	■
	Rate and speed	■	■
	MissingLink support	■	■
	Smart MissingLink support	■	■
	Max frame size	10KB	10KB
	Diagnostic LEDs	9	9
OAM	Rate limiting	■	■
	Dying gasp support	■	■
ECO-FRIENDLY	Management	■	■
		■	■

SFP and SFP+ Optics

Learn more about Allied Telesis pluggable optics on page 42.



Chassis-Based

MCF3000 Series COMING SOON

The Allied Telesis MCF3000 is a 1RU, three blade, chassis system able to support up to 24 conversions, (dependent on connector type). This chassis is powered by hot-swappable AC or DC power supplies. This allows for flexibility amongst connection types/speeds as well as the industry's smallest form factor for up to 24 media conversions at 1RU high.

With both Gig (MCF3000) and 10 Gig (MCF3010) blades the MCF3000 chassis family will be able to handle the most robust conversion needs. The SFP port on the MCF3000/8SP enables backward compatibility to 100MB networks, while the SFP+ port on the MCF3010T/4SP will handle 10G distances beyond the standard 220m using our complete line of optics.

- ▶ **MCF3300**
3-slot up to 24 media converter chassis
- ▶ **MCF3000/8SP**
8 x 100/1000MB SFP to 10/100/1000T
- ▶ **MCF3000/8LC**
8 x 1000SX/LC to 10/100/1000T
- ▶ **MCF3010T/4SP**
4 x 10GT to SFP+
- ▶ **MCF3000M**
Management module

- » Configure, monitor, troubleshoot remotely via the management module
- » Backup/restore/upgrade
- » Ethernet interfaces
- » USB console port
- » 1 RU, 3-slot design
- » Complete system hardware monitoring
- » Missing Link/Smart Missing Link
- » Enhanced user management
- » Syslog (System Logging)
- » Multiple IP addressing modes (IPv4 / IPv6, DHCP, Static, Bootp)
- » SNMP v1, SNMP v2c, and SNMP v3
- » Ability to shut down a port or whole card for power saving or security
- » Ability to enable/disable remote management
- » Limited AMF support
- » Redundant Power Supply (capable)

SFP and SFP+ Optics

Learn more about Allied Telesis pluggable optics on page 42.



Network Adapters

We're the market leader for fiber adapters with fast, secure and reliable solutions.

From 100Mbps to 10 Gigabit, Allied Telesis seamlessly connects desktops, laptops, servers, and thin clients with a continually expanding portfolio of high-quality, reliable, and cost-effective network adapters.

As the worldwide leader in fiber adapter cards Allied Telesis continues to offer the highest-quality cards at competitive prices. With offerings from 100FX to 10 Gig, we have a card to fit your secure fiber optic network needs.



Desktop/Workstation



29xx Series

Allied Telesis 29xx network adapters provide the maximum possible bandwidth and bus efficiency with the benefits of low-power consumption. They include a comprehensive Microsoft Windows utility which performs detailed tests, diagnostics and analysis.

Advanced Power Management (ACPI)

ACPI is part of the environmental control initiative for computers. Allied Telesis adapter cards support ACPI, which places the system in a low power state when it is not receiving or transmitting data.

Wake-on-LAN (WoL)

WoL is a feature of adapter cards that allows a computer fitted with a card to be remotely powered-on. The computer receives a special data packet via the network port that will cause the computer to boot. This, coupled with PXE support, allows network administrators to gain complete access to all computers on their networks.

Preboot Execution Environment (PXE) Support

PXE allows network administrators to perform preboot procedures on a system, such as installing an operating system, running a virus checker, or downloading a predefined system configuration. PXE support included in Allied Telesis adapter cards allows a workstation or computer to boot from a remote server connected to the network prior to booting from the local hard drive.

FEATURES		GIGABIT COPPER		COPPER AND FIBER
		2912T	2911T/2	2911GPa/SP
BUS TYPE		PCIe (x1)	PCIe (x1)	PCIe (x1)
PORTS AND MEDIA SUPPORT	10/100/1000T PoE			IEEE 802.3at (30W)
	10/100/1000T	■	■ (2 ports)	
	100FX			
	1000X			1000Mbps SFP
FIBER TYPE				Depends on SFP
MAX FIBER DISTANCE				Depends on SFP
PERFORMANCE	QoS			
	IEEE 802.1p priority queues	■	■	■
	TCP/IP checksum CPU offload	■	■	■
	Jumbo frames	■	■	■
	Link aggregation support	■	■	■
	Link aggregation failover	■	■	■
	Teaming	■	■	■
MANAGEMENT	Wake-on-LAN	■	Copper port	Copper port
	Managed boot agent (PXE remote boot ROM)	2.1	2.1	2.1
	DASH (TruManage)	■		
	VLAN support	■	■	■
	Advanced power management (ACPI)	■	■	■
	SNMP	■	■	■
SECURITY	IPSec offload	■		
DRIVER SUPPORT	Windows Server 2012	■	■	■
	Windows Server 2016	■	■	■
	Windows Server 2019	■	■	■
	Windows 10	■	■	■
	Linux	■	■	■
IPv6 SUPPORT		■	■	
DIAGNOSTICS	LEDs	■	■	■
	Virtual cable tester	■	■	
PHYSICAL	Low profile bracket and full height provided	■	■	■

SFP/SFP+ Optics


Learn more about Allied Telesis pluggable optics on page 42.



FEATURES		GIGABIT FIBER				FAST ETHERNET FIBER	
		2914SX /LC/SC	2914SP	2911SX	2911SFP/2	2711FX	2712FX
BUS TYPE		PCIe (x1)	PCIe (x1)	PCIe (x1)	PCIe (x1)	PCIe (x1)	PCIe (x1)
PORTS AND MEDIA SUPPORT	10/100/1000T PoE						
	10/100/1000T						
	100FX		SFP			LC, SC, ST	SC
	1000X	LC, SC	SFP	LC, SC, ST	1000Mbps SFP (2 ports)		
FIBER TYPE		MMF	100/1000 SFP	MMF	Depends on SFP	MMF	MMF
MAX FIBER DISTANCE		220 m / 500 m	Depends on SFP	220 m / 500 m	Depends on SFP	2 km	2 km
QoS	IEEE 802.1p priority queues	■	■	■	■	■	■
	TCP/IP checksum CPU offload	■	■	■	■	■	■
	Jumbo frames	■	■	■	■	■	■
	Link aggregation support	■	■	■	■	■	■
	Link aggregation failover	■	■	■	■	■	■
	Teaming	■	■	■	■	■	■
MANAGEMENT	Wake-on-LAN	■	■	■	■	■	■
	Managed boot agent (PXE remote boot ROM)	2.1	2.1	2.1	2.1	2.1	2.1
	DASH (TruManage)	■	■	■	■	■	■
	VLAN support	■	■	■	■	■	■
	Advanced power management (ACPI)	■	■	■	■	■	■
	SNMP	■	■	■	■	■	■
SECURITY							■
DRIVER SUPPORT	IPSec offload						
	Windows Server 2012			■	■		
	Windows Server 2016			■	■		
	Windows Server 2019			■	■		
	Windows 10	■	■	■	■	■	■
	Linux	■	■	■	■	■	■
IPv6 SUPPORT		■	■	■	■	■	■
DIAGNOSTICS	LEDs	■	■	■	■	■	■
	Virtual cable tester	■	■	■	■	■	■
PHYSICAL		■	■	■	■	■	■
	Low profile bracket and full height provided	■	■	■	■	■	■

27M2 29M2

The Allied Telesis 27M2 and 29M2 network adapters are ideal for fiber-to-the-desktop networks that depend on secure and reliable systems. These compact form-factor PCBA adapters are specifically designed for motherboards with the M.2 interface.

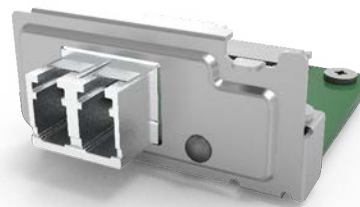

10G Adapters

ANC/DNC Series

Large file transfers, multimedia support and more and more users are causing high demand on network resources. These issues are taxing on bandwidth.

Allied Telesis single and dual-port, 10 Gigabit adapters offer cost-effective solutions for your file or application server or even a high-powered workstation to transfer more data, faster.

FEATURES		SFP+ 10 GIGABIT		RJ-45 10 GIGABIT
		ANC10S/2	DNC10SP	DNC10T
BUS TYPE		PCIe (x8)	PCIe (x4)	PCIe (x4)
PORTS AND MEDIA SUPPORT	Connector type	2 x SFP+	SFP or SFP+	RJ-45
	Fiber type	MMF, SMF	MMF, SMF	
	Max distance	Depends on SFP+	Depends on SFP+	100 m
QoS	IEEE 802.1p priority queues	■	■	■
PERFORMANCE	TCP/IP checksum CPU offload	■	■	■
	Jumbo frames	■	■	■
	Link aggregation support	■	■	■
	Link aggregation failover	■	■	■
	iSCSI Boot	■	■	■
MANAGEMENT	Managed boot agent (PXE remote boot ROM)	2.1	■	■
	VLAN support	■	■	■
	Teaming	■	■	■
	SNMP	■	■	■
DRIVER SUPPORT	Windows Server 2012	■	■	■
	Windows Server 2016	■	■	■
	Windows Server 2019	■	■	■
	Windows 10	■	■	■
	Linux	■	■	■
IPv6 SUPPORT		■	■	■
DIAGNOSTICS	LEDs	■	■	■
PHYSICAL	Low profile bracket and full height provided	■	■	■



Transceiver Modules

Offering a wide variety of products to round out your end-to-end network solution.

Allied Telesis optics provide fiber and copper connectivity for the full range of Allied Telesis product lines. Pluggable transceivers allow one product the flexibility to expand by media type (copper or fiber), speed (Fast Ethernet and 1, 10, or 40 Gigabit), and/or distance (220 m to 80 km).



Allied Telesis offers SFP, cSFP, SFP+, QSFP+ and QSFP28 pluggable transceivers, which comply with industry networking regulations. This compliance allows Allied Telesis pluggable optics to be used on any industry-standard networking equipment.

Pluggable Transceivers

SFP Series (SP)

The SP Series delivers flexible, full-duplex Ethernet connectivity. These hot-swappable fiber interfaces simply plug into an SFP slot on Allied Telesis products that are SFP compatible. Configurations can be optimized to meet a variety of distance and service requirements.

cSFP Series

The cSFP Series offers two channel Bi-Directional SFP designed expressly for high-speed communication applications. This hot-pluggable transceiver simply plugs into a cSFP slot on an Allied Telesis product for convenient transmission capacity upgrade.

QSFP Series (QSFP+)

The QSFP Series offers the latest industry-standard 40 Gigabit Ethernet connectivity in a flexible, small form factor. It is ideal for Datacom/Telecom switch and router connections, as well as data aggregation, backplane, proprietary protocol, and high-density applications. This hot-swappable transceiver simply plugs into a QSFP slot on any compatible Allied Telesis product.

FEATURES	GIGABIT FIBER TRANSCEIVERS (SFP)				
	SPSX SPSX/I SPSX/E	SPEX SPEX/E	SPLX10 SPLX10/I SPLX10/E	SPLX40 SPLX40/E	SPZX80
FORM FACTOR	SFP	SFP	SFP	SFP	SFP
FIBER TYPE	MMF	MMF	SMF	SMF	SMF
NUMBER OF FIBERS	2 (Rx, Tx)	2 (Rx, Tx)	2 (Rx, Tx)	2 (Rx, Tx)	2 (Rx, Tx)
SPEED	1000Mbps	1000Mbps	1000Mbps	1000Mbps	1000Mbps
DIGITAL DIAGNOSTICS MONITORING (DDM)	■ (SX/I)		■ (LX10/I)	■ (LX40)	■
Rx WAVELENGTH	850 nm	1310 nm	1310 nm	1310 nm	1550 nm
Tx WAVELENGTH	850 nm	1310 nm	1310 nm	1310 nm	1550 nm
MAX DISTANCE	220 / 550 m 550 m (SX/E)	2 km	10 km	40 km	80 km
CONNECTOR TYPE	LC	LC	LC	LC	LC
TEMPERATURE	0°C to 70°C (SX) -40°C to 85°C (SX/I) -40°C to 105°C (SX/E)	0°C to 70°C (EX) -40°C to 105°C (EX/E)	0°C to 70°C (10) -40°C to 85°C (10/I) -40°C to 105°C (10/E)	0°C to 70°C (40) -40°C to 105°C (40/E)	0°C to 70°C

TAA Compliant

Allied Telesis provides many options for Trade Act Compliant (TAA) optics. These products are manufactured in TAA compliant countries and continue our commitment to providing a wide range of offerings for any network requirement.

- ▶ SPEX
- ▶ SPEX/E
- ▶ SPFX/2
- ▶ SPLX10/E
- ▶ SPLX40/E
- ▶ SPSX
- ▶ SPSX/I
- ▶ SPSX/E
- ▶ SP10SR
- ▶ SP10LR/M
- ▶ SP10ER40/I
- ▶ SP10BD10/I-12
- ▶ SP10BD10/I-13
- ▶ SP10BD20-12
- ▶ SP10BD20-13
- ▶ SP10BD40/I-12
- ▶ SP10BD40/I-13
- ▶ SPBD20DUAL-14
- ▶ SPBD40DUAL-14
- ▶ QSFP SR4
- ▶ QSFP LR4

FEATURES	FAST ETHERNET FIBER TRANSCEIVERS		
	SPFX/2	SPFXBD-LC-13 SPFXBD-LC-15	SPFX/15
FORM FACTOR	SFP	SFP	SFP
FIBER TYPE	MMF	SMF	SMF
NUMBER OF FIBERS	2 (Rx, Tx)	1 (BiDi)	2 (Rx, Tx)
SPEED	100Mbps	100Mbps	100Mbps
DIGITAL DIAGNOSTICS MONITORING (DDM)	■		■
Rx WAVELENGTH	1310 nm	1550 nm (13) 1310 nm (15)	1310 nm
Tx WAVELENGTH	1310 nm	1310 nm (13) 1550 nm (15)	1310 nm
MAX DISTANCE	2 km	15 km	15 km
CONNECTOR TYPE	LC	LC - BiDi	LC
TEMPERATURE	0°C to 70°C	0°C to 70°C	0°C to 70°C

FEATURES	40 GIGABIT FIBER (QSFP+)	
	QSFP SR4	QSFP LR4
FORM FACTOR	QSFP+	QSFP+
FIBER TYPE	MMF	SMF
NUMBER OF FIBERS	2 (Rx, Tx)	2 (Rx, Tx)
SPEED	40G	40G
DIGITAL DIAGNOSTICS MONITORING (DDM)	■	■
Rx WAVELENGTH	850 nm	4 CWDM lanes*
Tx WAVELENGTH	850 nm	4 CWDM lanes*
MAX DISTANCE	Up to 150 m	Up to 10 km
CONNECTOR TYPE	MPO	LC
TEMPERATURE	0°C to 70°C	0°C to 70°C

* Central wavelengths of the 4 CWDM channels - 1271, 1291, 1311 and 1331 nm

FEATURES	COPPER RJ-45 TRANSCEIVERS	
	SPTX	SP10T
FORM FACTOR	SFP	SFP+
SPEED	10/100/1000T	100M / 1G / 10G BaseT
MAX DISTANCE	100 m	30 m
CONNECTOR TYPE	RJ-45	RJ-45
TEMPERATURE	0°C to 70°C	-5°C to 85°C



SPI0 Series (SFP+)

The SPI0 Series offers customers a wide variety of 10 Gigabit Ethernet connectivity options for data center, enterprise, and service provider transport applications. These hot-swappable devices plug into an Ethernet SFP+ port and have the smallest 10G form factor in the industry. Configurations can be optimized to meet a variety of distance and service requirements.

iMG Transceivers

- ▶ **TN-P015-A**
SC, Gigabit/100M, 20 km SFP, Tx 1310, Rx 1480 - 1560, use with iMG1400 Series
- ▶ **SPBD20EPON-13/I**
20 km, bi-directional, 1 Gigabit GEAPON SFP for iMG2426F

INDUSTRIAL EXTENDED

Temperatures

Different network environments call for a variety of temperature ranges. Allied Telesis supports a wide range of industrial temperature optical accessories for use in all its extended and industrial temperature products. The SP Series is available in standard (0-70°C), **industrial (-40 to 85°C)**, and **extended (-40 to 105°C)** temperature variants.

FEATURES	GIGABIT FIBER TRANSCEIVERS (SFP)		COMPACT GIGABIT FIBER (CSFP)	GIGABIT OPTICS (NSP)
	SPBD10-13 SPBD10-14	SPBD20LC/I-13 SPBD20LC/I-14	SPBD20DUAL-14 SPBD40DUAL-14	SPBD20-13/I SPBD20-14/I
FORM FACTOR	SFP	SFP	CSFP	SFP
FIBER TYPE	SMF	SMF	SMF	SMF
NUMBER OF FIBERS	1 (BiDi)	1 (BiDi)	2 (BiDi)	1 (BiDi)
SPEED	1000Mbps	1000Mbps	1000Mbps	1000Mbps
DIGITAL DIAGNOSTICS MONITORING (DDM)		■	■	■
Rx WAVELENGTH	1490 nm (13) 1310 nm (14)	1490 nm (13) 1310 nm (14)	1310 nm	1550 nm (13/I) 1310 nm (14/I)
Tx WAVELENGTH	1310 nm (13) 1490 nm (14)	1310 nm (13) 1490 nm (14)	1490 nm	1310 nm (13/I) 1490 nm (14/I)
MAX DISTANCE	10 km	20 km	20 km 40 km	20 km
CONNECTOR TYPE	LC - BiDi	LC - BiDi	2 × LC	SC
TEMPERATURE	0°C to 70°C	-40°C to 85°C	-40°C to 85°C	-40°C to 95°C

COMING SOON

COMING SOON

COMING SOON

FEATURES	10 GIGABIT FIBER TRANSCEIVERS (SFP+)							
	SP10SR SP10SR/I	SP10LR SP10LR/I	SP10LRM	SP10ER40/I	SP10ZR80/I	SP10BD10/I-12 SP10BD10/I-13	SP10BD20-12 SP10BD20-13	SP10BD40/I-12 SP10BD40/I-13
FORM FACTOR	SFP+	SFP+	SFP+	SFP+	SFP+	SFP+	SFP+	SFP+
FIBER TYPE	MMF	SMF	MMF	SMF	SMF	SMF	SMF	SMF
NUMBER OF FIBERS	2 (Rx, Tx)	2 (Rx, Tx)	2 (Rx, Tx)	2 (Rx, Tx)	2 (Rx, Tx)	1 (BiDi)	1 (BiDi)	1 (BiDi)
SPEED	10G	10G	10G	10G	10G	10G	10G	10G
DIGITAL DIAGNOSTICS MONITORING (DDM)	■	■	■	■	■	■	■	■
Rx WAVELENGTH	850 nm	1310 nm	1310 nm	1550 nm	1550 nm	1330 nm (12) 1270 nm (13)	1330 nm (12) 1270 nm (13)	1330 nm (12) 1270 nm (13)
Tx WAVELENGTH	850 nm	1310 nm	1310 nm	1550 nm	1550 nm	1270 nm (12) 1330 nm (13)	1270 nm (12) 1330 nm (13)	1270 nm (12) 1330 nm (13)
MAX DISTANCE	300 m	10 km	Up to 220 m	40 km	80 km	10 km	20 km	40 km
CONNECTOR TYPE	LC	LC	LC	LC	LC	LC	LC	LC
TEMPERATURE	0°C to 70°C (SR) -40°C to 85°C (SR/I)	0°C to 70°C (LR) -40°C to 85°C (LR/I)	0°C to 70°C	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C	0°C to 70°C	-40°C to 85°C

QSFP+ Cables

- ▶ **QSFP1CU**
QSFP+ 1 m cable
- ▶ **QSFP3CU**
QSFP+ 3 m cable



QSFP28 Cables

COMING SOON

- ▶ **QSFP28-1CU**
100G DAC, passive, 1 m
- ▶ **QSFP28-3CU**
100G DAC, passive, 1 m

Breakout Cables

- ▶ **QSFP-4SFP10G-3CU**
QSFP+ port to 4 × 10G ports, 3 m
- ▶ **QSFP-4SFP10G-5CU**
QSFP+ port to 4 × 10G ports, 5 m



Optical Cables

- ▶ **MTP12-1**
MTP cable for QSFP+ Series, 1 m
- ▶ **MTP12-5**
MTP cable for QSFP+ Series, 5 m



Twinax Cables

- ▶ **SP10TW1**
10G SFP+ Twinax, 1 m
- ▶ **SP10TW3**
10G SFP+ Twinax, 3 m
- ▶ **SP10TW7**
10G SFP+ Twinax, 7 m

Company Details