



### Affordable Power over Ethernet Switching

The ProSAFE FS108P provides power and data from a single point, using Power over Ethernet (PoE) over a single Cat-5 cable. The eight Fast Ethernet ports can be used for any 10/100 Mbps link and four of these ports can supply industry-standard IEEE 802.3af power. Advanced auto-sensing algorithm gives power only to 802.3af end devices, so no need to worry about damaging proprietary PoE or non-PoE equipment. In addition, it discontinues the power when PoE devices are disconnected. Easy and reliable, the ProSAFE FS108P automatically determines PoE requirements, speed, duplex, and cable type using Auto Uplink™.

The affordably priced ProSAFE FS108P delivers PoE to any small business network that wants to simplify the installation of wireless access points and IP-based surveillance cameras. These devices are optimally installed on a ceiling or high on a wall, away from most electrical outlets. PoE eliminates the requirement for a dedicated electrical outlet to power these devices. This allows for flexibility in situating devices where AC power is difficult to access and lowers installation costs. Compact and flexible, the ProSAFE FS108P is ideal for small business networks that need to inexpensively use PoE to deploy wireless access points and IP-based network surveillance cameras.

### Highlights

#### Flexible

- Choose to plug in up to eight Ethernet or Fast Ethernet devices and mix in up to four 802.3af IP-based devices like wireless access points or IP-based network surveillance cameras. Place these 802.3af-compliant devices where they belong – high up on walls and ceiling for maximum coverage – or anywhere else you need them. Power and data are carried over standard Cat 5 cabling.

#### Plug and Play


- The standards-based ProSAFE FS108P senses and adjusts for network speed and cabling type automatically, for easy integration into your existing 10/100 Ethernet network. For PoE, the switch automatically detects 802.3af-compliant devices, and supplies power as needed. Front panel LEDs keep you informed of switch and PoE status.

#### Quiet and Compact

- Engineered for compact convenience, it features a 9-inch, durable metal case that is easily positioned on your desktop or a wall, using the included mounting hardware. The fan-less design quietly integrates with your small office environment.

#### Great Value

- With data switching and Power over Ethernet integrated into one unit, the FS108P saves space, reduces cables and eliminates the requirement for dedicated electrical outlets – lowering installation costs, simplifying installation of PoE-capable devices, and eliminating the need for electricians or extension cords. All in all, a great benefit for a modest price.

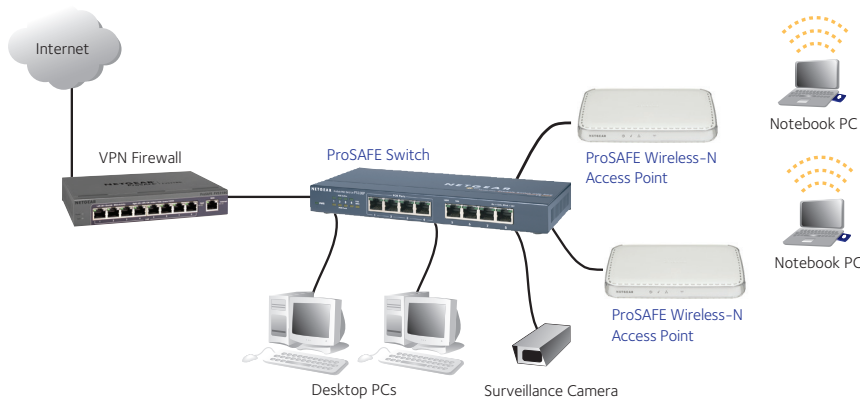

### Technical Specifications

#### Network Ports

- 8 auto speed-sensing 10/100 RJ-45 ports

#### Network Protocol and Standards

- IEEE 802.3i 10BASE-T
- IEEE 802.3u 100BASE-TX
- IEEE 802.1p priority tags
- IEEE 802.3x Flow Control
- IEEE 802.3af DTE Power via MDI

#### Performance Specifications

- Forwarding modes: Store-and-forward
- Bandwidth: 1.6Gbps
- Network latency: Less than 20  $\mu$ s for 64-byte frames in store-and-forward mode for 100Mbps to 100Mbps transmission
- Buffer memory: 96KB embedded memory per unit
- Address database size: 1,000 media access control (MAC) addresses per system
- Addressing: 48-bit MAC address
- Mean time between failures (MTBF): 927,000 hours
- Acoustic noise: 0dB (fanless)

#### Status LEDs

- System: Power, PoE maximum Power
- Per port: Link, activity, speed, PoE active, PoE fault

#### Power Supply

- Total power consumption: 56.1W maximum
- 802.3af power consumption: 53W maximum (Ports 1 – 4)
- 48V DC, 1.25A power output; plug is localized to country of sale

#### Physical Specifications

##### Dimensions: (W x D x H)

- 235 x 103 x 27mm (9.3 x 4.1 x 1.1in)

##### Weight

- 0.69kg (1.52lb)

#### Environmental Specifications

- Operating temperature: 32° to 104°F (0° to 40°C)
- Storage temperature: -40° to 158°F (-40° to 70°C)
- Operating humidity: 90% maximum relative humidity, non-condensing
- Storage humidity: 95% maximum relative humidity, non-condensing
- Operating altitude: 10,000ft (3,000m) maximum
- Storage altitude: 10,000ft (3,000m) maximum

#### Electromagnetic Emissions

- CE mark, commercial
- FCC Part 15 Class B
- VCCI Class B
- EN 55022 (CISPR 22), Class B
- C-Tick, Class B

#### Electromagnetic Immunity

- EN 55024

#### Safety

- CE mark, commercial
- CE/LVD EN 60950

#### Warranty and Support\*

- ProSAFE Lifetime Warranty
- Lifetime 24x7 Online Chat Technical Support
- 90 days (24/7) Live Phone Technical Support
- Lifetime Next Business Day (NBD) Hardware Replacement

#### ProSUPPORT Service Packs Available

- On Call 24 x 7, Category 1\*\*
  - PMB0311 (1 yr.)
  - PBM0331 (3 yrs.)
  - PMB0351 (5 yrs.)

#### Package Contents

- ProSAFE® 8-port 10/100 Switch with Power over Ethernet (FS108P)
- AC Adapter
- Wall-mount kit
- Installation guide
- Warranty/support information card

#### Ordering Information

##### North America

FS108PNA

##### Europe General

FS108PEU

##### Asia/Australia:

FS108PAU

##### China

FS108-300PRS

\* This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and modifications to product may void the warranty; covers hardware, fans, and internal power supplies—not software or external power supplies; see <http://www.netgear.com/about/warranty/> for details. Lifetime technical support includes basic phone support for 90 days from purchase date and lifetime online chat support when purchased from a NETGEAR authorized reseller. This product was tested for quality and its components may be recycled. For indoor use only.

\*\* The NETGEAR OnCall 24x7 contract provides unlimited phone and email technical support for your networking product. For ProSAFE products purchased prior to 06/2014, also includes next-business-day hardware replacement.

\*NETGEAR #1 in US Market Share according to NPD data for switches in April 2015

NETGEAR, the NETGEAR logo, ProSAFE and ReadyNAS are trademarks and/or registered trades of NETGEAR, Inc. and/or its subsidiaries in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. © 2015 NETGEAR, Inc. All rights reserved.