



Philips Signage Solutions
D-Line Display

32"

Direct LED Backlight
Full HD

SignageSolutions

32BDL4031D

Inform. Effortlessly.

Smart, powerful 24/7 display.

Make it clear with a powerful Philips D-Line Professional Full HD Display. This responsive solution offers brilliant picture quality, simple control, and reliable connectivity.

Brilliant picture. Blazing processor speed.

- Full HD. Clear images. Crisp contrast
- IPS panel: rich color consistency from every angle
- Place in landscape or portrait orientation

Effortless setup. Total control.

- CMND & Control. Operate, monitor, maintain

Cost-effective system solution

- Energy-saving automatic backlight control
- FailOver. Ensure your display never goes blank

PHILIPS

Highlights

CMND & Control



Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

FailOver



From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs

ensuring content keeps playing even if the primary source goes down. Simply set a list of alternate inputs to be sure your business is always on.

Specifications

Picture/Display

- Diagonal screen size: 31.5 inch / 80 cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 400 cd/m²
- Contrast ratio (typical): 1100:1
- Dynamic contrast ratio: 500,000:1
- Response time (typical): 8 ms
- Aspect ratio: 16:9
- Viewing angle (H / V): 178 / 178 degree
- Pixel pitch: 0.36375 x 0.36375 mm
- Display colors: 16.7 Million
- Panel technology: IPS
- Placement: Landscape (24/7), Portrait (24/7)

Supported Display Resolution

Computer formats

| Resolution | Refresh rate |
|-------------|------------------|
| 1920 x 1200 | 60Hz |
| 1920 x 1080 | 60Hz |
| 1600 x 1200 | 60Hz |
| 1440 x 900 | 60Hz |
| 1366 x 768 | 60Hz |
| 1360 x 768 | 60Hz |
| 1280 x 800 | 60Hz |
| 1280 x 768 | 60Hz |
| 1024 x 768 | 60Hz |
| 800 x 600 | 56, 60, 72, 75Hz |
| 640 x 480 | 60, 67, 72, 75Hz |

Video formats

| Resolution | Refresh rate |
|------------|--------------|
| 1080i | 50, 60Hz |
| 1080p | 50, 60Hz |
| 720p | 50, 60Hz |
| 576i | 50Hz |
| 576p | 50Hz |
| 480i | 60Hz |
| 480p | 60Hz |

Connectivity

- Video input: Display Port 1.2x1, DVI-I x 1, HDMI 1.4x2
- Audio input: 3.5 mm jack
- Audio output: 3.5mm jack
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack
- Video output: DisplayPort 1.2x1, DVI-I x1

Convenience

- Screen saving functions: Pixel Shift
- Tiled Matrix: Up to 15 x 15
- Keyboard control: Lockable, Hidden
- Network controllable: RS232, RJ45
- Signal Loop Through: IR Loophthrough
- Picture in picture: PIP

Dimensions

- Bezel width: 10.8 mm (T/L/R), 15.7 mm (B)
- Set dimensions (W x H x D): 724.8 x 424.3 x 64.1 mm
- Set dimensions in inch (W x H x D): 28.54 x 16.7 x 2.52 inch
- VESA Mount: 200 x 200 mm M6
- Product weight: 6.15 kg
- Product weight (lb): 13.55 lb

Operating conditions

- Temperature range (operation): 5 ~ 40 °C
- Temperature range (storage): -10 ~ 50 °C
- MTBF: 50,000 hour(s)
- Altitude: 0 ~ 3000 m
- Humidity range (operation)[RH]: 10 ~ 80% (without condensation)
- Humidity range (storage) [RH]: 0 ~ 90% (without condensation)
- Relative humidity: 20 ~ 80 %

Power

- Consumption (On mode): 110W(max)
- Mains power: AC (100 ~ 240 V) , 2.5A
- Standby power consumption: <0.5 W
- Consumption (Typical): 60 W


Sound

- Built-in speakers: 2 x 10W RMS

Accessories

- Included accessories: AC Power Cord, RS232 cable, Remote Control, Batteries for remote control, Quick start guide
- Included Accessories: Edge Alignment Kit (1)-2pcs, Edge Alignment Kit (2)-1pcs, M3 screw x 1, RS232 daisy-chain cable, SD card cover x 1, Thumb Screw x8
- Stand: Universal Stand-S (BM05911)(Option)

Philips 32BDL4031D
Version: 1.0
Release Date: 2019/05/27

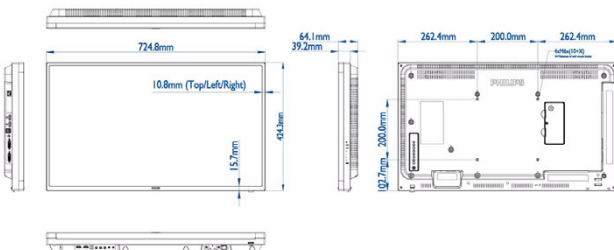

Issue date 2019-09-12

Version: 1.0.1

12 NC: 8670 001 57436
EAN: 87 12581 75585 0

© 2019 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com