

## Product Highlights

### Performance

- 7280CR Series: 60 x 100GbE
- 7280QR Series: 72 x 40GbE
- 7280SR Series: 48 x 25GbE and 6 x 100GbE
- 7280TR: 48 x 1/10GbE and 6x 100GbE
- 7280SR: 48 x 1/10GbE and 6x 100GbE
- Up to 60 wire-speed 100GbE ports
- Up to 12 terabits per second
- Up to 5.76 billion packets per second
- Wire speed L2 and L3 forwarding
- QSFP100: Quad 10GbE or 25GbE mode

### Data Center Optimized Design

- Ultra-deep packet buffer up to 32GB
- Virtual Output Queues per port to eliminate head of line blocking
- Over 94% efficient power supplies
- Redundant & hot-swap power and fans
- Front-to-rear or rear-to-front cooling
- Designed for NEBS
- Tool less rails for simple installation

### Virtualization and Provisioning

- CloudVision
- VXLAN for next generation DC
- LANZ for microburst detection
- DANZ Advanced Mirroring & TAP Aggregation for improved visibility
- VM Tracer
- Zero Touch Provisioning (ZTP)
- Advanced Event Monitoring
- Accelerated sFlow (RFC3176)

### Cloud Networking Ready

- 768K MAC Addresses
- 768K IPv4 and IPv6 Host Routes
- Over 2M IPv4 Routes with 7280R2K
- Arista AlgoMatch™

### Resilient Control Plane

- High Performance x86 CPU
- Up to 32GB DRAM
- 4GB Flash
- User applications can run in a VM

### Arista Extensible Operating System

- Single binary image
- Fine-grained truly modular network OS
- Stateful Fault Containment (SFC)
- Stateful Fault Repair (SFR)
- Full access to Linux shell and tools
- Extensible platform - bash, python, C++, GO, OpenConfig

## Overview

The Arista 7280R Series of fixed systems, including the 7280R, 7280RA, 7280R2, 7280R2A and the 7280R2K, are key components of the Arista 7000 Series portfolio of data center switches. The Arista 7280R Series are purpose built 10/25/40/100GbE systems built for the highest performance environments, and to meet the needs of the largest scale data centers and service providers. They deliver scalable L2 and L3 resources and high density with advanced features for network monitoring, precision timing and network virtualization to deliver scalable and deterministic network performance while simplifying designs and reducing Opex. The 7280R capabilities address the requirements for modern networking and rich multi-media content delivery requiring a lossless forwarding solution in a compact and energy efficient form factor.

The 7280R can be deployed in a wide range of open networking solutions including large scale layer 2 and layer 3 cloud designs, overlay networks, virtualized or traditional enterprise data center networks. Deep packet buffers and large routing tables allow for internet peering, interconnect and Inter-DC networking. The broad range of interfaces and density choice provides deployment flexibility.

The 7280R Series are available in a range of models with a choice of 10GBASE-T, 10GbE and 25GbE SFP with 40GbE and 100GbE QSFP uplinks and systems that offer up to 60 ports of wire speed 100GbE in a 2RU system.

7280R support for 100GbE QSFP incorporates a flexible choice of interface speed including 25GbE and 50GbE providing unparalleled flexibility and the ability to seamlessly transition data centers to the next generation of Ethernet performance. The 7280R Series provide industry leading power efficiency with airflow choices for back to front, or front to back. An optional built-in SSD supports advanced logging, data captures and other services directly on the switch. Combined with Arista EOS the 7280R Series delivers advanced features for big data, cloud, virtualized and traditional designs.



*Arista 7280R Series*

## Arista EOS

All Arista products including the 7280R Series runs the same Arista EOS software, binary image simplifying network administration with a single standard across all switches. Arista EOS is a modular switch operating system with a unique state sharing architecture that cleanly separates switch state from protocol processing and application logic. Built on top of a standard Linux kernel, all EOS processes run in their own protected memory space and exchange state through an in-memory database. This multi-process state sharing architecture provides the foundation for in-service-software updates and self-healing resiliency together with stateful switchover without the loss of data plane forwarding.

Arista EOS enables advanced monitoring and automation capabilities such as Zero Touch Provisioning, LANZ, VM Tracer and Linux based tools to be run natively on the switch.

## Enhanced Features for High Performance Cloud Networks

The Arista 7280R delivers a suite of advanced traffic control and monitoring features to improve the agility of modern high performance environments, with solutions for automation, data monitoring, precise timing and next-generation virtualization.

Automating the data center enables customers to dynamically provision computing resources in the most efficient manner while also meeting business needs by maintaining service level agreements (SLAs). Arista EOS automates complex IT workflows and simplifies network operations while reducing or even eliminating downtime. Arista EOS rich automation capabilities not only reduce the human error element in network operations but also enable IT operators to make the network work the way they want.

Arista offers solutions for a variety of approaches to cloud-like network automation. Addressing the needs of the largest public cloud environments as well as applying those lessons learned in the turnkey CloudVision automation offering.

### CloudVision

CloudVision is a network-wide approach for workload orchestration and workflow automation as a turnkey solution for Cloud Networking. CloudVision extends the EOS publish subscribe architectural approach across the network for state, topology, monitoring and visibility. This enables enterprises to move to cloud-class automation without needing any significant internal development.

### Advanced Event Management (AEM)

Advanced Event Management (AEM), a sub-system of Arista EOS, is a powerful and flexible tool to automate tasks and customize the behavior of EOS and the operation of the overall data center switching infrastructure. Simplifying the overall operations, AEM provides the tools to customize alerts and actions. AEM allows operators to fully utilize the intelligence within EOS to respond to real-time events, automate routine tasks, and automate actions based on changing network conditions.

### Precise Data Analysis

Arista Latency Analyzer (LANZ) and Precision Data Analyzer (DANZ) are integrated features of EOS. DANZ provides a solution to monitoring and visibility challenges at 10/40/100Gbps giving IT operations the ability to proactively deliver feedback on congestion events, filter, replicate, aggregate and capture traffic without affecting production performance. LANZ provides precise real-time monitoring of micro-burst and congestion events before they impact applications, with the ability to identify the sources and capture affected traffic for analysis.

### Precision Timing (IEEE 1588)

Arista's hardware derived Precision Time Protocol solution provides a robust mechanism for accurate in-band time distribution in high performance environments. The system clock can be synchronized using IEEE 1588 PTP.

### Virtualization

Supporting next-generation virtualized data centers requires tight integration with orchestration tools and emerging encapsulation technologies such as VXLAN. The 7280R builds on the valuable tools already provided by the Arista VM Tracer suite to integrate directly into encapsulated environments. Offering a wire-speed gateway between VXLAN and traditional L2/3 environments, the 7280R makes integration of non-VXLAN aware devices including servers, firewalls and load-balancers seamless and provides the ability to leverage VXLAN as a standards based L2 extension technology for non-MPLS environments.

### AlgoMatch™

AlgoMatch is a unique Arista innovation for modern cloud networks, combining both software and hardware to enable more flexible and scalable solutions for access control, policy based forwarding and network telemetry. By combining general purpose memory with advanced software algorithms AlgoMatch delivers higher scale, performance and efficiency with lower power and is more cost effective than traditional solutions. AlgoMatch provides a more efficient packet matching algorithm that in turn enables flow matching for access control, policy and visibility. The net benefits are a high performance policy engine with both increased functionality and scale in a cost and power efficient solution. AlgoMatch is available on the 7280RA, 7280R2A and 7280R2K Series of products.

- AlgoMatch enables IPv4 and IPv6 access control at the same scale
- L4 rule ranges are programmed efficiently without expansion or reduced capacity
- Multiple actions can be performed on a single packet or flow
- User defined filters allow flexible packet classification based on offsets for custom actions
- Supports rich policy with consistent semantics that would exhaust classical resources



*Arista 7280TR-48C6*

**7280TR-48C6: 48 port 10GbE BASE-T and 6 ports 100GbE**

- Offers 48 wire speed 100M/1G/10G RJ45 ports
- Six 100G QSFP ports allow choice of 6 x 100GbE, 24x 25GbE, 6x 40GbE, or 24x 10GbE
- 2.16Tbps of wire speed performance with 4GB of buffer



*Arista 7280SR-48C6*

**7280SR-48C6: 48 port SFP+ and 6 ports 100GbE**

- Offers 48 wire speed 1/10G SFP+ ports
- Six 100G QSFP ports allow choice of 6 x 100GbE, 24x 25GbE, 6x 40GbE, or 24x 10GbE
- 2.16Tbps of wire speed performance with 4GB of buffer



*Arista 7280SR2A-48YC6 and 7280SR2-48YC6*

**7280SR2A-48YC6 and 7280SR2-48YC6: 48 port 25GbE SFP and 6 ports 100GbE**

- Offers 48 wire speed 1/10/25G SFP ports with FC and RS FEC
- SFP ports offer 25G or 10G/1G speeds configurable in groups of 4
- Six 100G QSFP ports allow choice of 6 x 100GbE, 24x 25GbE, 6x 40GbE, or 24x 10GbE
- 3.6Tbps of wire speed performance with 8GB of buffer



*Arista 7280SR2K-48C6*

**7280SR2K-48C6: 24 port SFP+, 24 port 25GbE SFP and 6 ports 100GbE**

- Offers 48 wire speed SFP ports with 24 1/10G and 24 1/10/25G with FC and RS FEC
- 25G SFP ports offer 25G or 10G/1G speeds configurable in groups of 4
- Six 100G QSFP ports allow choice of 6 x 100GbE, 24x 25GbE, 6x 40GbE, or 24x 10GbE
- 2.88Tbps of wire speed performance with 4GB of buffer



*Arista 7280QR-C36 and 7280QRA-C36S*

**7280QR-C36 and 7280QRA-C36S: 24 port QSFP+ and 12 ports QSFP100**

- Offer a choice of ports combinations with QSFP+ and QSFP100 optics and cables
- The 7280QR-C36 offers flexible interface combinations up to - 12x100GbE, 36x40GbE, 24x50GbE, 48x 25GbE, 144x 10GbE
- The 7280QRA-C36S offers flexible interface combinations up to - 12x100GbE, 36x40GbE, 24x 50GbE<sup>1</sup>, 48x 25GbE<sup>2</sup>, 120x 10GbE
- Up to 4.32Tbps of wire speed performance with 8GB of buffer



*Arista 7280QR-C72*

**7280QR-C72: 56 port QSFP+ and up to 16 ports QSFP100**

- Full 72 ports of 40G with flexible combinations of up to 16 ports of 100GbE
- Maximum of 96 ports of 10G with 48 of 40G, or 56 of 40G and 8 ports of 100GbE
- QSFP100 ports with 5 speeds including 10GbE\*, 25GbE\*, 40GbE, 50GbE\* and 100GbE
- 6.4Tbps of wire speed performance with 16GB of buffer



*Arista 7280CR2A-30 and 7280CR2K-30*

**7280CR2A-30 and 7280CR2K-30: 30 port QSFP100**

- Up to 30 100G ports with QSFP100
- Maximum of 120 ports of 10GbE or 25GbE with FC and RS FEC
- 6Tbps of wire speed performance with 12GB of buffer



*Arista 7280CR-48*

**7280CR-48: 48 port QSFP100 and 8 ports of QSFP+**

- Up to 48 100G ports with QSFP100 and 8 ports of 40G with QSFP+
- Maximum of 224 ports of 10GbE or 192 ports of 25GbE
- 5 speeds for flexible 10GbE, 25GbE, 40GbE, 50GbE and 100GbE with optics or cables
- 10.24Tbps of wire speed performance with 32GB of buffer



*Arista 7280CR2-60, 7280CR2A-60 and 7280CR2K-60*

**7280CR2-60, 7280CR2A-60 and 7280CR2K-60: 60 port QSFP100**

- Up to 60 100G ports with QSFP100
- Maximum of 240 ports of 10GbE or 25GbE with FC and RS FEC
- 12Tbps of wire speed performance with 24GB of buffer

1. Not currently supported in EOS  
2. Max 24x 25GbE ports currently supported in EOS

## Maximum Network Design Flexibility

- Scalable designs with up to a 128-way ECMP provides flexibility and balances traffic evenly across the largest leaf-spine designs
- MLAG designs are effective at almost any layer of the network and maximize cross-sectional bandwidth with fast failover times measured in 100's of milliseconds for link failures.
- VXLAN gateway, bridging and routing with VMTracer features to enable next generation data center designs
- Scaleable routing tables to support internet route peering
- Wide choice of dense 10G/40G/100G interfaces with broad support for flexible 10GbE, 25GbE or 50GbE modes.
- Support for standards based IEEE 25GbE with mix and match support for both 10G and 25G for simple and cost effective migration
- Virtual output queue (VoQ) architecture and deep packet buffering to eliminate head of line blocking with low latency
- ACL scalability with up to 24K entries per forwarding engine allows for rich policy control
- Flexible allocation of L2 and L3 forwarding table resources for more design choice
- PTP, sFlow, DANZ and multi-port mirroring tools provide network wide visibility and monitoring to detect traffic bursts, monitor latency and congestion and allow capacity planning to improve application performance and availability

## 7280R Accelerated sFlow

sFlow is a powerful tool used commonly by network operators for advanced network telemetry, capacity planning, security analysis and quality of experience monitoring. All models of the 7280R Series enable sFlow utilizing the high performance CPU. Within modern high performance systems traffic sampling requires the capability to both sample and process packet rates of hundreds of millions of packets per second. With the 7280R Series Accelerated sFlow feature the sampling and processing of flow samples into sFlow datagrams is handled via a dedicated sFlow engine capable of generating up to 1.6Mpps of sFlow data, and of supporting 1:1000 sampling rates of full wire speed systems or higher rates with selective sampling based on triggers and filters. All sFlow v5 information is included in the sFlow records ensuring consistent integration with existing standard sFlow collection and analysis tools and no loss of information.


## 7280R Deterministic Network Performance

The Arista 7280R Series uses a deep buffer virtual output queue (VOQ) architecture that eliminates head-of-line (HOL) blocking and virtually eliminates packet drops even in the most congested network scenarios. An advanced traffic scheduler fairly allocates bandwidth between all virtual output queues while accurately following queue disciplines including weighted fair queueing, fixed priority, or hybrid schemes. As a result, the Arista 7280 can handle the most demanding data center requirements with ease, including mixed traffic loads of real-time, multicast, and storage traffic while still delivering low latency.

## 7280R High Availability

The Arista 7280R switches were designed for continuous operations with system wide monitoring of both hardware and software components, simple serviceability and provisioning to prevent single points of failure. Key high availability features include:

- 1+1 hot-swappable power supplies and four hot-swap fans provide dynamic temperature control combined with N+1 redundancy
- Color coded PSU's and fans that deliver platinum level power efficiency
- Live software patching
- Self healing software with Stateful Fault Repair (SFR)
- Smart System Upgrade (SSU) and Accelerated Software Update (ASU)

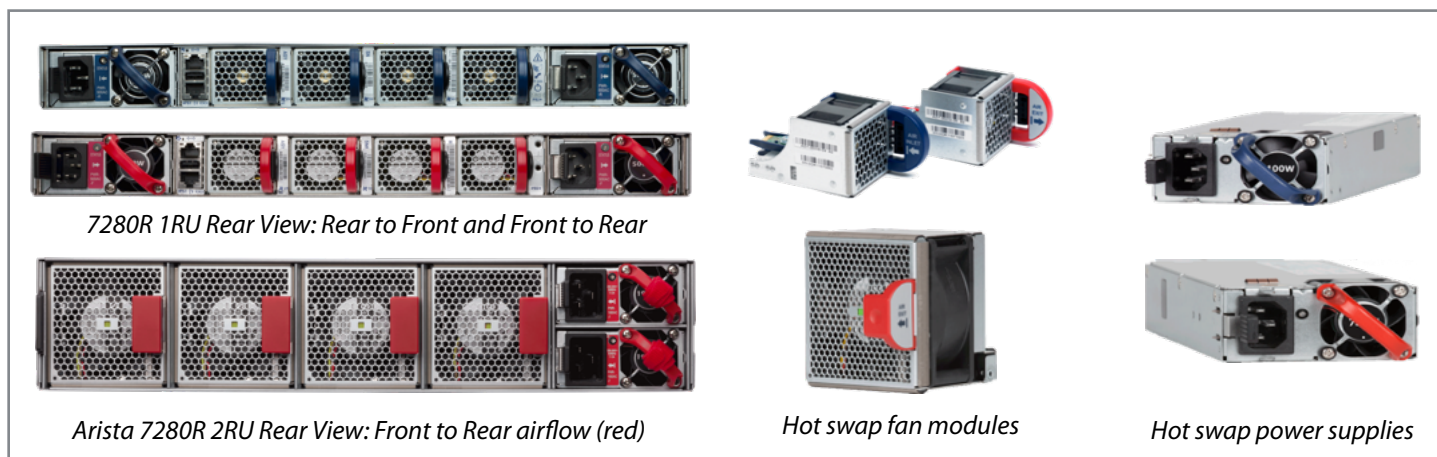

## Layer 2 Features

- 802.1w Rapid Spanning Tree
- 802.1s Multiple Spanning Tree Protocol
- Rapid Per Vlan Spanning Tree (RPVST+)
- 4096 VLANs
- Q-in-Q
- 802.3ad Link Aggregation/LACP
  - 64 Ports / Channel
  - 224 groups per system
- MLAG (Multi-Chassis Link Aggregation)
  - Uses IEEE 802.3ad LACP
  - 128 ports per MLAG
- 802.1Q VLANs/Trunking
- 802.1AB Link Layer Discovery Protocol
- 802.3x Flow Control
- Jumbo Frames (9216 Bytes)
- IGMP v1/v2/v3 snooping
- Storm Control
- 802.1 AVB
- SMPTE-2059-2

## Layer 3 Features

- Static Routes
- Routing Protocols: OSPF, OSPFv3, BGP, MP-BGP, IS-IS, and RIPv2
- 128-way Equal Cost Multipath Routing (ECMP)
- VRF
- Bi-Directional Forwarding Detection (BFD)
- Unicast Reverse Path Forwarding (uRPF)
- VRRP
- Virtual ARP (VARP)
- Policy Based Routing (PBR)
- Route Maps

## Multicast

- IGMP v2/v3
- Protocol Independent Multicast (PIM-SM / PIM-SSM)
- PIM-BiDir
- Anycast RP (RFC 4610)
- Multicast Source Discovery Protocol (MSDP)

## Advanced Monitoring and Provisioning

- Latency Analyzer and Microburst Detection (LANZ)
  - Configurable Congestion Notification (CLI, Syslog) \*
  - Streaming Events (GPB Encoded) \*
  - Capture/Mirror of congested traffic \*
- Zero Touch Provisioning (ZTP)
- Advanced Mirroring
  - Port Mirroring (14 sessions)
  - Enhanced Remote Port Mirroring
  - SPAN/TAP M:N Aggregation
  - L2/3/4 Filtering
- Advanced Event Management suite (AEM)
  - CLI Scheduler
  - Event Manager
  - Event Monitor
  - Linux tools

- Integrated packet capture/analysis with TCPDump
- Restore and Configure from USB
- RFC 3176 sFlow
- Optional SSD for logging and data capture
- IEEE 1588 PTP

## Virtualization Support

- VXLAN Bridging and Routing (VRF, MLAG)
- VM Tracer VMware Integration

## Security Features

- Control Plane Protection (CPP)
- Ingress / Egress ACLs using L2, L3, L4 fields
- Ingress / Egress ACL Logging and Counters
- MAC ACLs
- ACL Deny Logging
- ACL Counters
- Atomic ACL Hitless restart
- DHCP Relay / Snooping \*
- MAC Security
- TACACS+
- RADIUS
- ARP trapping and rate limiting

## Quality of Service (QoS) Features

- Up to 8 queues per port
- Strict priority queueing
- 802.1p based classification
- DSCP based classification and remarking
- Egress shaping / Weighted round robin (WRR)
- Policing / Shaping
- Rate limiting \*
- Explicit Congestion Notification (ECN) marking
- 802.1Qbb Per-Priority Flow Control (PFC)
- 802.1Qaz Enhanced Transmission Selection (ETS)\*
- Data Center Bridging Extensions (DCBX)

## Network Management

- CloudVision
- Configuration rollback and commit
- 100/1000 Management Port
- RS-232 Serial Console Port
- USB Port
- SNMP v1, v2, v3
- Management over IPv6
- Telnet and SSHv2
- Syslog
- AAA
- Industry Standard CLI
- Beacon LED for system identification
- System Logging
- Environment monitoring

\* Not currently supported in EOS

### Extensibility

- Linux Tools
  - Bash shell access and scripting
  - RPM support
  - Custom kernel modules
- Software Defined Networking (SDN)
  - eAPI
  - OpenStack Neutron Support
- Programmatic access to system state
  - Python
  - Chef
  - Puppet
  - C++
  - eAPI
  - GO
  - OpenConfig
  - OpenStack Neutron Plug-in support
- Native KVM/QEMU support

### System Scalability

- 9216 Byte Jumbo Frame Support
- 8 Priority Queues per Port
- 1152 Link Aggregation Groups (LAG)
- 32 Ports per LAG
- Virtual Output Queueing
- Distributed Scheduler
- WFQ, CIR\*, ETS\*, Fixed Priority

### Standards Compliance

- 802.1D Bridging and Spanning Tree
- 802.1p QOS/COS
- 802.1Q VLAN Tagging
- 802.1w Rapid Spanning Tree
- 802.1s Multiple Spanning Tree Protocol
- 802.1AB Link Layer Discovery Protocol
- 802.3ad Link Aggregation with LACP
- 802.3x Flow Control
- 802.3ab 1000BASE-T
- 802.3z Gigabit Ethernet
- 802.3ae 10 Gigabit Ethernet
- 802.3by 25 Gigabit Ethernet
- 802.3ba 40 Gigabit Ethernet
- 802.3ba 100 Gigabit Ethernet
- RFC 2460 Internet Protocol, Version 6 (IPv6) Specification

- RFC 2461 Neighbor Discovery for IP Version 6 (IPv6)
- RFC 2462 IPv6 Stateless Address Autoconfiguration
- RFC 2463 Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification
- IEEE 1588-2008 Precision Time Protocol

### SNMP MIBs

- RFC 3635 EtherLike-MIB
- RFC 3418 SNMPv2-MIB
- RFC 2863 IF-MIB
- RFC 2864 IF-INVERTED-STACK-MIB
- RFC 2096 IP-FORWARD-MIB
- RFC 4363 Q-BRIDGE-MIB
- RFC 4188 BRIDGE-MIB
- RFC 2013 UDP-MIB
- RFC 2012 TCP-MIB
- RFC 2011 IP-MIB
- RFC 2790 HOST-RESOURCES-MIB
- RFC 3636 MAU-MIB
- RMON-MIB
- RMON2-MIB
- HC-RMON-MIB
- LLDP-MIB
- LLDP-EXT-DOT1-MIB
- LLDP-EXT-DOT3-MIB
- ENTITY-MIB
- ENTITY-SENSOR-MIB
- ENTITY-STATE-MIB
- ARISTA-ACL-MIB
- ARISTA-QUEUE-MIB
- RFC 4273 BGP4-MIB
- RFC 4750 OSPF-MIB
- ARISTA-CONFIG-MAN-MIB
- ARISTA-REDUNDANCY-MIB
- RFC 2787 VRRPv2MIB
- MSDP-MIB
- PIM-MIB
- IGMP-MIB
- IPMROUTE-STD-MIB
- SNMP Authentication Failure trap
- ENTITY-SENSOR-MIB support for DOM (Digital Optical Monitoring)
- User configurable custom OIDs

See EOS release notes for latest supported MIBs

### Scale Comparison <sup>1</sup>

	7280R	7280RA	7280R2	7280R2A	7280R2K
MAC Addresses	768K	768K	768K	768K	768K
IPv4 Host Routes	768K	768K	768K	768K	768K
IPv6 Unicast Host Routes	768K	768K	768K	768K	768K
IPv4 Unicast LPM Routes	Over 1M	Over 1M	1.3M	1.3M	2M
IPv6 Unicast LPM Routes	928K	928K	1M	1M	1.4M
Multicast Routes	Up to 768K	Up to 768K	Up to 768K	Up to 768K	Up to 768K
ACL Entries per Forwarding Engine	24K	24K	24K	24K	24K

1. Maximum values dependent on shared resources in some cases

Model	7280CR-48 <sup>E</sup>	7280QR-C72 <sup>E</sup>	7280QR-C36 <sup>E</sup>	7280SR-48C6 <sup>E</sup>	7280TR-48C6 <sup>E</sup>
Ports	48 x QSFP100 & 8 x QSFP+	72 x QSFP (56x QSFP+ and 16 x QSFP100)	36 x QSFP (24x QSFP+ and 12x QSFP100)	48 x SFP+ 6 x QSFP100	48 x 10G-T 6 x QSFP100
Max 100GbE Ports	48	16	12	6	6
Max 50GbE Ports	96	32	24	12	12
Max 40GbE Ports	56	72	36	6	6
Max 25GbE Ports	192	64	48	24	24
Max 10GbE Ports	224	160	144	72	72 (100Mb-10Gb)
Throughput (fd)	10.24 Tbps	6.4 Tbps	4.32 Tbps	2.16 Tbps	2.16 Tbps
Packets/Second	5.76 Bpps	2.88 Bpps	1.44 Bpps	720 Mpps	720 Mpps
Latency	From 3.8 us	From 3.8 us	From 3.8 us	From 3.8 us	From 3.8 us
CPU	Multi-core x86	Multi-core x86	Quad-Core x86	Quad-Core x86	Quad-Core x86
System Memory	16 Gigabytes	8 GB (16 GB optional)	8 GB (32 GB optional)	8 GB (32 GB optional)	8 GB (32 GB optional)
Packet Buffer Memory	32 GB	16 GB	8 GB	4 GB	4 GB
USB Ports	1	1	1	2	2
Flash Storage Memory			4 GB		
SSD Storage Option			Yes		
100/1000 Mgmt Ports			1		
RS-232 Serial Ports			1 (RJ-45)		
Hot-swap Power Supplies			2 (1+1 redundant)		
Hot-swappable Fans			4 (N+1 redundant)		
Reversible Airflow Option	No (front to rear)	Yes	Yes	Yes	Yes
Rack Units	2 U	2 U	1 U	1 U	1 U
Size (WxHxD)	19 x 3.5 x 22.2" (48.3 x 8.9 x 56.3cm)	19 x 3.5 x 22.2" (48.3 x 8.9 x 56.3cm)	19 x 1.75 x 20.6" (48.3 x 4.4 x 52.3cm)	19 x 1.75 x 16" (48.3 x 4.4 x 40.6cm)	19 x 1.75 x 16" (48.3 x 4.4 x 40.6cm)
Typical/Max Power Draw <sup>1</sup>	1363W / 1710W	696W / 1200W	324W / 499W	263W / 381W	290W / 405W
Weight	46.7lbs (21.2kg)	47.3lbs (21.5kg)	21lbs (9.7kg)	17.8lbs (8.1kg)	22.2lbs (10.1kg)
NEBS	Yes	Yes	Yes	Yes	No
Fan Tray	FAN-7002H-F	FAN-7002H-F/R	FAN-7000-F/R	FAN-7000-F/R	FAN-7000-F/R
Power Supplies	1900W AC 1900W DC	1900W AC 1900W DC	745W AC 1900W DC	500W AC 500W DC	500W AC 500W DC
AlgoMatch	No	No	No	No	No
Accelerated sFlow	No	No	No	No	No
EOS Feature Licenses	Group 4	Group 3	Group 2	Group 2	Group 2
Minimum EOS	4.17.1	4.18.1	4.17.1	4.17.1	4.17.1

1. Typical power consumption measured at 25C ambient with 50% load on all ports  
 E. Product is subject to an End of Sale notice

Model Comparison	7280QRA-C365 <sup>E</sup>	7280SR2-48YC6 <sup>E</sup>	7280SR2A-48YC6 <sup>E</sup>	7280SRA-48C6 <sup>E</sup>	7280TRA-48C6 <sup>E</sup>
Ports	36 x QSFP (24x QSFP+ and 12x QSFP100)	48 x SFP25 6 x QSFP100	48 x SFP25 6 x QSFP100	48 x SFP+ 6 x QSFP100	48 x 10G-T 6 x QSFP100
Max 100GbE Ports	12	6	6	6	6
Max 50GbE Ports	24	12	12	12	12
Max 40GbE Ports	36	6	6	6	6
Max 25GbE Ports	48	72	72	24	24
Max 10GbE Ports	120	72	72	72	72 (100Mb-10Gb)
Throughput (fd)	3.84 Tbps	3.6 Tbps	3.6 Tbps	2.16 Tbps	2.16 Tbps
Packets/Second	1.44 Bpps	1.67 Bpps	1.67 Bpps	720 Mpps	720 Mpps
Latency	From 3.8 us	From 3.8 us	From 3.8 us	From 3.8 us	From 3.8 us
CPU	Quad-Core x86	Quad-Core x86	Quad-Core x86	Quad-Core x86	Quad-Core x86
System Memory	8 GB (32 GB optional)	8 GB (32 GB optional)	8 GB (32 GB optional)	8 GB (32 GB optional)	8 GB (32 GB optional)
Packet Buffer Memory	8 GB	8 GB	8 GB	4 GB	4 GB
USB Ports			2		
Flash Storage Memory			4 GB		
SSD Storage Option			Yes		
100/1000 Mgmt Ports			1		
RS-232 Serial Ports			1 (RJ-45)		
Hot-swap Power			2 (1+1 redundant)		
Hot-swap Fans			4 (N+1 redundant)		
Reversible Airflow	Yes	Yes	Yes	Yes	Yes
Rack Units	1 U	1 U	1 U	1 U	1 U
Size (WxHxD)	19 x 1.75 x20.6" (48.3 x 4.4 x52.3cm)	19 x 1.75 x20.6" (48.3 x 4.4 x52.3cm)	19 x 1.75 x20.6" (48.3 x 4.4 x52.3cm)	19 x 1.75 x16" (48.3 x 4.4 x40.6cm)	19 x 1.75 x16" (48.3 x 4.4 x40.6cm)
Typical/Max Power Draw <sup>1</sup>	419W / 570W	425W / 647W	450W / 685W	313W / 410W	290W / 405W
Weight	23.6lbs (10.7kg)	22.9lbs (10.4kg)	22.9lbs (10.4kg)	19.6lbs (8.9kg)	22.2lbs (10.1kg)
NEBS	Yes	Yes	Yes	Yes	No
Fan Tray	FAN-7000H-F/R	FAN-7000H-F/R	FAN-7000H-F/R	FAN-7000H-F/R	FAN-7000H-F/R
Power Supplies	747W AC 1900W DC	747W AC 1900W DC	747W AC 1900W DC	500W AC 500W DC	500W AC 500W DC
AlgoMatch	Yes	No	Yes	Yes	Yes
Accelerated sFlow	No	No	Yes	No	No
EOS Feature License	Group 2	Group 2	Group 2	Group 2	Group 2
Minimum EOS	4.19.0	4.18.3	4.19.0	4.19.0	4.19.0

1. Typical power consumption measured at 25C ambient with 50% load on all ports  
E. Product is subject to an End of Sale notice



Model Comparison	7280CR2-60 <sup>E</sup>	7280CR2A-60 <sup>E</sup>	7280CR2K-60 <sup>E</sup>	7280CR2A-30 <sup>E</sup>	7280CR2K-30 <sup>E</sup>	7280SR2K-48C6 <sup>E</sup>
Ports	60 x QSFP100	60 x QSFP100	60 x QSFP100	30 x QSFP100	30 x QSFP100	24 x SFP25, 24 x SFP+ 6 x QSFP100
Max 100GbE Ports	60	60	60	30	30	6
Max 50GbE Ports	120	120	120	60	60	12
Max 40GbE Ports	60	60	60	30	30	6
Max 25GbE Ports	240	240	240	120	120	48
Max 10GbE Ports	240	240	240	120	120	72
Throughput (fd)	12 Tbps	12 Tbps	12 Tbps	6 Tbps	6 Tbps	2.88 Tbps
Packets/Second	5.02 Bpps	5.02 Bpps	5.02 Bpps	2.51 Bpps	2.51 Bpps	835Mpps
Latency	From 3.8 us	From 3.8 us	From 3.8 us	From 3.8 us	From 3.8 us	From 3.8 us
CPU	Multi-core x86	Multi-core x86	Multi-core x86	Multi-core x86	Multi-core x86	Quad-Core x86
System Memory	16 Gigabytes	16 Gigabytes	16 Gigabytes	32 Gigabytes	32 Gigabytes	32 Gigabytes
Packet Buffer Memory	24 GB	24 GB	24 GB	12 GB	12 GB	4 GB
USB Ports				1		
Flash Storage Memory				4 GB		
SSD Storage Option	No		Included		Included	Yes
100/1000 Mgmt Ports				1		
RS-232 Serial Ports				1 (RJ-45)		
Hot-swap Power				2 (1+1 redundant)		
Hot-swap Fans	4 (N+1 redundant)	4 (N+1 redundant)	4 (N+1 redundant)	5 (N+1 redundant)	5 (N+1 redundant)	4 (N+1 redundant)
Reversible Airflow	No (front to rear)	No (front to rear)	No (front to rear)	No (front to rear)	No (front to rear)	Yes
Rack Units	2 U	2 U	2 U	1 U	1 U	1 U
Size (WxHxD)	19 x 3.5 x 25.2" (48.3 x 8.9 x 64cm)	19 x 3.5 x 25.2" (48.3 x 8.9 x 64cm)	19 x 3.5 x 25.2" (48.3 x 8.9 x 64cm)	19 x 1.71 x 26.4" (48.3 x 4.4 x 67 cm)	19 x 1.71 x 26.4" (48.3x 4.4x 67 cm)	19 x 1.75 x16" (48.3x 4.4x 40.6cm)
Typical/Max Power Draw <sup>1</sup>	1660W / 1850W	1760W / 1900W	1760W / 1900W	565W / 750W	565W / 750W	215W / 370W
Weight	54.8lbs (24.9kg)	54.8lbs (24.9kg)	54.8lbs (24.9kg)	34.2lbs (15.5kg)	34.2lbs (15.5kg)	20lbs (9kg)
NEBS	No	No	No	No	No	Yes
Fan Tray	FAN-7002H-F	FAN-7002H-F	FAN-7002H-F	FAN-7001D-F	FAN-7001D-F	FAN-7000H-F/R
Power Supplies	1900W AC 1900W DC	1900W AC 1900W DC	1900W AC 1900W DC	1600W AC 1600W DC	1600W AC 1600W DC	747W AC 1900W DC
AlgoMatch	No	Yes	Yes	Yes	Yes	Yes
Accelerated sFlow	Yes	Yes	Yes	Yes	Yes	Yes
EOS Feature License	Group 4	Group 4	Group 4	Group 3	Group 3	Group 2
Minimum EOS	4.20.2	4.19.1	4.20.1	4.20.3	4.20.3	4.20.4

1. Typical power consumption measured at 25C ambient with 50% load on all ports

E. Product is subject to an End of Sale notice

### Supported Optics and Cables

Interface Type	40G QSFP ports
10GBASE-CR	0.5m-5m QSFP+ to 4x SFP+ (see note 1)
40GBASE-CR4	QSFP+ to QSFP+: 0.5m-5m
40GBASE-AOC	3m to 100m
40GBASE-UNIV	150m (OM3) / 150m (OM4), 500m (SM)
40GBASE-SRBD	100m (OM3) / 150m (OM4)
40GBASE-SR4	100m (OM3) / 150m (OM4)
40GBASE-XSR4	300m (OM3) / 400m (OM4)
40GBASE-PLRL4	1km (1km 4x10G LR/LRL)
40GBASE-PLR4	10km (10km 4x10G LR/LRL)
40GBASE-LRL4	1km
40GBASE-LR4	10km
40GBASE-ER4	40km
100GbE	100G QSFP ports
100GBASE-SR4	70m OM3 / 100m OM4 Parallel MMF
100GBASE-XSR4	150m OM3 / 300m OM4 Parallel MMF
100GBASE-SWDM4	70m OM3 / 100m OM4 Duplex MMF
100GBASE-SRBD	70m OM3 / 100m OM4 Duplex MMF
100GBASE-LR	10km SM Duplex
100GBASE-LR4/LRL4	10km/2km SM Duplex
100GBASE-XCWDM4	10km SM Duplex
100GBASE-CWDM4	2km SM Duplex
100GBASE-FR	2km SM Duplex
100GBASE-DR	500m SM Duplex
100GBASE-PSM4	500m SM Parallel
100GBASE-AOC	1m to 30m
100GBASE-ERL4	40km SM Duplex
100GBASE-CR4	QSFP to QSFP: 1m to 5m
25GBASE-CR	QSFP to SFP25: 1m to 3m lengths

### Interface Type

### SFP+ ports

10GBASE-CR	SFP+ to SFP+: 0.5m-5m
10GBASE-AOC	SFP+ to SFP+: 3m-30m
10GBASE-SRL	100m
10GBASE-SR	300m
10GBASE-LRL	1km
10GBASE-LR	10km
10GBASE-ER	40km
10GBASE-ZR	80km
10GBASE-T	Up to 30m over Cat6a
10GBASE-DWDM	80km
100Mb TX, 1GbE SX/LX/TX	Yes
Interface Type	25G SFP ports
25GBASE-CR	SFP25 to SFP25: 1m-5m
25GBASE-AOC	SFP+ to SFP+: 3m-30m
25GBASE-MR-XSR	200m OM3 / 300m OM4 Duplex MMF
25GBASE-SR	70m
25GBASE-LR	10km
25GBASE-MR-LR	10km

### Power Supply Specifications

Power Supply	PWR-500AC	PWR-500-DC	PWR-745AC	PWR-747AC	PWR-1600AC	PWR-1611-DC	PWR-1900AC	PWR-1900-DC
Input Voltage	100-240V AC	-48 to -60 VDC	100-240V AC	100-240V AC	200-240V AC	-48 to -60 VDC	200-240V AC	40-72 VDC
Typical Input Current	6.5 - 3.2A	11.8A Max (-48V)	10.0 - 5.0A	10.0 - 5.0A	12.9 - 9.5A	38A Max (-48V)	11.2 - 9.5A	44A Max (-48V)
Input Frequency	50/60Hz	DC	50/60Hz	50/60Hz	50/60Hz	DC	50/60Hz	DC
Input Connector	IEC 60320 C14	AWG #14 Max	IEC 60320 C14	IEC 60320 C14	IEC 60320 C14	AWG #6 Max	IEC 60320 C20	AWG #6 Max
Efficiency	93% Platinum	90%	93% Platinum	93% Platinum	93% Platinum	92%	93% Platinum	95%

### Standards Compliance

EMC	FCC Class A, ICES-003, EN 55032, EN IEC 61000-3-2:2019, EN 61000-3-3
Immunity	EN 55035 EN 300 386
Safety	EN 62368-1:2014 + A11:2017 IEC 62368-1:2014
Certifications	BSMI (Taiwan) CE (European Union) KCC (South Korea) NRTL (North America) RCM (Australia/New Zealand) UKCA (United Kingdom) VCCI (Japan)
European Union Directives	2014/35/EU Low Voltage Directive 2014/30/EU EMC Directive 2012/19/EU WEEE Directive 2011/65/EU RoHS Directive 2015/863/EU Commission Delegated Directive
Further Information	<a href="#">Product Certification Portal</a>

### Environmental Characteristics

Operating Temperature	0 to 40°C (32 to 104°F)
Storage Temperature	-40 to 70°C (-40 to 158°F)
Relative Humidity	5 to 95%
Operating Altitude	0 to 10,000 ft, (0-3,000m)

Product Number	Product Description
DCS-7280CR-48-F	Arista 7280R, 48x100GbE QSFP and 8x40GbE QSFP+ switch, front to rear air, 2 x AC and 2 x C19-C20 cords
DCS-7280CR-48#	Arista 7280R, 48x100GbE QSFP and 8x40GbE QSFP+ switch, configurable fans and psu, 2 x C19-C20 cords
DCS-7280CR-48-D#	Arista 7280R, 48x100GbE QSFP and 8x40GbE QSFP+ switch, SSD, configurable fans and psu, 2 x C19-C20 cords
DCS-7280CR-48-DC-F	Arista 7280R, 48x100GbE QSFP and 8x40GbE QSFP+ switch, front to rear air, 2 x DC
DCS-7280QR-C72-F	Arista 7280R, 72x40GbE QSFP+ with 16x100GbE QSFP switch, front to rear air, 2x AC and 2xC19-C20 cords
DCS-7280QR-C72-R	Arista 7280R, 72x40GbE QSFP+ with 16x100GbE QSFP switch, rear to front air, 2x AC and 2xC19-C20 cords
DCS-7280QR-C72#	Arista 7280R, 72x40GbE QSFP+ with 16x100GbE QSFP switch, configurable fans and psu
DCS-7280QR-C72M-F	Arista 7280R, 72x40GbE QSFP+ with 16x100GbE QSFP switch, expn mem, SSD, front to rear air, 2x AC
DCS-7280QR-C72M-R	Arista 7280R, 72x40GbE QSFP+ with 16x100GbE QSFP switch, expn mem, SSD, rear to front air, 2x AC
DCS-7280QR-C72-M#	Arista 7280R, 72x40GbE QSFP+ with 16x100GbE QSFP switch, expn mem, SSD, configurable fans and psu
DCS-7280QR-C36-F	Arista 7280R, 24x40GbE QSFP+ & 12x100GbE QSFP switch, front to rear air, 2x AC and 2xC13-C14 cords
DCS-7280QR-C36-R	Arista 7280R, 24x40GbE QSFP+ & 12x100GbE QSFP switch, rear to front air, 2x AC and 2xC13-C14 cords
DCS-7280QR-C36#	Arista 7280R, 24x40GbE QSFP+ & 12x100GbE QSFP switch, configurable fans and psu, 2xC13-C14 cords
DCS-7280QR-C36-M-F	Arista 7280R, 24x40GbE QSFP+ & 12x100GbE QSFP switch, expn mem, SSD, front to rear air, 2x AC
DCS-7280QR-C36-M-R	Arista 7280R, 24x40GbE QSFP+ & 12x100GbE QSFP switch, expn mem, SSD, rear to front air, 2x AC
DCS-7280QR-C36-M#	Arista 7280R, 24x40GbE QSFP+ & 12x100GbE QSFP switch, expn mem, SSD, configurable fans and psu
DCS-7280SR-48C6-F	Arista 7280R, 48x10GbE (SFP+) & 6x100GbE QSFP switch, front to rear air, 2x AC and 2xC13-C14 cords
DCS-7280SR-48C6-R	Arista 7280R, 48x10GbE (SFP+) & 6x100GbE QSFP switch, rear to front air, 2x AC and 2xC13-C14 cords
DCS-7280SR-48C6#	Arista 7280R, 48x10GbE (SFP+) & 6x100GbE QSFP switch, configurable fans and psu, 2xC13-C14 cords
DCS-7280SR-48C6-M-F	Arista 7280R, 48x10GbE (SFP+) & 6x100GbE QSFP switch, expn mem, SSD, front to rear air, 2x AC and 2xC13-C14 cords
DCS-7280SR-48C6-M-R	Arista 7280R, 48x10GbE (SFP+) & 6x100GbE QSFP switch, expn mem, SSD, rear to front air, 2x AC and 2xC13-C14 cords
DCS-7280SR-48C6-M#	Arista 7280R, 48x10GbE (SFP+) & 6x100GbE QSFP switch, expn mem, SSD, configurable fans and psu
DCS-7280TR-48C6-F	Arista 7280R, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch, front to rear air, 2x AC and 2xC13-C14 cords
DCS-7280TR-48C6-R	Arista 7280R, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch, rear to front air, 2x AC and 2xC13-C14 cords
DCS-7280TR-48C6#	Arista 7280R, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch, configurable fans and psu, 2xC13-C14 cords
DCS-7280TR-48C6-M#	Arista 7280R, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch, expn mem, SSD, configurable fans and psu

## Note:

- Arista 7280CR and 7280QR-C72 switches ship with two C19-C20 power cables (2m). Other power cables must be ordered separately
- Front-to-rear means the air flows from the switch port side to the fan side. Rear to front means the air flows from the fan side to the switch port side.

Product Number	Product Description
DCS-7280CR2K-60-F	Arista 7280R2, 60x100GbE QSFP switch router, AlgoMatch-2, front to rear air, 2 x AC
DCS-7280CR2K-60#	Arista 7280R2, 60x100GbE QSFP switch router, AlgoMatch-2, configurable fans and psu
DCS-7280CR2K-60-DC-F	Arista 7280R2, 60x100GbE QSFP switch router, AlgoMatch-2, front to rear air, 2 x DC
DCS-7280CR2A-60-F	Arista 7280R2, 60x100GbE QSFP switch router, AlgoMatch, front to rear air, 2 x AC
DCS-7280CR2A-60#	Arista 7280R2, 60x100GbE QSFP switch router, AlgoMatch, configurable fans and psu
DCS-7280CR2A-60-DC-F	Arista 7280R2, 60x100GbE QSFP switch router, AlgoMatch, front to rear air, 2 x DC
DCS-7280CR2-60-F	Arista 7280R2, 60x100GbE QSFP switch router, front to rear air, 2 x AC
DCS-7280CR2-60#	Arista 7280R2, 60x100GbE QSFP switch router, configurable fans and psu
DCS-7280CR2-60-DC-F	Arista 7280R2, 60x100GbE QSFP switch router, front to rear air, 2 x DC
DCS-7280CR2K-30-F	Arista 7280R2, 30x100GbE QSFP switch, AlgoMatch-2, expn mem, front to rear air, 2 x AC
DCS-7280CR2K-30#	Arista 7280R2, 30x100GbE QSFP switch, AlgoMatch-2, expn mem, configurable fans and psu
DCS-7280CR2A-30-F	Arista 7280R2, 30x100GbE QSFP switch, AlgoMatch, expn mem, front to rear air, 2 x AC
DCS-7280CR2A-30#	Arista 7280R2, 30x100GbE QSFP switch, AlgoMatch, expn mem, configurable fans and psu
DCS-7280SR2-48YC6-F	Arista 7280R2, 48 25GbE SFP and 6 x 100GbE QSFP switch, front to rear air, 2 x AC
DCS-7280SR2-48YC6-R	Arista 7280R2, 48 25GbE SFP and 6 x 100GbE QSFP switch, rear to front air, 2 x AC
DCS-7280SR2-48YC6#	Arista 7280R2, 48x25GbE SFP and 6 x 100GbE QSFP switch, configurable fans and psu
DCS-7280SR2-48YC6-M#	Arista 7280R2, 48 25GbE SFP and 6 x 100GbE QSFP switch, expn mem, SSD, configurable fans and psu
DCS-7280SR2-48YC6-M-F	Arista 7280R2, 48 25GbE SFP and 6 x 100GbE QSFP switch, expn mem, SSD, front to rear air, 2 x AC
DCS-7280SR2-48YC6-M-R	Arista 7280R2, 48 25GbE SFP and 6 x 100GbE QSFP switch, expn mem, SSD, rear to front air, 2 x AC
DCS-7280SR2A-48YC6-F	Arista 7280R2, 48 25GbE SFP and 6 x 100GbE QSFP switch, AlgoMatch, front to rear air, 2 x AC
DCS-7280SR2A-48YC6-R	Arista 7280R2, 48 25GbE SFP and 6 x 100GbE QSFP switch, AlgoMatch, rear to front air, 2 x AC
DCS-7280SR2A-48YC6#	Arista 7280R2, 48x25GbE SFP and 6 x 100GbE QSFP switch, AlgoMatch, configurable fans and psu
DCS-7280SR2A-48YC6-M#	Arista 7280R2, 48x25GbE SFP and 6 x 100GbE QSFP switch, AlgoMatch, expn mem, SSD, configurable fans and psu
DCS-7280SR2A-48YC6M-F	Arista 7280R2, 48 25GbE SFP and 6 x 100GbE QSFP switch, AlgoMatch, expn mem, front to rear air, 2 x AC
DCS-7280SR2A-48YC6M-R	Arista 7280R2, 48 25GbE SFP and 6 x 100GbE QSFP switch, AlgoMatch, expn mem, rear to front air, 2 x AC

## Note:

- Front-to-rear means the air flows from the switch port side to the fan side. Rear to front means the air flows from the fan side to the switch port side.

## Optional Components and Spares

Product Number	Product Description
DCS-7280QRA-C36S-F	Arista 7280RA, 36x40GbE QSFP+ / 18 x 40GbE & 12x100GbE switch router, AlgoMatch, front to rear air, 2x AC
DCS-7280QRA-C36S-R	Arista 7280RA, 36x40GbE QSFP+ / 18 x 40GbE & 12x100GbE switch router, AlgoMatch, rear to front air, 2x AC
DCS-7280QRA-C36S#	Arista 7280RA, 36x40GbE QSFP+ / 18 x 40GbE & 12x100GbE switch router, AlgoMatch, configurable fans and psu
DCS-7280QRA-C36S-M#	Arista 7280RA, 36x40GbE QSFP+ / 18 x 40GbE & 12x100GbE switch router, AlgoMatch, expn mem, SSD, configurable fans and psu
DCS-7280QRA-C36SM-F	Arista 7280RA, 36x40GbE QSFP+ / 18 x 40GbE & 12x100GbE switch router, AlgoMatch, expn mem, SSD, front to rear air, 2x AC
DCS-7280QRA-C36SM-R	Arista 7280RA, 36x40GbE QSFP+ / 18 x 40GbE & 12x100GbE switch router, AlgoMatch, expn mem, SSD, rear to front air, 2x AC
DCS-7280SRA-48C6-F	Arista 7280RA, 48x10GbE (SFP+) & 6x100GbE QSFP switch router, AlgoMatch, front to rear air, 2x AC
DCS-7280SRA-48C6-R	Arista 7280RA, 48x10GbE (SFP+) & 6x100GbE QSFP switch router, AlgoMatch, rear to front air, 2x AC
DCS-7280SRA-48C6#	Arista 7280RA, 48x10GbE (SFP+) & 6x100GbE QSFP switch router, AlgoMatch, configurable fans and psu
DCS-7280SRA-48C6-M#	Arista 7280RA, 48x10GbE (SFP+) & 6x100GbE QSFP switch router, AlgoMatch, expn mem, SSD, configurable fans and psu
DCS-7280SRA-48C6M-F	Arista 7280RA, 48x10GbE (SFP+) & 6x100GbE QSFP switch router, AlgoMatch, expn mem, SSD, front to rear air, 2x AC
DCS-7280SRA-48C6M-R	Arista 7280RA, 48x10GbE (SFP+) & 6x100GbE QSFP switch router, AlgoMatch, expn mem, SSD, rear to front air, 2x AC
DCS-7280TRA-48C6-F	Arista 7280RA, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch router, AlgoMatch, front to rear air, 2x AC
DCS-7280TRA-48C6-R	Arista 7280RA, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch router, AlgoMatch, rear to front air, 2x AC
DCS-7280TRA-48C6#	Arista 7280RA, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch router, AlgoMatch, configurable fans and psu
DCS-7280TRA-48C6-M#	Arista 7280RA, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch router, AlgoMatch, expn mem, SSD, configurable fans and psu
DCS-7280TRA-48C6M-F	Arista 7280RA, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch router, AlgoMatch, expn mem, SSD, front to rear air, 2x AC
DCS-7280TRA-48C6M-R	Arista 7280RA, 48x10GbE RJ45 (1/10G) & 6x100GbE QSFP switch router, AlgoMatch, expn mem, SSD, rear to front air, 2x AC
DCS-7280SR2K-48C6-M-F	Arista 7280R2, 24x10GbE, 24x25GbE & 6x100GbE QSFP switch router, expn mem, SSD, front to rear air, 2x AC
DCS-7280SR2K-48C6-M-R	Arista 7280R2, 24x10GbE, 24x25GbE & 6x100GbE QSFP switch router, expn mem, SSD, rear to front air, 2x AC
DCS-7280SR2K-48C6-M#	Arista 7280R2, 24x10GbE, 24x25GbE & 6x100GbE QSFP switch router, expn mem, SSD, configurable fans & psu
LIC-FIX-2-E	Enhanced L3 License for Arista Group 2 Fixed switches, (BGP, OSPF, ISIS, PIM, NAT)
LIC-FIX-2-V	Virtualization license for Group 2 Arista Fixed switches (VMTracer and VXLAN)
LIC-FIX-2-V2	EOS Extensions, Security and Partner Integration license for Arista Group 2 Fixed switches
LIC-FIX-2-Z	Monitoring & Automation license for Arista Group 2 Fixed switches (ZTP, LANZ, TapAgg, API, Time-stamping, OpenFlow)
LIC-FIX-2-FLX-L	FLX-Lite License for Arista Fixed switches Group 2 - Full Routing Up to 256K Routes, EVPN, VXLAN, SR, base MPLS LSR (no TE or link/node protection)

## Optional Components and Spares

Product Number	Product Description
LIC-FIX-3-E	Enhanced L3 License for Arista Group 3 Fixed switches, (BGP, OSPF, ISIS, PIM, NAT)
LIC-FIX-3-V	Virtualization license for Group 3 Arista Fixed switches (VMTracer and VXLAN)
LIC-FIX-3-V2	EOS Extensions, Security and Partner Integration license for Arista Group 3 Fixed switches
LIC-FIX-3-Z	Monitoring & Automation license for Arista Group 3 Fixed switches (ZTP, LANZ, TapAgg, API, Time-stamping, OpenFlow)
LIC-FIX-3-FLX-L	FLX-Lite License for Arista Fixed switches Group 3 - Full Routing Up to 256K Routes, EVPN, VXLAN, SR, base MPLS LSR (no TE or link/node protection)
LIC-FIX-4-E	Enhanced L3 License for Arista Group 4 Fixed switches, (BGP, OSPF, ISIS, PIM, NAT)
LIC-FIX-4-V	Virtualization license for Group 4 Arista Fixed switches (VMTracer and VXLAN)
LIC-FIX-4-V2	EOS Extensions, Security and Partner Integration license for Arista Group 4 Fixed switches
LIC-FIX-4-Z	Monitoring & Automation license for Arista Group 4 Fixed switches (ZTP, LANZ, TapAgg, API, Time-stamping, OpenFlow)
LIC-FIX-4-FLX-L	FLX-Lite License for Arista Fixed switches Group 4 - Full Routing Up to 256K Routes, EVPN, VXLAN, SR, base MPLS LSR (no TE or link/node protection)
LIC-FIX-2-FLX	FLX License for Arista Fixed Group 2 - Full Routing upto 2M Routes, >24K ACL, EVPN, VXLAN, SR, Adv MPLS-LER/LSR, with TE & link/node protection
LIC-FIX-3-FLX	FLX License for Arista Fixed Group 3 - Full Routing upto 2M Routes, >24K ACL, EVPN, VXLAN, SR, Adv MPLS-LER/LSR, with TE & link/node protection
LIC-FIX-3-FLX	FLX License for Arista Fixed Group 3 - Full Routing upto 2M Routes, >24K ACL, EVPN, VXLAN, SR, Adv MPLS-LER/LSR, with TE & link/node protection
LIC-FIX-4-FLX	FLX License for Arista Fixed Group 4 - Full Routing upto 2M Routes, >24K ACL, EVPN, VXLAN, SR, Adv MPLS-LER/LSR, with TE & link/node protection
PWR-500AC-F	Spare 500 Watt AC power supply for Arista 7050X and 7280R 1RU Switches (front-to-rear airflow)
PWR-500AC-R	Spare 500 Watt AC power supply for Arista 7050X and 7280R 1RU Switches (rear-to-front airflow)
PWR-500-DC-F	Spare 500 Watt DC power supply for Arista 7050X and 7280R 1RU Switches (front-to-rear airflow)
PWR-500-DC-R	Spare 500 Watt DC power supply for Arista 7050X and 7280R 1RU Switches (rear-to-front airflow)
PWR-745AC-F	Spare 750 Watt AC power supply for Arista 7060X and 7280QR Series Switches (front-to-rear airflow)
PWR-745AC-R	Spare 750 Watt AC power supply for Arista 7060X and 7280QR Series Switches (rear-to-front airflow)
PWR-747AC-RED	Spare 750 Watt AC power supply for Arista 7280R Switches (front-to-rear airflow)
PWR-747AC-BLUE	Spare 750 Watt AC power supply for Arista 7280R Switches (rear-to-front airflow)
PWR-1600AC-F	Spare 1600W AC power supply for Arista 7000 Series 1U switches (front to rear airflow (7280CR2A-30 and 7280CR2K-30)
PWR-1611-DC-RED	Spare 1600W DC power supply for Arista 7000 Series 1U switches (front to rear airflow) (7280CR2A-30 and 7280CR2K-30)
PWR-1900AC-F	Spare 1900 Watt AC power supply for Arista 7260CX and 7280R Series Switches (front-to-rear airflow)
PWR-1900AC-R	Spare 1900 Watt AC power supply for Arista 7260CX and 7280R Series Switches (rear-to-front airflow)
PWR-1900-DC-F	Spare 1900W DC Power Supply for 7260X and 7280R Series Series Switches (front to rear airflow)
PWR-1900-DC-R	Spare 1900W DC Power Supply for 7260X and 7280R Series Series Switches (rear-to-front airflow)

## Optional Components and Spares

## Product Number    Product Description

FAN-7000H-F	Spare high speed fan module for Arista 7280R 1RU switches (front to rear airflow)
FAN-7000H-R	Spare high speed fan module for Arista 7280R 1RU switches (rear to front airflow)
FAN-7000-F	Spare fan module for Arista 7150, 7124SX(FX), 7050, 7280 & 7048-A switches (front-to-rear airflow)
FAN-7000-R	Spare fan module for Arista 7150, 7124SX(FX), 7050, 7280 & 7048-A switches (rear-to-front airflow)
FAN-7001D-F	Spare fan module for Arista 7000 Series 1RU switches (front-to-rear airflow) (7280CR2A-30 and 7280CR2K-30)
FAN-7002H-F	Spare fan module for Arista 2U 7260CX-64, 7280CR and 7320X switches (front-to-rear airflow)
FAN-7002H-R	Spare fan module for Arista 2U 7260CX-64, 7280CR and 7320X switches (rear-to-front airflow)
KIT-7001	Spare tool-free accessory kit (v2) for 1RU Arista switches. 2-post & 4-post mount. (2x C13-C14, 2m)
KIT-2POST-1U-NT	Spare tool-free 2-post mount kit (v2) for 1RU Arista tool-free switches
KIT-2POST	Spare 2RU 2 post rack mount installation kit for Arista 7250 / 7050, 7260X and 7280R switches
KIT-4POST-NT	Spare tool-free 4-post mount kit (v2) for 1RU Arista tool-free switches
KIT-7003	Spare tool-free accessory kit (v2) for 2RU Arista switches. 2-post & 4-post mount. (2x C19-C20, 2m)
KIT-GND-EXT-2RU	Arista 7000 Series 2RU Ground Extender Kit for NEBS compliance.

## Headquarters

5453 Great America Parkway  
 Santa Clara, California 95054  
 408-547-5500

## Support

[support@arista.com](mailto:support@arista.com)  
 408-547-5502  
 866-476-0000

## Sales

[sales@arista.com](mailto:sales@arista.com)  
 408-547-5501  
 866-497-0000