

# PHILIPS

CoreLine  
Panel UGR19



Innovative



Easy to install



High quality

REAL  
PROs  
REAL  
QUALITY

## Panel rejection or panel perfection?

Real professionals count on the new **Philips CoreLine Panel UGR19**.

Our slimmest panel is clearly the next step in recessed luminaires for the design and build market. It not only offers increased energy efficiency and excellent glare control, but is also visually appealing without being intrusive.

### Key Features and Benefits

- ✓ 60% more energy efficient compared to conventional TL Solutions.
- ✓ UGR19 office compliant.
- ✓ Options available for Interact Pro connected lighting system.



### Applications

- ✓ Offices
- ✓ Schools
- ✓ Meeting rooms
- ✓ Lunch rooms
- ✓ Hallways & corridors

50,000  
hours  
@L70

Up to  
**110**  
lm/w

**IP20**

**5**  
year  
warranty


interact  
ready.

[www.clubblue.co.nz](http://www.clubblue.co.nz)

## Simple installation and different mounting options


Simple and flexible installation: Comes with a plug-in connector for the driver and a Flex and Plug. Suitable for T-rail ceiling installations. For recessed and surface mounting in plaster ceilings, a proprietary kit is necessary.

### Dimensions

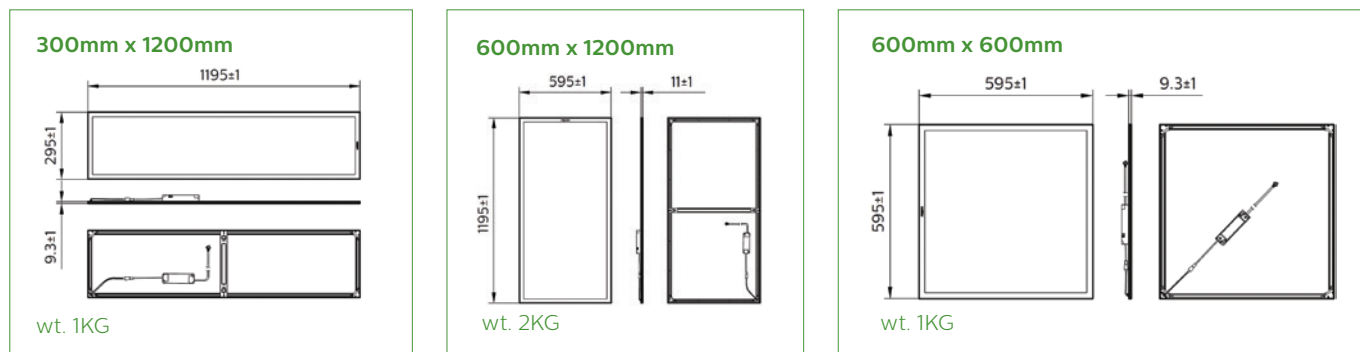

Dimensions shown above are nominal measurement. Slight variation in dimension may occur in production.

### Polar intensity

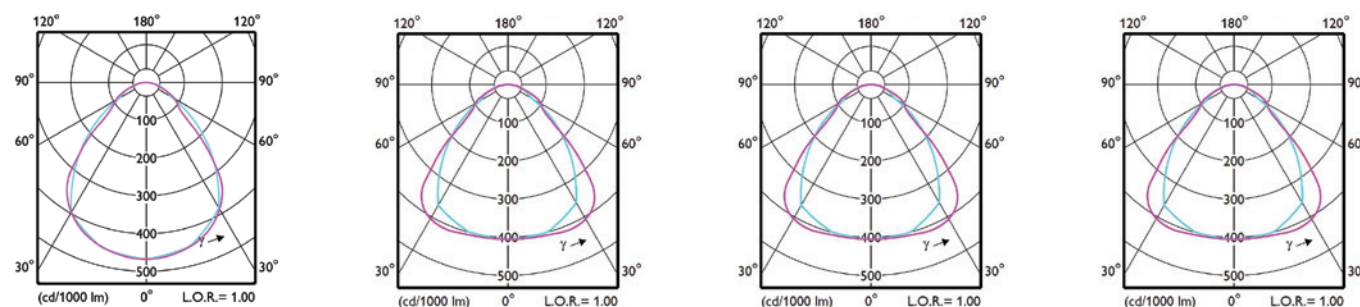

LED40S 840 W30L120

LED40S 840 W60L60

LED40S 840 W60L120

LED60S 840 W60L120

## Order codes for the CoreLine Panel UGR19

### CoreLine Panel UGR19

Specification	Part Number	Shortcode
36W, 4000lm, 4000K, 1200X300	911401761042 RC160V LED40S 840 W30L120 PSU OC CAU	RC16V484312POF
36W, 4000lm, 4000K, 600X600	911401761052 RC160V LED40S 840 W60L60 PSU OC CAU	RC16V48466POF
36W, 4000lm, 4000K, 1200X600	911401761062 RC160V LED40S 840 W60L120 PSU OC CAU	RC16V484612POF
55W, 6000lm, 4000K, 1200X600	911401761072 RC160V LED60S 840 W60L120 PSU OC CAU	RC16V684612POF

### CoreLine Panel UGR19 Interact Ready

Specification	Part Number	Shortcode
36W, 4000lm, 4000K, 1200X300, IAR	911401755052 RC160X LED40S 840 W30L120 IAP OC CAU	RC16V484312IOF
36W, 4000lm, 4000K, 600X600, IAR	911401755032 RC160X LED40S 840 W60L60 IAP OC CAU	RC16V48466IOF
36W, 4000lm, 4000K, 1200X600, IAR	911401767682 RC160X LED40S 840 W60L120 IAP OC CAU	RC16V84612IOF

\*Note: All the above options come with Flex and Plug.

