



BASELITE – ALLOY COLLECTION – LED – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	HDC12	41	E16	SQ ½"	43	45W	3K	PR3	GR12	44	LDM120

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



A - SHADES

- ALLOY COLLECTION**
AC810 - 12WLED (MAX)
CNC10 - 12WLED (MAX)
HDC12 - 25WLED (MAX)
HRC14 - 25WLED (MAX)
TAC14 - 25WLED (MAX)
WC514 - 25WLED (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB,
 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40,
 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51,
 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64,
 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79,
 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91,
 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C - MOUNTING OPTIONS

- ½" ARM EXTENSIONS**
 E1, E2, E3, E4, B1, E16, E17
- ¾" ARM EXTENSIONS**
 E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, E25
- E14 - CREATE YOUR OWN**
 (BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).
- ½" WALL MOUNT**
 B10, B11, B101, B13, WM13, WM13R,
 WM13X
- ¾" WALL MOUNT**
 B9, B9C, B12, WM10, WM11, WM14,
 WM14X, WM15, WM18, WM30, WM35,
 WM35X, WM55, WM55X, WM60, WM61,
 WM70, WM71, WM71X
- LED CORD MOUNT**
 LBLC, LWHC, LTCB, LTCW, LTCHB, LTCHW,
 LTLB, LTLW, LTLB, LTLW, LRCB, LRCW, LRCHB,
 LRCHW, LFHB, LFHW, LHLC, LHWHC, LCBL,
 LCWHC
- STEM MOUNT**
 ST6, ST12, ST18, ST24, ST36, ST48, STXX

D - MOUNTING ADD-ONS

- LED ADD-ONS**
 LWTM, LSLC, LSTC
- UNIVERSAL ADD-ONS**
 SQ ½", SQ ¾", FH ½", FH ¾", TRB ½",
 TRB ¾", SWL, LGSWL, CNK

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
LIGHT EMITTED DIODE (LED)
 12W, 25W

G - LED COLOR TEMP

(ONLY APPLICABLE FOR LED LIGHT SOURCE. SKIP
 THIS SECTION IF OPTION DOES NOT APPLY.)
 27K - 2700 K*
 3K - 3000 K
 35K - 3500 K
 4K - 4000 K
 5K - 5000 K*

H - ELECTRICAL OPTION

NOT AVAILABLE

I - GLASS OPTIONS

- CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
 GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
 PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J - ACCESSORIES


- GR10, GR12, GR14, UGR, CGR, LGR10, LGR12,
 LGR14, CRL10, CRL12, CRL14, FLE10, FLE12,
 FLE14, FGR10, FGR12, FGR14, GU-1, GU-2

K - ACCESSORY COLOR


SEE SECTION "B" FOR COLOR OPTIONS.

NOTES


- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
 *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
 *ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
 *FIXTURE DIMENSIONS MAY VARY ±0.25.
 *CORD AND CANOPY COME IN THE SAME COLOR.

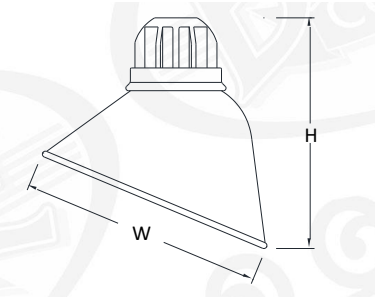


AC810 H-9.5" W-10"

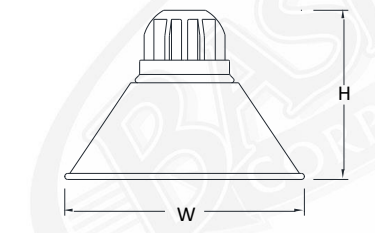


CNC10 H-7" W-10"

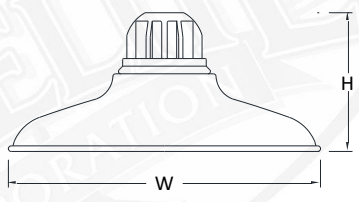


TAC14 H-6.25" W-14"

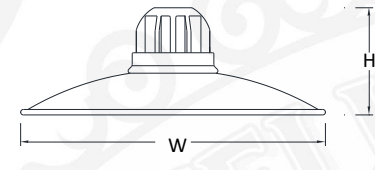

HRC14 H-5" W-14"

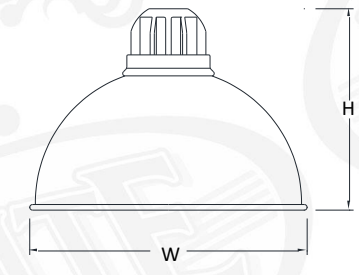

HDC12 H-9" W-12.5"

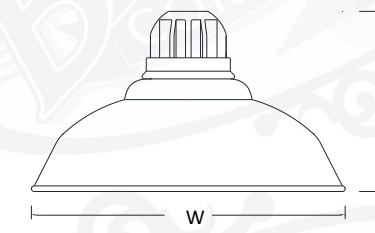

WC514 H-8" W-14"



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E1 8.5"(H) 18.5"(W)



E2 18.5"(H) 35"(W)



E3 16"(H) 24.75"(W)




E4 14.5"(H) 22.25"(W)



B1 4"(H) 12"(W)




E16 4.75"(H) 8.5"(W)



E17 4.75"(H) 9.5"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

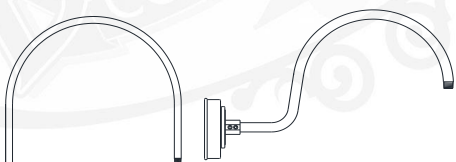


E20 85"(H) 27.25"(W)



E3A 16.375"(H) 26.25"(W)




E4A 14.5"(H) 23.75"(W)




E5 15"(H) 38.5"(W)



E6 9"(H) 23.75"(W)



E9 41.75"(H) 28.125"(W)

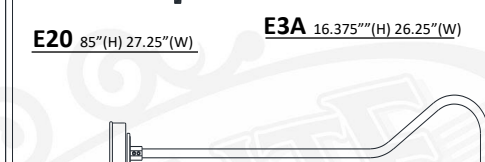


E7 9"(H) 49.75"(W)




E10 18"(H) 55.75"(W)



E8 12"(H) 31.25"(W)




E13 30.625"(H) 26.75"(W)

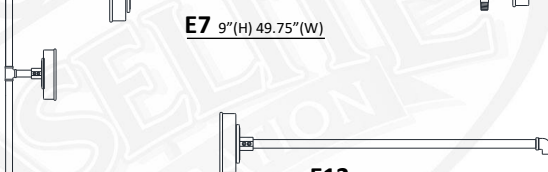


E12 6(H) 39"(W)



E11 19"(H) 36.5"(W)




E25 32.625"(H) 28.5"(W)



B15 7.5"(H) 24.5"(W)




B15S 7.5"(H) 19.5"(W)



E21 12.5"(H) 28.5"(W)


E14



* Baselite will take your sketch and fabricate a custom arm extension to meet your needs

* Dimensions to be determined by customer

NOTES:



* All arms sold with Cast Backplate (CB)

* Backplate may vary in size depending on light source.

1/2" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B10 6"(H) 12.5"(W)



B101 6"(H) 13.5"(W)



B11 6"(H) 14.5"(W)



B13 6"(H) 16.5"(W)



WM13R 12"(H) 9.5"(W)



WM13X 12"(H) 10.5"(W)



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED




B12 6"(H) 15.5"(W)



B9 5"(H) 18"(W)



B9C 5"(H) 18"(W)
*CHAIN HEIGHT TBD BY CUSTOMER



WM14X 18"(H) 14"(W)




WM15 23"(H) 19.5"(W)




WM35X 26"(H) 22"(W)




WM55X 19"(H) 27"(W)




WM60X 18"(H) 22"(W)



WM61X 18"(H) 22"(W)




WM70X 18"(H) 22"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

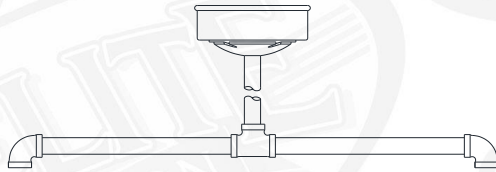

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH LSTC AND ST18



ST(XX) STEM- 1/2" NPT
XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

LED CORD MOUNTS

*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



LBLC 8' BLACK CORD
LWHC 8' WHITE CORD




LTCB 8' BLACK CORD, CABLE, and LOOP
LTCW 8' WHITE CORD, CABLE, and LOOP



LTCHB 8' BLACK CORD, 3' CHAIN, and LOOP
LTCHW 8' WHITE CORD, 3' CHAIN, and LOOP



LTLB 8' BLACK TELEPHONE CORD AND CABLE
LTLW 8' WHITE TELEPHONE CORD AND CABLE
* Not available with compact fluorescent



LRCB 8' BLACK CORD, CABLE, and LOOP
LRCW 8' WHITE CORD, CABLE, and LOOP



LRCHB 8' BLACK CORD, 3' CHAIN, and LOOP
LRCHW 8' WHITE CORD, 3' CHAIN, and LOOP



LFHB 8' BLACK CORD WITH FLAT HUB
LFHW 8' WHITE CORD WITH FLAT HUB



LCBLC 8' BLACK CORD and CABLE
LCWHC 8' WHITE CORD and CABLE

NOTES:


*DISTANCE TO LAMP (CF) 10'
*All compact fluorescent and LED housings may vary in size according to light source chosen.




D - MOUNTING ADD-ONS

LED - STEM AND ARM ADD-ONS


* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



LWTM WEATHERTIGHT LED WALL MOUNT




LSLC LED SLOPE CEILING CANOPY



LSTC LED STEM MOUNT CANOPY


UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:



CNK CANOPY For MULTIPLE FIXTURES

*CNK dimensions vary on number of fixtures applied



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

LIGHT EMITTING DIODE (LED)

LED 12W (MAX)- AC810, CNC10, HDC14
LED 25W (MAX)- HRC14, TAC14, WC514

*IMPORTANT - FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / LED25W /

OPTION	WATTAGE	LUMENS		CRI	VOLTAGE	DIMMING
LED12W	12W	1000	1200	>90	120-277 VAC	See section "H"
LED25W	25W	1900	2000	>90	120-277 VAC	See section "H"
		@3000K	@5000K			

H - ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DEATIALS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

LED DIMMING OPTIONS

FOR TRIAC OR 0-10V OPTOIN CHOOSE FROM THE FOLLOWING. CONTACT DRIVER MANUFACTURER FOR SPECIFICATIONS.

- LDM120** - TRIAC DIMMING AT 120 VOLT
- LDM277** - TRIAC DIMMING AT 277 VOLT
- LDM0-10V** - 0 - 10v

I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)

CL4 4" CLEAR GLASS

PR4 4" PRISMATIC GLASS

RE4 4" RED GLASS

BL4 4" BLUE GLASS

BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED




FR3 3" FROSTED GLASS



AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS



FR4 4" FROSTED GLASS

AH4 4" AMBER HYDE GLASS

GR4 4" GREEN GLASS



BA7 7" CLEAR GLOBE



PR8 8" PRISMATIC



OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED


BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)

PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)


GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W
4" GLASS – 200W INC / LED25W

GLASS – DIMENSIONS
3" GLASS
Diameter 3.34"
Height 6.93"
Fitter 3.29"
4" GLASS
Diameter 4.34"
Height 8.37"
Fitter 4.29"


J – ACCESSORIES



GR10 10" WIRE GRILL




LGR10 10" LOUVERED GRILL



FGR10 10" FLAT GRILL



CRL10 10" CURVED POLYCARB LENS



FLE10 10" FLAT CLEAR LENS

GR12 12" WIRE GRILL

LGR12 12" LOUVERED GRILL

FGR12 12" FLAT GRILL

CRL12 12" CURVED POLYCARB LENS

FLE12 12" FLAT CLEAR LENS

GR14 14" WIRE GRILL

LGR14 14" LOUVERED GRILL


FGR14 14" FLAT GRILL

CRL14 14" CURVED POLYCARB LENS


FLE14 14" FLAT CLEAR LENS




UGR U- WIRE GUARD




WG-1 WIRE GUARD



WG-2 WIRE GUARD



GU-1 CAST ALUMINUM GUARD



GU-2 CAST GUARD