

# Fulfil All Your Video Conferencing Needs Today

## Smart Video Conferencing Bundle Deal

With any 55" or up model from the ST02 series smart signage you can either get a DVY21 conference camera for free\* or another of the listed cameras with a special discount! 4K UHD with vivid colours and sharp contrast on thin-bezel screens, our ST series brings optimal clarity and quality for your video conferencing.

\*Please contact us for ST4302 exclusive offers.




### Stylish Design

Slim and lightweight design with ultra-thin bezels offers more expansive collaboration



### Brighter Screen

Display vivid images with 4K UHD resolution and 450 nits brightness

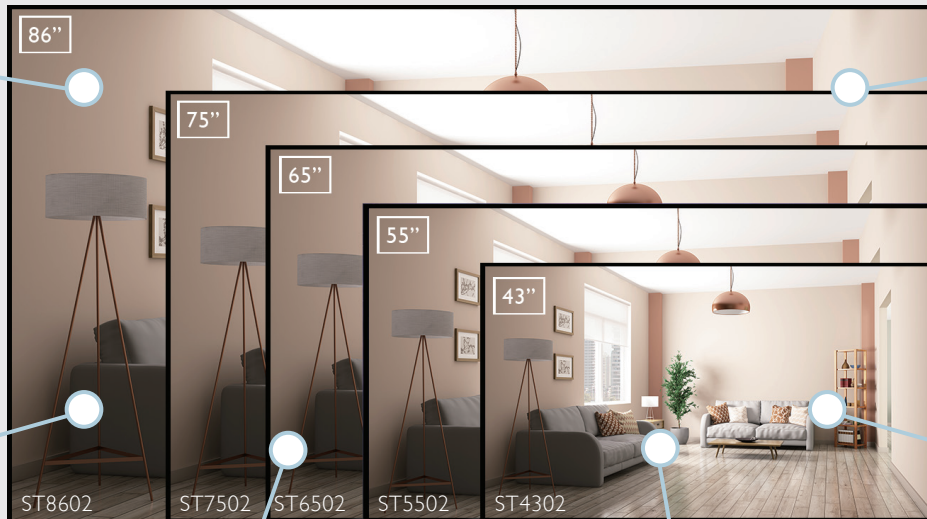


### InstaShare 2.0

Wirelessly display content from your own device. Supports up to 9 split screen



### X-Sign Broadcast

Instantly push alerts, messages and announcements



### Anti-glare Technology

Ensures optimal readability in any viewing condition



### Video Conferencing

Compatible with leading software such as Zoom Rooms and Microsoft Teams with OPS slot-in PC



DVY21

Compact Full HD Webcam

**FREE**



DVY22

Smart 4K Camera

**SPECIAL DISCOUNT**



DVY23

20x Zoom PTZ Camera

**SPECIAL DISCOUNT**



SCAN ME

Contact us

Scan the QR code to contact our sales experts or write to us at [B2BMarketing@benq.eu](mailto:B2BMarketing@benq.eu)

**BenQ**

Model		ST4302	ST5502	ST6502	ST7502	ST8602	
<b>Panel</b>	Screen Size	43"	55"	65"	75"	86"	
	Resolution	3840 × 2160	3840 × 2160	3840 × 2160	3840 × 2160	3840 × 2160	
	Brightness (Typ.)	450	450	450	450	450	
	Contrast Ratio (Typ.)	5000: 1	4500: 1	1200: 1	1200: 1	1200: 1	
	Viewing Angle (H/V) (degree)	178 / 178	178 / 178	178 / 178	178 / 178	178 / 178	
	Response Time (G-t-G) (ms)	8	8	8	8	8	
	Backlight Life (hrs)	30,000	30,000	30,000	30,000	30,000	
	Operating Hour (hrs/days)	18 / 7	18 / 7	18 / 7	18 / 7	18 / 7	
	Orientation	Landscape / Portrait	Landscape / Portrait	Landscape	Landscape	Landscape	
<b>Power</b>	Type	Internal	Internal	Internal	Internal	Internal	
	Power Supply	100V~240V, 50 / 60 Hz	100V~240V, 50 / 60 Hz	100V~240V, 50 / 60 Hz	100V~240V, 50 / 60 Hz	100V~240V, 50 / 60 Hz	
	Power Consumption	Maximum (W/h)	200	300	320	320	550
		Typical (W/h)	170	280	300	300	450
		Standby Mode (W/h)	0,5	0,5	0,5	0,5	0,5
		Off Mode (W/h)	<0,5W	<0,5W	<0,5W	<0,5W	<0,5W
	AC Power Switch	I	I	I	I	I	
Wake up	VGA / HDMI	VGA / HDMI	VGA / HDMI	VGA / HDMI	VGA / HDMI		
<b>Environment</b>	Operation Temperature	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	
	Operating Humidity	20% ~ 90% RH non-condensing	20% ~ 90% RH non-condensing	20% ~ 90% RH non-condensing	20% ~ 90% RH non-condensing	20% ~ 90% RH non-condensing	
<b>Connectivity</b>	Input	VGA	I	I	I	I	
		HDMI	2.0 × 2	2.0 × 2	2.0 × 2	2.0 × 2	
		Display Port	1.2 × 1	1.2 × 1	1.2 × 1	1.2 × 1	
		Audio Input	× 1 (3.5 mm)	× 1 (3.5 mm)	× 1 (3.5 mm)	× 1 (3.5 mm)	
	Output	HDMI	1.3 × 1	1.3 × 1	1.3 × 1	1.3 × 1	
		Audio Output	× 1 (3.5 mm)	× 1 (3.5 mm)	× 1 (3.5 mm)	× 1 (3.5 mm)	
	USB (Type A)	2.0 × 2 / 3.0 × 1 for OPS	2.0 × 2 / 3.0 × 1 for OPS	2.0 × 2 / 3.0 × 1 for OPS	2.0 × 2 / 3.0 × 1 for OPS	2.0 × 2 / 3.0 × 1 for OPS	
	RS232	I	I	I	I	I	
RJ45	I	I	I	I	I		
Remote Controller	I	I	I	I	I		
<b>Audio</b>	Internal Speaker	12W × 2	12W × 2	12W × 2	12W × 2	12W × 2	
<b>Mechanical</b>	Dimension (mm)	961.4 × 553.7 × 71.9	1233.6 × 708.4 × 76.6	1450.6 × 828.1 × 78.5	1672.2 × 954.9 × 75.3	1930.8 × 1109.3 × 82.4	
	Weight (Screen / Package) (kg)	11.6 / 15.9	18.4 / 25.7	22.9 / 33.6	29.3 / 43.7	50.4 / 69.8	
	Bezel Width (T/B/L/R) (mm)	8.7 / 13.1 / 8.7 / 8.7	10.7 / 14.9 / 10.7 / 10.7	8.8 / 12.8 / 8.8 / 8.8	9.0 / 13.3 / 9.0 / 9.0	13.9 / 23.4 / 13.9 / 13.9	
	Wall Mounting (VESA) (mm) (Screw Type /Max. Length)	200 × 200 (4 holes) M6 × 12L	400 × 200 (4 holes) M6 × 12L	400 × 200 (4 holes) M6 × 10L	400 × 200 (4 holes) M8 × 15L	600 × 400 (4 holes) M8 × 20L	
	OPS slot	I	I	I	I	I	

Model		DVY21	DVY22	DVY23
<b>Camera</b>	Dimensions (H × W × D)	30 mm × 102 mm × 46 mm (1.18 in × 4.02 in × 1.81 in)	56 mm × 220 mm × 93 mm (2.20 in × 8.66 in × 3.65 in)	150 mm × 181 mm × 116 mm (5.90 in × 7.13 in × 4.55 in)
	Weight	0.15 kg (0.33 lbs)	0.53 kg (1.17 lbs)	1.38 kg (3.04 lbs)
	Sensor	1080P FHD	4K UHD	1080P FHD
	Resolution	1080p, 720p, SD @ 30 fps	Main stream : 4K, 1080p, 900p, 720p @ 30 fps / Sub stream : 720p, 480p, 172p @30 fps	1080p, 720p, SD @ 30 fps
	Field of view	Horizontal: 87° Vertical: 50° Diagonal: 88°	Horizontal: 120° Vertical: 85° Diagonal: 126°	Horizontal: 55° Vertical: 31° Diagonal: 63°
	Zoom	-	Digital : 4x	Optical : 20x / Digital : 10x
	Pan   Tilt	-	Digital	±170°   -30° to 90°
	Pan   Tilt speed	-	-	100°/sec   45°/sec
	Focus	Fixed	Auto and manual	Auto and manual
	Auto framing	-	Yes	-
	Preset positions	-	10	Remote: 10 / LAN: 255
	Lens type	Glass	Glass	Glass
	Low light performance	0.5 Lux	0.1 Lux	0.5 Lux



SCAN ME



<https://www.benq.eu/en-eu/business/index.html>

© 2021 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

**BENQ**