

# XEED WUX6010

WUXGA resolution, high brightness and top quality optics make this the no-compromise installation projector.

Achieve breath-taking images with Canon's XEED WUX6010 installation projector, featuring native WUXGA resolution, 6000 lumens colour brightness, HDBaseT and a choice of five high-quality optional lenses



- Achieve detailed, ultra-realistic images with native WUXGA resolution
- Deliver outstanding brightness with 6000 lumens and a 2000:1 contrast ratio
- Create vivid images with accurate colours, using LCOS panel technology
- Transmit HD images, audio and control signals via a single cable with HDBaseT
- Choose from five high-quality interchangeable Canon projection lenses
- Powered lens shift, zoom and focus for fast and accurate installation
- Project picture-by-picture from two digital sources
- New advanced image processor includes features like hardware edge-blending, picture-by-picture and four corner keystone correction
- Easy access to the lamp and air filter helps keep maintenance costs down



## Product Range



XEED 4K500ST

XEED 4K500ST  
**XEED WUX6010**  
XEED WUX500



**XEED WUX6010**




XEED WUX500

**Canon**

## Technical Specifications

<p><b>PANEL</b></p> <p><b>Type</b> LCOS reflective display, TFT Active Matrix</p> <p><b>Size and Number</b> 0.71" diagonal, 3 panels</p> <p><b>Aspect Ratio</b> 16:10</p> <p><b>Native Resolution</b> 1920 x 1200 (WUXGA), 2304000 pixels</p> <p><b>OPTICS</b></p> <p><b>Lamp Type</b> 340W / 264W NSHA</p> <p><b>Lens F Number and Focal Length</b> F1.89 – F2.65; f=23.0 – 34.5 mm (Lens RS-IL01ST)</p> <p><b>Zoom Magnification and Control</b> 1.5x Motorised</p> <p><b>Focus Control</b> Motorised</p> <p><b>Lens Shift</b> Vertical: -15 % to +5 %, Motorised Horizontal: +/-10 %, Motorised</p> <p><b>IMAGE AND AUDIO</b></p> <p><b>Brightness</b> 6000 lumens (4660 lumens in Eco Mode)</p> <p><b>Brightness Uniformity</b> 88 %</p> <p><b>Contrast Ratio</b> 2000:1 (full on / full off)</p> <p><b>Projection Distance</b> 1.3 m – 29.0 m (3.2 m - 4.8 m for 100" image, Lens RS-IL01ST)</p> <p><b>Coverage</b> 40" - 600" (86 cm x 54 cm - 1292 cm x 808 cm)</p> <p><b>Screen Size</b> 1.49:1 - 2.24:1</p> <p><b>Projection Ratio</b> 1x - 12x</p> <p><b>Digital Zoom Magnification</b> Vertical: +/-20° Horizontal: +/-20°</p> <p><b>Keystone Correction Range</b> Vertical: +/-20° Horizontal: +/-20°</p> <p><b>Digital RGB Compatibility</b> WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA</p> <p><b>Analogue RGB Compatibility</b> WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA</p> <p><b>Digital Video Scan Systems</b> 1080p / 1080i / 720p / 576p / 480p</p> <p><b>Component Video Scan Systems</b> 1080p / 1080i / 720p / 576p / 576i / 480p / 480i</p> <p><b>HDBaseT</b> Equivalent to the input of digital RGB and digital video</p> <p><b>USB data transfer</b> JPEG still image</p> <p><b>Built-in Speaker</b> 5W RMS, Monaural</p>	<p><b>PORTS AND CONNECTORS</b></p> <p><b>Digital RGB / Analogue RGB Input 1</b> DVI-I 29-pin</p> <p><b>Digital Video and Audio Input</b> HDMI V1.3 (with Deep Colour)</p> <p><b>HDBaseT input</b> RJ-45 (HDBaseT) Image, audio, control signal &amp; network</p> <p><b>Analogue RGB Input 2</b> Mini D-Sub 15-pin (Component via optional adaptor cable)</p> <p><b>Audio Input 1</b> 3.5 mm stereo mini-jack</p> <p><b>Audio Input 2</b> 3.5 mm stereo mini-jack</p> <p><b>Audio Output</b> 3.5 mm stereo mini-jack (variable level)</p> <p><b>USB Port</b> USB Type A</p> <p><b>Service Port / Projector Control</b> Mini D-Sub 9-pin</p> <p><b>Network Port</b> RJ-45 (1000BASE-T / 100BASE-TX / 10BASE-T)</p> <p><b>Wired remote control</b> 3.5mm stereo mini-jack</p> <p><b>MECHANISMS</b></p> <p><b>Front Elevation Mechanism</b> Two rotary feet, 6° maximum image elevation</p> <p><b>RATINGS</b></p> <p><b>Dimensions (W x H x D)</b> 380 mm x 170 mm x 430 mm</p> <p><b>Weight</b> 8.5 kg (without lens)</p> <p><b>Power Source</b> 100V - 240V AC, 50/60Hz</p> <p><b>Power Consumption</b> Normal Mode: 465W / Eco Mode: 370W / Standby: 0.3-2.0W (depending on HDBaseT and network settings)</p> <p><b>Noise Level</b> Normal Mode: 40dBA / Eco Mode: 36dBA</p> <p><b>Operating Environment</b> 0°C to +40°C</p> <p><b>Storage Environment</b> -30°C to +60°C</p> <p><b>Warranty</b> 3 years</p>
--	--

All data is based on Canon standard testing methods except where indicated  
Subject to change without notice.

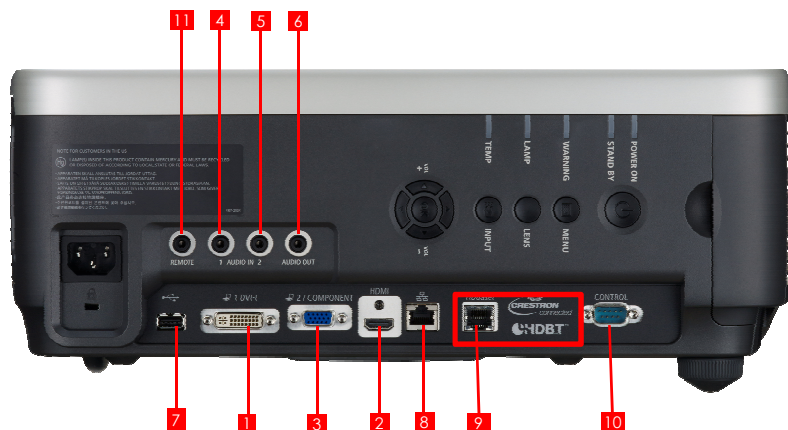

	Connector	Signal
<b>Video input</b>	1	DVI-I Digital PC/Analog PC
	2	HDMI HDMI (includes audio signal)
	3	Mini Dsub15 Analog PC2/Component Video
<b>Audio input</b>	4	Mini jack Stereo Sound
	5	Mini jack Stereo Sound
<b>Audio output</b>	6	Mini jack Stereo Sound
<b>Connector</b>	7	USB type A USB connection
	8	RJ-45 1000BASE-T/100BASE-TX/10-BASE-T
	9	HDBaseT Video, audio, Ethernet, Control
	10	D sub 9 RS-232C connection
	11	Mini jack Wired remote controller connection

# XEED WUX6010

WUXGA resolution, high brightness and top quality optics make this the no-compromise installation projector.


Achieve breath-taking images with Canon's XEED WUX6010 installation projector, featuring native WUXGA resolution, 6000 lumens colour brightness, HDBaseT and a choice of five high-quality optional lenses

Sales Start Date: January 2016



## Projection Distance (metres)

Lens	100"	200"	300"	400"	500"	600"
Wide Fixed Zoom lens RS-IL03WF	1.73	3.45	5.17			
Wide Zoom Lens RS-IL05WZ	2.2 - 3.2	4.3 - 6.5	6.5 - 9.7	8.6 - 13	10.8 - 16.3	12.9 - 19.5
Standard Zoom Lens RS-IL01ST	3.2 - 4.8	6.4 - 9.6	9.6 - 14.5	12.9 - 19.3	16.1 - 24.1	19.3 - 29
Long Zoom Lens RS-IL02LZ	4.7 - 8	9.5 - 16.1	14.2 - 24.2	19 - 32.3	23.8 - 40.4	28.5 - 48.5
Ultra-Long Zoom Lens RS-IL04UL	7.6 - 14.9	15.2 - 29.8	22.7 - 44.6	30.2 - 59.4	37.7 - 74.2	45.2 - 89

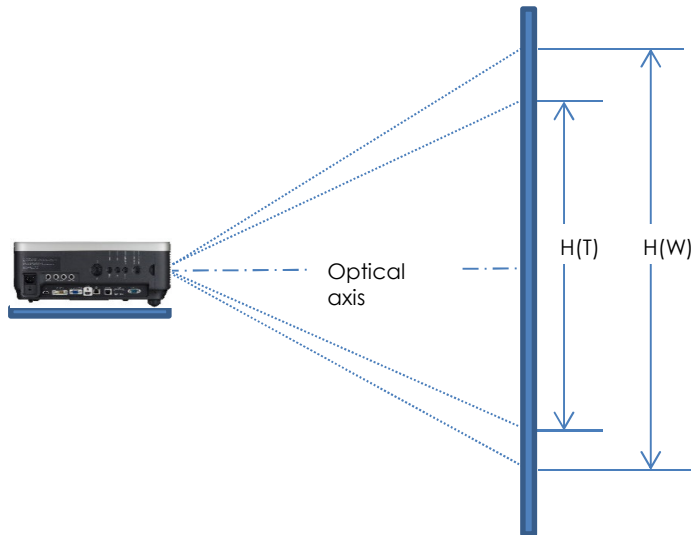

## Additional information

Lens	Throw ratio (100")	Image size (in)	Projection distance (m)
Wide Fixed Zoom lens RS-IL03WF	0.80:1	40 - 300	0.69 - 5.17
Wide Zoom Lens RS-IL05WZ	1.00:1 - 1.50:1	40 - 600	0.9 - 19.5
Standard Zoom Lens RS-IL01ST	1.49:1 - 2.24:1	40 - 600	1.3 - 29
Long Zoom Lens RS-IL02LZ	2.19:1 - 3.74:1	40 - 600	1.9 - 48.5
Ultra-Long Zoom Lens RS-IL04UL	3.55:1 - 6.94:1	40 - 600	4.6 - 89

Canon Throw Distance Calculator: <http://www.canon.com/lcd-sim/>

# XEED WUX6010

WUXGA resolution, high brightness and top quality optics make this the no-compromise installation projector.

Achieve breath-taking images with Canon's XEED WUX6010 installation projector, featuring native WUXGA resolution, 6000 lumens colour brightness, HDBaseT and a choice of five high-quality optional lenses



#### Product Details:

Product Name	Mercury Code	EAN Code
Multimedia Projector XEED WUX6010 (E)	0867C003AA	4549292045659
Multimedia Projector XEED WUX6010 (GB)	0867C007AA	8714574634180
Multimedia Projector XEED WUX6010 MEDICAL (E)	0867C005AA	8714574634166
Multimedia Projector XEED WUX6010 MEDICAL (GB)	0867C006AA	8714574634173

#### Optional Accessories:

Product Name	Mercury Code	EAN Code
Lamp Assembly RS-LP09	9963B001AA	4549292020885
Ceiling Attachment RS-CL11	4969B001AA	4960999685403
Ceiling Pipe 400-600mm RS-CL08	3096B001AA	4960999614144
Ceiling Pipe 600-1000mm RS-CL09	3097B001AA	4960999614151
Top Cover (Dark Grey) RS-TC01	5471B001AA	4960999789620
Replacement Air Filter RS-FL01	4971B001AA	4960999685427
Remote Controller RS-RC04	4970B001AA	4960999685410
Remote Controller RS-RC05	5750B001AA	4960999810393
Standard Zoom Lens RS-IL01ST	4966B001AA	4960999685373
Long Zoom Lens RS-IL02LZ	4967B001AB	4960999685380
Short Fixed Lens RS-IL03WF	4968B001AB	4960999685397
ULTRA LONG LENS RS-IL04	6064B001AA	4960999840123
WIDE ZOOM LENS RS-IL05WZ	8168B001AA	4960999971315

#### Measurement / Logistic Information:

Product Name	Mercury Code	Pack type	Pack description	Quantity per pack	Length (mm)	Width (mm)	Height (mm)	Gross Weight (kg)
Multimedia Projector XEED WUX6010 (E)	0867C003AA	EA	Each	1	430	380	170	
Multimedia Projector XEED WUX6010 (GB)	0867C007AA							
Multimedia Projector XEED WUX6010 MEDICAL (E)	0867C005AA	CT	Carton	1	500	540	310	11.7
Multimedia Projector XEED WUX6010 MEDICAL (GB)	0867C006AA							

#### What's in the box?

- Projector XEED WUX6010
- Remote Control
- AAA MN Battery
- AC Mains Power cable
- Computer Cable
- Box with EAN code
- Warranty book(E)
- Instruction (CD-ROM)
- Important Information(Book)