



# Power Cord Specifications

## Supported Power Cords and Plugs

Each power supply has a separate power cord. Standard power cords or jumper power cords are available for connection to the appliance. The jumper power cords, for use in racks, are available as an optional alternative to the standard power cords.



**Note**

Only the approved power cords or jumper power cords provided with the appliance are supported.

Table B-1 lists the power cords for the appliance power supplies.

**Table B-1** Supported Power Cords for the Appliance

Description	Length Feet/Meters	Amperage and Voltage	Plug	Connector
CAB-AC-250V/13A Power Cord (North America) See <a href="#">Figure B-1</a>	6.6 ft/2.0 m	13A/250VAC	NEMA L6-20 Molded Twistlock	IEC 60320-C13
CAB-N5K6A-NA AC Type A Power Cord (North America) See <a href="#">Figure B-2</a>	8.2 ft/2.5 m	13A/250VAC	NEMA 6-15	IEC 60320-C13
CAB-9K12A-NA AC Type A Power Cord (North America) See <a href="#">Figure B-3</a>	8.2 ft/2.5 m	13A/125VAC	NEMA 5-15	IEC 60320-C15
SFS-250V-10A-AR AC power cord (Argentina) See <a href="#">Figure B-4</a>	8.2 ft/2.5 m	10A/250VAC	IRAM 2073	IEC 60320-C13
CAB-9K10A-AU AC power cord (Australia) See <a href="#">Figure B-5</a>	8.2 ft/2.5 m	10A/250VAC	A.S 3112-2000	IEC 60320-C15

**Table B-1 Supported Power Cords for the Appliance (continued)**

Description	Length Feet/Meters	Amperage and Voltage	Plug	Connector
SFS-250V-10A-CN Power cord (China) See <a href="#">Figure B-6</a>	8.2 ft/2.5 m	10A/250VAC	CCC GB2009.1 GB1002	IEC 60320-C13
CAB-9K10A-EU Power cord (Europe) See <a href="#">Figure B-7</a>	8.2 ft/2.5 m	10A/250VAC	M 2511	IEC 60320-C15
SFS-250V-10A-ID AC Power Cord (India, South Africa, and United Arab Emirates) See <a href="#">Figure B-8</a>	8.2 ft/2.5 m	16A/250VAC	EL-208	IEC 60320-C13
SFS-250V-10A-IS AC Power Cord (Israel) See <a href="#">Figure B-9</a>	8.2 ft/2.5 m	10A/250VAC	SI-32	IEC 60320-C13
CAB-9K10A-IT AC Power Cord (Italy) See <a href="#">Figure B-10</a>	8.2 ft/2.5 m	10A/250VAC	CEI 23-16/VII	IEC 60320-C15
CAB-9K10A-SW AC Power Cord (Switzerland) See <a href="#">Figure B-11</a>	8.2 ft/2.5 m	10A/250VAC	MP232	IEC 60320-C15
CAB-9K10A-UK Power Cord (United Kingdom) See <a href="#">Figure B-12</a>	8.2 ft/2.5 m	10A/250VAC (13A fuse)	BS 1363A/ SS 145	IEC 60320-C15
CAB-C13-CBN 2.2-ft Cabinet Jumper Power Cord See <a href="#">Figure B-13</a>	2.2 ft/0.68 m	10A/250VAC	SS10A C13	HS10S C14
CAB-C13-C14-2M 6.6-ft Cabinet Jumper Power Cord See <a href="#">Figure B-14</a>	6.6 ft/2.0 m	10A/250VAC	SS10A C13	HS10S C14
CAB-C13-C14-AC 9.8-ft Cabinet Jumper Power Cord See <a href="#">Figure B-15</a>	9.8 ft/3.0 m	10A/250VAC	SS10A C13	HS10S C14
CAB-250V-10A-BR AC Power Cord (Brazil) See <a href="#">Figure B-16</a>	7.0 ft/2.1 m	10A/250VAC	NBR 14136	IEC 60320-C13


**Table B-1** Supported Power Cords for the Appliance (continued)

Description	Length Feet/Meters	Amperage and Voltage	Plug	Connector
CAB-JPN-3PIN AC Type A Power Cord (Japan) See <a href="#">Figure B-17</a>	7.9 ft/2.4 m	10A/250VAC	NEMA5-15P/ JIS C8303	IEC 60320-C13
CAB-C13-C14-2M-JP AC Cabinet Jumper Power Cord (Japan) See <a href="#">Figure B-18</a>	6.6 ft/2.0 m	10A/250VAC	EN 60320-2-2/E (C14G)	IEC 60320-C13

# AC Power Cord Illustrations


This section includes the AC power cord illustrations. See [Figure B-1](#) through [Figure B-18](#).

**Figure B-1** CAB-AC-250V/13A (North America)

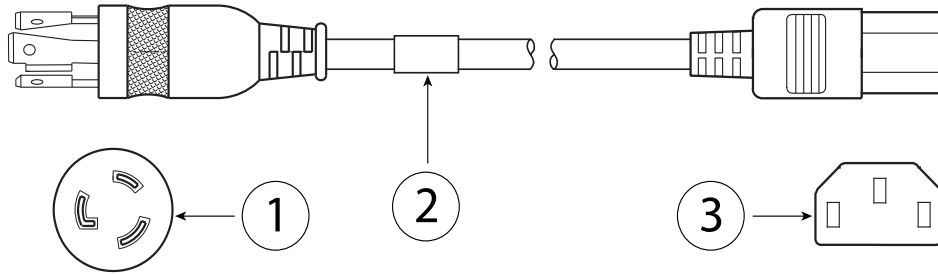

<b>1</b>	Plug: NEMA L6-20 (Molded Twistlock)	<b>3</b>	Cord set rating: 13A, 250V
<b>2</b>	Connector: IEC 60320-C13		-


**Figure B-2** CAB-N5K6A-NA (North America)

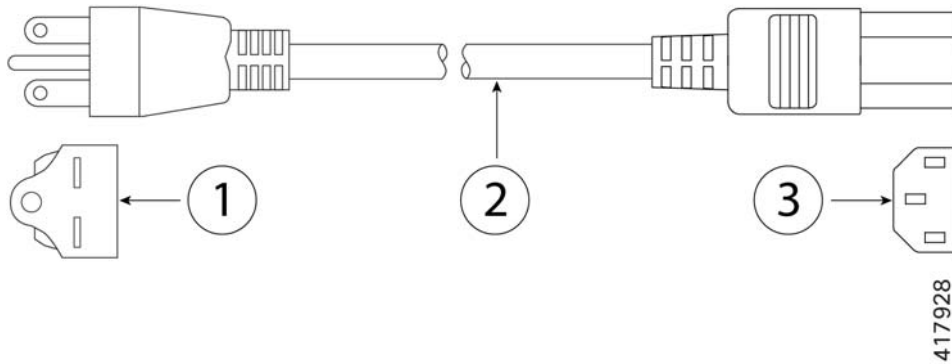

<b>1</b>	Plug: NEMA6-15P	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: IEC 60320-C13		-


417928

**Figure B-3 CAB-9K12A-NA (North America)**

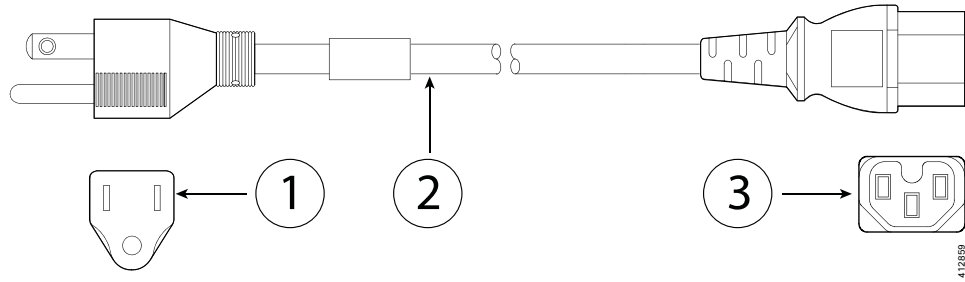


<b>1</b>	Plug: NEMA5-15P	<b>3</b>	Cord set rating: 13A, 250V
<b>2</b>	Connector: IEC 60320-C15		-

**Figure B-4 SFS-250V-10A-AR (Argentina)**

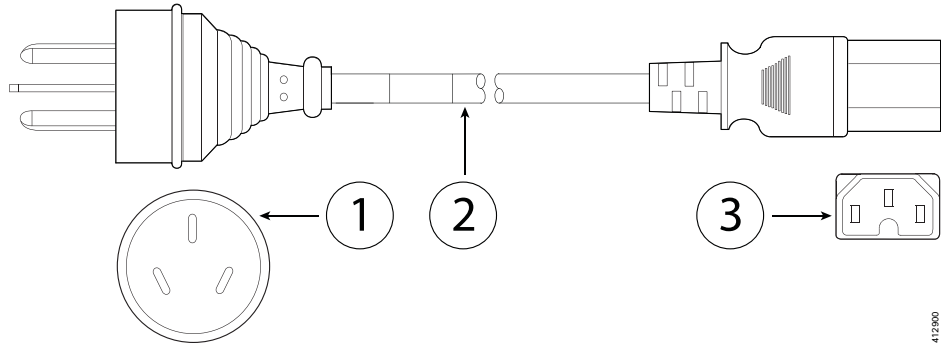


<b>1</b>	Plug: IRAM 2073	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: IEC 60320-C13		-

**Figure B-5 CAB-9K10A-AU (Australia)**

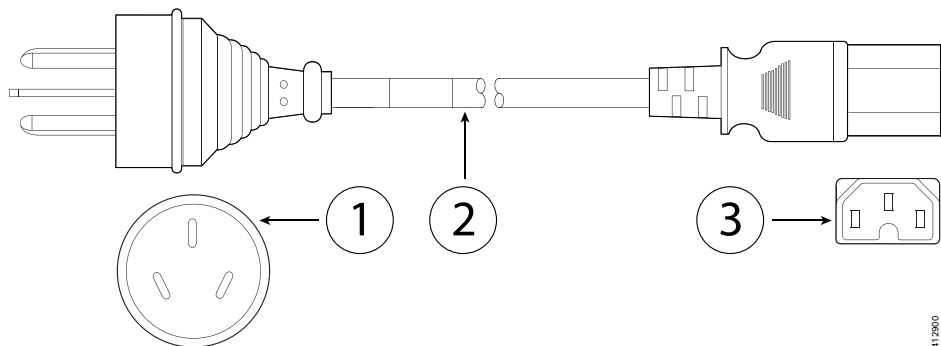


<b>1</b>	Plug: A.S. 3112-2000	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: IEC 60320-C15		-

**Figure B-6 SFS-250V-10A-CN (China)**

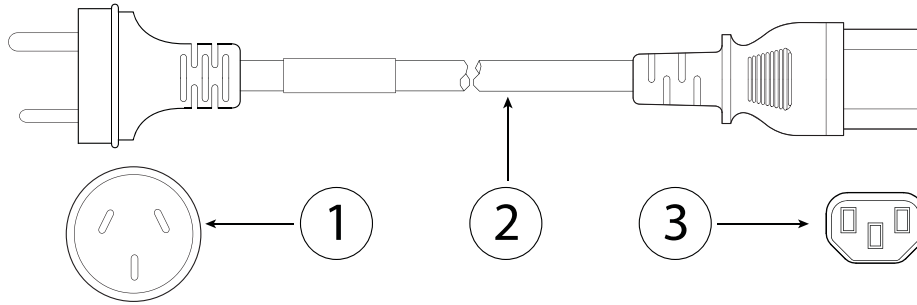


<b>1</b>	Plug: CCEE GB2009	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: IEC 60320-C13		-

**Figure B-7 CAB-9K10A-EU (Europe)**

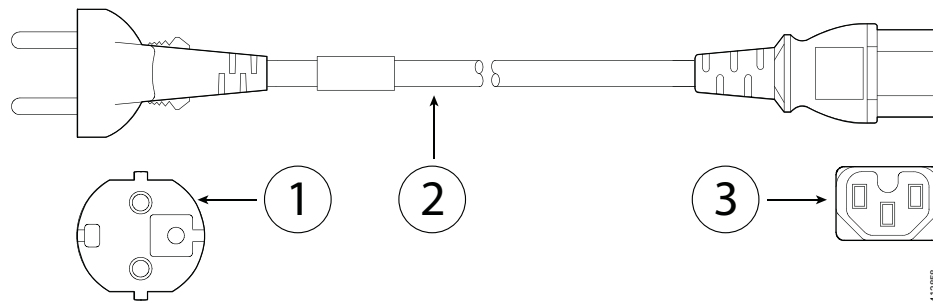


<b>1</b>	Plug: CEE 7/7 (M2511)	<b>3</b>	Cord set rating: 10A/16A, 250V
<b>2</b>	Connector: IEC 60320-C15		-

**Figure B-8 SFS-250V-10A-ID (India, South Africa, and United Arab Emirates)**

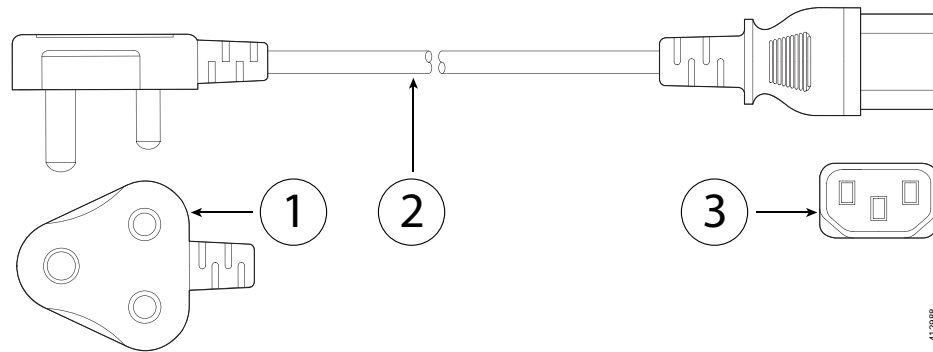

<b>1</b>	Plug: IS 6538-1971	<b>3</b>	Cord set rating: 16A, 250V
<b>2</b>	Connector: IEC 60320-C13		-


**Figure B-9** SFS-250V-10A-IS (Israel)

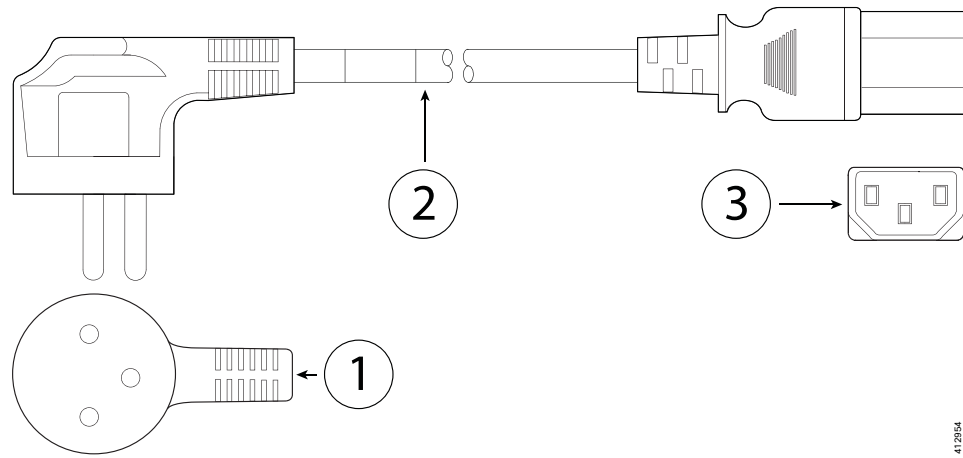

412054

<b>1</b>	Plug: SI-32	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: IEC 60320-C13		–


**Figure B-10** CAB-9K10A-IT (Italy)

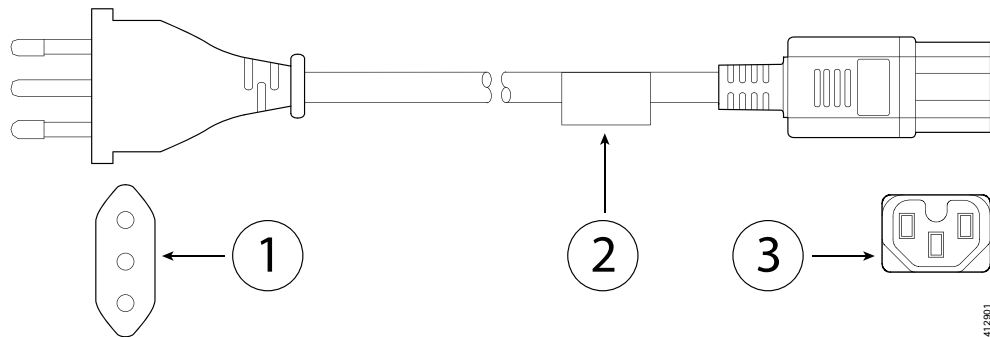

412801


<b>1</b>	Plug: CEI 23-16/VII (I/3G)	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: C15M (EN 60320-C15)		–

**Figure B-11 CAB-9K10A-SW (Switzerland)**

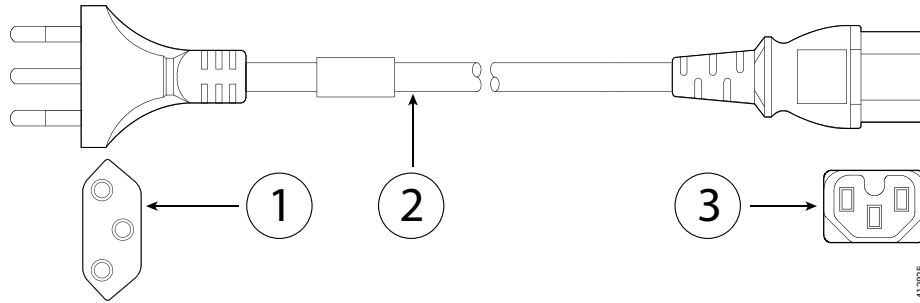


<b>1</b>	Plug: MP232-R (SEV 1011)	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: IEC 60320-C15		-

**Figure B-12 CAB-9K10A-UK (United Kingdom)**

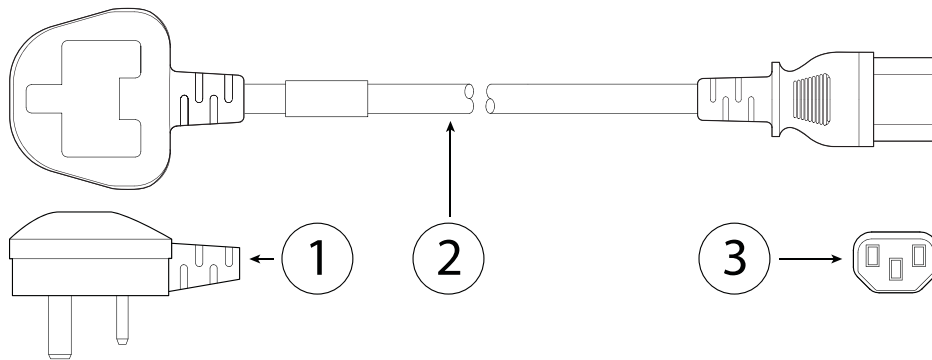

<b>1</b>	Plug: BS1363A/SS145	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: IEC 60320-C15		-


**Figure B-13 CAB-C13-CBN, Jumper Power Cord (0.68 m)**

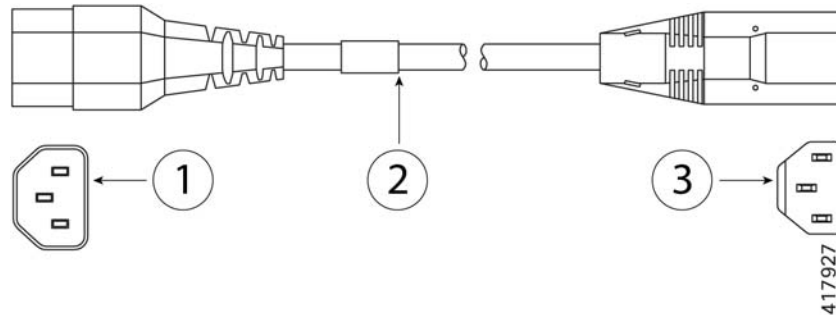

<b>1</b>	Plug: SS10A	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: HS10A		-




**Figure B-14 CAB-C13-C14-2M, Jumper Power Cord (2 m)**

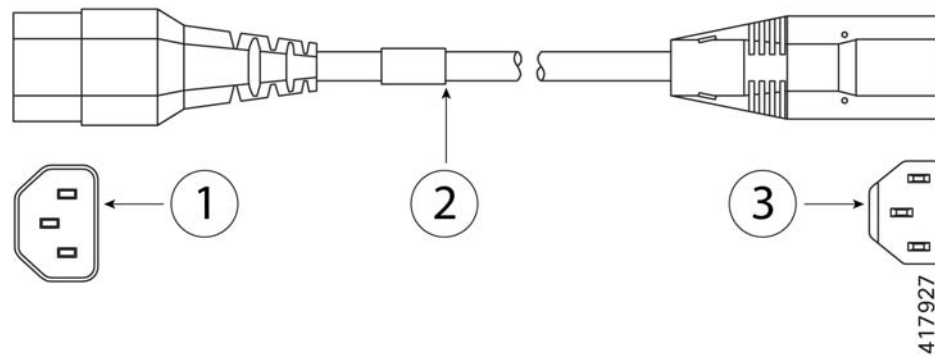


<b>1</b>	Plug: SS10A	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: HS10A		-

**Figure B-15 CAB-C13-C14-AC, Jumper Power Cord (3 m)**

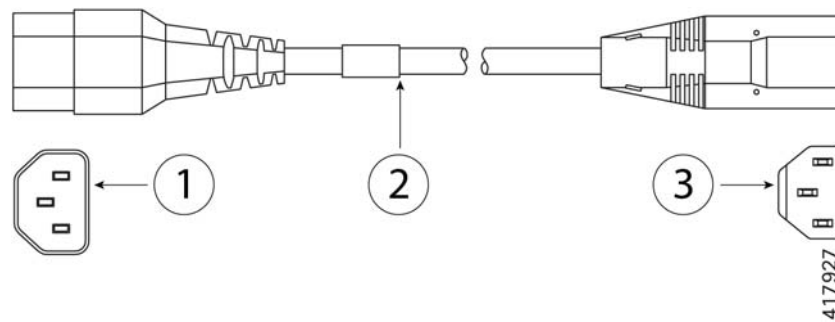


<b>1</b>	Plug: SS10A	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: HS10A		-

**Figure B-16 CAB-250V-10A-BR (Brazil)**

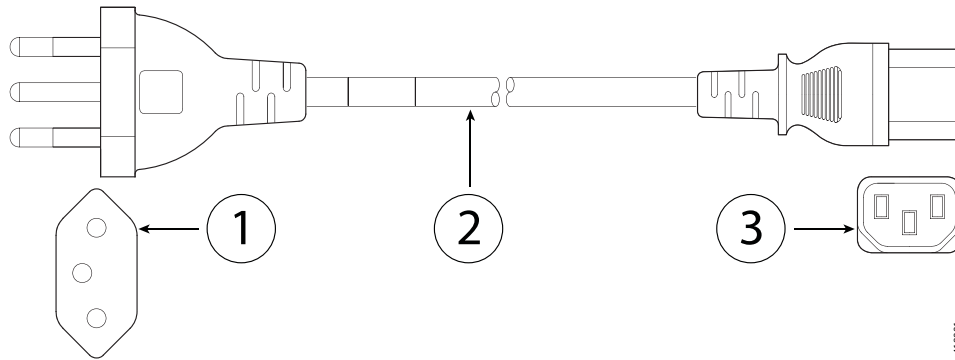


<b>1</b>	Plug: NBR 14136	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: IEC 60320-C13		-

**Figure B-17 CAB-JPN-3PIN (Japan)**

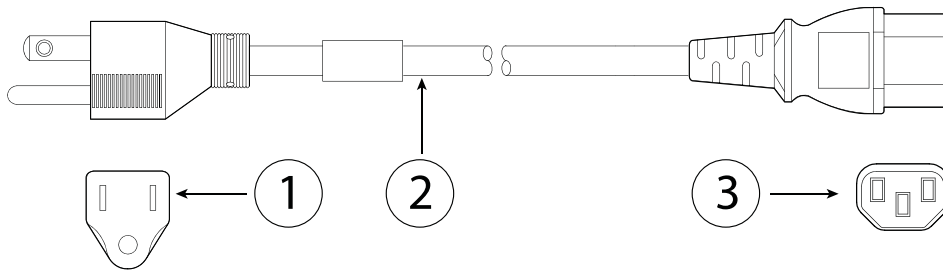

<b>1</b>	Plug: NEMA5-15P/JIS 8303	<b>3</b>	Cord set rating: 12A, 125V
<b>2</b>	Connector: IEC 60320-C13		-

**Figure B-18 CAB-C13-C14-2M-JP (Japan)**

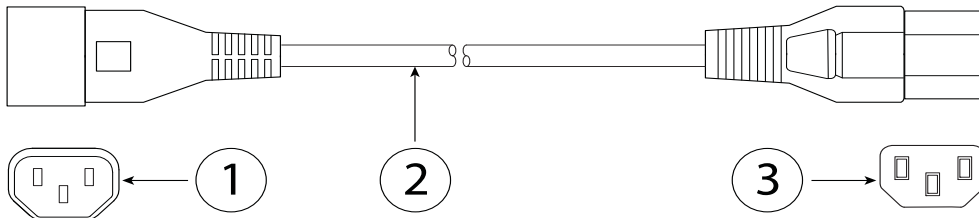

<b>1</b>	Plug: EN 60320-2-2/E	<b>3</b>	Cord set rating: 10A, 250V
<b>2</b>	Connector: IEC 60320-C13		-