



PORCELAIN STONE® | NATURAL STONE | GLASS TILE | WALL TILE

CROSSVILLEINC.COM



Welcome to Crossville, Inc.

We love partnering with designers like you for one simple reason: what inspires you, inspires us.

CREATIVE SOLUTIONS FOR EVERY PROJECT

For more than 30 years, designers and architects, retailers, and specifiers have looked to Crossville for creative solutions. This catalog will familiarize you with our products, services, and complimentary samples. Finding your next inspiration isn't always obvious, but finding the right partner should be.

HIGHEST STANDARDS FROM THE INSIDE OUT

Crossville is a subsidiary of The Curran Group, a family-owned, privately held corporation. We run on the same principles that the Currans are known for in all their business endeavors: family, partnership, integrity, improvement, and respect. Get to know us, and you'll find that our unique value system guides our relationships with employees, business associates, and with you, our customers.

FAMILY OWNED AND DESIGNED IN THE U.S.

As America's first manufacturer of large format porcelain tile, Crossville brings a history of innovation to clients who expect the highest standards inside and out. In fact, a majority of our tile is made here in the United States. As a subsidiary of The Curran Group we remain true to core values of family, partnership, integrity, improvement, and respect.



*

Table of Contents

CROSSVILLE SOLUTIONS

Uniquely Crossville	PAGE 04
Special Services	PAGE 05
Application Areas	PAGE 06
Get Planked Program	PAGE 07
Wet DCOF/Safety Considerations	PAGE 08

Cross-Sheen®/Hydrotect™/Exterior Cladding	PAGE 09
Sustainability	PAGE 10
Cleaning	PAGE 143
Tile Performance Data Chart	PAGE 144
Appendix	PAGE 145

PORCELAIN STONE®

If you expect your design materials to rise to the level of your creative vision, Porcelain Stone by Crossville is the clear choice. With hundreds of styles, colors, and sizes, Porcelain Stone provides design flexibility demanded by the nation's top architects and designers. Strong, durable, and stain resistant, it's backed by a no-nonsense warranty.
































































NATURAL STONE

From the casual warmth of multi-stoned slate and the polished elegance of black and white marble, natural stone collections by Crossville provide a tapestry of colors, shapes, and textures to create a beautiful backdrop for living.



GLASS TILE

With Crossville's glass tile, bring your vision to life with creative, colorful designs on walls and ceilings. Play with vibrancy, boldness, or soft pastels and neutrals to create a statement that can't be ignored.











WALL TILE

Bring beauty to a new canvas with Crossville's wall tile. Handmade wall tile gives design a specialized touch in a consistent execution. Lasting looks are brought to life in endless creative solutions.















Uniquely Crossville

DESIGN TOOLS

Planning and visualization tools for designers and architects are available on **CrossvilleInc.com/Resources/Tile-101**.

FLOOR PATTERNS

Explore nearly 100 floor tile patterns with suggested tile sizes and collections for each.

SELECTING A GROUT

Find the best grout types and colors to complete your tile design.



GET PLANKED

Request your favorite tile in popular plank sizing (most Crossville collections are eligible).

MOSAIC BUILDER

Choose from nearly endless combinations of Crossville glass tile colors and sizes to design custom mosaic for walls, floors, and more.

CROSS-VISION®

Create, save, and print visualizations of paint and flooring combinations, either within stock Crossville environments or via your own uploaded images. Visit our visualizer tools at CrossvilleInc.com/Design-Inspiration/Design-Visualizers.

NATIONAL ACCOUNTS

Clients working on national, multi-location projects face unique challenges and need a partner with the ability to meet their requirements across large geographical areas, ensuring every site consistently receives high quality material on time. That's where the Crossville National Account Team steps in. With extensive experience in the retail, automotive, quick-serve restaurant, convenience, and hospitality segments, our in-house National Accounts Team has what it takes to manage supply chain needs. They provide expert materials forecasting, sales support, order processing, and inventory management.

Contact a National Accounts representative at (931) 484-2110 to learn more about the following:

- Dedicated customer focus with more than 26 years of service to commercial development.
- State-of-the-art logistics to ensure major market delivery 2-3 times per week.
- Special pricing programs to assist with cost-control needs.
- Expert materials forecasting, sales support, order processing and inventory management.
- Extended product warranties and custom designs for more creative freedom.

GSA ADVANTAGE

Quality Crossville products are available at GSA pricing

Designing for government projects? Our extensive line of award-winning Porcelain Stone floor and wall tile, and our line of accent tiles, is available to government customers at GSA pricing.

Fast delivery

Centrally located in Crossville, Tennessee, we have an industry-leading logistics system to ensure you get your tile when and where you need it, on time and on budget.

On contract

Our GSA contract number is GS-07F-0429 and the TXMAS contract number is TXMAS-5-0560. Our products may also be purchased on state contracts.

Special Services





SAMPLE BOARD



SAMPLE CARD BOX SET



CONTRACTOR BOARD



JEWELRY CARDS

ORDERING SAMPLES

Order complimentary samples in the color of your preference at **CrossvilleInc.com.**

OTHER SPECIAL SERVICES INCLUDE:

- Loose samples are free for architects and designers. See back cover for details.
- Chip kits are available through your local distributor.
- Custom patterns using 3x3 mosaics may be ordered through your local distributor; please allow adequate lead time.
- Water jet cutting service offers infinite design possibilities from company logos to the most intricate of murals. Contact your local distributor for more details.
- Crosstyle® provides custom cutting of any of Crossville Porcelain Stone tile into any geometric, straight-edged piece 2x2 or larger.
- Crossville now offers each of its Porcelain Stone products in popular plank shapes, with no minimum order and quick order fulfillment (most Crossville collections are eligible).
- Given the extreme hardness and durability of Crossville Porcelain Stone, cutting the tile or drilling holes requires specific blades and drill bits. Go to CrossvilleInc.com, and visit the Resouces/Installation Guide section for our cutting and core drilling guides.
- Crossville offers an online booklet of pattern layout designs called the "Pattern Book." Contact your local distributor or visit Crossville's website at CrossvilleInc.com.
- Crossville offers custom color service. Minimum order requirement and special set-up fees apply.
- Crossville offers Cross-Grid®, a process that grinds all four sides of our Porcelain Stone tiles. This squaring is also called rectified, and it allows the tile to be installed with narrower grout joints.
- Crossville's website offers a variety of additional tools and information valuable to both professionals and homeowners.



BROCHURE



SAMPLE FOLDER



Application Areas

	480	rinish	Interior Flore	Merior Wall	Sterior Wall	Treins Suese	Couries	Interior W.	Merior roops	Steniornaming	Poolfoundin	Water Line 700
Porcelain Stone (field tile)												
Alaska™	24	UPS	~	~	~	✓	~	~	Mosaic Only		~	~
Altered State	28	UPS	~	~	~	✓	~	~			~	~
Argent	30	UPS	~	~	~	✓	~	~			~	~
		HON	~	~	~	~	~	~			~	~
Astral Plane	34	UPS	~	~	~	~	~	~	Mosaic Only		~	~
Basalt	36	UPS	~	~	~	~	~	~			~	~
Bluestone	38	UPS	~	~	~	~	~	~	v †		~	~
		HON	~	~	~	~	~	~	·		~	~
Bohemia	40	UPS	~	~	~	~	~	~	Mosaic Only		~	~
Color Blox®	42	UPS	·	~	·	~	~	· ·			·	*
Color Blox Mosaic®	42	UPS	·	~	·	~	· ·	<u> </u>	v †		·	~
	46	P0	·	~	· ·	~	~	~	-		·	· ·
Cross-Colors® Mingles	40		·	~	·	· ·	·				·	· ·
0 01.1.9	40	UPS										
Cross-Slate®	48	CS	·	~	·	•	~	*	·	•	~	~
Cross-Tread®	48	CTS	·		· ·	•			~	~		
EcoCycle Americana®	50	UPS	~	~	~	~	~	~			~	~
Empire	52	PO	~	~	~	✓	~	~			~	~
		UP	~	~	~	✓	~	~	Mosaic Only		~	~
Familiar Territory™	56	<u>UPS</u>	~	~	~	✓	~	~	v †		~	~
		SPO	~	~	~	~	~	~			~	~
Garden	58	TX	~	~	~	✓		~	~	~	~	~
Gotham®	60	UPS	~	~	~	✓	~	~			~	~
Java Joint	62	UPS	~	~	~	~	~	~	Mosaic Only		~	~
Jazz Age™	64	UP	~	~	~	✓	~	~	Mosaic Only		~	~
Main Street	66	UPS	~	~	~	~	~	~	v †		~	~
Moonstruck	68	UPS	~	~	~	~	~	~			~	~
		HON	~	~	~	~	~	~			~	~
Nest®	70	UPS	~	~	~	~	~	~	Mosaic Only		~	~
Notorious®	74	UPS	~	~	~	~	~	~	Mosaic Only		~	~
	, ,	HON	~	~	·	~	~	~			~	~
Physics	76	UPS	·	~	·	~	~	· ·	Mosaic Only		·	· ·
Tiysics	70	PO	· ·	~	· ·	~	~	-			~	~
Ready to Wear	78	UPS	·	~	·	·	~	~			<u> </u>	· ·
•									Mosaic Only			
Reformation™	80	UPS	·		·	•	· ·	· ·	Mosaic Only		·	•
Relax™	84	UP	~	~	~	~	~	~	Mosaic Only		~	~
Retro Active 2.0	86	PO	~	~	~	✓	~	~			~	~
		UPS	~	~	~	✓	~	~	Mosaic Only		~	~
		PTN	~	~	~	✓	~	~			~	~
Shades by Crossville®	90	<u>UPS</u>	*	~	~	✓	~	~	Mosaic Only		~	~
		HON	~	~	~	~	~	~			~	~
SpeakEasy	94	UPS	~	~	~	✓	~	~			~	~
State of Grace	96	UPS	~	~	~	✓	✓	~	Mosaic Only†		~	✓
		SAT	~	~	~	✓	~	~			~	~
Story Teller™	98	UPS	~	~	~	✓	~	~	Mosaic Only		~	~
Structure	102	UPS	~	~	~	✓	~	~			~	~
Glass & Wall Tile												
Color By Numbers®	128	Satin/ Gloss		~				~				
Convergence	114			~				~				
Cursive™	132	Gloss		~				~				
Ebb & Flow	116			~		~		~				
Glass Blox®	118			~		~		~				Mosaic Only
Groove Glass	122			~		~		~				Mosaic Only
Handwritten	134					-						
		Matte/										
Sideview Glass	124	Polished		~				~				
Simpatico	136	Satin/ Gloss		~				~				
Swatches™	138	Satin/ Gloss		~				~				

^{*} Wet areas consist of surfaces that are either soaked, saturated, or subjected to moisture (such as gang showers, tub enclosures, laundry rooms).

^{**} Excludes mesh mounted mosaics. Contact your Crossville sales representative for more information.

NOTE: Trim applications will differ from field tile applications for the same series. † 2 x 2 or 3 x 3 UPS mosaic only, see Tile Performance Data Chart for additional information on wet area use for mosaic tiles. †† Recommended for light-duty horizontal use in residential applications only.

^{††† 4} x 4 hex for light-duty horizontal use in residential applications only.

Get Planked®Program

NEED IT IN PLANKS?

Found the perfect tile, but need it in planks?

Crossville now offers each of its Porcelain Stone products in popular plank shapes. With no minimum order and quick order fulfillment, you'll be seeing planks in no time.

Depending on the product selected there are 4 possible widths and 7 possible lengths, which add up to more than 2,596 shape combinations.


Many of Crossville's tiles are now available in the much-requested Half-Plank size (square tile cut in half). For the latest information about half-planked tile, please visit CrossvilleInc.com or phone: 931.484.2110





Wall: Main Street | AV214 Gallery Grey | AV215 Boutique Black Designed by: The Miller Hull Partnership

Get Planked Sizes*

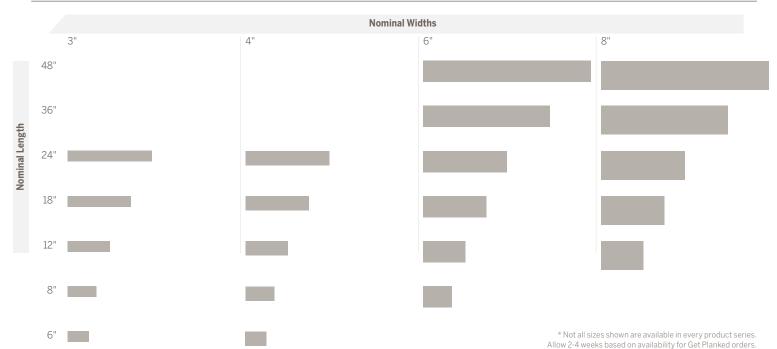



Wet DCOF/Safety Considerations

DCOF ACUTESTSM

The Wet DCOF AcuTestsm is the new standard for accurately determining the actual coefficient of friction on a tile surface. Developed by the Tile Council of North America (TCNA), the Wet DCOF (Dynamic Coefficient of Friction) AcuTest is a repeatable, reproducible method of measuring DCOF. This method uses a specifically engineered device to perform the required testing, ensuring the most precise results. The Wet DCOF AcuTest is included in the latest version of ANSI A137.1 Specifications for Ceramic Tile.

SAFETY CONSIDERATIONS FOR TILE

- In areas where standing water may occur, selected tile should have an elevated DCOF rating. Please refer to the "Tile Performance Data" page for additional information.
- Polished tile should not be used in areas where standing water, oil, or grease may be present due to the tile's low coefficient of friction.
- Pool deck tiles, whether interior or exterior, should have a surface texture that provides an elevated DCOF rating.
 Please refer to the "Tile Performance Data" page for additional information.
- Ramps or inclines should have an increased DCOF.
- There are no tiles that are slip proof, only slip resistant.



The Tile Council of North America (TCNA), established in 1945, has a leadership role in promoting the use of ceramic tile and in developing North American and international industry standards. To learn more about TCNA, please go to **tcnatile.com**.

Product	Finish	Wet DCOF Range
Empire	PO	0.22 - 0.32
Cross-Colors® Mingles	PO	0.31 - 0.41
Physics	PO	0.31 - 0.41
Retro Active 2.0	PO	0.31 - 0.41
State of Grace	SAT	0.31 - 0.41
Alaska™	UPS	0.42 - 0.52
Altered State	UPS	0.42 - 0.52
Argent	HON	0.42 - 0.52
Astral Plane	UPS	0.42 - 0.52
Bluestone	HON	0.42 - 0.52
Color Blox®/Color Blox® Mosaic	UPS	0.42 - 0.52
EcoCycle Americana®	UPS	0.42 - 0.52
Empire	UP	0.42 - 0.52
Familiar Territory™	SPO	0.42 - 0.52
Java Joint	UPS	0.42 - 0.52
Jazz Age™	UP	0.42 - 0.52
Moonstruck	HON	0.42 - 0.52
Nest [®]	UPS	0.42 - 0.52
Notorious®	HON	0.42 - 0.52
Reformation™	UPS	0.42 - 0.52
Relax™	UP	0.42 - 0.52
Retro Active 2.0	PTN	0.42 - 0.52
Shades by Crossville®	HON	0.42 - 0.52
State of Grace	UPS	0.42 - 0.52
Story Teller™	UPS	0.42 - 0.52
Argent	UPS	0.50 - 0.60
Basalt	UPS	0.50 - 0.60
Bluestone	UPS	0.50 - 0.60
Bohemia	UPS	0.50 - 0.60
Cross-Colors® Mingles	UPS	0.50 - 0.60
Familiar Territory [™]	UPS	0.50 - 0.60
Garden	TX	0.50 - 0.60
Gotham®	UPS	0.50 - 0.60
Moonstruck	UPS	0.50 - 0.60
Notorious®	UPS	0.50 - 0.60
Physics	UPS	0.50 - 0.60
Ready to Wear	UPS	0.50 - 0.60
Retro Active 2.0	UPS	0.50 - 0.60
Shades by Crossville®	UPS	0.50 - 0.60
SpeakEasy	UPS	0.50 - 0.60
Structure™	UPS	0.50 - 0.60
Main Street	UPS	0.58 - 0.68

The defining threshold value is 0.42 for level interior spaces expected to be walked upon when wet, a wet DCOF of less than 0.42 shall only be installed when the surface will be kept dry when walked upon and proper safety procedures will be applied when cleaning the tiles.

Finishing, Coating, and Cladding

CROSS-SHEEN®

- Protect tile from stains, scuffs, and graffiti.
- Integrated invisible finish that requires only a mild cleaner for hassle-free maintenance.
- Applicable to exterior and interior walls as well as interior flooring for commercial or residential.
- Exclusively from Crossville, and made in the U.S. to stringent specifications.
- Visit us online for usage of Cross-Sheen in the redesign of DeAnza High School, Ashland Youth Center, and others.

₩ HYDROTECT™ COATING

- Revolutionary invisible coating self-cleans exteriors against dirt, grime, algae and pollution.
- Applicable to floors and walls indoors and outside.
- No toxic chemicals needed to maintain that Day 1 look for years to come.
- Purifies exterior air by reducing greenhouse gases, environmental pollutants and volatile organic compounds in the presence of UV light.
- A 10,000-square-foot area of tiles can clean the air as effectively as 70 poplar trees or green space the size of four tennis courts.

To learn more about Cross-Sheen and Hydrotect visit Crossvillelnc.com/Tile-101/Finishes-Coatings.

EXTERIOR CLADDING

- Offers both aesthetic appeal and structural functionality.
- Graffiti resistant and appropriate for all kinds of environments.
- Engineered for utility savings due to thermal mass advantages.
- Contact us at crossc@crossvilleinc.com to learn more.



Sustainability

RECYCLED CONTENT

At Crossville, we put our name behind every product we sell. That's why we have developed the EcoCycle Tile Process™ logo, which will be shown in conjunction with products containing recycled content. Tile containing a specified minimum amount of recycled content will be designated with a percentage shown in the log. In addition, this logo will specify the nature of the recycled content, such as pre-consumer or post-consumer.

RECYCLED PRODUCTS

Crossville recycles nearly 12 million pounds of previously discarded filtrate and fired tile waste. In addition to its own fired waste recycling. Crossville also accepts and recycles reclaimed, previously installed tile through its Tile Take-Back® Program. For more information, visit CrossvilleInc.com/green.

Alaska™	4%
Altered State	4%
Argent	4%
Astral Plane	4%
Basalt	4%
Bluestone	4%
Bohemia	4%
Color Blox®/Color Blox® Mosaic	4%
Cross-Colors® Mingles	4%
EcoCycle Americana®	4%
Empire	13%**
Familiar Territory™	4%
Gotham [®]	4%
Java Joint	4%
Main Street	4%
Moonstruck	4%
Nest®	4%
Notorious®	4%
Physics	4%
Ready to Wear	4%
Reformation™	4%
Retro Active 2.0	4%
Shades by Crossville®	4%
SpeakEasy	4%
State of Grace	4%
Story Teller™	4%
Structure™	4%

** Certified by SCS

TILE TAKE-BACK® PROGRAM

With our Tile Take-Back® Program, Crossville, the tile industry's leader in sustainable initiatives, solves the major environmental problem facing the tile industry today: recycling fired tile.



Previously, pre and post-consumer tile has been considered non-recyclable. While many tile manufacturers, including Crossville, have successfully reused scrap powders and unfired tile, hundreds of millions of pounds of damaged or otherwise unsellable fired tile (tile in its finished state), have gone to landfills each year. Additionally, there has been no environmentally friendly manner to dispose of previously installed tile.

We have developed a proprietary system of processing porcelain tile back into powder used in manufacturing new tile. The resulting new products will have a verifiable recycled content, and more than 4 million pounds of tile that Crossville previously sent to local landfills will be recycled. This is in addition to any tile Crossville will receive through our ground-breaking Tile Take-Back Program. Not only will the new process allow Crossville to repurpose its own scrap tile, but will allow the company to take back samples and previously installed tile, always a concern for environmentally-minded designers and building owners.

LEED INFORMATION

For information on Crossville's recycled products and their relation to LEED information, please visit CrossvilleInc.com.



Sustainability

SUSTAINABLE PARTNERSHIPS

In our efforts to preserve the environment, Crossville partners with TOTO USA, the world's largest plumbing products manufacturer, to recycle pre-consumer waste. Crossville has developed a proprietary system of processing TOTO's sanitary ware waste back into powder used in manufacturing new tile.

In March 2011, Crossville became a net consumer of waste, meaning we recycle more waste into new products than we generate through our manufacturing processes.

This recycling conserves resources; the volume of finished goods Crossville ships now exceeds the amount of raw material it extracts from the earth for use in manufacturing.

SUSTAINABLE OPERATIONAL PROCEDURES

In order to minimize our impact on the environment, Crossville goes beyond offering recycled products. Crossville's sustainable operational procedures include:

- Printing of marketing materials at Forestry Stewardship Council certified facilities; use of soy inks and recycled paper whenever possible.
- Packaging of samples, merchandising materials and piece goods with recycled/recyclable wrapping and cushioning.
- Company-wide recycling program for all office and production facility paper waste.

GREEN SQUARED™ CERTIFICATION

The standard in sustainability for the tile industry in North America is ANSI A138.1. Crossville was the first manufacturer to achieve Green Squaredsm certification for its entire U.S. manufactured porcelain tile product line-up, which is manufactured in Crossville, TN, as well as its production processes. Green Squared is the stringent and powerful new measure for tile industry sustainability developed by Tile Council of North America under the American National Standards Institute (ANSI) process.

Green squared^{s™}

- Evaluates products and processes in five key environmental and social categories:
 - Product characteristics
 - Manufacturing operations
 - Corporate governance
 - Innovation
 - End-of-life product management
- Recognizes manufacturers for leadership in environmental stewardship and corporate responsibility.
- Serves as the standard bearer to ensure transparent, full disclosure of sustainability product, manufacturer by manufacturer industry wide.



Through the EcoCycle Tile Process TM , Crossville recycles millions of pounds of tile waste each year that would otherwise be sent to landfills. The two-pronged, proprietary process addresses the recycling of fired tile and filtrate waste. It's a major contributor to Crossville's status as a net consumer of waste (the company recycles more waste than it produces)—a distinction that no other domestic tile manufacturer has yet to achieve.














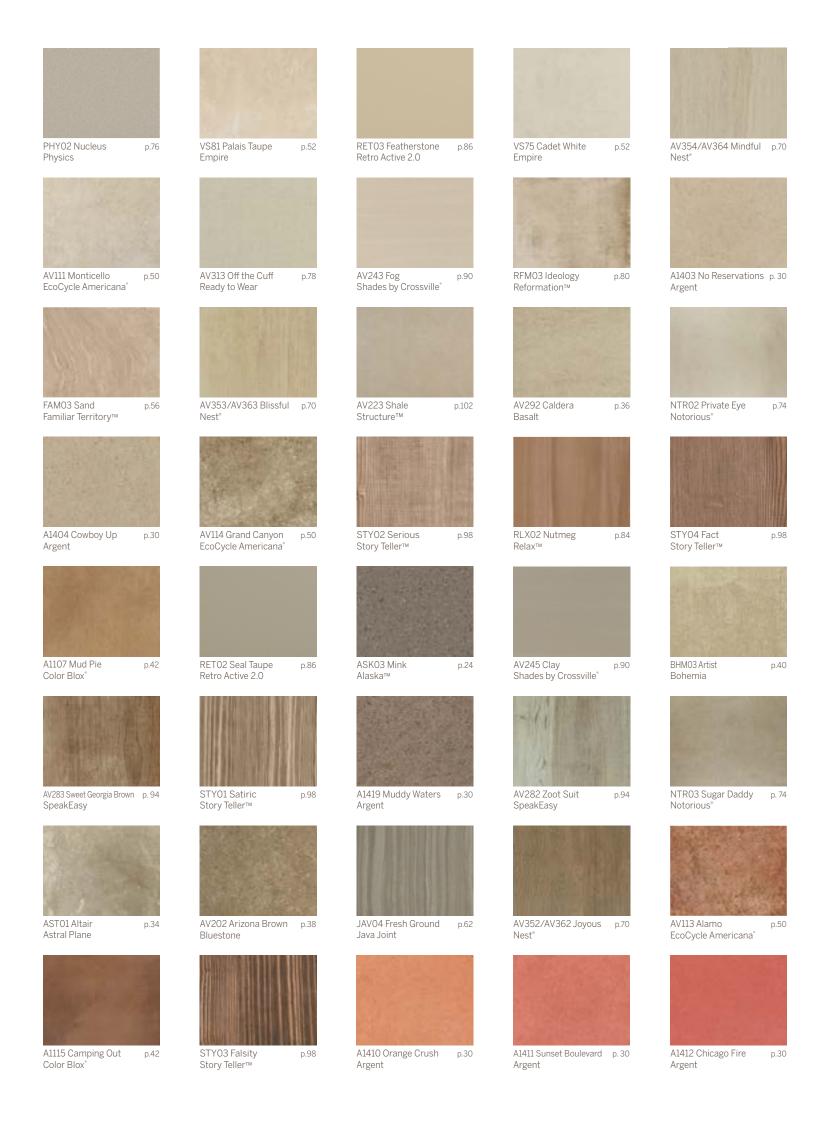

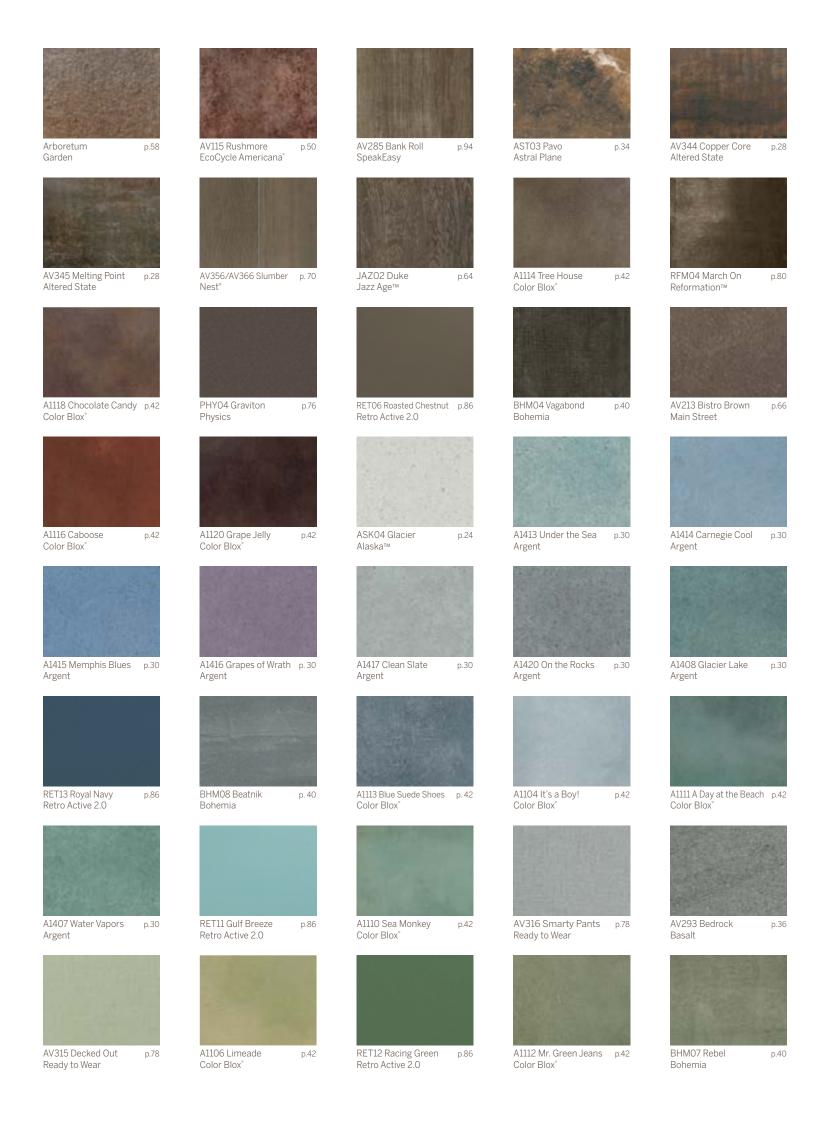



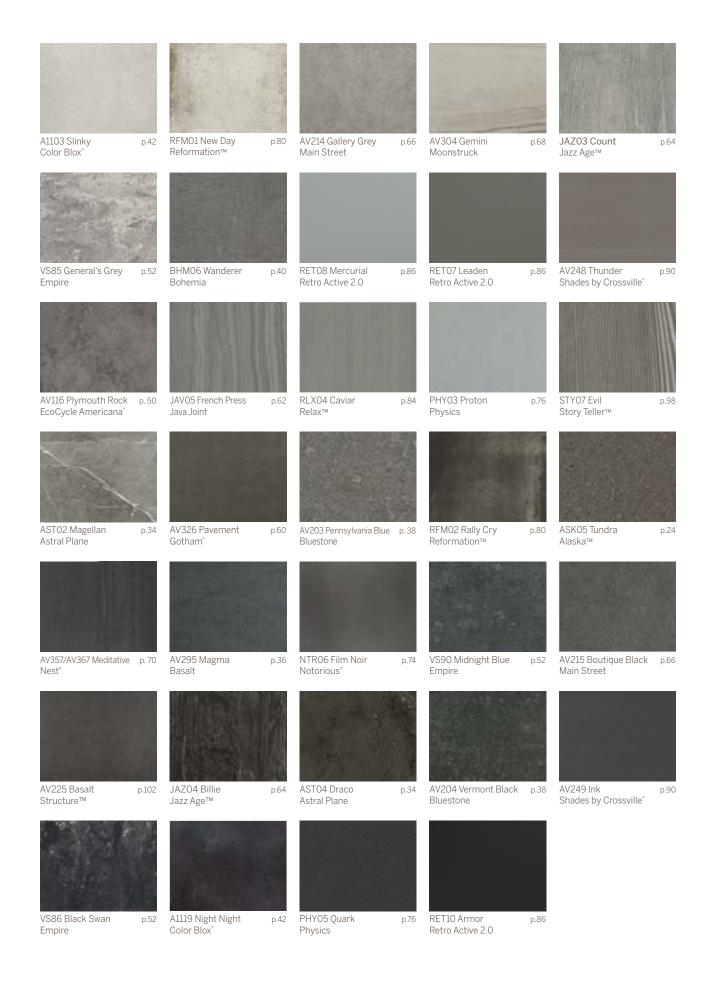









Porcelain Stone®



ALASKA™

ALTERED STATE

ARGENT

ASTRAL PLANE

BASALT

BASALT

BLUESTONE

BOHEMIA

COLOR BLOX®

COLOR BLOX® MOSAIC

 ${\tt CROSS\text{-}COLORS}^{\tt @}\,\,{\tt MINGLES}$

ECOCYCLE AMERICANA®

EMPIRE

FAMILIAR TERRITORY™

GARDEN

GOTHAM®

JAVA JOINT

JAZZ AGE™

MAIN STREET

MOONSTRUCK

NEST®

NOTORIOUS®

PHYSICS

READY TO WEAR

REFORMATION™

 $RELAX^{TM}$

RETRO ACTIVE 2.0

SHADES BY CROSSVILLE®

SPEAKEASY


STATE OF GRACE

STORY TELLER™

 $\mathsf{STRUCTURE}^{\scriptscriptstyle\mathsf{TM}}$












ASK01 Ice




ASK04 Glacier



ASK02 Bone



ASK05 Tundra



ASK03 Mink

Mosaics



ASK01.10202MOS Ice 2x2 Mosaic

ASK03.10202MOS

Mink 2x2 Mosaic





Ice Polygon Mosaic




ASK03.1POLYMOS




Mink Polygon Mosaic



ASK05.10202MOS ASK05.1POLYMOS Tundra 2 x 2 Mosaic Tundra Polygon Mosaic



ASK02.10202MOS Bone 2 x 2 Mosaic



ASK04.10202MOS Glacier 2 x 2 Mosaic



ASK02.1POLYMOS Bone Polygon Mosaic



ASK04.1POLYMOS Glacier Polygon Mosaic

















Sizes & Finishes (Available in all colors)

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
12 x 24	297 x 597	10.5	UPS
24 x 24	597 x 597	10.5	UPS
24 x 48	597 x 1197	10.5	UPS

Crossville recommends a grout joint of 3mm.

This tile is rectified.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 2 Square Mosaic*	298 x 298	10.5	UPS
Polygon Mosaic**	341 x 385	10.5	UPS

^{*} Mounted on 12 x 12 sheet with 3mm grout joints

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 12 Cove Base	150 x 297	10	UPS
4 x 24 Single Bullnose	97 x 597	10.5	UPS





6 x 12 Cove Base

4 x 24 Single Bullnose

Recommended Use

Alaska is recommended for interior floors, walls, coutertops, and exterior walls in both residential and commercial applications. Alaska is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.



Example Sizes (Field tile available in all colors)






^{**} Mounted on 13 x 15 sheet with 2mm grout joints







AV341 White Hot



AV344 Copper Core



AV342 Steel Gaze



AV345 Melting Point



AV343 Acid Wash

Sizes & Finishes (Available in all colors)

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 24	147 x 597	10.5	UPS
12 x 24	297 x 597	10.5	UPS
24 x 24	597 x 597	10.5	UPS
24 x 24			-

Crossville recommends a minimum 3mm grout joint. This tile is rectified. Please note: Tile is directional. Please install accordingly.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 12 Mosaic*	47 x 297	10.5	UPS

^{*} 2×12 mosaic is mounted on a 297×297 sheets with a 3mm grout joint. The 2×12 mosaic can be used in linear drain shower pans as long as the 12 inch side runs parallel to the drain.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 24 Single Bullnose	147 x 597	10.5	UPS




6 x 24 Single Bullnose

Recommended Use


Altered State is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Altered State is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



24 x 24



12 x 24



2 x 12 Mosaic















Wet DCOF (UPS) 0.42 - 0.52



Argent

- Broad coordinating color palette provides dramatic design versatility
- Rectangular sizes are enhanced with Get Planked
- Cross-Sheen finish for easy cleaning (UPS only)
- Honed colors available in stock as 12 x 24
- All field tiles except 12 x 12* are rectified with a minimum recommended 3 mm grout joint
 - grout joint of 3/16 inch.
- Get Planked available

Visit the website to learn more:

Crossvilleinc.com/Products/Argent



A1401 Winter Garden UPS/HON



A1402 Sacred Sand UPS/HON



A1403 No Reservations UPS/HON



A1404 Cowboy Up UPS/HON



A1405 Hollywood and Vine UPS/HON



A1406 Emerald City UPS/HON



A1407 Water Vapors UPS/HON



A1408 Glacier Lake UPS/HON



A1409 Lemon Drop UPS/HON



A1410 Orange Crush UPS/HON



A1411 Sunset Boulevard UPS/HON



A1412 Chicago Fire UPS/HON



A1413 Under the Sea UPS/HON



A1414 Carnegie Cool UPS/HON



A1415 Memphis Blues UPS/HON



A1416 Grapes of Wrath UPS/HON



A1417 Clean Slate UPS/HON



A1418 Concrete Jungle UPS/HON



A1419 Muddy Waters UPS/HON



A1420 On the Rocks UPS/HON

Price Groups

Group I
Group II
Group III

















Sizes & Finishes

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 6*	147 x 147	9.5	UPS
6 x 24*	147 x 602.5	9.5	UPS
12 x 24	299 x 602.5	9.5	UPS/HON

HON (Honed finish) is semi-polished

All field tiles except 12 x 12* are rectified with a minimum recommended 3 mm grout joint. 12 x 12 is non-rectified, minimum recommended grout join 3/16 inch.

Nominal (in)	Actual (in)	Thickness (mm)	Finish
12 x 12*†	11-13/16 x 11-13/16	9.5	UPS

 $[\]ensuremath{^*}\xspace$ HON finish available through special order.

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 12 Cove Base*	147 x 299	9.5	UPS
4 x 12 Bullnose	96 x 299	9.5	UPS



(Universal, flat top)




All colors

Recommended Use


Argent is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Argent is not recommended for exterior horizontal surfaces or exterior paving. The honed (semi-polished) field tile is not recommended for wet areas. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.







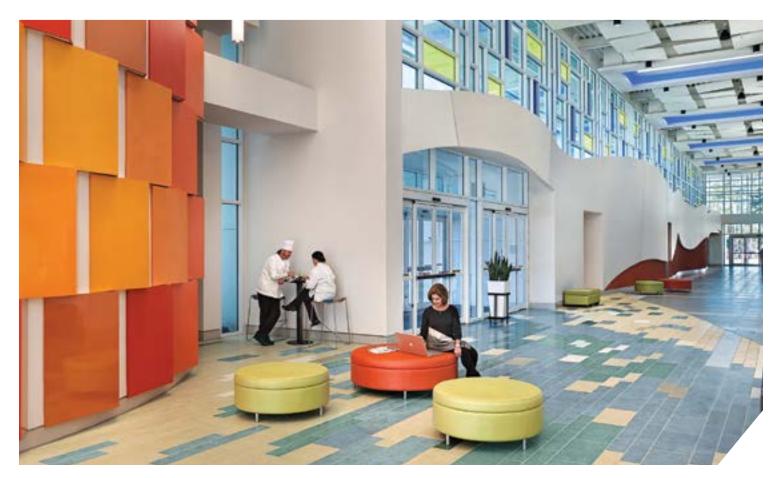

[†] Calibrated and measured in inches.

^{*} Available only in A1401, A1402, A1403, A1404, A1417, A1418, A1419 and A1420



Astral Plane


- Two mosaic options to complete your designs
- Cross-Sheen finish for easy cleaning
- Recommended grout joint: 3mm
- Field Tile Rectified
- Cove base and bullnose trim available
- Get Planked available

Visit the website to learn more: Crossvilleinc.com/Products/Astral-Plane

Astral Plane | AST01 Altair







AST02 Magellan



AST03 Pavo



AST04 Draco

FIELD TILE Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 24	147 x 597	10.5	UPS
12 x 24	297 x 597	10.5	UPS
24 x 24	597 x 597	10.5	UPS
Crossville recommends a grout joint of 3mm. This tile is rectified.			

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 2*	47 x 47	10.5	UPS
Random**			UPS

^{* 2} x 2 Mosaic tile in 297mm x 297mm mounted sheets with a 3mm grout joint ** Random Mosaic tile in 297mm x 322mm mounted sheets with a 3mm grout joint


COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 24 Bullnose	97 x 597	10.5	UPS
6 x 12 Cove Base	147 x 297	10	UPS
Guia Caus Pass	A v 24 Pullage		
6 x 12 Cove Base	4 x 24 Bullnose		
(Universal Flat Top)			

Recommended Use

Astral Plane is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Astral Plane is not recommended for exterior horizontal surfaces or exterior paving. **If offset pattern is required for tiles 15 inches or longer, Crossville recommends** an offset of not greater than 33%.


See CrossvilleInc.com for detailed installation instructions.




24 x 24



12 x 24

















Wet DCOF (UPS) 0.42 - 0.52





AV291 Silica



AV293 Bedrock



AV292 Caldera



AV294 Mafic



AV295 Magma

Sizes & Finishes (Available in all colors)

FIELD TILE Nominal (in)	Actual (in)	Thickness (in)	Finish
12 x 12	11-13/16 x 11-13/16	3/8	UPS
12 x 24	11-13/16 x 23-13/16	3/8	UPS

Crossville recommends a grout joint of 3/16 inch.

This tile is calibrated (non-rectified).

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Finish
4 x 12 Bullnose	3-3/4 x 11-3/4	3/8	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	UPS

6 x 12 Cove Base



Recommended Use

Basalt is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Basalt is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.



12 x 24



12 x 12















Wet DCOF (UPS) **0.50 - 0.60**



AV201 Colorado Buff UPS



AV202 Arizona Brown UPS



AV203 Pennsylvania Blue UPS



AV204 Vermont Black UPS



AV201 Colorado Buff HON



AV202 Arizona Brown HON



AV203 Pennsylvania Blue HON



AV204 Vermont Black HON

Sizes & Finishes (Available in all colors)

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 6	147 x 147	10.5	UPS/HON
6 x 24	147 x 597	10.5	UPS/HON
12 x 12	297 x 297	10.5	UPS/HON
12 x 24	297 x 597	10.5	UPS/HON
24 x 24	597 x 597	10.5	UPS/HON
Crossville recommends a gr	out joint of 3mm.		

This tile is rectified.

HON (Honed finish) is semi-polished.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 2*	47 x 47	10.5	UPS
3 x 6**	72 x 147	10.5	HON
Random***			
2 x 2	47 x 47	10.5	UPS/HON Mixed
2 x 4	47 x 97	10.5	UPS/HON Mixed
2 x 6	47 x 147	10.5	UPS/HON Mixed

- * 2 x 2 mosaic tile mounted on 297 x 297 sheets. ** 3 x 6 mosaic tile mounted on 297 x 372 sheets (staggered joints). *** 2 x 2, 2 x 4 and 2 x 6 mosaic tile mounted on 297 x 322 sheets.

COORDINATING TRIM (Available in all colors)

OOOKDINATING TKIN	(Available III all Colol s)		
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 12 Single Bullnose	97 x 297	10.5	UPS/HON
6 x 12 Cove Base	150 x 297	10	UPS
6 x 8 Cove Base Corners Left & Right	150 x 200	10	UPS
6 x 12 Cove Base	4 x 12 Single Bullnose	6 x 8 Cove Base Corner Left	6 x 8 Cove Base Corner Right
(Universal flat top)		(Flat Top)	(Flat Top)

Recommended Use


not greater than 33%.

Bluestone is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Bluestone is not recommended for exterior horizontal surfaces or exterior paving. The honed (semi-polished) field tile is not recommended for wet areas where standing water may occur. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of

(Flat Top)

See CrossvilleInc.com for detailed installation instructions.

$\pmb{Example \ Sizes} \ (\textit{Field tile available in all colors})$

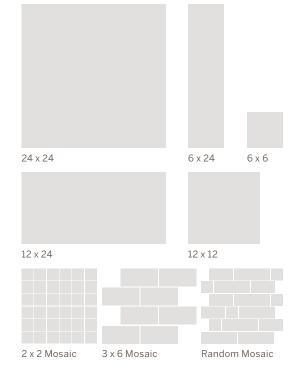

Wet Area Use for Mosaic

See Tile Performance Data chart.







(Flat Top)










Wet DCOF (UPS) 0.50 - 0.60 (HON) 0.42 - 0.52

Bohemia

- Eight gorgeous colors in a unique fabric and plaster mixed visual
- Complete trim package
- Recommended grout joint: 3mm
- Field Tile Rectified
- Cross-Sheen Finish for easy cleaning

Visit the website to learn more: Crossvilleinc.com/Products/Bohemia









BHM01 Free Spirit

BHM02 Drifter


BHM03 Artist

BHM04 Vagabond









BHM05 Tinker

BHM06 Wanderer

BHM07 Rebel

BHM08 Beatnik

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
12 x 24	297 x 597	10.5	UPS
24 x 24	597 x 597	10.5	UPS
Crossville recommends a gr	out joint of 3mm.		

MOSAICS

This tile is rectified.

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
3 x 3*	297 x 297	10.5	UPS
Basketweave Mosaic*	301.3 x 301.3	10.5	UPS

^{* 3} x 3 and Basketweave Mosaic tile mounted on 12 x 12 sheets.

COORDINATING TRIM (Available in all colors)


Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 24 Single Bullnose	96 x 597	10.5	UPS
6 x 12 Cove Base	150 x 297	10	UPS



(Universal Flat Top)



Example Sizes (Field tile available in all colors)



12 x 24



Basketweave Mosaic

Recommended Use

Bohemia is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Wet Area Use for Mosaic













Wet DCOF (UPS) **0.50 - 0.60**

A1109 Sidewalk Chalk



Price Groups

A1119 Night Night

l	Group
II	Group I
III	Group II
IV	Group I\



A1108 Sea Otter





A1114 Tree House







A1117 I See the Moon



(UPS) **0.42 - 0.52** Field Tile (UPS) **0.42 - 0.52** 3 x 3 Mosaic

Sizes & Finishes

FIELD TILE Nominal (in)	Actual (in)	hickness (in)	Finish
6 x 6 [†]	5-13/16 x 5-13/16	3/8	UPS
6 x 12 [†]	5-13/16 x 11-13/16	3/8	UPS
12 x 12	11-13/16 x 11-13/16	3/8	UPS
12 x 24	11-13/16 x 23-13/16	3/8	UPS
18 x 18	17-13/16 x 17-13/16	3/8	UPS

 † The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance

Please allow two to eight weeks for delivery depending on Crossville's production schedule.

Crossville recommends a minimum grout joint of 3/16 inch.

This tile is calibrated (non-rectified).

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Finish		
3 x 3*	2-7/8 x 2-7/8	1/4	UPS		
* 3 x 3 Mosaic Tile in 11-7/8 x 11-7/8 sheets with a 1/8 inch grout joint.					

COORDINATING TRIM

Nominal (in)	Actual (in)	Thickness (in)	Finish
3 x 3 Mounted Bullnose** 1 Linear Foot	2-7/8 x 2-7/8	1/4	UPS
3 x 3 Bullnose Corner	2-7/8 x 2-7/8	1/4	UPS
3 x 3 Mounted Cove Base** 1 Linear Foot	2-7/8 x 3-5/8	1/4	UPS
4 x 12 Single Bullnose	3-3/4 x 11-3/4	3/8	UPS
4 x 12 Bullnose Corner Left & Right	3-3/4 x 11-3/4	3/8	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	UPS
6 x 8 Cove Base Corner Left & Right	5-7/8 x 7-3/4	3/8	UPS



6 x 12 Cove Base (Universal, Flat Top)



6 x 8 Cove Base Corner Left

(Flat Top)



(Flat Top)





Corner








3 x 3 Mounted Cove Base 1 Linear Foot (Flat Top)

Recommended Use

Color Blox is recommended for interior floors, walls, countertops, and exterior walls in both commercial and residential applications. Color Blox is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.



Example Sizes (Field tile available in all colors)

12 x 24



6 x 12

3 x 3 Mosaic

12 x 12

Wet Area Use for Mosaic







Cross-Colors®

- Minimum 4% recycled content
- A variety of textures and finishes
- Numerous trim options available
- Field Tile Calibrated
- Contemporary color palette designed by one of the industry's top color forecasters
- Recommended grout joint: 3/16"

Visit the website to learn more: CrossvilleInc.com/Products/Cross-Colors-Mingles









A790 Burgundy Smoke*



A675 Stonehenge*



A233 Sand Bisque*



A825 Mercury*



A900 Mica*



A850 Graphite*



A880 Onyx*



R001 Grey Mingle

Sizes & Finishes

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 6 (cut/bevel)*	5-3/4 x 5-3/4	5/16	UPS/PO/CS
8 x 8	7-3/4 x 7-3/4	5/16	UPS/CS/CTS
12 x 12	11-3/4 x 11-3/4	5/16	UPS/PO/CS

Crossville recommends a minimum grout joint of 3/16 inch.

Note: The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance.

Please allow two to eight weeks for delivery depending on Crossville's production schedule.

This tile is calibrated (non-rectified)

Example Sizes (Field tile available in all colors)

6 x 6



12 x 12

COORDINATING TRIM

Trim Program (available in UPS finish only)

Size	6 x 8 Cove Base(in)	1 x 6 Inside Cove Base Corners(in)	6 x 8 Left & Right Cove Base Corner(in)	4 x 8 Bullnose(in)	4 x 8 Left & Right Bullnose Corners(in)	4 x 8 Bullnose Stair Tread(in)
Actual	5-7/8 x 7-3/4	1 x 5-7/8	5-7/8 x 7-3/4	3-7/8 x 7-3/4	3-7/8 x 7-3/4	3-7/8 x 7-3/4
Thickness	5/16	_	5/16	5/16	5/16	5/16



Cove Base (Standard, round top)



Inside Cove Base Corner



Cove Base Corner - Left (Round Top)



Cove Base Corner - Right (Round Top)



ullnose



Left Bullnose Corner



Right rner Bullnose Corner



8 x 8

Bullnose

Recommended Use

Cross-Colors (UPS) is recommended for interior floors, walls, countertops, and exterior walls in both commercial and residential applications. Cross-Colors (PO) is recommended for interior floors (except where standing water may occur), walls, countertops and exterior walls in both residential and commercial environments.

See CrossvilleInc.com for detailed installation instructions.











V1

ADE & W (U

Wet DCOF (UPS) 0.50 - 0.60 (PO) 0.31 - 0.41

47

^{*} Cross-Sheen® finish for easy cleaning available on UPS only.

^{*} These colors are inventoried in $cut/bevel 6 \times 6$, UPS finish, at Crossville. All other 6×6 Polished and Cross-Slate tiles are special order.

Crossville offers designers, architects, and builders the utilitarian textures to answer the specific needs of those areas with the highest exposure. These textures are an integral part of the tile and cannot be worn down. No matter how technical the specifications, we have a surface that is highly functional, yet able to blend beautifully with any design application. Please refer to the Tile Performance Data chart in the back of this catalog for actual tile performance details.

Unpolished (UPS)

Cross-Sheen finish imparts a subtle glow to an unpolished surface that enhances color and allows scuffs, stains, and even permanent marker and graffiti to be easily removed. Unpolished with Cross-Sheen finish is appropriate high-traffic interior floors and walls where low maintenance is desired. Unpolished with Cross-Sheen finish is not recommended for wet areas where standing water may occur or for exterior horizonal and/or walking surfaces.


Polished (PO)

Polished Porcelain Stone is a practical alternative to natural stone with its attractive, mirror-like finish and can be used with other surface textures to increase visual interplay and interest. Polished finish adds a look of elegance and sophistication to interior floors and interior and exterior walls. Polished finish is not recommended for wet areas where standing water may occur or for exterior horizontal and/or walking surfaces.



Cross-Slate® (CS)

The Cross-Slate finish combines the rustic and textured feel of slate with the through-body color and durability of Porcelain Stone for strong commercial value where enhanced traction is needed. Cross-Slate is recommended for high-traffic interior and exterior walking surfaces in both residential and commercial environments.



Cross-Tread® (CTS)

Enhanced traction and ease of maintenance make this texture a suitable choice for wet and greasy interior floor areas and exterior walking surfaces. The Cross-Tread surface pattern is eye-catching, making it a great option for transitional areas and for use as an accent tile.

Wet DCOF Unpolished 0.50 - 0.60 Polished 0.31 - 0.41

(UPS) Cross-Tread® (CTS) 0.50 - 0.60 (P0) Cross-Slate® (CS 0.50 - 0.60

*The increased real world traction of these types of surfaces cannot be fully realized by our current DCOF testing methodologies due to their exaggerated facial structure.





EcoCycle Americana®

- Competitively priced for exceptional value
- Deep hues go all the way through the tile, making the body an integral part of the overall color
- Recommended grout joint: 3/16"
- Field Tile Calibrated
- Cross-Sheen Finish for easy cleaning (UPS only)
- Rounded edges allow for a smoother transition

Visit the website to learn more:

Crossvilleinc.com/Products/EcoCycle-Americana





AV111 Monticello



AV113 Alamo



AV112 Gold Rush



AV115 Rushmore



AV114 Grand Canyon



AV116 Plymouth Rock

FIELD TILE			
Nominal (in)	Actual (in)	Thickness (in)	Finish
12 x 12	11-3/4 x 11-3/4	5/16	UPS
18 x 18	17-3/4 x 17-3/4	3/8	UPS
Crossville recommends a gr	out joint of 3/16 inch.		

This tile is calibrated (non-rectified).

Nominal (in)	Actual (in)	Thickness (in)	Finish
4 x 12 Single Bullnose	3-3/4 x 11-3/4	5/16	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	5/16	UPS



6 x 12 Cove Base (Universal, flat top)



4 x 12 Single Bullnose

Recommended Use

EcoCycle Americana is recommended for interior floors, walls, countertops, and exterior walls. EcoCycle Americana is not recommended for exterior horizontal surfaces on exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%. See CrossvilleInc.com for detailed installation instructions.



18 x 18



12 x 12
















Wet DCOF (UPS) **0.42 - 0.52**

Empire

- All colors available in polished and unpolished finishes
- Extensive selection of trim, including unique 6 x 12 cove base
- Sizes rectified to mix and match a variety of patterns
- Field Tile Rectified
- Recommended grout joint: 3mm

Visit the website to learn more: CrossvilleInc.com/Products/Empire

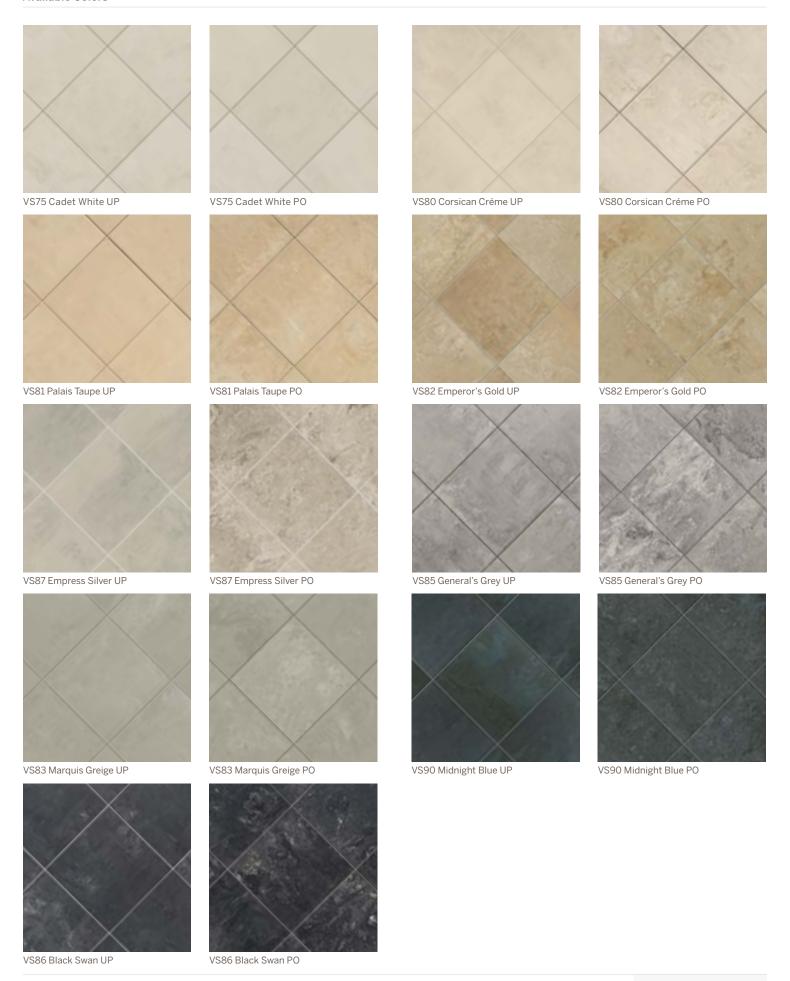













FIELD TILE

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
12 x 12	297 x 297	10.5	UP/PO
12 x 24	297 x 597	10.5	UP/PO
24 x 24	597 x 597	10.5	UP/PO

Note: All field tile is rectified. Crossville recommends a minimum 3 mm grout joint. This tile is rectified.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 2 Mosaic*	297 x 297	10.5	UP
* 2 v 2 massis mounted on 207	y 207 chapte with a 2mm grout joint	LID finish only	

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 24 Single Bullnose	97 x 597	10	PO, UP
6 x 12 Cove Base	150 x 298	10	UP
6 x 8 Cove Base Corner Left & Right	150 x 200	10	UP
4 x 24 Single Bullnose	6 x 12 Cove Base (Universal, Flat Top)	Corner Left	6 x 8 Cove Base Corner Right (Flat Top)

Recommended Use

Empire is recommended for interior floors, walls, countertops, and exterior walls. Empire is not recommended for exterior horizontal surfaces or exterior paving. The polished finish is not recommended for wet areas where standing water may occur. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Wet Area Use for Mosaic

See Tile Performance Data chart.

Example Sizes (Available in all colors)



12 x 24




2 x 2 Mosaic Mounted to a 297 x297 sheet - UP only











FAM02 Taupe UPS/SPO



FAM01 Crème UPS/SPO









FAM03 Sand UPS/SPO





FAM05 Iron UPS/SP0

Sizes & Finishes (Available in all colors)

E1	E1	n	THE	Е.

Nominal (in)	Actual (in)	Thickness (in)	Finish
12 x 24	11-13/16 x 23-13/16	3/8	UPS/SP0

Crossville recommends a grout joint of 3/16 inch. This tile is calibrated (non-rectified).

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Finish	
2 x 2 Mosaic*	11-15/16 x 11-15/16	3/8	UPS	
* Marintad on 12 v 12 about with	2 mana away it in in to			


Mounted on 12 x 12 sheet with 3mm grout joints.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Finish
4 x 24 Single Bullnose	3-13/16 x 23-13/16	3/8	UPS/SPO
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	UPS








Recommended Use


Familiar Territory is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Familiar Territory is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



12 x 24



2 x 2 Square Mosaic UPS Finish (Mounted on a 12 x 12 sheet.)

Wet Area Use for Mosaic
















Wet DCOF (UPS) 0.50 - 0.60 (SPO) **0.42 - 0.52**









Arboretum

Colonnade

Sizes & Finishes (Available in all colors)

FIELD TILE

Nominal (in)	Actual (in)	Thickness (in)	Finish
6 x 6	5-13/16 x 5-13/16	3/8	TX
6 x 12	5-13/16 x 11-13/16	3/8	TX
12 x 12	11-13/16 x 11-13/16	3/8	TX
12 x 24	11-15/16 x 23-7/8	3/8	TX

Crossville recommends a grout joint of 3/16 inch. This tile is calibrated (non-rectified).

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Finish
3 x 12 Single Bullnose	2-15/16 x 11-13/16	3/8	TX



ITEM CODES

Color Names:	Belvedere	Arboretum	Colonnade
6 x 6	8633/F856	F857	F858
6 x 12	8619/E848	E849	E850
12 x 12	8622	8623	8624
12 x 24	8636/E852	E853	E854
Bullnose	8645	8646	8647

Recommended Use

Garden with its heavily textured surface is specifically recommended for exterior floors, walls and interior transitional spaces in commercial and residential applications. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed exterior installation tips.



12 x 24



6 x 6





Wet DCOF (TX) **0.50 - 0.60**





AV321 Lamp Post



AV323 Clock Tower



AV325 Dockside



AV322 Penthouse



AV324 Mainline



AV326 Pavement

FΙ	EL	D.	TI	LE.	

Nominal (in)	Actual (in)	Thickness (in)	Finish
2 x 6	1-13/16 x 5-13/16	3/8	UPS
12 x 24	11-13/16 x 23-13/16	3/8	UPS
Crossville recommends a grout joint of This tile is calibrated (non-rectified).	3/16 inch.		

COORDINATING TRIM (Available in all colors)

(""""""""""""""""""""""""""""""""""""""				
Nominal (in)	Actual (in)	Thickness (in)	Finish	
4 x 24 Single Bullnose	3-13/16 x 23-13/16	3/8	UPS	
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	UPS	



6 x 12 Cove Base



4 x 24 Single Bullnose

Recommended Use

Gotham is recommended for interior floors, walls, countertops, and exterior walls in both residential and

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)

12 x 24

2 x 6

commercial applications. Gotham is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not greater than 33%.















Wet DCOF (UPS) **0.50 - 0.60**



Java Joint

- Competitvely priced for exceptional value
- Complete trim package including mosaic suitable for shower floor
- Cross-Sheen finish for easy cleaning
- Field Tile Calibrated
- Recommended grout joint: 3/16"

Visit the website to learn more: Crossvilleinc.com/Products/Java-Joint





JAV01 Two Sugars



JAV03 House Blend



JAV04 Fresh Ground



JAV05 French Press

Sizes & Finishes (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Finish
12 x 24	11-13/16 x 23-13/16	3/8	UPS

Crossville recommends a grout joint of 3/16 inch. This tile is calibrated (non-rectified).

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Finish
2 x 2 Mosaic*	11-3/4 x 11-3/4	3/8	UPS
* Mounted on 11-3/4 x 11-3/4 sheets.			

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Finish
4 x 24 Single Bullnose	3-13/16 x 23-13/16	3/8	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	UPS







Recommended Use


Java Joint is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Java Joint is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



12 x 24



2 x 2 Mosaic*

Wet Area Use for Mosaic















Wet DCOF (UPS) 0.42 - 0.52





Sizes & Finishes (Available in all colors)

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
8 x 48	197 x 1196	10	UP
Crossville recommends a gro	out joint of 3mm.		
This tile is rectified.			

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 2*	299 x 299	10	UP
Herringbone**	295 x 341	10	UP

 $^{^{*}}$ Mounted on 12 x 12 sheet with 4.3mm grout joints.

COORDINATING TRIM (Available in all colors)

4 x 24 Single Bullnose			
4 X Z4 Sirigle Dulli 103e	97 x 597	10	UP
6 x 12 Cove Base 1 † Manufactured in the USA	.47 x 297	10	UPS†






Recommended Use

Jazz Age is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Jazz Age is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



8 x 48

Wet Area Use for Mosaic







Wet DCOF (UP) 0.42 - 0.52

^{**} Mounted on 12 x 15 sheet with 2.5mm grout joints.



AV211 Cinema Champagne




AV214 Gallery Grey



AV212 Cafè Caramel



AV215 Boutique Black



AV213 Bistro Brown

ΕĪ	EL	D	TI	IL.	E	
		_		-	_	

Nominal (in)	Actual (in)	Thickness (in)	Finish
6 x 6†	5-13/16 x 5-13/16	3/8	UPS
6 x 18†	5-13/16 x 17-13/16	3/8	UPS
12 x 12	11-13/16 x 11-13/16	3/8	UPS
18 x 18	17-13/16 x 17-13/16	3/8	UPS

[†] The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance.

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Finish
2 x 2 Mosaic*	11-13/16 x 11-13/16	3/8	UPS

^{*} 2×2 mosaic tile mounted on $11-13/16 \times 11-13/16$ sheets.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Finish
4 x 12 Single Bullnose	3-3/4 x 11-3/4	3/8	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	UPS







4 x 12 Single Bullnose


Recommended Use

Main Street is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Main Street is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)







6 x 6

Wet Area Use for Mosaic













Wet DCOF (UPS) 0.58 - 0.68



Please allow two to eight weeks for delivery depending on Crossville's production schedule. Crossville recommends a grout joint of 3/16 inch.

This tile is calibrated (non-rectified).





AV301 Juno UPS/HON



AV302 Luna UPS/HON



AV303 Kosmos UPS/HON



AV304 Gemini UPS/HON



AV305 Apollo UPS/HON

FIELD TILE

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
12 x 24	297 x 597	10.5	UPS/HON
18 x 36	447 x 897	10.5	UPS/HON

Crossville recommends a grout joint of 3mm.

This tile is rectified.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 24 Single Bullnose	96 x 597	10.5	UPS/HON



4 x 24 Single Bullnose

Recommended Use

Moonstruck is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Moonstruck is not recommended for exterior horizontal surfaces or exterior paving. The honed (semi-polished) field tile is not recommended for wet areas. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not greater than 33%. See CrossvilleInc.com for detailed installation instructions.



18 x 36



12 x 24















Wet DCOF (UPS) 0.50 - 0.60 (HON) 0.42 - 0.52



Oak



AV351 Levity Oak



AV353 Blissful Oak



AV355 Peaceful Oak



AV357 Meditative Oak



Olive



AV361 Levity Olive



AV363 Blissful Olive



AV365 Peaceful Olive



AV367 Meditative Olive



AV352 Joyous Oak



AV354 Mindful Oak



AV356 Slumber Oak



AV362 Joyous Olive



AV364 Mindful Olive



AV366 Slumber Olive













Wet DCOF (UPS) **0.42 - 0.52**



NBC01 - Levity in Oak and Olive



NBC02 - Joyous in Oak and Olive



NBC03 - Blissful in Oak and Olive



NBC04 - Mindful in Oak and Olive



NBC05 - Peaceful in Oak and Olive



NBC06 - Slumber in Oak and Olive



NBC07 - Meditative in Oak and Olive



NBC08 - Levity, Blissful, and Mindful in Olive

FIELD TILE					
Nominal (in)	Actual (mm)	Thickness (mm)	Finish		
3 v 15	72 v 372	10.5	LIPS		

3 x 15	72 x 372	10.5	UPS
6 x 36	147 x 897	10.5	UPS
8 x 36	197 x 897	10.5	UPS

 $Cross viller e commends\ a\ minimum\ 3mm\ grout\ joint.$

This tile is rectified.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish		
1 x 6 Mosaic*	297 x 297	10.5	UPS		
$*1 \times 6$ mosaic mounted on 297 \times 297 sheets with a 3mm grout joint.					

COORDINATING TRIM


Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 18 Single Bullnose	147 x 447	10.5	UPS
6 x 12 Cove Base (Olive only)	150 x 297	10	UPS
6 x 18 Single Bullnose	6 x 12 Cove Base (Universal, Flat Top)		

Recommended Use

Nest is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Nest is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Available in all colors)





Notorious®

- Coordinates with Nest and Crossville Porcelain Countertops for additional design opportunities
- Complete trim package including mosaic suitable for shower floors
- Field Tile Rectified
- Recommended grout joint: 3mm
- Cross-Sheen finish for easy cleaning
- Get Planked available

Visit the website to learn more: CrossvilleInc.com/Products/Notorious



NTR01 Femme Fatale UPS/HON *



NTR02 Private Eye UPS/HON




NTR03 Sugar Daddy UPS/HON



NTR04 Suspense UPS/HON *





NTR06 Film Noir UPS/HON *

* Coordinate with Crossville Porcelain Countertops

Sizes & Finishes (Available in all colors)

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
3 x 15	72 x 372	10.5	UPS
12 x 12	297 x 297	10.5	UPS/HON
12 x 24	297 x 597	10.5	UPS/HON
24 x 24	597 x 597	10.5	UPS/HON
24 x 36	597 x 897	10.5	UPS/HON

 $Cross ville\ recommends\ a\ grout\ joint\ of\ 3mm.$

This tile is rectified.

MOSAICS			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
Mixed Mosaic*	297 x 297	10.5	UPS

^{*} Mixed Mosaic mounted on 297 x 297 sheet.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 12 Single Bullnose	97 x 297	10.5	UPS/HON**
6 x 12 Cove Base	150 x 297	10	UPS

^{**} HON finish is special order only.



6 x 12 Cove Base (Universal, flat top)




Recommended Use

Notorious is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Notorious is not recommended for exterior horizontal surfaces or exterior paving. The honed (semi-polished) field tile is not recommended for wet areas. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)



24 x 36



24 x 24



3 x 15

comprised of 1 x 4 and 2 x 4 tiles















Wet DCOF (UPS) 0.50 - 0.60 (HON) **0.42 - 0.52**





- Competitively priced for exceptional value
- Coordinates with Retro Active 2.0 and Alaska
- Complete trim package including mosaic suitable for shower floors
- Field Tile Calibrated
- Cross-Sheen finish for easy cleaning

Visit the website to learn more: CrossvilleInc.com/Products/Physics





PHY01 Boson UPS/PO



PHY03 Proton UPS/PO

PHY04 Graviton UPS/PO

PHY05 Quark UPS/PO

PHY02 Nucleus UPS/PO

Sizes & Finishes (Available in all colors)

FIELD TILE

Nominal (in)	Actual (in)	Thickness (in)	Finish
12 x 12	11-3/4 x 11-3/4	5/16	UPS/PO
12 x 24	11-3/4 x 23-3/4	5/16	UPS/PO

Crossville recommends a grout joint of 3/16 inch. This tile is calibrated (non-rectified).

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Finish
3 x 3 Mosaic*	11-3/4 x 11-3/4	1/4	UPS
* 3 x 3 Mosaic mounted on 12 x 12 sheet			

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Finish
4 x 12 Single Bullnose	3-3/4 x 11-3/4	5/16	UPS/PO
6 x 12 Cove Base	5-7/8 x 11-3/4	5/16	UPS
1 x 6 Inside Corner	1 x 5-7/8	5/16	UPS
1 x 6 Outside Corner	1 x 5-7/8	5/16	UPS
6 x 12 Cove Base	4 x 12 Single Bullnose	1 x 6 Inside &	

Example Sizes (Field tile available in all colors)



12 x 24



12 x 12



12 x 12

Recommended Use

(Universal, flat top)

Physics is recommended for interior floors, walls, countertops and exterior walls in both residential and commercial applications. Not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.





Outside Corners













Wet DCOF (UPS) 0.50 - 0.60 (PO) 0.31 - 0.41

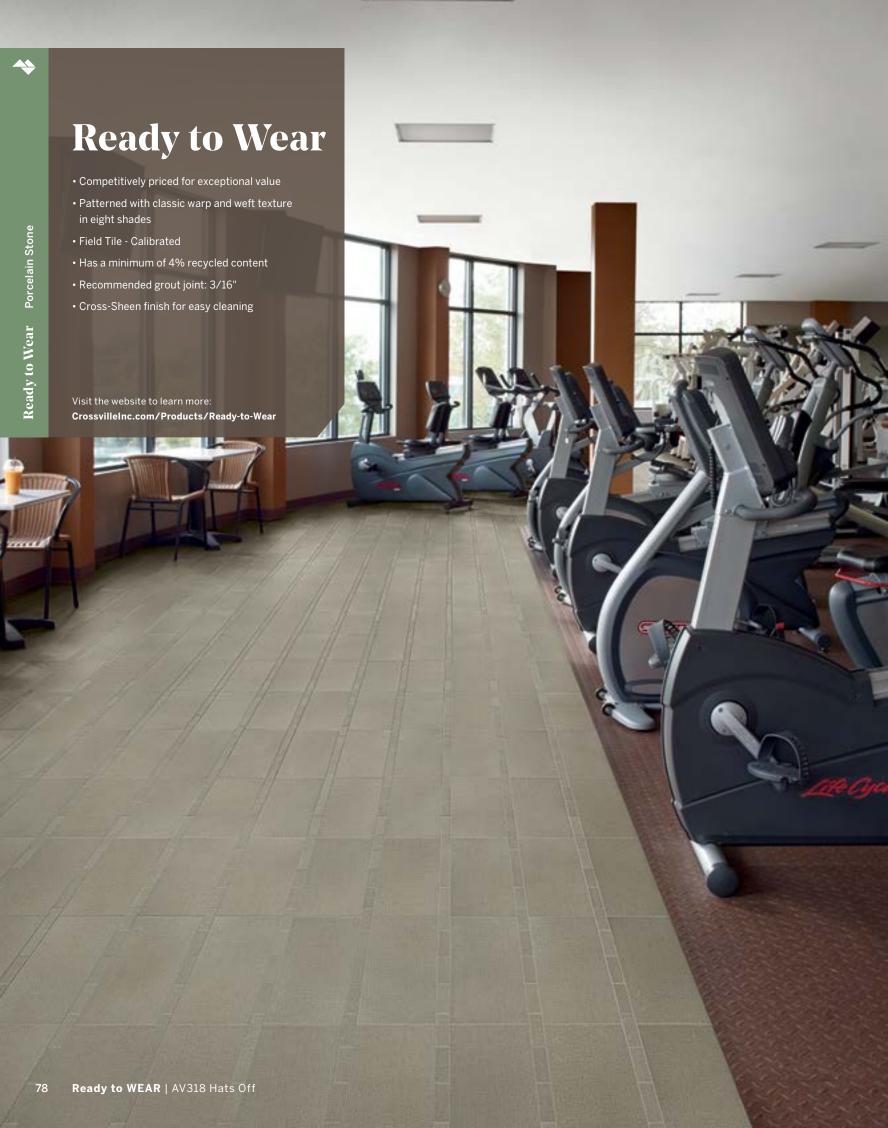

Cools



AV312 Hand in Glove



AV314 Perfect Fit



AV316 Smarty Pants



AV317 Flannel Suit

Warms



AV311 Buttoned Up



AV313 Off the Cuff



AV315 Decked Out



AV318 Hats Off

Sizes & Finishes (Available in all colors)

FIELD TILE

Nominal (in)	Actual (in)	Thickness (in)	Finish
2 x 6	1-13/16 x 5-13/16	3/8	UPS
12 x 24	11-13/16 x 23-13/16	3/8	UPS

Crossville recommends a grout joint of 3/16 inch. This tile is calibrated (non-rectified).

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (in)	Thickness (in)	Finish
4 x 24 Single Bullnose	3-13/16 x 23-13/16	3/8	UPS



4 x 24 Single Bullnose

Recommended Use

Ready to Wear is recommended for interior walls and floors and exterior walls in both commercial and residential applications. Not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.



12 x 24

2 x 6















Wet DCOF (UPS) 0.50 - 0.60



ReformationTM

- Complementary light and dark tones
- New block mosaic and traditional 2 x 2 mosaic available
- Coordinating trim available
- Field Tile Rectified
- Recommended grout joint: 3mm
- Cross-Sheen finish for easy cleaning

Visit the website to learn more: CrossvilleInc.com/Products/Reformation





RFM01 New Day



RFM02 Rally Cry

RFM01 Block Mosaic



RFM03 Ideology



RFM04 March On






Option 2





RFM03 Block Mosaic



Option 4



RFM04 Block Mosaic



RFM012 x 2 Mosaic



RFM02 2 x 2 Mosaic



RFM03 2 x 2 Mosaic



RFM042x2Mosaic















Wet DCOF (UPS) **0.42 - 0.52**



FI	Ε	L	D	Т	II	LI	Ε
ы			:	اء	,	٠.	-١

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 36	147 x 897	10.5	UPS
12 x 36	297 x 897	10.5	UPS
24 x 36	597 x 897	10.5	UPS

Crossville recommends a grout joint of 3mm.

This tile is rectified.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 2 Square Mosaic*	298 x 298	10.5	UPS
Block Mosaic*	297 x 297	10.5	UPS

^{* 2} x 2 Square Mosaic mounted on 12 x 12 sheet.

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 18 Single Bullnose	147 x 447	10.5	UPS
6 x 12 Cove Base	150 x 297	10	UPS





6 x 12 Cove Base (Universal, Flat Top)


Recommended Use

Reformation is recommended for interior floors, walls, countertops and exterior walls in both residential and commercial applications. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Available in all colors)



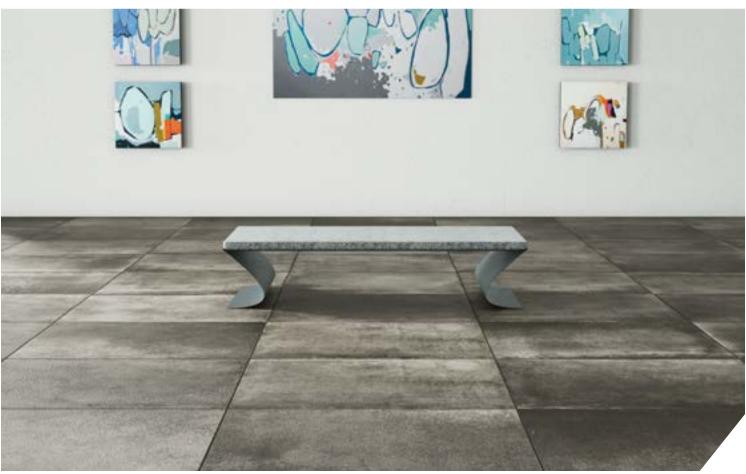

^{*} Block Mosaic mounted on 12 x 12 sheet.



83







RLX01 Chiffon





RLX02 Nutmeg





RLX03 Woolen





RLX04 Caviar

Sizes & Finishes (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 36	147 x 897	9.3	UP

Crossville recommends a grout joint of 3mm. This tile is rectified.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 2 Square Mosaic*	298 x 298	9.3	UP
* Mounted on 12 x 12 sheet with a	3mm grout joint.		

COORDINATING TRIM (Available in all colors)

COCKENIAL INC.			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 18 Bullnose	146 x 447	9.3	UP



6 x 18 Bullnose


Recommended Use

Relax is recommended for interior floors, walls, countertops and exterior walls in both residential and commercial applications. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

 $See\ Cross ville Inc. com\ for\ detailed\ installation\ instructions.$

Example Sizes (Field tile available in all colors)

6 x 36



2 x 2 Square Mosaic UP Finish (Mounted on a 12 x 12 sheet)







Wet DCOF (UP) 0.42 - 0.52

Retro Active 2.0

- Coordinates with Alaska, Physics, and Retro Active 2.0 patterns
- Pattern texture for linear look
- Popular plank shapes, including 24" length
- Multiple sizes for design versatility
- Rounded edges allow for a smoother transition
- Ideal for minimalist looks
- Cross-Sheen finish for easy cleaning (UPS only)

Visit the website to learn more:

CrossvilleInc.com/Products/Retro-Active-2-0





RET04 Empress White UPS/PO/PTN



I RET05 Snow Blind UPS/PO/PTN











RET10 Armor UPS/PO/PTN

RET07 Leaden UPS/PO/PTN


II RET11 Gulf Breeze UPS/PO/PTN

II RET12 Racing Green UPS/PO/PTN



RET13 Royal Navy UPS/PO/PTN

Price Groups	
I	Group I
II	Group II

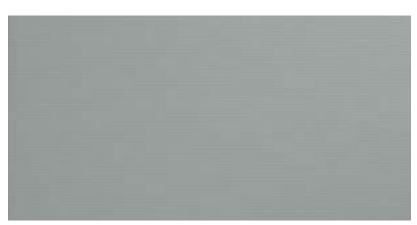

Pattern Example - RETO8 Mercurial PTN, Available in all colors













Wet DCOF (UPS) 0.50 - 0.60 (PO) 0.31 - 0.41

FIELD TILE				
Nominal (in)	Actual (in)	Thickness (in)	Finish	
3 x 12*†	2-3/4 x 11-3/4	5/16	PO/UPS/PTN	
4 x 12*†	3-3/4 x 11-3/4	5/16	PO/UPS/PTN	
4 x 24*†	3-3/4 x 23-3/4	5/16	PO/UPS/PTN	
6 x 12*†	5-3/4 x 11-3/4	5/16	PO/UPS/PTN	
6 x 24*†	5-3/4 x 23-3/4	5/16	PO/UPS/PTN	
12 x 12	11-3/4 x 11-3/4	5/16	PO/UPS/PTN	
12 x 24	11-3/4 x 23-3/4	5/16	PO/UPS/PTN	

^{*} Custom cut program. Allow 2-4 weeks based on availability for delivery.

MOSAICS

Nominal (in)	Actual (in)	Thickness (in)	Finish
2 x 4 Mosaic*	11-3/4 x 11-3/4	5/16	UPS

^{*} 2 x 4 Mosaic mounted on 12 x 12 sheet.

COORDINATING TRIM

Nominal (in)	Actual (in)	Thickness (in)	Finish	
4 x 12 Single Bullnose	3-3/4 x 11-3/4	5/16	PO/UPS/PTN	
2 x 12 Cove Base	1-3/4 x 11-11/16	3/8	UPS	
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	UPS	
2 x 2 Cove Base Inside Corner	1-3/4 x 1-3/4	3/8	UPS	
1 x 6 Inside and Outside Corner	1 x 5-7/8	NA	UPS	
2 x 4 Cove Base Outside Corner	1-3/4 x 3-1/2	3/8	UPS	
				6 0













6 x 12 Cove Base 4 x 12 Single Bullnose 2 x 12 Cove Base (Universal, Flat Top) (PO/UPS)

2 x 2 Inside 2 x 4 Outside Cove Base Corner Cove Base Corner


1 x 6 Inside & Outside Corners

Recommended Use

 $Retro\ Active\ 2.0\ is\ recommended\ for\ interior\ floors,\ walls,\ countertops\ and\ exterior\ walls\ in\ both\ residential$ and commercial applications. Not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.


See CrossvilleInc.com for detailed installation instructions.


Example Sizes (Available in all colors)













[†] The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance. Crossville recommends a grout joint of 3/16 inch.

This tile is calibrated (non-rectified).






AV241 Frost UPS/HON



AV242 Vapor UPS/HON



AV243 Fog UPS/HON



Mosaic blends available**

SBC1/.10103HMOS Warm Grays (AV243, AV245, AV247)




AV244 Mist UPS/HON



AV245 Clay UPS/HON



AV246 Ash UPS/HON



SBC2/.10103HMOS Cool Grays (AV244, AV246, AV248)



AV247 Haze UPS/HON



AV248 Thunder UPS/HON



AV249 Ink UPS/HON



SBC3/.10103HMOS Whites (AV241, AV242)

1 x 3 Mosaic Border***




SBC1/.10212MT Luster***



SBC2/.10212MT Shine***

- **Honed finish only.
 ***Globally sourced.

Mosaic solids available in all colors, UPS finish only



Shown in-AV249

















FIELD TILE				
Nominal (in)	Actual (mm)	Thickness (mm)	Finish	
6 x 24	147 x 597	10.5	UPS/HON	
12 x 24	297 x 597	10.5	UPS/HON	
24 x 24	597 x 597	10.5	UPS/HON	
24 x 36	597 x 897	10.5	UPS/HON	

 ${\it Crossville}\ recommends\ a\ grout\ joint\ of\ 3mm.$ This tile is rectified.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
1 x 3 Mosaic Blends*	297 x 297	10.5	HON
1 x 3 Mosaic Solids*	297 x 297	10.5	UPS
1 x 3 Mosaic Border**	47 x 334.5	10.5	Metallic

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 24 Single Bullnose	96 x 597	10.5	UPS/HON
6 x 12 Cove Base	150 x 297	10	UPS





4 x 24 Single Bullnose

HON (Honed finish) is semi-polished.

Recommended Use

Shades by Crossville is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Shades by Crossville is not recommended for exterior horizontal surfaces or exterior paving. The honed (semi-polished) field tile is not recommended for wet areas. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Wet Area Use for Mosaic

See Tile Performance Data chart.

Example Sizes (Available in all colors)



24 x 24



6 x 24



1 x 3 Mosaic Blends and Solids Solids UPS only

1 x 3 Mosaic Border



^{* 1} x 3 Mosaic mounted on 11-7/8 x 11-7/8 sheets. ** Mounted on a 2 x 12 sheet Globally sourced.







AV281 Sidecar





AV283 Sweet Georgia Brown



AV284 Silver Screen



AV285 Bank Roll

FIELD TILE Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 36	147 x 897	10.5	UPS
8 x 36	197 x 897	10.5	UPS

297 x 897

 $Cross ville\ recommends\ a\ grout\ joint\ of\ 3mm.$

This tile is rectified.

12 x 36

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 18 Single Bullnose	147 x 447	10.5	UPS



6 x 18 Single Bullnose

Recommended Use

SpeakEasy is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. SpeakEasy is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

 $See\ Cross ville Inc. com\ for\ detailed\ installation\ instructions.$

Example Sizes (Field tile available in all 4 colors)

12 x 36



6 x 36



10.5

UPS











Wet DCOF (UPS) **0.50 - 0.60**

95

State of Grace

- Coordinates with Crossville Porcelain Countertops
- One shade of white in Unpolished and Satin finishes
- Trim includes 4 x 24 single bullnose and 2 x 12 cove
- Field Tile Rectified
- Recommended grout joint: 3mm
- Cross-Sheen finish for easy cleaning (UPS only)

Visit the website to learn more:

CrossvilleInc.com/Products/State-of-Grace



State of Grace GRC01 UPS/SAT



12 x 15 Herringbone UPS Finish 306.1mm x 371.6mm sheet



2 x 2 Mosaic UPS Mesh mounted on a 298mm x 298mm sheet



3 x 3 Hex Mosaic UPS



6 x 12 Base Molding*



3 x 12 Crown Molding*



1-1/2 x 12 Chair Rail*



2-1/2 x 12 Left & Right Chevron



3 x 6 Picket

Sizes & Finishes

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
3 x 6	72 x 147	10.5	UPS/SATIN
3 x 6 Picket	72 x 146	10.5	UPS/SATIN
6 x 24	147 x 597	10.5	UPS/SATIN
12 x 12	297 x 297	10.5	UPS/SATIN
12 x 24	297 x 597	10.5	UPS/SATIN
24 x 24	597 x 597	10.5	UPS/SATIN
24 x 48	597 x 1197	10.5	UPS/SATIN
2-1/2 x 12 Chevron	64 x 305	10.5	UPS/SATIN
Overestille verenement and a succession	1-1-1-1-1-2		

 $Cross ville\ recommends\ a\ grout\ joint\ of\ 3mm.$

This tile is rectified.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 2 Square*	47 x 47	10.5	UPS
3 x 3 Hex**	77 x 88	10.5	UPS
12 x 15 Herringbone***	33 x 98	10.5	UPS

- * Mosaic mounted on 298 x 298 sheets with a 3mm grout joint. Coverage area 0.97 SF per sheet.
 ** Mosaic Mounted on 296.1×276.4 sheets with a 3.5mm grout joint. Coverage area 0.71 SF per sheet.
 *** Mosaic mounted on 306.1×371.6 sheets with a 2.5mm grout joing. Coverage area 0.93 SF per sheet.

COORDINATING TRIM

4 x 24 Single Bullnose Recommended Use



24 x 48





State of Grace UPS is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. The satin finish is recommended for residential and light commercial use only. State of Grace is not recommended for exterior horizontal surfaces or exterior paving. The satin finish is not recommended for wet areas where standing water may occur. If offset pattern is required for tiles 15 inches or longer, Crossville recommended an offset of not greater than 33%. See CrossvilleInc.com for detailed installation instructions.

† Globally Sourced - Hydrotect™ not available















Wet DCOF (UPS) 0.42 - 0.52 (SAT) 0.31 - 0.41

Story TellerTM

- Four colorways, each with a light and dark version
- Versatile 6 x 48 planks with 6 x 24 bullnose and 6 x 12 cove base
- Field Tile Rectified
- Mosaic options: A traditional 2 x 2 and a 1 x 6 brick
- French-inspired cerused style, made in the USA
- Recommended grout joint: 3mm

Visit the website to learn more: CrossvilleInc.com/Products/Story-Teller

6 x 48



STY01 Satiric



STY02 Serious



STY03 Falsity



STY04 Fact



STY05 Villain



STY06 Hero



STY07 Evil



STY08 Good

2 x 2 Mosaics





STY02 Serious



STY03 Falsity



STY04 Fact



STY05 Villain



STY06 Hero



STY07 Evil



STY08 Good

1 x 6 Brick Mosaics

















STY01 Satiric

STY02 Serious

STY03 Falsity

STY04 Fact

STY05 Villain

STY06 Hero

STY07 Evil













Wet DCOF (UPS) **0.42 - 0.52**



Sizes & Finishes (Available in all colors)

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 48	147 x 1197	10.5	LIPS

Crossville recommends a grout joint of 3mm.

This tile is rectified.

MOSAICS

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
2 x 2 Mosaic*	299 x 299	10.5	UPS
1 x 6 Brick Mosaic**	297 x 372	10.5	UPS

^{*} Mounted on 12 x 12 sheet with 2.5mm grout joints. ** Mounted on a 13 x 15 sheet with 3mm grout joint.

COORDINATING TRIM

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 24 Single Bullnose	147 x 597	10.5	UPS
6 x 12 Cove Base	150 x 297	10	UPS





6 x 12 Cove Base

6 x 24 Single Bullnose

Recommended Use

Story Teller is recommended for interior floors, walls, countertops and exterior walls in both residential and commercial applications. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Available in all colors)

6 x 48





2 x 2 Mosaic (Mounted on a 298 x 298 sheet)

2 x 2 Brick Mosaic (Mounted on a 297 x 392 sheet)







- Contemporary collection is inspired by concrete and stone
- Minimum 4% pre-consumer recycled content
- Cross-Sheen finish for easy cleaning (UPS only)
- Field Tile Rectified
- Recommended grout joint: 3mm

Visit the website to learn more: Crossvilleinc.com/Products/Structure



AV221 Gypsum







AV222 Sandstone



AV225 Basalt



AV223 Shale

FIELD TILE Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 6	147 x 147	10.5	UPS
6 x 24	147 x 597	10.5	UPS
12 x 12	297 x 597	10.5	UPS
24 x 24	597 x 597	10.5	UPS

Crossville recommends a minimum 3mm grout joint. This tile is rectified.

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 24 Single Bullnose	97 x 597	10.5	UPS
6 x 12 Cove Base	150 x 297	10	UPS








Recommended Use

Structure is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Structure is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville recommends an offset of not greater than 33%.

See CrossvilleInc.com for detailed installation instructions.

Example Sizes (Field tile available in all colors)





12 x 24 6 x 6















Wet DCOF (UPS) **0.50 - 0.60**





Natural Stone





YIN + YANG



Yin + Yang

- Natural stone tile in modular, mosaic shapes and sizes
- Well-balanced stone shades to harmonize with decor
- Versatile options for interior walls, floors and outdoor vertical surfaces
- Select Yin+Yang coordinates with Ebb & Flow

Visit the website to learn more:

CrossvilleInc.com/Products/Yin-Yang



YY04 Black Dragon + (polished finish)




YY07 Moon Gate + (natural finish)



YY03 Snow Flower + (polished finish)



YY05 Koi Pond (natural finish)



YY01 Bonsai + (natural finish)



YY06 Lotus Blossom (natural finish)



YY02 Silk Fan (polished finish)



YY08 Tea Garden (polished finish)

Sizes & Finishes (Available in all colors)

FIELD TILE Nominal (in) Nominal (in) Actual (mm) Thickness (mm) 332.21 x 332.21 1 x 3 Herringbone* 13 x 13 10 1-1/2 x 6-1/2 Brick** 1-1/2 x 6-1/2 41 x 170 10 1/2 x 1/2 Mosaic* 12 x 12 299 x 299 10 1 x 3 Elongated Hex* 8-3/4 x 11-1/2 223.52 x 294 10 10 1/2 x 1-1/2 Stacked Mosaic* 299 x 299 12 x 12 3 x 12 Plank** 3 x 12 84 x 299 10 Linear Mosaic*** 11-1/2 x 11-3/4 298 x 295 10

Recommended Use

Yin + Yang natural stone is recommended for interior and exterior walls. It is recommended for dry interior floors. Yin + Yang is not suitable for the lining of pools, fountains, or spas. This natural stone displays a wide variation in colors. Please refer to CrossvilleInc.com for photos. Always work from at least four cartons to ensure optimum installation.


Care and Maintenance

For complete care and maintenance information of stone products, the Marble Institute of America provides extensive information on their website, marbleinstitute.com/ consumers/care.cfm.

Phone (440) 250-9222.

^{*} Mesh mounted. ** Sold as loose pieces.

^{***} Linear Mosaic consists of 15 x 98, 23 x 148, and 38 x 148 tiles.




YY04/.1.5.5MOS Mosaic 1/2 x 1/2



YY04/.10103HEX Elongated Hex 1 x 3



YY04/.10103HB Herringbone 1 x 3



YY04/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY04/.1MIXMOS Linear Mosaic



YY04/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY04/.10312PLK Plank 3 x 12 **

Snow Flower - Coordinates with Ebb & Flow EF01 Snow and Ice and EF06 Wind and Rain



YY03/.1.5.5MOS Mosaic 1/2 x 1/2



YY03/.10103HEX Elongated Hex 1 x 3



YY03/.10103HB Herringbone 1 x 3



YY03/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY03/.1MIXMOS Linear Mosaic



YY03/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY03/.10312PLK Plank 3 x 12 **

^{**} Sold as loose pieces Shown in multiple pieces to show variation.

^{*} Please note that the various tile planks and mosaic in the Yin + Yang series are modular with each other however; the facial dimensions and thickness of cut stone tiles can vary. These irregularities are what gives stone tiles and mosaic their handmade appearance. As such, very narrow grout joints and precise alignment of the field tiles may be difficult to achieve.

Koi Pond




YY05/.1.5.5MOS Mosaic 1/2 x 1/2



YY05/.10103HEX Elongated Hex 1 x 3



YY05/.10103HB Herringbone 1 x 3



YY05/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY05/.1MIXMOS Linear Mosaic



YY05/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY05/.10312PLK Plank 3 x 12 **

Koi Pond displays a wide variation in colors. Please refer to CrossvilleInc.com for photos. Always work from at least four cartons to ensure optimum installation.

Moon Gate - Coordinates with Ebb & Flow EF04 Sand and Surf



YY07/.1.5.5MOS Mosaic 1/2 x 1/2



YY07/.10103HEX Elongated Hex 1 x 3



YY07/.10103HB Herringbone 1 x 3



YY07/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY07/.1MIXMOS Linear Mosaic



YY07/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY07/.10312PLK Plank 3 x 12 **

^{**} Sold as loose pieces Shown in multiple pieces to show variation.

^{*} Please note that the various tile planks and mosaic in the Yin + Yang series are modular with each other however; the facial dimensions and thickness of cut stone tiles can vary. These irregularities are what gives stone tiles and mosaic their handmade appearance. As such, very narrow grout joints and precise alignment of the field tiles may be difficult to achieve.



YY01/.1.5.5MOS Mosaic 1/2 x 1/2



YY01/.10103HEX Elongated Hex 1 x 3



YY01/.10103HB Herringbone 1 x 3



YY01/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY01/.1MIXMOS Linear Mosaic



YY01/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY01/.10312PLK Plank 3 x 12 **

Silk Fan



YY02/.1.5.5MOS Mosaic 1/2 x 1/2



YY02/.10103HEX Elongated Hex 1 x 3



YY02/.10103HB Herringbone 1 x 3



YY02/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY02/.1MIXMOS Linear Mosaic



YY02/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY02/.10312PLK Plank 3 x 12 **

^{**} Sold as loose pieces Shown in multiple pieces to show variation.

^{*} Please note that the various tile planks and mosaic in the Yin + Yang series are modular with each other however; the facial dimensions and thickness of cut stone tiles can vary. These irregularities are what gives stone tiles and mosaic their handmade appearance. As such, very narrow grout joints and precise alignment of the field tiles may be difficult to achieve.

Lotus Blossom



YY06/.1.5.5MOS Mosaic 1/2 x 1/2



YY06/.10103HEX Elongated Hex 1 x 3



YY06/.10103HB Herringbone 1 x 3



YY06/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY06/.1MIXMOS Linear Mosaic




YY06/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY06/.10312PLK Plank 3 x 12 **

 $Lotus\ Blossom\ displays\ a\ wide\ variation\ in\ colors.\ Please\ refer\ to\ CrossvilleInc.com\ for\ photos.\ Always\ work\ from\ at\ least\ four\ cartons\ to\ ensure\ optimum\ installation.$

Tea Garden



YY08/.1.5.5MOS Mosaic 1/2 x 1/2



YY08/.10103HEX Elongated Hex 1 x 3



YY08/.10103HB Herringbone 1 x 3



YY08/.1.51.5MOS Stacked Mosaic 1/2 x 1-1/2



YY08/.1MIXMOS Linear Mosaic



YY08/.11.56.5BR Brick 1-1/2 x 6-1/2 **



YY08/.10312PLK Plank 3 x 12 **

^{**} Sold as loose pieces Shown in multiple pieces to show variation.

^{*} Please note that the various tile planks and mosaic in the Yin + Yang series are modular with each other however; the facial dimensions and thickness of cut stone tiles can vary. These irregularities are what gives stone tiles and mosaic their handmade appearance. As such, very narrow grout joints and precise alignment of the field tiles may be difficult to achieve.




Convergence | CONO8 Peacock

Glass Tile












CONVERGENCE
EBB & FLOW
GLASS BLOX®
GROOVE GLASS
SIDEVIEW GLASS



Backsplash: Convergence | CON01 Pearl Counterfront: Convergence | CON04 Pigeon Floor: State of Grace | GRC01 Countertop: State of Grace | PC012

Colors - Neutrals







CON02 Chardonnay



CON03 Sepia



CON04 Pigeon

Colors - Brights




CON05 Orchid



CON06 Indigo



CON07 Currant



CONO8 Peacock

Sizes & Finishes (Available in all colors)

F	ΙE	L	D	Т	Ш	E

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
4 x 4 Mosaic*	298 x 298	6	PO

Mosaic mounted on 298 x 298 sheet.

Recommended Use

Convergence is recommended for interior walls in wet or dry locations.



Convergence | CON08 Peacock | CON06 Indigo











EF01/.1.503MOS



EF01/.1MIXMOS

Linear Mosaic

1/2 x 1/2 Mosaic

1/2 x 3 Stacked Mosaic

Linear Mosaic



EF06/.1.5.5MOS



EF06/.1.503MOS



EF06/.1MIXMOS




EF02/.1.5.5MOS



EF02/.1.503MOS







EF07/.1.5.5MOS



EF07/.1.503MOS



EF07/.1MIXMOS





EF03/.1.5.5MOS*



EF03/.1.503MOS



EF03/.1MIXMOS





EF08/.1.5.5MOS



EF08/.1.503MOS



EF08/.1MIXMOS

EF04 Sand and Surf* Coordinates with Yin+Yang YY07 Moon Gate



EF04/.1.5.5MOS



EF04/.1.503MOS



EF04/.1MIXMOS



EF09/.1.5.5MOS



EF09/.1.503MOS



EF09/.1MIXMOS

EF05 Rocks and Minerals 村 韓 田 田 田 村 **日本日本日本** H 13 E **自**家田居日

EF05/.1.5.5MOS



EF05/.1.503MOS



EF05/.1MIXMOS

*Coordinates with Crossville Yin+Yang Natural Stone tile.

Sizes & Finishes (Available in all colors)

FIELD TILE		
Nominal (in)	Actual (in)	Thickness (in)
1/2 x 1/2 Mosaic*	9/16 x 9/16	1/4
1/2 x 3 Stacked Mosaic*	9/16 x 2-7/8	1/4
Linear Mosaic**		
1/2 x 2	9/16 x 1-7/8	1/4
1/2 x 4	9/16 x 3-7/8	1/4
1/2 x 6	9/16 x 5-7/8	1/4

^{1/8} inch grout joint on all mosaic sheets.

Recommended Use

Crossville's Ebb & Flow mosaic can be used for interior walls and covered exterior wall applications. In wall applications exposed to regular moisture (such as shower walls) the application of a penetrating sealer, such as Miracle 511 Impregnator, is required.

See detailed installation instructions at CrossvilleInc.com.



^{*} Actual size of mounted sheet is 11-3/4 x 11-3/4.

^{**} Actual size of mounted sheet is 11-3/4 x 13.



G024 Sapphire

G016 Mermaid

G012 Vivid Teal

G005 Glisten Green

G066 Sunshine

Bright Solids (1 x 1 mounted on 12 x 12 sheets)



Neutral Solids (1 x 1 mounted on 12 x 12 sheets)



G048 Black Magic*



G065 Citrine

G062 Lemon Zest










G047 Moonbeam*




Blends (1 x 1 mounted on 12 x 12 sheets)



GB10 Sunrise/Rose Aura/



GB06 Angel Fish/South Sea/ Glacier



GB02 Orange Sizzle/Flame/ Dazzle Red

GB07 South Sea/Aegean/


Blue Grotto



GB04 Moonbeam/Lemon Zest/Lime Shimmer


GB08 Mermaid/Vivid Teal/

Sapphire






GB09 Sapphire/Mermaid/ Aegean




GB03 Angel Fish/Blue Grotto/ Purple Zing



GB01 Moonbeam/Black Magic

Blends ($1/2 \times 2$ mounted on 12×12 sheets)



GB11 Blue Haze/Ocean Air/ North Sea



GB12 Dewdrop/Olive Mist/ Deep Sea




GB13 Dusk/Taupe Fog/ Brandy




GB14 Champagne/Honey/ Iced Tea


Example Sizes (Field tile available in all colors)



1 x 1 mounted 12 x 12 sheets (Available in all 44 colors)



1/2 x 2 mounted 12 x 12 sheets (Available in G046, G047, G048, G071, G076, G083, and G153 only)



2 x 4 mounted 12 x 12 sheets (Available in all 44 colors)

(Available in all 44 colors) 1/2 x 6 (Available in all 44 colors)

Sizes & Finishes (Available in all colors)

FIELD TILE Description	Nominal (in)	Actual (in)	Thickness (in)
Solids	1 × 1*	7/8 x 7/8	1/4
	1/2 x 2*	3/8 x 1-7/8	1/4
	1/2 x 6	3/8 x 5-3/4	1/4
	2 x 4*	1-7/8 x 3-7/8	1/4
	4 x 4	3-7/8 x 3-7/8	1/4
Blends	1 × 1*	7/8 x 7/8	1/4
	1/2 x 2*	3/8 x 1-7/8	1/4


^{*}Actual size of mesh mounted sheets is 11-5/8 x 11-5/8.

Recommended Use

Glass Blox can be used for interior wall applications wet or dry locations, and exterior covered wall applications. Note: Mosaic only are acceptable for pool waterlines. Custom blends available in all sizes except 1/2 x 6 and 4 x 4.







GG20 Shimmy



GG21 Salsa



GG22 Disco



GG11 Jump Style



GG30 Rumba





GG32 Twist

Blends



GGB02 Jitterbug



GGB03 Vogue





GGB05 Conga

Sizes & Finishes (Available in all colors)

FIELD TILE		
Description	Actual (mm)	Thickness (mm)
2 x 8	48 x 198	6
2 x 12	48 x 298	6
2 x 16	48 x 398	6
4 x 8	98 x 198	6
4 x 12	98 x 298	6
4 x 16	98 x 398	6
2 x 2 Blends*	48 x 48	6
2 x 8 2 x 12 2 x 16 4 x 8 4 x 12 4 x 16	48 x 198 48 x 298 48 x 398 98 x 198 98 x 298 98 x 398	6 6 6 6 6

*Mounted on a 12 x 12 sheet. Actual size of mounted sheet is 298 x 298 with a recommended 2mm grout joint.

Recommended Use

Groove Glass can be used for interior wall applications – wet or dry locations, and exterior covered wall applications.

Note: Mosaic only are acceptable for pool waterlines.

Example Sizes (Field tile available in all colors)

4 x 16		
2 x 16	4 x 8	2 x 8
4 x 12		
2 x 12		







SV03/.103031 Gold Polished Finish



SV01/.103031 Tungsten Polished Finish



SV01/.103032 Tungsten



SV04/.103031 Copper Polished Finish



SV02/.103031 Silver Polished Finish



Matte Finish



SV02/.103032 Silver Matte Finish

Coordinating Trim Accent Bars (available in all colors)

Coordinating Trim Accent Bars (available in all colors)





SV01/.10312AB Tungsten 3 x 12 Accent Bar, Mixed Finish



SV04/.10312AB Copper 3 x 12 Accent Bar, Mixed Finish



SV02/.10312AB Silver 3 x 12 Accent Bar, Mixed Finish

Coordinating Trim Liner Bars (available in all colors)



SV03/.10106LB1 Gold 1-1/8 x 6 Liner Bar, Polished Finish



SV04/.10106LB1 Copper 1-1/8 x 6 Liner Bar, Polished Finish



SV03/.10106LB2 Gold 1-1/8 x 6 Liner Bar, Matte Finish



SV04/.10106LB2 Copper 1-1/8 x 6 Liner Bar, Matte Finish



SV01/.10106LB1 Tungsten 1-1/8 x 6 Liner Bar, Polished Finish



SV02/.10106LB1 Silver 1-1/8 x 6 Liner Bar, Polished Finish



SV01/.10106LB2 Tungsten 1-1/8 x 6 Liner Bar, Matte Finish



SV02/.10106LB2 Silver 1-1/8 x 6 Liner Bar, Matte Finish

Sizes & Finishes (Available in all colors)

FIELD	TILE			
	Nominal (in)	Nominal Piece (in)	Actual (mm)	Thickness (mm)
	12 x 12 Mosaic	3 x 3	300 x 300	8

3 x 3 Mosaic

Matte or Polished Finish Mesh mounted on a

300mm x 300mm sheet

vailable in all colors.

Mesh mounted on 300 x 300mm sheet. **Coordinating Trim**

Nominal (in)	Nominal Piece (in)	Actual (mm)	Thickness (mm)	Finish
3 x 12 Accent Bar*	1 x 3 & 2 x 3	75 x 300	8	Mixed
1-1/8 x 6 Liner Bar**	1-1/8 x 6	N/A	16	Matte/Polished

^{*} Mesh mounted on a 75mm x 300mm sheet. Available in all colors.

^{**} Actual size 28mm x 150mm. Available in all colors and finishes.



1-1/8 x 6 Liner Bar with Profile

Recommended Use

Sideview Glass tile can be used for interior walls in wet or dry applications.

Cleaning

Finish

Matte/Polished

Regular cleaning is the best way to keep Sideview Glass tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville products is available at CrossvilleInc.com.





Handwritten | HWR03 Private Affair

Wall Tile



Color by Numbers®

- 16 picture perfect hues
- Minimum of 4% recycled content
- 6 glass listello options to add variety to design
- Coordinates with Simpatico

Visit the website to learn more: CrossvilleInc.com/Products/Color-By-Numbers









^{**} Coordinates with Simpatico

Brights (available in Gloss Only)

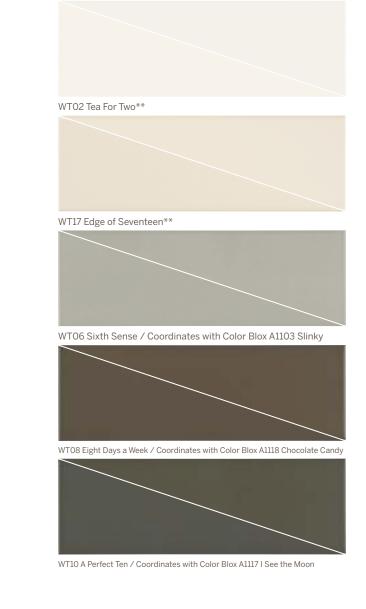

WT11 Eleventh Hour





WT14 Carbon-14









Sizes & Finishes (Available in all colors)

FIELD TILE		
Nominal (in)	Actual (in)	Thickness (in)
4 x 8	3-15/16 x 7-7/8	1/4
8 x 8	7-7/8 x 7-7/8	1/4
4 x 12	3-15/16 x 11-13/16	1/4

Crossville recommends a minimum 1/16 grout joint. This tile is calibrated (non-rectified).

Color, Finishes, and Sizes


	Fir	nish				Cove Base	Single Bullnose
Color	Gloss	Satin	4 x 8	4 x 12	8 x 8	& Corners	& Corners
WTO1	~	~	~	~	~	~	~
WTO2	~	~	~	✓	~	✓	~
WTO3	~	~	~	~	~	~	~
WTO6	~	~	~	✓		~	~
WTO7	~	~	~	~		✓	~
WTO8	~	~	~	~		~	~
WTO9	~	~	~	~		✓	~
WT10	~	~	~	~		~	~
WT11	~		~				
WT13	~		~				
WT14	~		~				
WT16	~		~				
WT17	~	~	~	~		~	~
WT18	~	~	~	~		~	✓
WT19	~		~				
WT20	~		~				

Recommended Use

Color By Numbers tile is recommended for interior vertical surfaces in all residential and light commercial applications.

COORDINATING TRIM

Nominal (in)	Actual (in)	Thickness (in)		
2 x 8 Single Bullnose	2 x 7-7/8	1/4		
4 x 12 Single Bullnose	3-15/16 x 11-13/16	1/4		
2 x 2 Bullnose Corner	2-3/16 x 2-3/16	1/4		
4 x 4 Bullnose Corner	3-15/16 x 3-15/16	1/4		
4 x 8 Cove Base*	3-15/16 x 7-7/8	1/4		
4 x 8 Cove Base Corner	3-15/16 x 7-7/8	1/4		
Left & Right*				
1/2 x 12 Listello	7/16 x 11-11/16	1/4		



^{*} Cove Base has an unglazed flat top.

Example Sizes (Available in all colors)





4 x12





CursiveTM

- Nine trending colors
- Unique shapes to complete your design
- Hand crafted appearance
- Water color effect


Visit the website to learn more: CrossvilleInc.com/Products/Cursive

Available Colors



^{*} Each tile has a handmade appearance with a watercolor effect around the edges.

Available Shapes

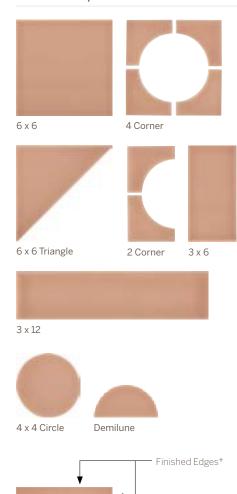

* Has finished edges on one 6" and 1-1/2" side.

1.5 x 6 Trim

Sizes & Finishes (Available in all colors)

ELD TILE				
	Nominal Size (in)	Actual (in)	Thickness (in)	Finish
6	3 x 6	3 x 6	3/8	Gloss
12	3 x 12	3 x 12	3/8	Gloss
6	6 x 6	6 x 6	3/8	Gloss
cle	4 x 4	4 x 4	3/8	Gloss
ilune	2 x 4	2 x 4	3/8	Gloss
rner	6 x 6	6 x 6	3/8	Gloss
orner	3 x 6	3 x 6	3/8	Gloss
gle	6 x 6	6 x 6	3/8	Gloss

Crossville recommends a minimum 1/8 inch - 1/4 inch grout joint. This tile is calibrated (non-rectified).

COORDINATING TRIM

Nominal (in)	Actual (in)	Thickness (in)	Finish
1-1/2 x 6*	1-3/8 x 6	3/8	Gloss

* Has finished edges on one 6" and 1-1/2" side.

Recommended Use

 $\label{cursive tile} \textit{Cursive tile is recommended for interior vertical surfaces in residential and}$ commercial applications.





Sizes & Finishes (Available in all colors)

Crossville recommends an 1/8 inch - 1/4 inch grout joint.

FIELD TILE		
Nominal (in)**	Thickness (in)	Finish
3 x 6	3/8	Gloss
3 x 12	3/8	Gloss
3 x 6 Picket	3/8	Gloss
3 v 6 Gothic Picket	3/8	Gloss

MOSAICS

Nominal (in)**	Thickness (in)	Finish
Diamond Mosaic*	3/8	Gloss
Leaf Mosaic*	3/8	Gloss
*Manager 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10	La	and the first seal

^{*}Mosaic are mounted on 12 x 12 sheets with an 1/8 inch - 1/4 inch grout joint.


COORDINATING TRIM

Nominal (in)**	Thickness (in)	Finish	
1/2 x 6 Arrow Liner	5/8	Gloss	
1/2 x 6 Dome Liner	5/8	Gloss	
2-1/2 x 6 Chair Rail	3/4	Gloss	
3 x 6 Bullnose	3/8	Gloss	
3 x 3 Bullnose Corner	3/8	Gloss	
3 x 3 2-1/2 x 6 Bullnose Corner Chair Rail	3 x 6 Bullnose	1/2 x 6 Dome Liner	1/2 x 6 Arrow Liner

** Handcrafted Variation

Handwritten tiles are manufactured to appear handmade. Due to this handmade appearance, variations in size, thickness, flatness and color are to be expected. Therefore, blending the tile before and during installation is recommended.

Example Sizes (Field tile available in all colors)

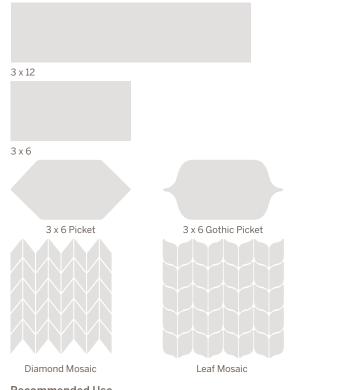

Recommended Use

Crossville recommends Handwritten tile for interior vertical surfaces in all residential and light commercial applications. Applications may include light-duty bathroom walls, vanity tops, kitchen backsplashes, and light-duty kitchen countertops.



Simpatico

- Features contemporary textures is gloss or satin finishes
- Four accent colors bring a retro feel to modern design
- 6 x 24 and 12 x 24 inch formats offer added versatility
- Coordinates with Color by Numbers

Visit the website to learn more: CrossvilleInc.com/Products/Simpatico



Neutrals

LWT02 Fellowship Gloss/Satin*
Coordinates with Color by Numbers WT02 Tea For Two



LWT18 Goodwill Gloss/Satin* Coordinates with Color by Numbers WT18 1812 Overture





LWT22 Kinship Gloss



LWT06 Camaraderie Gloss/Satin*
Coordinates with Color by Numbers WT06 Sixth Sense. Textures (Available in LWT02 only, 12 x 24 only)*



LWT02.11224ORGG Organic Gloss LWT02.11224ORGS Organic Satin



LWT02.11224BOTG Botanic Gloss LWT02.11224BOTS Botanic Satin



LWT02.11224PIXG Pixel Gloss LWT02.11224PIXS Pixel Satin



LWT02.11224CUBG Cube Gloss LWT02.11224CUBS Cube Satin

Sizes & Finishes (Available in all colors)

FIELD TILE			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 24	146 x 590	9.3	Gloss/Satin*
12 x 24	294 x 590	9.3	Gloss/Satin*
Crossville recommends a mi	nimum 2mm grout joint.		

^{*} Please note that colors (LWT14, LWT21, LWT22 and LWT23 are only available in gloss finish and all textures are only available in the 12 x 24 size.

This tile is calibrated (non-rectified).

COORDINATING TRIM (Available in all colors)

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
3 x 24 Single Bullnose*	71.4 x 590	9.3	Gloss/Satin*
*Bullnose only available in neutra	colors.		

3 x 24 Single Bullnose


Recommended Use

Simpatico tile is recommended for interior vertical surfaces in all residential and light commercial applications.

Example Sizes (Field tile available in all colors)



12 x 24



6 x 24





SwatchesTM

- Three color sets that make creating and specifying wall applications simple + fun
- 16 unique colors
- Choose between satin or gloss for 10 of the 16 colors (others are gloss only)
- Variety of sizes of field tile and trim available

Visit the website to learn more:


CrossvilleInc.com/Products/Swatches

Necessary Objects





NECO3 Stone Gloss/Satin

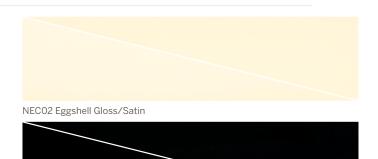

NECO4 Coal Gloss/Satin

Neutral Territory





NEU13 Seashell Gloss/Satin



NEU15 Smokestack Gloss/Satin



NEU12 Warm Silver Gloss/Satin



NEU14 Old Lace Gloss/Satin



NEU16 Sea Ice Gloss/Satin

Brilliant Deduction



BRI21 Cobalt Gloss



BRI23 Lipstick Gloss



BRI25 Petrol Gloss



BRI22 Mulberry Gloss





BRI26 Spruce Gloss









FIELD TILE

Nominal (in)	Actual (mm)	Thickness (mm)	Finish
3 x 6	73 x 148	8	Gloss/Satin*
6 x 6	148 x 148	8	Gloss/Satin*
2 x 8	48 x 198	8	Gloss/Satin*
4 x 8	98 x 198	8	Gloss/Satin*
3 x 12	73 x 298	8	Gloss/Satin*

Crossville recommends a minimum 2mm grout joint. **This product is calibrated (non-rectified).**

COORDINATING TRIM

Nominal (in)	Actual (mi	m)	Thickness (m	m) Finish
3 x 6 Single Bullnose	73 x 148		8	Gloss/Satin*
4 x 8 Single Bullnose	98 x 198		8	Gloss/Satin*
3 x 12 Single Bullnose	73 x 298		8	Gloss/Satin*
3 x 3 Double Bullnose	73 x 73		8	Gloss/Satin*
4 x 4 Double Bullnose	98 x 98		8	Gloss/Satin*
4 x 8 Cove Base	98 x 198		8	Gloss/Satin*
4 x 8 Cove Base Corner Left/Righ	t 98 x 198		8	Gloss/Satin*
3x6 Single 4x8 Single Bullnose 3x	2 Single Bullnose	3 x 3 Double Bullnose	4 x 4 Double 4 x	8 Cove Base 4 x 8 Cove Base Corner (Left & Right)

3 x 12 3 x 6 4 x 8 6 x 6 2 x 8

Swatches tile is recommended for interior vertical surfaces in residential and commercial applications.

COLOR/SIZE AVAILABILITY CHART

			Field Tile				Trim								
Collection	Color	Finish	2x8	4x8	3x12	6x6	3x6	4x8 SBN	3x12 SBN	3x6 SBN	4x4 DBN	3x3 DBN	4x8 CB	4x8 CBL	4x8 CBR
	NEC01	Satin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEC01	Gloss	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEC02	Satin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Necessary	NEC02	Gloss	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Objects	NEC03	Satin	√	✓	✓	√	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEC03	Gloss	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEC04	Satin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEC04	Gloss	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEU11	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU11	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU12	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU12	Gloss		✓	✓			✓	√		✓	✓	✓	✓	✓
	NEU13	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
Neutral	NEU13	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	✓
Territory	NEU14	Satin		✓	✓			✓	✓		✓	✓	✓	√	✓
	NEU14	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU15	Satin		✓	✓			✓	✓		✓	✓	✓	✓	✓
	NEU15	Gloss		✓	✓			✓	√		✓	✓	✓	✓	✓
	NEU16	Satin		✓	✓			✓	✓		✓	✓	✓	✓	√
	NEU16	Gloss		✓	✓			✓	✓		✓	✓	✓	✓	√
	BRI21	Gloss			✓										
	BRI22	Gloss			√ ·										
Brilliant	BRI23	Gloss			√ ·										
Deduction	BRI24	Gloss			_										
	BRI25	Gloss			_										
	BRI26	Gloss			_										

 $^{{}^{*}\}operatorname{Please}\operatorname{note}\operatorname{that}\operatorname{all}\operatorname{Brilliant}\operatorname{Deduction}\operatorname{colors}\operatorname{are}\operatorname{only}\operatorname{available}\operatorname{in}\operatorname{gloss}\operatorname{finish}.$



Cleaning

Suggested Cleaners For Problem Stains

In keeping with Crossville's long-standing position on sustainability, we highly recommend the use of low VOC, non-hazardous, and non-polluting products for cleaning and maintaining tile and grout (for specific problem stains, please use the following stain removal chart).

These products are used by tile and maintenance professionals and may not be readily available in all areas. Most household cleaners are sufficient to clean common stains as long as they conform to the standards set forth in the Daily Maintenance Section. In the case where stain removal becomes a problem, contact a cleaning and maintenance product supplier or your local tile distributor for professional suggestions.

In keeping with its commitment to quality, Crossville will offer its Technical Service Department for individualized assistance. This department can assist you in the proper installation and maintenance of all Crossville Porcelain Stone tiles. Contact Crossville Technical Services at 931.484.2110.

Crossville recommends the use of professional cleaning and maintenance products. If additional information or assistance is required on a contaminant not listed, or if you need to find out where the products are sold, please call us, or contact one of the companies to the right.

<u>Custom Building Products, Tilelab & Aquamix</u> Seal Beach, CA 90740

800.272.8786 custombuildingproducts.com aquamix.com

Fila Chemicals USA Corp. 10800 NW 21st St. # 170 Miami. FL 33172 305.513.0708 www.filasolutions.com

Miracle Sealants Co.

12318 Lower Azusa Rd Arcadia, CA 91006-5872 800.350.1901 ext. 3013 miraclesealants.com

	STAIN	FILA	CUSTOM	AQUA MIX	MIRACLE SEALANTS	COMMON
Food Groups	Mustard Ketchup Mayonnaise Tea Bags Ice Cream Beer/Wine Orange Juice Grape Juice Coffee Coke Soy Sauce	Fila PS87 or Fila SR95	TileLab Grout & Tile Cleaner	Concentrated Stone & Tile Cleaner or Grout Deep Clean	Porcelain and Ceramic Tile Cleaner or Tile & Stone Cleaner or Liquid Poultice or Finish Sealer Stripper	Mr. Clean" Neutral Floor Cleaner" 409" Spic and Span" Fantastic" Comet" Windex" Lysol" Soft Scrub" Mr. Clean Magic Eraser" Bar Keepers Friend"
Oil & Grease	Vegetable Mineral Petroleum Wax Sealer Meat Grease Hydraulic Oil Trans. Fluid Linseed Oil Lipstick Rubber Shoe Polish Paint (Oil Based)	Fila PS87 or Fila No Spot - Fila No Paint Star Fila PS87 or Fila No Paint Star	TileLab Heavy Duty Stripper & Cleaner	Heavy-Duty Tile & Grout Cleaner	Porcelain and Ceramic Tile Cleaner or Tile & Stone Cleaner or Liquid Poultice or Finish Sealer Stripper	Mr. Clean Neutral Floor Cleaner 409 Spic and Span Fantastic Comet Windex Lysol Soft Scrub Mr. Clean Magic Eraser Bar Keepers Friend*
Markers/Graffiti	Felt Tip Ink Water Marker Permanent Fluorescent Pencil Crayon	Fila PS87 or Fila SR95 - Fila PS87	TileLab Heavy Duty Stripper & Cleaner	Sealer & Coating Remover	Porcelain and Ceramic Tile Cleaner or Mira Strip or Tile Restor or Finish Sealer Stripper	Comet Soft Scrub Mr. Clean Neutral Floor Cleaner ZUD* Mr. Clean Magic Eraser Bar Keepers Friend
Water-Based Agents	Water Base Paint or Stain	Fila PS87 or Deterdek	TileLab Heavy Duty Stripper & Cleaner	Sealer & Coating Remover	Porcelain and Ceramic Tile Cleaner or Finish Sealer Stripper or Tile & Stone Cleaner	Mr. Clean Neutral Floor Cleaner Comet Mr. Clean Magic Eraser Bar Keepers Friend
Tile Grout	Cement Latex Polymer	Deterdek or Fila PS87	TileLab Sulfamic Acid Cleaner or Grout Haze Remover	Sulfamic Acid Crystals or Phosphoric Acid Substitute or Grout Haze Clean-Up* - Sealer & Coating Remover	Heavy Duty Acid Cleaner (HDAC) or Phosphoric Acid or Finish Sealer - Epoxy Grout Film Remover	White Vinegar Lime-A-Way Mr. Clean Magic Eraser Bar Keepers Friend

^{*}For problem stains, it may be necessary to use an abrasive powder compound in conjunction with the above cleaners: With Heavy-Duty Tile & Grout Cleaner or Grout Haze Clean-Up, use Aqua Mix Poultice. Please be careful to follow manufacturers recommended procedures when using any cleaning product. To download a copy of "How to Care for Porcelain Stone" tile," be sure to visit our web site at Crossvilleinc.com.



Tile Performance Data

		Water Absorption	Deep Abrasion	Breaking Strength	Bond Strength	Wet Dynamic Coefficient of Friction	Facial Dimensions Range	Range of Thickness	Warpage (Diagonal)	Wedging	Frost Resistance	Chemical Resistance	Scratch Hardness
Porcelain Stone® Tile													
Alaska™	(UPS)	< 0.20%	-	≥ 500 lbf	> 200 psi	.4252	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Altered State	(UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.4252	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Argent	(HON)	< 0.20%	_	≥ 500 lbf	> 200 psi	.4252	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Argent	_ `	< 0.20%	_	≥ 500 lbf	> 200 psi	.5060	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Astral Plane		< 0.20%	_	≥ 500 lbf	> 200 psi	.4252	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Basalt	, ,	< 0.20%	_	≥ 400 lbf	> 200psi	.5060	± 0.15%	0.030	± 0.20%	± 0.25%	Resistant	Unaffected	7
Bluestone		< 0.20%	_	≥ 450 lbf	> 200 psi	.4252	± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
Bluestone	, ,	< 0.20%	_	≥ 450 lbf	> 200 psi	.5060	± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
Bohemia	. ,	< 0.20%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.025	± 0.20%	± 0.20%	Resistant	Unaffected	7
Color Blox°	, ,	< 0.10%	_	≥ 450 lbf	> 200 psi	.4252	± 0.10 %	0.025	± 0.20%	± 0.20%	Resistant	Unaffected	6
Color Blox® Mosaic		< 0.10%	_	≥ 450 lbf	> 200 psi	.4252	- 0.2570	-			Resistant	Unaffected	6
Cross-Colors Mingles	(013)	< 0.10 70		≥ 230 lbl	> 200 psi	.4232					Nesistant	Ullallected	0
- Polished	(PO)	< 0.10%	< 150	350-420 lbf	> 200 psi	.31 – .41	± 0.15%	0.015	± 0.20%	± 0.30%	Resistant	Unaffected	7
- Unpolished	. ,	< 0.10%	< 150	350-420 lbf	> 200 psi	.5060	± 0.15%	0.015	± 0.20%	± 0.30%	Resistant	Unaffected	7
- Cross-Slate®		< 0.10%	< 150	350-420 lbf	> 200 psi	.50 – .60	± 0.15%	N/A	± 0.20%	± 0.30%	Resistant	Unaffected	7
- Cross-State - Cross-Tread*		< 0.10%	< 150	350-420 lbf	> 200 psi	.5060	± 0.15%	N/A	± 0.20%	± 0.30%	Resistant	Unaffected	7
EcoCycle Americana®		< 0.10%	- 150		> 200 psi	.42 – .52	± 0.15%	0.030	± 0.20%	± 0.30%	Resistant	Unaffected	7
	\ /			≥ 350 lbf									
Empire	. , ,	< 0.10%	< 110	≥ 425 lbf	> 200 psi	.22 – .32	± 0.20%	0.020	± 0.20%	± 0.40%	Resistant	Unaffected	6
Empire	. ,	< 0.10%	< 110	≥ 425 lbf	> 200 psi	.42 – .52	± 0.20%	0.020	± 0.20%	± 0.40%	Resistant	Unaffected	6
Familiar Territory™	(UPS)	< 0.20%	_	≥ 400 lbf	> 200 psi	.50 – .60	± 0.15%	0.025	± 0.20%	± 0.30%	Resistant	Unaffected	7
Familiar Territory™	/	< 0.20%	-	≥ 400 lbf	> 200 psi	.42 – .52	± 0.15%	0.025	± 0.20%	± 0.30%	Resistant	Unaffected	7
Garden	. ,	< 0.50%	-	≥ 500 lbf	> 200 psi	.50 – .60	± 0.40%	0.040	± 0.40%	± 0.40%	Resistant	Unaffected	7
Gotham®	/	< 0.20%		≥ 400 lbf	> 200 psi	.50 – .60	± 0.15%	0.025	± 0.20%	± 0.35%	Resistant	Unaffected	7
Java Joint				≥ 400 lbf	> 200 psi	.42 – .52	± 0.15%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Jazz Age™	(UPS)	< 0.30%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.25%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Main Street	(UPS)	< 0.10%	_	≥ 500 lbf	> 200 psi	.58 – .68	± 0.15%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
Moonstruck	(HON)	< 0.20%	-	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Moonstruck	(UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.50 – .60	± 0.10%	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Nest®	(UPS)	< 0.20%	-	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.035	± 0.20%	± 0.25%	Resistant	Unaffected	7
Notorious®	(HON)	< 0.20%	-	≥ 500 lbf	> 200 psi	.42 – .52	$\pm~0.10\%$	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Notorious®	(UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.50 – .60	$\pm0.10\%$	0.025	± 0.20%	± 0.25%	Resistant	Unaffected	7
Physics	(PO)	< 0.20%	-	≥ 350 lbf	> 200 psi	.3141	± 0.10%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Physics	(UPS)	< 0.20%	-	≥ 350 lbf	> 200 psi	.5060	± 0.10%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Ready to Wear	(UPS)	< 0.20%	_	≥ 400 lbf	> 200 psi	.50 – .60	± 0.15%	0.020	± 0.20%	± 0.35%	Resistant	Unaffected	7
Reformation™	(UPS)	< 0.20%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.030	± 0.20%	± 0.25%	Resistant	Unaffected	7
Relax™	(UPS)	< 0.30%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.025	± 0.20%	± 0.30%	Resistant	Unaffected	7
Retro Active 2.0	(PO)	< 0.20%	_	≥ 350 lbf	> 200 psi	.31 – .41	± 0.20%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Retro Active 2.0	, ,	< 0.20%	_	≥ 350 lbf	> 200 psi	.50 – .60	± 0.20%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Retro Active 2.0		< 0.20%	_	≥ 350 lbf	> 200 psi	.42 – .52	± 0.20%	0.020	± 0.20%	± 0.30%	Resistant	Unaffected	7
Shades by Crossville®	, ,	< 0.30%	_	≥ 500 lbf			± 0.10%	0.025	± 0.20%	± 0.20%	Resistant	Unaffected	7
Shades by Crossville®		< 0.30%	_	≥ 500 lbf	> 200 psi		± 0.10%	0.025	± 0.20%	± 0.20%	Resistant	Unaffected	7
SpeakEasy		< 0.20%	_	≥ 500 lbf	> 200 psi	.5060	± 0.10%	0.035	± 0.20%	± 0.25%	Resistant	Unaffected	7
State of Grace		< 0.20%	_	≥ 500 lbf	> 200 psi	.31 – .41	± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
State of Grace		< 0.20%	_	≥ 500 lbf	> 200 psi	.42 – .52	± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
Story Teller™		< 0.20%		> 500 lbf	> 200 psi		± 0.10%	0.020	± 0.20%	± 0.25%	Resistant	Unaffected	7
Structure TM		< 0.20%		> 500 lbf	> 200 psi	.50 – .60	± 0.10%	0.025	± 0.20%	± 0.20%	Resistant	Unaffected	7

Test results available on request.

Like any material, Crossville tile can become slippery when wet. We recommend that care be taken to keep the surface dry.

Color reproduction in the photography in this catalog is representative only. Slight variation is inherent in fired porcelain and natural stone. Before selecting a color, contact your local representative for live samples or order online at crossvilleinc.com.

 ${}^* The increased real world traction of these types of surfaces cannot be fully realized by any current DCOF testing methodology due to their exaggerated facial structures.$

Wet Area Use For Mosaic Tiles

Crossville produces mosaic tiles with the Cross-Sheen finish. The AcuTest sm Wet Dynamic COF is \geq 0.42. Their small sizes ensure frequent grout joints which provides traction and drainage.

Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water, and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Crossville's mosaic to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

Shade & Texture Index

V1 = Uniform Appearance	Differences among pieces from the same production run are minima
V2 = Slight Variation	Clearly distinguishable differences in texture and/or pattern with similar colors. $ \\$
V3 = Moderate Variation	While the colors and/or textures present on a single piece of tile will I indicative of the colors and/or textures to be expected on the other tile the amount of colors and/or texture on each piece may vary significant It is recommended that the range be viewed before selection.
V4 = Substantial Variation	Random color and/or texture differences from tile to tile, so that of tile may have totally different colors and/or textures from that on oth tiles. Thus, the final installation will be unique. It is recommended that the range be viewed before selection.
V1	V2 V3 V4

Inspect products upon delivery and for best results, blend tile from several cartons during installation.

Crossville Appendix

DEFINITIONS

Bullnose* - Rounded convex trim used to provide a smooth, rounded edge for countertops, stair steps and building corners. This is the most used trim shape for wall tile installations. Wall tile bullnose is sometimes referred to as surface cap. It has one rounded finished edge on the tile and can be used horizontally or vertically. Left Bullnose Corner & Right Bullnose Corner also referred to as Double Bullnose.

Calibrated Tile - Tiles that have been sorted to meet a pre-determined acceptance of variable range in size. Crossville recommends a minimum grout joint of 3/16 inch.

Cross-Sheen® (UPS) - An invisible, integrated finish that protects the look of nearly any Crossville tile from the defacing effects of scuffs, stains, even permanent marker, and graffiti.

Cross-Slate® (CS) - The Cross-Slate finish combines the rustic and textured feel of slate with the through-body color and durability of Porcelain Stone for strong commercial value where enhanced traction is needed. Cross-Slate is recommended for high-traffic interior and exterior walking surfaces in both residential and commercial environments.

Cross-Tread® (CTS) - Enhanced traction and ease of maintenance make this texture a suitable choice for wet and greasy interior floor areas and exterior walking surfaces. The Cross-Tread surface pattern is eye-catching, making it a great option for transitional areas and for use as an accent

Cove Base (Standard, round top)* – This cove base has a rounded finished top like bullnose and is used as a cove base in areas that will not have wall tile installed above it.

Cove Base (Universal, flat top)* - This cove base has a finished, flat top. It can be used alone or with tile stacked on top. Exception: Color By Numbers and Swatches cove base have an unglazed, flat top.

Dynamic Coefficient of Friction (DCOF) - Sometimes called kinetic coefficient of friction. This is the ratio of the force necessary to keep a surface already in motion sliding over another divided by the weight (or normal force) of an object. This force is a materials property of the two surfaces. DCOF is usually less than SCOF for the same materials. Contaminants such as dirt, water, soap, oil, or grease can change this value.

Honed (HON)/Semi-Polished (SPO)- Tile that has had the surface mechanically altered to a uniform, semi-polished finish.

Modular - Tiles of various dimensions are sized so that they may be installed together in patterns with a common specified joint width. The difference between Actual and Nominal is the grout joint.

Patterned (PTN) - A repeated, decorative texture or finish created for visual interplay and/or interest.

Polished (PO) – Polished Porcelain Stone is a practical alternative to natural stone with its attractive, mirror-like finish and can be used with other surface textures to increase visual interplay and interest. Polished finish adds a look of elegance and sophistication to interior floors and interior and exterior walls. Polished finish is not recommended for wet areas where standing water may occur or for exterior horizontal and/or walking surfaces.

Rectified/Cross-Grid® - A tile that has had all edges mechanically finished to achieve a more precise facial dimension. 3-4mm grout joint recommended

Satin - Tile that has had the surface mechanically altered to produce a smooth, semi-matte finish.

Textured (TX) - The appearance and rustic look of natural slate.

Through-body Color - The color of the tile is the same through and

Unpolished (UPS) - Cross-Sheen finish imparts a subtle glow to an unpolished surface that enhances color and allows scuffs, stains, and even permanent marker and graffiti to be easily removed. Unpolished with Cross-Sheen finish is appropriate high-traffic interior floors and walls where low maintenance is desired. Unpolished with Cross-Sheen finish is not recommended for wet areas where standing water may occur or for exterior horizontal and/or walking surfaces.

Unpolished (UP) - Material with a fused impervious facial finish, composed of ceramic materials, normally absent of gloss or shine. May be textured or smooth to the touch.

*Bullnose and Cove Base Diagrams






















145







Order your samples quickly and easily online at CrossvilleInc.com

We offer a variety of sizes and shipping options to satisfy your project needs.

You may also place sample orders through your Crossville representative, by emailing **Samples@CrossvilleInc.com** or calling **800.221.9093**



If you want a better idea of what Crossville tile would look like in a particular room setting, visit our website at CrossvilleInc.com and try Cross-Vision. This powerful software tool allows you to visualize different types of Crossville tile in kitchens, bathrooms, dining rooms, and other living areas. In addition, our website features comprehensive information about Crossville's entire portfolio of products, including tile, trim, borders, and accents.

You can also download detailed care and maintenance instructions for our various products, or browse electronic versions of Crossville's product brochures. So whether you need information about Crossville products or tile in general, please visit us at **CrossvilleInc.com**.

* Information here is subject to change. Please refer to CrossvilleInc.com for the latest, most accurate information.



PO Box 1168, Crossville, TN 38557 Phone 931.484.2110 Fax 931.456.2956 Crossc@CrossvilleInc.com CrossvilleInc.com



Trade Organizations







Wet Dynamic Coefficient of Friction information gathered as a result of DCOF Acu Test**

(B) - Color Blox, Color Blox Mosaics, Color by Numbers, Cross-Colors, Cross-Tech, Cross-Sheen, Cross-Slate, Cross-Tread, Cross-Vision, Crossville, Crossville Ceramics, EcoCycle, EcoCycle Americana, EcoCycle Tile Process, Get-Planked, Glass Blox, Gotham, Nest, Notorious, Porcelain Stone, Shades by Crossville, Tile Take Back, and Crosstyle are copyrighted marks of Crossville, Inc.

TM - Hydrotect, Laminam by Crossville, and Structure are registered trademarks of Crossville, Inc.

All products manufactured by Crossville® contain pre-consumer recycled content. Globally sourced products contain varied amounts of recycled content. See individual product pages for details.