

**Szafy Net-Access[™] oraz system
zabudowy kiosków w Data Center**





Table of Contents

| | |
|------------------------------------------------------------------------------------------|----------------|
| Net-Access™ N-Type Cabinets | 4 – 6 |
| Net-Access™ S-Type Cabinets | 7 – 11 |
| Net-Access™ Cable Capacity Charts and Cable Management Finger Locations | 12 |
| Net-Access™ Integral Cabinet Top Cable Routing System | 13 |
| Net-Contain™ Vertical Exhaust Duct | 14 – 15 |
| Net-Access™ Cabinet/Thermal Accessories | 16 – 18 |
| Net-Contain™ Universal Containment System | 19 – 24 |
| Net-Contain™ Cabinet Supported Cold Aisle/Hot Aisle Containment .. | 25 – 27 |
| Net-Contain™ Inlet and Exhaust Ducting Solutions | 28 – 29 |
| Thermal Sealing Accessories | 30 – 31 |

Net-Access™ N-Type Cabinets

Optimum Accessibility and Cable Management for High Density Applications

Net-Access™ N-Type Cabinets are the first choice for data center managers and systems integrators specifying high density network, storage and compute applications that require optimal thermal management and the capacity to manage high cable densities.

Integral cabinet air seal features and integration with passive hot and cold air containment components drive efficient utilization of cooling capacity and reduce cooling energy consumption. The Net-Access™ inset frame design efficiently manages large quantities of cables and provides space for unmatched access reducing operational costs. This industry leading design also maximizes airflow and provides easy access to equipment for ongoing operational efficiencies, providing exceptional value in a 800mm (31.5") wide enclosure.



Inset frame provides up to 10% more space for cable management and cooling airflow

Industry leading inset cabinet frame posts create a large area for airflow to provide proper heat dissipation and enable easy access to equipment, in-cabinet ducting and cabling, speeding deployments and reducing operational costs.



Dual hinged doors speed deployments and moves, adds, and changes up to 30%

IT staff is scarce, downtime is expensive. For a 120 rack dynamic data center, our cabinets save you up to an hour a day, adding up to \$18,250 per year savings for your staff.



Efficiently manage high cable densities


Modular snap in fingers align with rack spaces to simplify cable management, providing proper bend radius control and organizing cables for faster moves, adds and changes and installations.





Open rail mounting creates more cable management space and equipment positioning flexibility

High strength frame eliminates need for support members between rails, providing unobstructed space between the frame and the side panels.

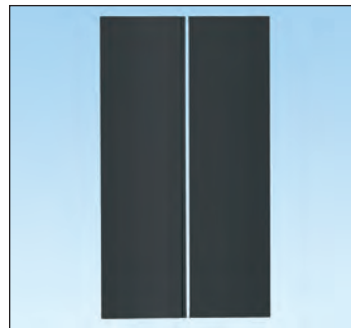

Vertical split side panels enable fast access to equipment

Innovative vertical split side panels and optional vertical split hinged side panels allow fast easy access to end of row network equipment and cabling, eliminating time consuming handling.



Innovative Leveling Feet Design Reduces Cabinet Installation Time up to 80%

Heavy duty, M14 thread top drive leveling feet are easily accessed and allow cabinets to be leveled in less time than typical leveling feet.



Bond cabinets to the telecommunications grounding infrastructure with single connection, reducing installation time

Entire cabinet is fully electrically bonded, requiring no grounding whips to doors or side panels for protection of equipment and personnel.



Net-Access™ N-Type Cabinets

Net-Access™ N-Type Cabinets are ideal for network applications that requires optimal thermal management and the capacity to manage high cable densities of switch applications.



- Front dual or single hinge doors with 69% open perforation
- Dual hinge front door allows door to open to the left or right
- Rear perforated split doors with 69% opening
- Inset frame for improved cable management
- Single point bonding at top and bottom of cabinet
- Static load rating - 3000 lbs. and rolling load rating - 2500 lbs.
- Fully integral bonded without the use of grounding wires - equipment rails, door and side panels
- Cable management fingers included (2 sets – SN25F)
- Adjustable rear rails

Net-Access™ N-Type Standard Configured Cabinets

| Series | Width | Height | Depth | Side Panels | Colors | Standards Options (Select Only One) |
|--------|-----------|----------------------------------|--------------------------|-----------------------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| N | 8 = 800mm | 2 = 42RU 5 = 45RU 8 = 48RU | 1 = 1070mm 2 = 1200mm | 2 = 2 side panels* 9 = No side panel | B = Black W = White | C = Cage Nut Rails E = Single Hinge Front Door and Cage Nut Rails S = No Doors** T = Integral Cabinet Top Cable Routing System** TC = Integral Cabinet Top Cable Routing System and Cage Nut Rails U = Vertical Blanking and Cage Nut Rails V = VED Ready ** Y = VED Ready and Cage Nut Rails YT = VED Ready, Cage Nut Rails, and Integral Cabinet Top Cable Routing System |

*Standard side panel.

**Includes #12-24 tapped equipment rails. V, Y and YT - only available for 1200mm deep cabinets.

Standard Configurations have 6 characters with only one standard option suffix.

| | | | | | | | |
|---|---|---|---|---|---|--|--|
| N | 8 | 2 | 1 | 2 | B | | |
|---|---|---|---|---|---|--|--|

Net-Access™ Dynamic Cabinets

The Net-Access™ Dynamic Cabinet is designed to allow the cabinet to be installed with equipment at one facility and safely shipped to another location. This is the ideal cabinet for System Integrators or Value Added Resellers as it allows the equipment to be pre-installed, cabled and ready for quick deployment. The heavy duty reinforced frame has been tested and approved to support the additional weight of equipment. A heavy duty shock pallet allows the cabinet to be shipped with equipment. The optional reusable ramp allows the cabinet to be easily unloaded from the pallet.



- Outset post design
- Welded and assembled steel frame construction
- Easy maintenance powder coat finish
- Adjustable rear equipment rails with continuous positioning
- Fixed front equipment rails
- Integral vertical airdams with covered cable pass-through openings
- Large cable entry/cable access
- Single hinge perforated front door with keyed swing handle
- Split hinge perforated rear door with keyed swing handle
- Optional split side panels on both sides with dual latches and keyed lock
- Two sets of PDU mounting brackets
- High density cable management fingers (SN25F)
- Select cable entry holes are equipped with plastic sealing plugs, others have cutouts
- Static load of 1,361kg (3,000 lbs.)
- Rolling load of 1,136kg (2,500 lbs.)
- Dynamic shipping load of 907kg (2,000 lbs.)
- EIA-310-E compliant
- Fully integral bonded without the use of grounding wires - equipment rails, door and side panels
- Hardware kit: M6 screws and cage nuts
- Factory installed casters, swivel in the rear and fixed in the front
- Adjustable leveling legs
- Single point grounding locations at bottom of cabinet

| Part Number | Nominal Width mm | Height | Nominal Depth mm | Side Panels | Color | Ramp |
|-------------|------------------|--------|------------------|-------------|-------|------|
| S7222BDHRSP | 700 | 42 RU | 1200 | 2 | Black | Yes |
| S7222BDHSP | | | | | | No |
| S7229BDHRSP | | | | 0 | | Yes |
| S7229BDHSP | | | | | | No |

Net-Access™ S-Type Cabinets

Cost Effective and Versatile Cabinets for all Data Center Applications and Facilities Designs

Net-Access™ S-Type Cabinets provide data center managers and systems integrators an unprecedented range of features in a cost effective cabinet platform for server, network, and pre-configured cabinet applications.

Integral cabinet air seal features and seamless integration with passive hot and cold air containment components provide efficient utilization of cooling capacity, and contribute to reduced cooling energy consumption. An innovative frame design maximizes RU utilization saving as much as 15% of the floor space while safely accommodating equipment loads. Offered in a variety of widths, heights, and depths, they can be specified for a variety of applications in any facility to meet the diverse application needs of today's data centers.



Large selection of standard cabinet widths, heights, and depths offered in:


- 600mm (24"), 700mm (28"), and 800mm (31.5") Widths
- 1070mm (42") and 1200mm (48") Depths
- 42 RU, 45 RU, and 48 RU Heights
- Black and White Color Option
- Static Load Rating 1,364kg (3,000 lb.)
- Rolling Load Rating 1,136kg (2,500 lb.)





Out-Set Cable Entry Improves Floor Space Utilization up to 5%

Network cable entry locations are outside of equipment area, allowing top 2 RUs to be used, optimizing cabinet utilization and saving floor space.

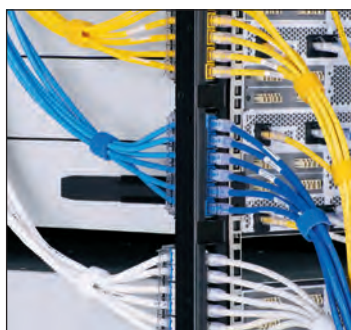

Zero RU E-Rail Vertical Patching Adds Capacity and Improves Floor Space Utilization by 10%

Unique Zero RU E-Rail is the industry's only vertical patching system for 600mm (24") wide cabinets integrating with Quick-Net™ Copper and Fiber Cabling Systems, optimizing cabinet utilization and saving floor space.



Innovative Leveling Feet Design Reduces Cabinet Installation Time by 80%

Heavy duty, M14 thread top drive leveling feet are easily accessed and allow cabinets to be leveled in less time than typical leveling feet.

A 15% savings in floor space means you can build a 420 server POD with 10 server cabs versus a competitors' cabinet that would require 12 server cabinets to hold equivalent amount of servers. CapEx savings¹⁰ \$900/ft² x 16ft² = \$14,400 capital savings per POD.

10) Cost Model: Dollars per kW plus Dollars per Square Foot of Computer Floor, Uptime 2008

Net-Access™ S-Type Cabinets

Net-Access™ S-Type Cabinets are ideal for server applications where high density RU utilization and cable management are required.



- Front single hinge door and split perforated rear door with 69% open perforation
- Vertically split hinged side panels (if applicable)
- Vertical blanking panel
- Heavy-duty leveling legs
- Ganging brackets
- Rear equipment rails accommodate cable management fingers (finger sold separately)
- Fully integral bonded without the use of grounding wires – equipment rails, door and side panels
- Static load rating – 3000 lbs. and rolling load rating – 2500 lbs.
- Casters
- PDU brackets included
- Adjustable rear equipment rails

Net-Access™ S-Type Standard Configured Cabinets

| Series | Width | Height | Depth | Side Panels | Colors | Standards Options (Select Only One) |
|--------|-------------------------------------|----------------------------------|--------------------------|-----------------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| S | 6 = 600mm 7 = 700mm 8 = 800mm | 2 = 42RU 5 = 45RU 8 = 48RU | 1 = 1070mm 2 = 1200mm | 2 = 2 side panels* 9 = No side panel | B = Black W = White | F = Vertical Cable Management Fingers P = Vertical Patching Equipment Rails S = No Doors T = Integral Cabinet Top Cable Routing System T9 = Integral Cabinet Top Cable Routing System and No Casters V = VED Ready V9 = VED Ready and No Casters 9 = No Casters |

*Standard side panel P - only available for 600mm wide S-Type Cabinets. V and V9 - only available for 1200mm deep cabinets.

Standard Configurations have 6 characters with only one standard option suffix.

| | | | | | | | |
|---|---|---|---|---|---|--|--|
| S | 6 | 2 | 1 | 2 | B | | |
|---|---|---|---|---|---|--|--|

Net-Access™ S-Type Universal Cabinets

Net-Access™ S-Type Universal Cabinets are ideal for network or server application that provides effective thermal management, high density cable management and RU utilization.



- Front single hinge door and split perforated rear door with 69% open perforation
- Vertically split hinged side panels (if applicable)
- Ganging brackets included
- Heavy-duty leveling legs
- Adjustable front and rear equipment rails
- Top and bottom rail position markings
- Front and rear equipment rails accommodate cable management fingers (includes 1 set of fingers)
- Fully integral bonded without the use of grounding wires – equipment rails, door and side panels
- Static load rating – 3000 lbs. and rolling load rating – 2500 lbs.
- Casters
- PDU brackets included

Net-Access™ S-Type Universal Standard Configured Cabinets

| Series | Width | Height | Depth | Side Panels | Colors | Standards Options (Select Only One) |
|--------|-------------------------------------|----------------------------------|--------------------------|-----------------------------------------|------------------------|-------------------------------------|
| S | 6 = 600mm 7 = 700mm 8 = 800mm | 2 = 42RU 5 = 45RU 8 = 48RU | 1 = 1070mm 2 = 1200mm | 2 = 2 side panels* 9 = No side panel | B = Black W = White | U = Universal Frame |

*Standard side panel.

Standard Universal Configurations have 7 characters

| | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|
| S | 6 | 2 | 1 | 2 | B | U |
|----------|----------|----------|----------|----------|----------|----------|

Net-Access™ Cable Capacity Charts

| Opening Size | Top Cap Opening Cable Capacity | | | | | | | | |
|--------------|--------------------------------|------------------|-------------------------------|-------------------------------|-------------------------------|------------------------------|-------------------------------|----------------|------------------------|
| | Area | | Cable Capacities | | | | | | |
| | In. ² | Cm. ² | Cat. 6A 0.354" (8.99mm) | Cat. 6A 0.310" (7.87mm) | Cat. 6A 0.297" (7.54mm) | Cat. 6 0.250" (6.35mm) | Cat. 5e 0.187" (4.75mm) | Fiber (3mm) | QuickNet™ Cassettes |
| 5" x 3.5" | 15.6 | 100.7 | 63 | 82 | 90 | 127 | 227 | 569 | 8 |
| 5" x 1.5" | 6.5 | 42.2 | 26 | 34 | 37 | 53 | 95 | 239 | 8 |

| Cabinet Size (mm) | Cable Pathways (Per Side) | | | | | | | | |
|----------------------|---------------------------|------------------|-------------------------------|-------------------------------|-------------------------------|------------------------------|-------------------------------|----------------|--|
| | Area | | Cable Capacities | | | | | | |
| | In. ² | Cm. ² | Cat. 6A 0.354" (8.99mm) | Cat. 6A 0.310" (7.87mm) | Cat. 6A 0.297" (7.54mm) | Cat. 6 0.250" (6.35mm) | Cat. 5e 0.187" (4.75mm) | Fiber (3mm) | |

N-Type (Front Side)

| | | | | | | | | |
|----------|------|-------|-----|-----|-----|-----|-----|------|
| 800x1070 | 43.8 | 282.7 | 178 | 232 | 252 | 357 | 638 | 1599 |
| 800x1200 | 43.8 | 282.7 | 178 | 232 | 252 | 357 | 638 | 1599 |

S-Type (Rear Side)

| | | | | | | | | |
|----------|------|-------|-----|-----|-----|-----|------|------|
| 600x1070 | 18.5 | 119.4 | 75 | 98 | 106 | 150 | 269 | 675 |
| 600x1200 | 30.5 | 196.8 | 123 | 161 | 176 | 248 | 444 | 1113 |
| 700x1070 | 32.4 | 208.9 | 131 | 171 | 186 | 263 | 471 | 1181 |
| 700x1200 | 53.4 | 344.4 | 216 | 282 | 308 | 434 | 777 | 1948 |
| 800x1070 | 46.3 | 298.4 | 187 | 245 | 267 | 376 | 673 | 1688 |
| 800x1200 | 76.3 | 491.9 | 309 | 404 | 440 | 621 | 1110 | 2783 |

Cable Management Finger Mounting Locations

| | Front Rails | | Rear Rails | |
|------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|
| | Front Side Facing the Front Door | Rear Side Facing the Rear Door | Front Side Facing the Front Door | Rear Side Facing the Rear Door |
| N-Type | Y | Y | Y | Y |
| S-Type Server | N | N | Y | N |
| S-Type Universal | T | N | Y | N |

Net-Access™ Integral Cabinet Top Cable Routing System

Speed deployments and optimize overhead space utilization

Net-Access™ Cabinets are available with an Integral Cabinet Top Cable Routing System that protects, routes, and manages large quantities of twisted pair data cables into and out of any Net-Access™ Cabinet. This versatile system is integral to the top of the cabinet and easily integrates with other cable pathways used throughout the data center, providing up to a 30% reduction in installation costs.



Net-Access™ Integral Cabinet Top Cable Routing System deployed on Net-Access™ Cabinets.

Net-Access™ Cabinet Top Cable Routing System

- Protects, routes, and manages large quantities of twisted pair data cables into and out of any Net-Access™ Cabinet
- Available as an integral design with the cabinet or as a stand-alone accessory
- When ordered integrated into the cabinet, the cabinet top cable routing system provides up to a 30% reduction in installation costs



SN7TCDW
SN8TCDW



SN1070CREC
SN1200CREC
SN1200VCREC

| Part Number | N- Type Compatibility | S-Type Compatibility | Width of Cabinet mm | Depth of Cabinet mm | Description | |
|-------------------------|-----------------------|----------------------|---------------------|---------------------|----------------------|--------------|
| Integral Top Hat | | | | | | |
| STH61B | — | X | 600 | 1070 | Top Cap | |
| STH62B | | | | 1200 | | |
| STH71B | | | 700 | 1070 | | |
| STH72B | | | | 1200 | | |
| SNTH81B | X | | 800 | 1070 | Divider Wall | |
| SNTH82B | | | | 1200 | | |
| SN7TCDW | — | | 600/700 | 800 | — | Divider Wall |
| SN8TCDW | | | | | | |
| SN1070CREC | X | — | — | 1070 | End of Row Cap | |
| SN1200CREC | | | | 1200 | End of Row Cap (VED) | |
| SN1200VCREC | | | | | | |

For other colors replace suffix B (Black) with W (White).

Net-Contain[™] Vertical Exhaust Duct

Passive Cooling for High Density Applications

Net-Contain[™] Vertical Exhaust Duct (VED) Systems optimize cooling energy utilization to support high density heat loads to enable 30kw or greater per cabinet. VEDs passively separate hot exhaust air from cooling air and direct hot exhaust air from active equipment into the Computer Room Air Handler (CRAH) air return system, allowing higher return air temperature improving CRAH and heat exchanger system efficiency up to 40% or more.

Net-Contain[™] Vertical Exhaust Duct System Benefits

- **Flexibility and Versatility** – Multiple sizes, heights and adjustable height features allow system to adapt to virtually any data center structure including slab floors or raised floors and facilities with or without drop ceilings
- **Speed Deployment and Reduce Installation Cost** – Fast, simple assembly and integral ceiling seal reduce installation time by 30% compared to competitive offerings
- **Enhance Your Data Center Environment** – Vertical Exhaust Duct and Net-Access[™] Cabinets with sealed, solid rear doors dampen equipment noise
- **Bond Vertical Exhaust Duct with single connection improves system reliability and protection to personnel** – Entire VED is fully electrically bonded to the cabinet requiring no grounding whips for protection of equipment and personnel



Net-Contain™ Vertical Exhaust Ducts (VEDs)



| Part Number | N-Type Compatibility | S-Type Compatibility | Description |
|----------------|----------------------|----------------------|-------------------------------------------------------------|
| C2VED**I1626B1 | X | X | VED – Adjustable from 406mm (16") up to 660mm (26") Height |
| C2VED**I2638B1 | | | VED – Adjustable from 660mm (26") up to 965mm (38") Height |
| C2VED**I3866B1 | | | VED – Adjustable from 965mm (38") up to 1676mm (66") Height |

Replace** with 06 (600mm), 07 (700mm), 08 (800mm).
 Also available in white, replace the "B1" with "W1".
 Requires VED ready cabinet.


Net-Access™ Cabinet Accessories



| Part Number | N- Type Compatibility | S-Type Compatibility | RU | Width of Cabinet mm | Description | | | |
|--------------|-----------------------|----------------------|-------------|------------------------------|---------------------------|-----|-------------------|-----|
| Doors | | | | | | | | |
| N8*DHDB | X | — | 42,45,48,51 | 800 | Dual Hinge Front, Black | | | |
| N8*SHDB | | | | | Single Hinge Front, Black | | | |
| S6*SHDB | 600 | | | | | | | |
| S7*SHDB | 700 | | | | | | | |
| S8*SHDB | 800 | | | | | | | |
| S6*SDB | 600 | X | | Split Perforated Rear, Black | | | | |
| S7*SDB | | | | | | 700 | | |
| SN8*SDB | 800 | | | | | | | |
| S6*SSHDB | 600 | | | | | — | Solid Rear, Black | |
| S75SSHDB | | | | | | | | 700 |
| S78SSHDB | | | | | | | | |
| SN8*SSHDB | 800 | | | | | | | |



| Part Number | N- Type Compatibility | S-Type Compatibility | RU | Depth of Cabinet mm | Description |
|----------------------------|-----------------------|----------------------|-------------|-----------------------------------------|-----------------------------------------|
| Cabinet Side Panels | | | | | |
| N*1SPS | X | — | 42,45,48,51 | 1070 | Split, Black |
| N*2SPS | | | | 1200 | |
| N*1SPH | | | | 1070 | Split Hinged, Black |
| N*2SPH | | | | 1200 | |
| S*1SPSE | 1070 | X | | Day 2, Post Cabinet Installation, Black | |
| S*2SPSE | | | | | |
| S*1SPD2B | 1070 | | | — | Day 2, Post Cabinet Installation, Black |
| S*2SPD2B | | | | | |
| SPSPNL | 1070 or 1200 | | | Partial Side Panel, Black | |

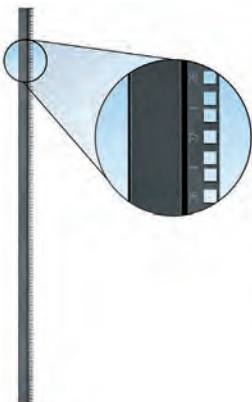

SN5RC

| Part Number | N-Type Compatibility | S-Type Compatibility | RU | Description |
|----------------------------|----------------------|----------------------|-------------|------------------------------------|
| Equipment Rail Sets | | | | |
| SN*RC | X | X | 42,45,48,51 | 1 Set of REAR Rails - Cage Nut |
| N*RT | | — | | 1 Set of REAR Rails - Tapped |
| N*RTFR | | — | | Front and Rear Rail Kit - Tapped |
| N*RCFR | | — | | Front and Rear Rail Kit - Cage Nut |
| S*RP | | — | | X |

*2 = 42RU, 5 = 45RU, 8 = 48RU, 1 = 51RU.
Parts reflect Black; may also be available in White.

Net-Access™ Cabinet Accessories (continued)




| Part Number | N-Type Compatibility | S-Type Compatibility | Description |
|------------------------------------------|----------------------|----------------------|--------------------------------------------------------------------|
| PDU Brackets and Cable Management | | | |
| SN15F | X | X | Finger Kit (100mm Deep) 42-45 RU Cabinets |
| SN25F | | | Finger Kit (150mm Deep) 42-45 RU Cabinets |
| SN18F | | | Finger Kit (100mm Deep) 48 RU Cabinets |
| SN28F | | | Finger Kit (150mm Deep) 48 RU Cabinets |
| SN11F | | | Finger Kit (100mm Deep) 51 RU Cabinets |
| SN21F | | | Finger Kit (150mm Deep) 51 RU Cabinets |
| NVPDUBE | | — | PDU Bracket - Sold in Pairs |
| SPDUBRK | | | |
| S2BRK6 | — | | Combination PDU/Cable Management Bracket - 6" Wide |
| S2BRK12 | | | Combination PDU/Cable Management Bracket - 12" Wide |
| SN7VCM | | | Vertical Cable Management Bracket - 700mm Wide Cabinets |
| SN8VCM | X | X | Vertical Cable Management Bracket - 800mm Wide Cabinets |
| SN8FBB | | | Front to Back Cable Management Bracket |
| S1DR | — | | 1 RU D-Ring Kit to be used with S2BRK6, S2BRK12, SN7VCM and SN8VCM |
| S2DR | | | 2 RU D-Ring Kit to be used with S2BRK6, S2BRK12, SN7VCM and SN8VCM |
| S1LR | | | 1 RU L-Ring Kit to be used with S2BRK6, S2BRK12, SN7VCM and SN8VCM |
| S2LR | | | 2 RU L-Ring Kit to be used with S2BRK6, S2BRK12, SN7VCM and SN8VCM |
| Slack Spools | | | |
| NERSS | X | — | End of Row Slack Spool |
| NACSS | | | Adjustable Center Slack Spools 210mm (8.3") to 267mm (10.5") |
| Vertical Patch | | | |
| S7VBPP | — | X | Vertical Patch Bracket for 700mm Wide Cabinets |
| SN8VPPB | X | | Vertical Patch Bracket for 800mm Wide Cabinets |

Net-Access™ Cabinet Accessories (continued)



| Part Number | N-Type Compatibility | S-Type Compatibility | Description |
|-----------------------|----------------------|----------------------|------------------------------------------------------------------------------|
| Casters | | | |
| NCSTR4 | X | — | 2 Fixed Casters for Front - 2 Swivel Casters for Rear |
| SCSTR4 | — | X | |
| OSHPD Brackets | | | |
| NAKOSHPD | X | — | Oshpod Bracket for N-Type Cabinet |
| SAKOSHPD | — | X | Oshpod Bracket for S-Type Cabinet |
| Locks | | | |
| CCL3 | X | X | 3-digit Combination Locks with Key Over-ride for Single Hinge or Split Doors |
| Shelves | | | |
| RSHLF23 | X | X | Shelf Kit - 44mm H x 483mm W x 584mm D Load Rating 275 lbs. |
| RSHLF | | | Shelf Kit - 44mm H x 483mm W x 762mm D Load Rating 275 lbs. |

NetAccess™ Cabinet Thermal Management Accessories




| Part Number | N-Type Compatibility | S-Type Compatibility | Description |
|---------------------------------|--------------------------|----------------------|---------------------------------------------------------------|
| Vertical Blanking Panels | | | |
| NVBP | X | — | Vertical Blanking Panels with Pass Thru Openings for 42-48 RU |
| S6VBPN | — | X* | Vertical Blanking Panels (No Pass Thru Openings) |
| S7VBPN | | | |
| S8VBPN | | | Vertical Blanking Panels with 1x5 Knockouts |
| S8VPBNE | | | Vertical Blanking Panels with 19" 1 RU Pass Thru Openings |
| Floor Seals | | | |
| N2EOR1BA1070B1 | X | — | End of Row Floor Seal for 1070mm Deep Cabinets |
| N2EOR1CA1200B1 | | | |
| S2EOR1BA1070B1 | | X | X |
| S2EOR1BA1200B1 | | | |
| C2FAB06A1200B1 | Front or Back Floor Seal | | |
| C2FAB07A1200B1 | | | |
| C2FAB08A1200B1 | | | |


*S-Type Universal Cabinets only.

Net-Contain™ Universal Containment System

The Universal Containment System allows user to go back and reclaim underutilized cooling capacity, reduce energy expense and reduce OpEx by retrofitting the existing data center with an innovative containment system. The system includes independent support structure, sliding doors, vertical blanking panels, and roof structure.


This offering can be configured in Vertical Wall (HotAisle Containment) and Roof Containment (Cold Aisle Containment) and allows the addition of cabinets (Panduit or non-Panduit) of varying sizes and design as needs dictate, reducing deployment time and capital investment.

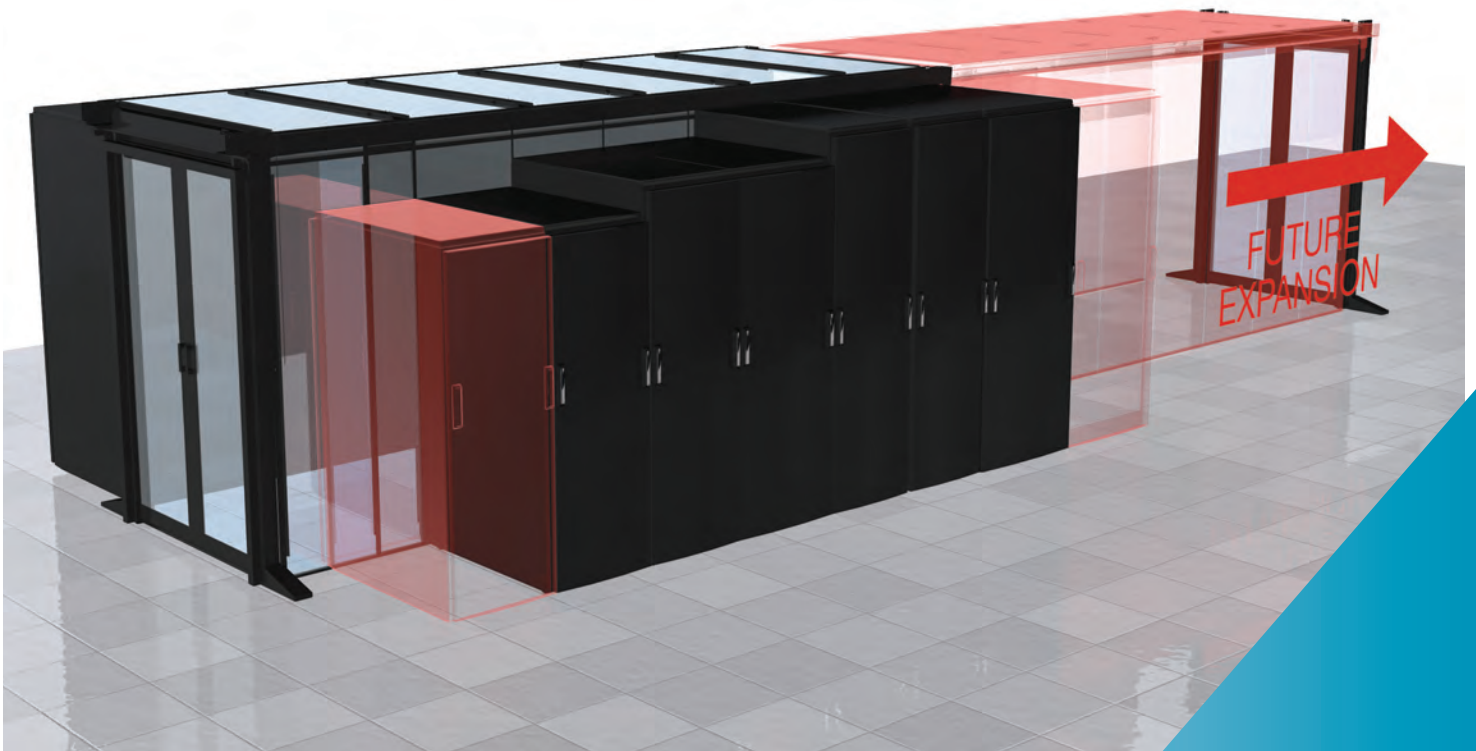

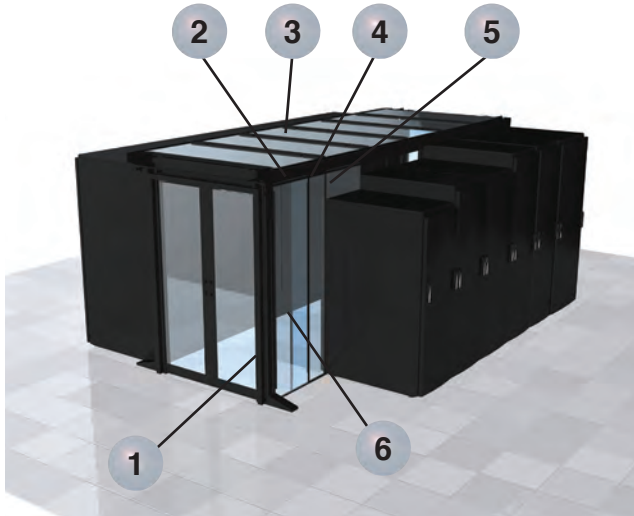

Roof Containment

Typically used for Passive Cold Aisle Containment; deployed either on raised floor or within-row cooling.

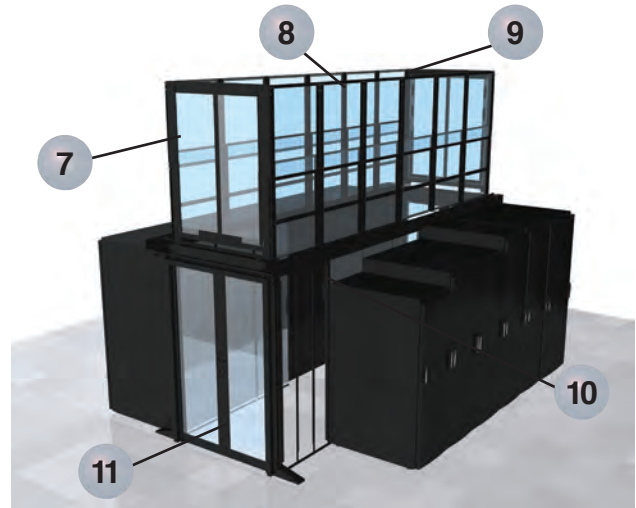

Vertical Wall Containment

Typically used for Passive Hot Aisle Containment or Ceiling Discharge Cold Aisle Containment.

| | Part Number | Description |
|----|----------------|-------------------------------------------------------------------------------------------------------------------------------------|
| 1 | CUEFRT**^^ | End of row frames form the Universal Aisle Containment structure at each end of a containment pod. |
| 2 | CUWBSS**ST^^ | Wall beam used to help create the UAC frame; configurations of 4 available wall beams will allow all aisle lengths to be contained. |
| 3 | CUSMPR52ST01NC | Mid-span post that provides structural support to the UAC frame; required for every 2400 mm on partially populated row. |
| 4 | CURFS06F**HB^^ | Integral ceiling structure used for aisle containment and mounted onto the top of the UAC frame. |
| 5 | CUTBPR0610HBN1 | Top of cabinet blanking panel used to fill gaps above cabinets; needed when cabinet height is less than UAC frame size. |
| 6 | CUFBPR**06HB^^ | Full blanking panel used to fill gap in containment where cabinets have not been deployed; mount directly under UAC frame. |
| 7 | C2HACER11626^^ | End of row adjustable vertical wall used to seal at the end of the UAC and mounted above end of row frame for aisle containment. |
| 8 | C2HAC**11626^^ | Adjustable vertical wall mounted onto UAC frame to seal gap up to ceiling plenum in aisle containment. |
| 9 | CUVWB12S12ST^^ | Vertical wall brace is mounted across the aisle between wall beams to provide extra stability in aisle containment. |
| 10 | CUVWA06S**ST^^ | Vertical wall adapter used to mount Vertical Walls to UAC frame in aisle containment. |
| 11 | CUD*SD^1 | Dual sliding doors provide thermal seal at the end of the row and attach to the end of row frames. |

^^B1 = Black, W1 = White.

**Please reference www.panduit.com for information on the Net-Contain Universal Containment System.

Net-Contain™ Universal Aisle Containment and Single Aisle Containment

End of Row Frames



CUEFRT8F06STB1

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | RU | UAC/USRC |
|--------------|------------------|---------------------------|----------------|----------------|----------|
| CUSREFRT8B1* | X | X | 900 | 42 RU to 45 RU | USRC |
| CUSREFRT9B1* | | | | 48 RU to 52 RU | |
| CUEFRT8W04B1 | | | 1200 | 42 RU to 45 RU | UAC |
| CUEFRT9W04B1 | | 48 RU to 52 RU | | | |
| CUEFRT8W06B1 | | 1800 | 42 RU to 45 RU | | |
| CUEFRT9W06B1 | | | 48 RU to 52 RU | | |

*Used with CUEFRCKITB1 conversion kit for applications with 2 rows of cabinets.
USRC represents Universal Single Row Containment.
UAC represents Universal Aisle Containment.

USRC to UAC Conversion Kit



CUEFRCKITB1

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | RU | UAC/USRC |
|-------------|------------------|---------------------------|----------------|----|----------|
| CUEFRCKITB1 | X | X | 900 | — | UAC |

Attaches to end of row frames.

Full Height Blanking Panels



CUFBPR4506HBB1

| Part Number | Roof Containment | Vertical Wall Containment | Panel Width mm | RU | UAC/USRC |
|----------------|------------------|---------------------------|----------------|----|----------|
| CUFBPR4206HBB1 | X | X | 600 | 42 | UAC/USRC |
| CUFBPR4506HBB1 | | | | 45 | |
| CUFBPR4806HBB1 | | | | 48 | |
| CUFBPR5206HBB1 | | | | 52 | |

Top of Cabinet Blanking Panel



CUTBPR0610HBN1

| Part Number | Roof Containment | Vertical Wall Containment | Width mm | Height mm | UAC/USRC |
|----------------|------------------|---------------------------|----------|-----------|----------|
| CUTBPR0610HBB1 | X | X | 1000 | 600 | UAC/USRC |

Roof Sections



CURFS08F06

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | Cabinet Width mm | UAC/USRC |
|----------------|------------------|---------------------------|----------------|------------------|----------|
| CUSRRF0S06B1 | X | — | 900 | 600 | USRC |
| CUSRRF0S07B1 | | | | 700 | |
| CUSRRF0S08B1 | | | | 800 | |
| CURFS06F04HBB1 | | | 1200 | 600 | UAC |
| CURFS07F04HBB1 | | | | 700 | |
| CURFS08F04HBB1 | | | | 800 | |
| CURFS06F06HBB1 | | | 1800 | 600 | |
| CURFS07F06HBB1 | | | | 700 | |
| CURFS08F06HBB1 | | | | 800 | |

Continued on next page

Net-Contain™ Universal Aisle Containment and Single Aisle Containment (continued)

Drop Away Panels



CUCGF06DBP1

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | Cabinet Width mm | UAC/USRC |
|-------------|------------------|---------------------------|----------------|------------------|----------|
| CUCGF03DPB1 | X | — | 900 | — | UAC |
| CUCGF04DBP1 | | | 1200 | | |
| CUCGF06DBP1 | | | 1800 | | |

End of Row Kits for Drop Away Panels



CUEORF03DPB1

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | Cabinet Width mm | UAC/USRC |
|--------------|------------------|---------------------------|----------------|------------------|----------|
| CUEORF03DPB1 | X | — | 900 | — | UAC |
| CUEORF04DPB1 | | | 1200 | | |
| CUEORF06DPB1 | | | 1800 | | |

Vertical Wall Adapters



CUVWA08S08STB1

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | Cabinet Width mm | UAC/USRC |
|----------------|------------------|---------------------------|----------------|------------------|----------|
| CUSRVWA06B1 | — | X | — | 600 | UAC/USRC |
| CUSRVWA07B1 | | | | 700 | |
| CUSRVWA08B1 | | | | 800 | |
| CUVWA06S06STB1 | | | | 600 | UAC |
| CUVWA07S07STB1 | | | | 700 | |
| CUVWA08S08STB1 | | | | 800 | |

Vertical Wall Brace



CUSRVWBB1

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | Cabinet Width mm | UAC/USRC |
|----------------|------------------|---------------------------|----------------|------------------|----------|
| CUSRVWBB1 | — | X | 900 | — | USRC |
| CUVWB12S12STB1 | | | 1200 | | UAC |

Vertical Wall



C2HAC0*13866B1

| Part Number | Roof Containment | Vertical Wall Containment | Adjustability In. | Cabinet Width mm | UAC/USRC |
|----------------|------------------|---------------------------|-------------------|------------------|----------|
| C2HAC0*11626B1 | — | X | 16-26 | 600/700/800 | UAC/USRC |
| C2HAC0*12638B1 | | | 26-38 | | |
| C2HAC0*13866B1 | | | 38-66 | | |

*For width size, use 06 (600mm), 07 (700mm) or 08 (800mm).

Net-Contain™ Universal Aisle Containment and Single Aisle Containment (continued)

End of Row Vertical Wall



| Part Number | Roof Containment | Vertical Wall Containment | Adjustability In. | Aisle Width mm | UAC/USRC |
|-----------------|------------------|---------------------------|-------------------|----------------|----------|
| CUSRVWERI1626B1 | — | X | 16-26 | — | USRC |
| CUSRVWER2638B1 | | | 26-38 | | |
| CUSRVWER3866B1 | | | 38-66 | | |
| C2HACERI1626B1 | | | 16-26 | | UAC |
| C2HACERI2638B1 | | | 26-38 | | |
| C2HACERI3866B1 | | | 38-66 | | |



CUD1SDB1



CUEOR12CPB1

Sliding Doors

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | Description | UAC/USRC |
|-------------|------------------|---------------------------|----------------|-----------------------------------------|----------|
| CUSR1SDLHB1 | X | X | 900 | Single Sliding, Left Hand Opening | USRC |
| CUSR1SDRHB1 | | | | Single Sliding, Right Hand Opening | |
| CUD1SDB1 | | | 1200/1800 | Double Sliding Door | UAC |
| CUD2SDB1 | | | | Double Sliding Door, Packaged as a Pair | |

For other colors, replace B1 (Black) with S1 (Silver).

End Of Row Caps

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | UAC/USRC |
|-------------|------------------|---------------------------|----------------|----------|
| CUSREORCPB1 | X | X | 900 | UAC/USRC |
| CUEOR12CPB1 | | | 1200 | UAC |
| CUEOR18CPB1 | | | 1800 | |

Wall Beams



CUWBPS08ST02B1

| Part Number | Roof Containment | Vertical Wall Containment | Length mm | Description | UAC/USRC | |
|----------------|------------------|---------------------------|-----------|-------------|----------|------|
| CUWBPS06ST02B1 | X | X | 600 | 2 Piece | UAC/USRC | |
| CUWBPS07ST02B1 | | | 700 | | | |
| CUWBPS08ST02B1 | | | 800 | | | |
| CUWBPS24ST02B1 | | | 2400 | | | |
| CUWBPS06ST01B1 | | | 600 | 1 Piece | | |
| CUWBPS07ST01B1 | | | | | | 700 |
| CUWBPS08ST01B1 | | | | | | 800 |
| CUWBPS24ST01B1 | | | | | | 2400 |

Continued on next page

Net-Contain™ Universal Aisle Containment and Single Aisle Containment (continued)

Mid-Span Cabinet Support



| Part Number | Roof Containment | Vertical Wall Containment | Height mm | UAC/USRC |
|----------------|------------------|---------------------------|-----------|----------|
| CUCMSS03ST01NC | X | X | 300 | UAC/USRC |
| CUCMSS06ST01NC | | | 600 | |

Mid-Span Post



| Part Number | Roof Containment | Vertical Wall Containment | RU | UAC/USRC |
|----------------|------------------|---------------------------|-------|----------|
| CUSMPR52ST01B1 | X | X | 42-52 | UAC/USRC |

Cabinet to Floor Seal



| Part Number | Roof Containment | Vertical Wall Containment | Cabinet Width mm | UAC/USRC |
|-------------|------------------|---------------------------|------------------|----------|
| CUCFS06B1 | X | X | 600 | UAC/USRC |
| CUCFS07B1 | | | 700 | |
| CUCFS08B1 | | | 800 | |
| CUCFS10B1 | | | 1000 | |

Building Column Adapter

| Part Number | Roof Containment | Vertical Wall Containment | UAC/USRC |
|-------------|------------------|---------------------------|----------|
| CUCAKITB1 | X | X | UAC/USRC |

For other colors, replace B1 (Black) with W1 (White).

Net-Contain™ Cabinet Supported Cold Aisle/Hot Aisle Containment

The Net-Contain™ Cabinet Supported Cold Aisle Containment (CAC) System provides a physical separation between the cold air and the hot exhaust air by enclosing the cold aisle. The goal of a CAC system is to supply cold air to the cold aisle where the equipment air intakes are located to optimize airflow distribution and improve cooling system thermal performance. As a result, a cold aisle system is typically used in high-density data centers because it is more efficient to direct cold air onto densely populated racks than to cool the entire room.

The Net-Contain™ Cabinet Supported Hot Aisle Containment (HAC) System provides a physical separation between the cold air and the hot exhaust air by enclosing the hot aisle. The goal of a HAC system is to capture all of the cabinet exhaust air and return it to the cooling units. HAC optimizes airflow distribution and cooling system performance. The remaining area outside of the HAC becomes a cold room with ambient air temperature close to the supply air temperature.

This integrated system is compatible with numerous Panduit product lines including; Net-Access™ N-Type and S-Type Cabinets, FiberRunner®, and Wyr-Grid® Overhead Cable Routing Systems.

Benefits

Energy Efficiency: Prevents hot spots and allows installation of high-density server cabinets close together in new builds or existing data centers, reducing the need for extra real estate and CRAH units lowering operating costs.

Optimized Airflow Distribution: Prevents mixing of cold and hot air streams; eliminates recirculation of hot air to cabinet inlets; provides uniform temperature at the inlets of IT equipment; prevents cold air bypass optimizing cool air delivery.

Improves Thermal Performance: Allows raising supply air set point temperature; higher return air temperature increases the thermal efficiency of cooling units, reducing cooling energy cost up to 30%.

Net-Contain™ Aisle Containment Systems

Panduit's Passive Cold Aisle Containment (CAC) and Hot Aisle Containment (HAC) Systems provide a physical separation between the cold air and the hot exhaust air. This integrated system is compatible with numerous Panduit product lines including; Net-Access™ N-Type and S-Type Cabinets, FiberRunner®, and Wyr-Grid® Overhead Cable Routing Systems.



C2CAC08F04IRB1B1



C2CAC06F08WPB1



C2HAC08I1626B1



C2HACERI1626B1

| Part Number | Aisle Width mm | Cabinet Width mm | Adjustability In. | RU | Compatible With CAC/HAC |
|-------------|----------------|------------------|-------------------|----|-------------------------|
|-------------|----------------|------------------|-------------------|----|-------------------------|

Low Profile Ceiling Structures

| | | | | | |
|----------------|------|-----|---|---|-----|
| C2CAC06F04IRB1 | 1200 | 600 | — | — | CAC |
| C2CAC07F04IRB1 | | 700 | | | |
| C2CAC08F04IRB1 | | 800 | | | |
| C2CAC06F06IRB1 | 1800 | 600 | | | |
| C2CAC07F06IRB1 | | 700 | | | |
| C2CAC08F06IRB1 | | 800 | | | |

Integral Roof Wall Panels

| | | | | | |
|----------------|---|-----|---|---|-----|
| C2CAC06F08WPB1 | — | 600 | — | — | CAC |
| C2CAC07F08WPB1 | | 700 | | | |
| C2CAC08F08WPB1 | | 800 | | | |

Row Base Cooling Blanking Panels

| | | | | | |
|----------------|---|-----|---|---|-----|
| C2CAC06ABWPAB1 | — | 600 | — | — | CAC |
| C2CAC06ABWPAB1 | | 700 | | | |
| C2CAC06ABWPAB1 | | 800 | | | |

Adjustable Vertical Walls

| | | | | | |
|----------------|---|-------------|-------|---|-----|
| C2HAC**I1626B1 | — | 600/700/800 | 16-26 | — | HAC |
| C2HAC**I2638B1 | | | 26-38 | | |
| C2HAC**I3866B1 | | | 38-66 | | |

Adjustable EOR Vertical Walls

| | | | | | |
|----------------|---|-------------|-------|---|-----|
| C2HACERI1626B1 | — | 600/700/800 | 16-26 | — | HAC |
| C2HACERI2638B1 | | | 26-38 | | |
| C2HACERI3866B1 | | | 38-66 | | |

Net-Contain™ Aisle Containment Systems (continued)



End of Row Caps

| Part Number | Aisle Width mm | Width of Cabinet mm | Adjustability In. | RU | Compatible With CAC/HAC | | | | | | |
|---------------|----------------|---------------------|-------------------|----|-------------------------|---|----|---------|---|----|---------|
| C2CEOR03CP2B1 | 900 | — | — | 42 | CAC/HAC | | | | | | |
| C2CEOR03CP5B1 | | | | 45 | | | | | | | |
| C2CEOR03CP8B1 | | | | 48 | | | | | | | |
| C2CEOR03CP1B1 | | | | 51 | | | | | | | |
| C2CEOR04CP2B1 | 1200 | | | — | | — | 42 | CAC/HAC | | | |
| C2CEOR04CP5B1 | | | | | | | 45 | | | | |
| C2CEOR04CP8B1 | | | | | | | 48 | | | | |
| C2CEOR04CP1B1 | | | | | | | 51 | | | | |
| C2CEOR06CP2B1 | 1800 | | | | | | — | | — | 42 | CAC/HAC |
| C2CEOR06CP5B1 | | | | | | | | | | 45 | |
| C2CEOR06CP8B1 | | | | | | | | | | 48 | |
| C2CEOR06CP1B1 | | | | | | | | | | 51 | |



Sliding Doors

| Part Number | Roof Containment | Vertical Wall Containment | Aisle Width mm | Description | Compatible With CAC/HAC |
|-------------|------------------|---------------------------|----------------|-----------------------------------------|-------------------------|
| CUSR1SDLHB1 | X | X | 900 | Single Sliding, Left Hand Opening | CAC/HAC |
| CUSR1SDRHB1 | | | | Single Sliding, Right Hand Opening | |
| CUD1SDB1 | | | 1200/1800 | Double Sliding Door | CAC/HAC |
| CUD2SDB1 | | | | Double Sliding Door, Packaged as a Pair | |

For other colors, replace B1 (Black) with S1 (Silver).

Sliding Door Adapter Frames



| Part Number | Aisle Width mm | Width of Cabinet mm | Adjustability In. | RU | Compatible With CAC/HAC | | | | | | |
|---------------|----------------|---------------------|-------------------|-------|-------------------------|---|-------|---------|---|-------|---------|
| C2SDT8W03DAB1 | 900 | — | — | 42-45 | CAC/HAC | | | | | | |
| C2SDT9W03DAB1 | | | | 48-51 | | | | | | | |
| C2SDT8W04DAB1 | 1200 | | | — | | — | 42-45 | CAC/HAC | | | |
| C2SDT9W04DAB1 | | | | | | | 48-51 | | | | |
| C2SDT8W06DAB1 | 1800 | | | | | | — | | — | 42-45 | CAC/HAC |
| C2SDT9W06DAB1 | | | | | | | | | | 48-51 | |

For other colors, replace B1 (Black) with W1 (White).

Single sliding doors are also available in Silver. Replace B1 (Black) with S1 (Silver).

Replace ** with 06 (600mm), 07 (700mm) or 08 (800mm).

Direct Cold Air to Where it is Needed



Net-Direct™ Inlet Ducts enable optimized containment by effectively directing airflow to improve network reliability

- Inlet duct solutions deliver cooling air directly from the cold aisle into the intake fans of switches
- Inlet ducts are completely passive, requiring no energy to operate and eliminating a point of failure
- Ensures front to back cooling airflow which enables an effective deployment of network switches with a Net-Contain™ Cold Aisle Containment deployment
- Inlet ducts enable reduced fan power energy consumption by allowing lower fan speeds, improving the reliability of the switch

Available for: Cisco[^] Nexus, Catalyst and MDS Switches and Juniper Networks^{^^} EX Series Switches.

Direct Hot Air to Where it Needs to Exhaust



Net-Direct™ Exhaust Ducts direct hot exhaust air out of a cabinet away from adjacent devices within non-contained environments

- Exhaust duct solutions channel hot exhaust air directly to the hot aisle, away from the cold air inlet of adjacent switches
- Exhaust ducts are completely passive, requiring no energy to operate and eliminating a point of failure
- Ensures switch exhaust airflow is directed to the hot aisle enabling effective deployment of network switches with a standard hot aisle/ cold aisle configuration
- Exhaust ducts enable reduced fan power energy consumption by allowing lower fan speeds, improving the reliability of the switch

Available for: Cisco[^] Nexus and Catalyst Switches.

Patented* In-Cabinet Ducting optimizes cooling system efficiency by establishing front-to-back airflow patterns through the cabinet.


[^]Cisco, Catalyst, and Cisco Nexus are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

^{^^}Juniper Networks is a registered trademark of Juniper Networks, Inc.

*Patents #8,035,965, #7,855,885 and #7,595,985 - Network Cabinet with Thermal Airflow Management System.

Net-Direct™ In-Cabinet Ducting


- Net-Direct™ Passive Cabinet Inlet Ducting directs cooling air from the cold aisle into the intake fans of switches
- Net-Direct™ Passive Cabinet Exhaust Ducting directs exhaust air from the side exhaust of the switch into the hot aisle



CDE1



CDE2



CNLTD21B2



CNLTD52A2



CNLTD142A3



CNLTD72A3



DIBBC2314S21W



DIRLC2214M21W



DIRBB2007S21W



Exhaust Ducts

| Part Number | Part Description | Std. Pkg. Qty. |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Air Inlet Ducting | | |
| CDE1 | Air inlet duct, 1 RU that resides below the switch provides cold aisle airflow to Cisco® Catalyst® 4948, 4928, and 4924. Optimized for use in server cabinet applications. | 1 |
| CDE2 | Air inlet duct, 1 RU that resides in-line and below switch provides cold aisle airflow to Cisco Nexus® N2K-C2148T-1GE, N2K-C2248TP-1GE, and N2K-C2232PP-10GE fabric extenders and Cisco® WS-C4948E-F, WS-C4948E-F-S, and WS-C4948E-F-E. Optimized for use in server cabinet applications. | |
| CNLTD21B2 | Air inlet duct designed for Cisco® Catalyst® 4900M switch. Consists of one 2 RU inlet duct and a side duct. Compatible with Net-Access™ N-Type Network Cabinets. | |
| CNLTD52A2 | Air inlet duct designed for Cisco® Catalyst® 6504-E switch. Consists of 2 RU top and 2 RU bottom inlet ducts and a side duct. Compatible with Net-Access™ N-Type Network Cabinets. | |
| DIRLC2214M21W | Air inlet duct designed for Cisco® Catalyst® 6509-E switch. Consists of 2 RU top and 2 RU bottom inlet ducts and a side duct. Compatible with Net-Access™ N-Type Network Cabinets. | |
| DIRBB2007S21W | Air inlet duct designed for Cisco® Nexus® 7004 switch. Consists of one 2 RU inlet duct and a side duct. Compatible with Net-Access™ N-Type Network Cabinets. | |
| CNLTD142A3 | Air inlet duct designed for Cisco® Nexus® 7009 switch. Consists of 3 RU top and 3 RU bottom inlet ducts and a side duct. Compatible with Net-Access™ N-Type Network Cabinets. | |
| CNLTD72A3 | Air inlet duct designed for Cisco® MDS 9506 switch. Consists of 3 RU top and 3 RU bottom inlet ducts and a side duct. Compatible with Net-Access™ N-Type Network Cabinets. | |
| DIBBC2314S21W | Air inlet duct designed for Cisco® MDS 9513 switch. Consists of 2 RU top and 3 RU bottom inlet ducts and a side duct. Compatible with Net-Access™ N-Type Network Cabinets. | |
| CID1RU22-23DB1 | Air inlet 1RU duct for Cisco® Nexus® 9372 switch, compatible with 21.5" – 23.5" switch depth. | |
| CID2RU16-20DB1 | Air inlet duct for Cisco® TOR switches, 2RU, depth compatible with 16" – 20" switch depth. | |
| DIFBA2002S00S | Air inlet duct for Cisco® Nexus® 9396 switch. | |
| DIFBA3003S00S | Air inlet duct for Cisco® Nexus® 93128 switch. | |
| DIRLC3210S17W | Air inlet duct for Cisco® Catalyst® 6807XL switch. | |
| DIRLC25S23W | Air inlet duct for Cisco® Catalyst® 6880X switch. | |
| Exhaust Ducting | | |
| DERLCC6509A | Air exhaust duct for Net-Access™ N-Type 1070mm depth cabinets. Designed for Cisco® Catalyst® 6509 switch. | 1 |
| DERLCC9513A | Air exhaust duct for Net-Access™ N-Type 1070mm depth cabinets. Designed for Cisco® MDS 9513 switch. | |
| DERLCC7009A | Air exhaust duct for Net-Access™ N-Type 1070mm depth cabinets. Designed for Cisco® Nexus® 7009 switch. | |
| DERLCC6513A | Air exhaust duct for Net-Access™ N-Type 1070mm depth cabinets. Designed for Cisco® Catalyst® 6513 switch. | |

^Cisco, Catalyst, and Cisco Nexus are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

Thermal Sealing Accessories



FLBSIM-51



BFS100X2000



TLBP1R-V



TLBP1S-V



TLBP2R-V



BR1B



RFG*X*Y

| Part Number | Part Description | Color | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|------------------|-------|----------------|----------------|
|-------------|------------------|-------|----------------|----------------|

Blanking Shades

| | | | | |
|-----------|---------------------------------------------------------------------------------------------------------------------------|-------|---|---|
| FLBSIM-51 | Full-length blanking shade blanks out 1-51 consecutive rack units on standard 19" (482.6mm) wide vertical mounting rails. | Black | 1 | – |
|-----------|---------------------------------------------------------------------------------------------------------------------------|-------|---|---|

Cabinet Blanking Foam Strip

| | | | | |
|-------------|-----------------------------------------------------------------------------------------------------------------------------|-------|---|----|
| BFS100X2000 | Adhesive-backed foam strips, 1/16" (1.6mm) closed-cell vinyl foam, perforated to create multiples of 1.00" x 20.00" strips. | Black | 1 | 10 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------|-------|---|----|

Tool-Less Blanking Panels

| | | | | |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------|---|
| TLBP1R-V | 1 RU tool-less blanking panel, round hole 19" (483mm) width for tapped rails. | Black | 5 | – |
| TLBP1R-V10 | | White | | |
| TLBP1S-V | 1 RU tool-less blanking panel, square hole 19" (483mm) width for 3/8" cage nut holes (may be used with or without cage nuts installed). | Black | | |
| TLBP1S-V10 | | White | | |
| TLBP2R-V | 2 RU tool-less blanking panel, round hole 19" (483mm) width for tapped rails. | Black | | |
| TLBP2S-V | | 2 RU tool-less blanking panel, square hole 19" (483mm) width for 3/8" cage nut holes (may be used with or without cage nuts installed). | White | |
| TLBP2S-V10 | | | | |
| TLBP1S-L | 1 RU tool-less blanking panel, square hole 19" (483mm) width for 3/8" cage nut holes (may be used with or without cage nuts installed). | Black | 50 | |

19" Mount Brush Seal Kit

| | | | | |
|------|-----------------------------------------------------|-------|---|---|
| BR1B | 1 RU 19" mount brush seal kit with cable pass thru. | Black | 1 | 1 |
| BR2B | 2 RU 19" mount brush seal kit with cable pass thru. | | | |

CoolBoot® Raised Floor Air Sealing Grommet - Integral Mount

| | | | | |
|----------|----------------------------------------------------------------------------------------------------|-----------|---|----|
| RFG10X8Y | Overall size of 10" x 8" (254.0mm x 203.2mm) allows for 8.2" x 6.2" (208.3mm x 157.5mm) capacity. | Navy Blue | 1 | 10 |
| RFG12X4Y | Overall size of 12" x 4" (304.8mm x 101.6mm) allows for 10.2" x 2.2" (259.1mm x 55.9mm) capacity. | | | |
| RFG12X8Y | Overall size of 12" x 8" (304.8mm x 203.3mm) allows for 10.2" x 6.2" (259.1mm x 157.5mm) capacity. | | | |
| RFG3DY | Overall size of 4.8" (121.9mm) diameter allows for 2.7" (68.6mm) diameter capacity. | | | |
| RFG5DY | Overall size of 6.8" (172.7mm) diameter allows for 4.7" (119.4mm) diameter capacity. | | | |
| RFG6X8Y | Overall size of 6" x 8" (152.4mm x 203.2mm) allows for 4.2" x 6.2" (106.7mm x 157.5mm) capacity. | | | |
| RFG8X8Y | Overall size of 8" x 8" (203.2mm x 203.2mm) allows for 6.2" x 6.2" (157.5mm x 157.5mm) capacity. | | | |

Thermal Sealing Accessories (continued)



| Part Number | Part Description | Color | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------|----------------|----------------|
| CoolBoot® Raised Floor Air Sealing Grommet - Surface Mount | | | | |
| RFG10X8SMY | Overall size of 10" x 8" (254.0mm x 203.2mm) allows for 8.2" x 6.2" (208.3mm x 157.5mm) capacity. | Navy Blue | 1 | 10 |
| RFG12X4SMY | Overall size of 12" x 4" (304.8mm x 101.6mm) allows for 10.2" x 2.2" (259.1mm x 55.9mm) capacity. | | | |
| RFG12X8SMY | Overall size of 12" x 8" (304.8mm x 203.2mm) allows for 10.2" x 6.2" (259.1mm x 157.5mm) capacity. | | | |
| RFG3DSMY | Overall size of 4.8" (121.9mm) diameter allows for 2.7" (68.6mm) diameter capacity. | | | |
| RFG5DSMY | Overall size of 6.8" (172.7mm) diameter allows for 4.7" (119.4mm) diameter capacity. | | | |
| RFG6X8SMY | Overall size of 6" x 8" (152.4mm x 203.2mm) allows for 4.2" x 6.2" (106.7mm x 157.5mm) capacity. | | | |
| RFG8X8SMY | Overall size of 8" x 8" (203.2mm x 203.2mm) allows for 6.2" x 6.2" (157.5mm x 157.5mm) capacity. | | | |

Also designed for retrofit application.



| Part Number | Part Description | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|
| CoolBoot® Cabinet Top Air Sealing Fitting | | | |
| CTGN1X5 | Used to seal off 1" x 5" cabinet top openings when cables are routed through the top of a cabinet. Airtight fabric and Ultra-Cinch™ Tie close top of fabric, minimizing hot air bypass around cables to improve cooling of network equipment and reduce energy costs. For use with 600mm wide Net-Access™ Cabinets. | 1 | 10 |
| CTGN3X5 | Used to seal off 3" x 5" cabinet top openings when cables are routed through the top of a cabinet. Airtight fabric and Ultra-Cinch™ Tie close top of fabric, minimizing hot air bypass around cables to improve cooling of network equipment and reduce energy costs. For use with 700mm, 800mm, and 1000mm wide Net-Access™ Cabinets. | | |
| CTGN6X6 | Used to seal off 6.5" x 6.5" cabinet top openings when cables are routed through the top of a cabinet. Airtight fabric and Ultra-Cinch™ Tie close top of fabric, minimizing hot air bypass around cables to improve cooling of network equipment and reduce energy costs. For use with 600mm, 700mm, 800mm, and 1000mm wide Net-Access™ Cabinets. | | |



| Part Number | Part Description | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|
| Cabinet Top Cover and Cable Protection Bezel | | | |
| CTCN1X5 | Used to seal off 1.5" x 5" cabinet top openings. Can also be used to add the CTGN1X5 to openings where the snap-on cover has been removed. For use with Net-Access™ Cabinets. | 1 | 10 |
| CTCN3X5 | Used to seal off 3.5" x 5" cabinet top openings. Can also be used to add the CTGN3X5 to openings where the snap-on cover has been removed. For use with Net-Access™ Cabinets. | | |
| CTCN6X6 | Used to seal off 6" x 6" cabinet top openings. Can also be used to add the CTGN6X6 to openings where the snap-on cover has been removed. For use with Net-Access™ Cabinets. | | 1 |
| CTNBZL6X6 | Used to provide a protective edge for cables routed through the 6.5" x 6.5" cabinet top openings after knock-outs are removed. Can also be used to add the CTGN6X6 to openings where knock-out has been removed. For use with Net-Access™ Cabinets. | | 10 |



PANDUIT®

Panduit Corp.
World Headquarters
Tinley Park, IL 60487

800.777.3300

www.panduit.com

PANDUIT w Polsce



PANDUIT®

Paweł Kutera
Territory Account Manager Poland
Mobile +48 515 531 452
E-mail: pawel.kutera@panduit.com

Dystrybucja w Polsce

DCNART Sp. z o.o.
ul. Obornicka 117
62-002 Suchy Las
Mobile +48 601 949 203
E-mail: info@dcnart.com

