

31.5-inch 4K IPS Surgical Monitor

| 32HL710S |

Superior Picture Quality for Fine Surgery

31.5-inch 4K (3840x2160) IPS Display | 178° Wide Viewing Angle

The larger 32HL710S, 31.5-inch 4K display with IPS, helps surgeons easily identify details, presenting accurate, realistic images during a procedure. In addition, when multiple doctors take part in the surgery, the wide viewing angle of the IPS panel allows each doctor to view content on the monitor from different angles with minimal color shift.




HDR 10

The 32HL710S allows accurate reproduction of HDR contents from devices such as surgical cameras that support HDR. This ensures image from HDR-supported endoscope cameras are displayed in a way that closely resembles how it would appear to actual visual observation.

Optimized for Surgical Environments

Mirror & Rotation Mode

Conveniently flip and rotate the monitor to adjust to your surgery needs with the Mirror & Rotation Mode setting. Depending on the situation, use Mirror Mode to share the ongoing surgical procedure in real-time, or Rotation Mode to adjust the screen for an easy-to-operate angle regardless of the surgical camera position.

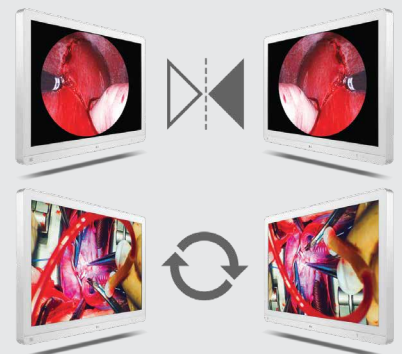


IP35 (Front) | IP32 (Except for Front) | IK06

The 32HL710S is ideal for surgical environments and highly reliable with an IP35 protection rating in the front, and an IP32 protection rating everywhere but the front, protecting it from all directions. It is also highly durable, protecting the glass from external mechanical impact with a IK06 rating. For this reason, 32HL710S reduces potential risk in a demanding surgical environment.


Enhanced Connectivity for Multi Modalities

Up to 4PBP (Picture by Picture) | PIP Multi-Modality Connectivity

The 32HL710S allows you to use 2PBP, 3PBP, and even 4PBP. The support up to 4PBP allows medical professionals to see a combination of endoscopic and fluoroscopic images while monitoring vital signs. In other words, different input signals, through 3G-SDI, DVI, DisplayPort and HDMI, can be viewed on one monitor simultaneously.

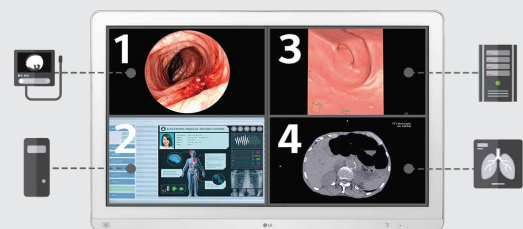

Specification

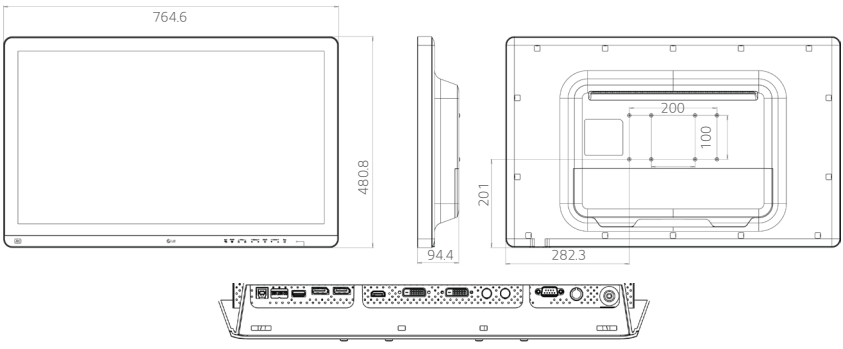Model		32HL710S
Model		
Panel	Panel Type	IPS
	Inch (Aspect Ratio)	31.5-inch (16:9)
	Resolution	8MP (3840 x 2160)
	Surface Treatment	Protection Glass (1.6t, Anti-reflection, Anti-fingerprint)
	Color Gamut (Typ.)	sRGB 115% (Area), sRGB over 99% (Coverage)
	Viewing Angles (CR≥10)	178° (Right/Left), 178° (Up/Down)
	Brightness (Typ.)	800cd/m ²
	Contrast Ratio (Typ.)	1300:1
	Response Time (GTG*)	14ms (Off- setting), 5ms (Faster- setting)
Feature	DICOM Compliant	Yes
	HW Calibration	Yes (True Color Pro)
	HDR	HDR 10
Video Signals	Input Terminals	HDMI x1, DisplayPort x1, DVI x1, 3G-SDI x1
	Output Terminals	DisplayPort x1, DVI x1, 3G-SDI x1
Connectivity	USB	1 upstream, 1 downstream
Power	Power Requirements	100-240Vac, 50-60Hz
	Power Consumption (Max.)	120W
	Power Consumption (DC Off)	Less than 0.3W
Resistance Rating		IP35 (Front), IP32 (Except for Front), IK06
Certifications & Standards		IEC(IEC 60601-1 / IEC 60601-1-2), EN(EN 60601-1 / EN 60601-1-2) IEC(IEC 60950-1 / IEC 55032, 55024), EN (EN 60950-1 / EN 55032, 55024) cUL (ANSI/AAMI ES 60601-1, CSA CAN/CSA-C22.2 NO. 60601-1) FCC (FCC part 15 Class A), FDA (Rgistration (Class I)), RoHS, REACH, WEEE
User Convenience	Screen Filp	Mirror Mode & Rotation Mode
	PBP / PIP	PBP (2/3/4PBP) / PIP
	Failover Input Switch	Yes
Physical Specifications	Weight (without stand)	12.4 kg (27.3 lb)

* GTG : Gray to gray response time

