

## Product Highlights

### Complete Internet Solution

A total solution that helps you connect, share, and enjoy your Internet connection with a single device that's easy to set up and manage

### Latest Wireless AC Technology

Enjoy combined wireless speeds of up to 750 Mbps and increased range thanks to the latest 802.11ac wireless technology

### Dual-Band Wi-Fi for Seamless Performance

Access your network via two concurrent wireless bands for seamless performance no matter what you are doing



## DSL-3682

# Wireless AC750 Dual-Band VDSL/ADSL Modem Router

## Features

### High-Speed Connectivity

- The latest 802.11ac wireless specification delivers blazing fast wireless connectivity with increased range and reliability
- RJ11 VDSL/ADSL port for speedy Internet access
- Four 10/100 Fast Ethernet LAN ports give you high-speed wired connectivity

### Flexible Bandwidth

- Concurrent dual-band wireless for combined connections of up to 750 Mbps<sup>1</sup>
- QoS engine to prioritise important traffic and deliver uninterrupted bandwidth

### Setup and Management

- Setup wizard to guide you through the configuration process
- Firewall and access control options to prevent attacks and restrict access to your network

The DSL-3682 Wireless AC750 Dual-Band VDSL/ADSL Modem Router provides high-speed Internet and wireless coverage to smart devices in your home. With concurrent dual-band 802.11ac, it brings you the future of high-bandwidth wireless connectivity, allowing you to stream HD video, make Internet voice calls, and surf the web from anywhere in your home. Four Ethernet ports provide wired connections for other devices such as network printers and drives, to share peripherals over your home network. It's stylish, easy-to-use and comes IPv6-ready so you can keep up with the next generation of network devices.

## High-Speed Wired and Wireless Connectivity

The DSL-3682 Wireless AC750 Dual-Band VDSL/ADSL Modem Router uses the latest high-speed wireless technology to bring you lightning-fast combined Wi-Fi speeds of up to 750 Mbps<sup>1</sup> and increased range. Enjoy streaming media, Internet phone calls, online gaming, and content-rich web surfing throughout your home. In addition, four Fast Ethernet ports give you solid, dependable wired performance for devices such as smart TVs and game consoles. The built-in Quality of Service (QoS) engine allows you to prioritise important traffic to ensure that your favourite applications are receiving optimal bandwidth.


## Dual-Band Wireless for Seamless Performance

The DSL-3682 features dual-band wireless, allowing you to operate two concurrent, high-speed Wi-Fi bands for ultimate wireless performance. Surf the web, chat, and play online games on the 2.4 GHz band on your computer, while simultaneously stream digital media on the 5 GHz band to your smartphone. What's more, each band can operate as a separate Wi-Fi network, giving you the ability to customise your network according to your connectivity needs. You can even configure a guest zone to give visitors Internet access without giving them access to the rest of your network.

# Wireless AC750 Dual-Band VDSL/ADSL Modem Router

## Easy to Set Up, Easy to Secure

Sharing your Internet connection doesn't have to be a complicated process; just open a web browser to access the setup wizard and follow the easy step-by-step instructions to get started. Implement WPA/WPA2 wireless security in minutes with the wireless network setup wizard, or use Wi-Fi Protected Setup (WPS), which establishes a secure connection to new devices without the need to enter settings or create passwords. In addition, the built-in firewall protects against malicious attacks from the Internet, and access control features allow you to restrict access to your network.

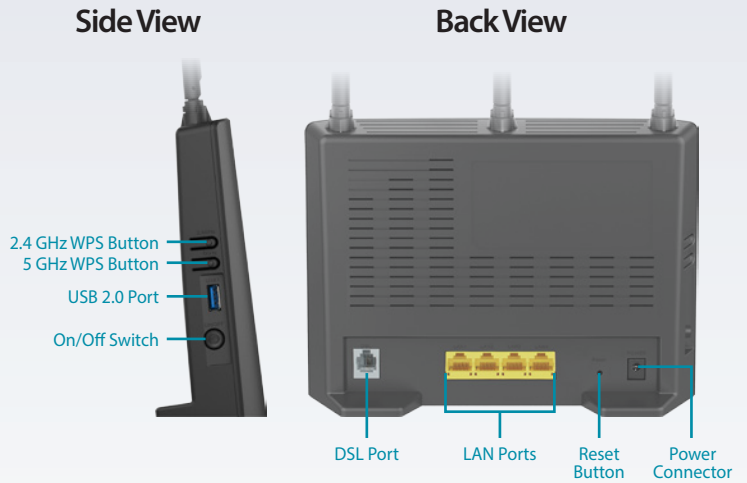

## Technical Specifications

### General

|                     |   |  |
|---------------------|---|--|
| Device Interfaces   | <ul style="list-style-type: none"> <li>• 802.11 ac/n/g/b Wireless LAN</li> <li>• Four 10/100 Fast Ethernet LAN ports</li> </ul>   | <ul style="list-style-type: none"> <li>• One RJ-11 Broadband port</li> <li>• One USB 2.0 port</li> </ul>   |
| ADSL Compliance     | <ul style="list-style-type: none"> <li>• ADSL Standards               <ul style="list-style-type: none"> <li>• Multi-mode</li> <li>• Full-rate ANSI T1.413 Issue 2</li> <li>• ITU-T G.992.1 (G.dmt) Annex A/C/I</li> <li>• ITU-T G.992.2 (G.lite) Annex A/C</li> <li>• ITU-T G.994.1 (G.hs)</li> </ul> </li> </ul>  | <ul style="list-style-type: none"> <li>• ADSL 2 Standards               <ul style="list-style-type: none"> <li>• ITU-T G.992.3 (G.dmt.bis) Annex A/J/L/M</li> </ul> </li> <li>• ADSL 2+ Standards               <ul style="list-style-type: none"> <li>• ITU-T G.992.5 Annex A/L/M</li> </ul> </li> </ul>  |
| VDSL Compliance     | <ul style="list-style-type: none"> <li>• ITU-T G.993.1</li> <li>• ITU-T G.993.2</li> </ul>  | <ul style="list-style-type: none"> <li>• 8a, 8b, 8c, 8d, 12a, 12b, 17a</li> </ul>  |
| ATM/PPP Support     | <ul style="list-style-type: none"> <li>• Multiprotocol over AAL5 (RFC 1483/2684)</li> <li>• Bridged and routed Ethernet encapsulation</li> <li>• LLC encapsulation</li> <li>• VC-based multiplexing</li> <li>• ATM Forum UNI3.1/4.0 PVC (up to 8 PVCs)</li> <li>• ATM Cell Format ITU-T Rec. I.361</li> <li>• ATM Adaptation Layer Type 5 (AAL5)</li> <li>• PPPoA (RFC2364)</li> </ul>  | <ul style="list-style-type: none"> <li>• PPPoE (RFC2516)</li> <li>• PPP Link Control Protocol (RFC 1661)</li> <li>• Internet Protocol Control Protocol (RFC 1332)</li> <li>• PPP Authentication Protocol (RFC 1334)</li> <li>• PPP Challenge Handshake Authentication Protocol (RFC 1994)</li> <li>• Microsoft PPP CHAP extensions (RFC 2433)</li> </ul>   |
| WLAN Specifications | <ul style="list-style-type: none"> <li>• Wi-Fi Protected Setup (WPS)</li> <li>• Multiple SSIDs</li> <li>• Automatic rate adapting</li> <li>• Auto channel selection</li> </ul>  | <ul style="list-style-type: none"> <li>• WMM support</li> <li>• 64-bit &amp; 128-bit WEP</li> <li>• WPA-PSK &amp; WPA2-PSK</li> <li>• MAC address filtering</li> </ul>   |
| Antenna Type        | <ul style="list-style-type: none"> <li>• Three fixed external antennas</li> </ul>   |  |
| Data Signal Rate    | <ul style="list-style-type: none"> <li>• 2.4 GHz 802.11 n/g/b</li> <li>• Up to 300 Mbps<sup>1</sup></li> </ul>  | <ul style="list-style-type: none"> <li>• 5 GHz 802.11 ac/a</li> <li>• Up to 433 Mbps<sup>1</sup></li> </ul>  |
| Network Services    | <ul style="list-style-type: none"> <li>• IPv4</li> <li>• DHCP server/client/relay</li> <li>• DNS relay</li> <li>• Dynamic DNS (DDNS)</li> <li>• Routing Information Protocol (RIP) v1/v2</li> <li>• NAT AGLs               <ul style="list-style-type: none"> <li>• PPTP</li> <li>• L2TP</li> <li>• FTP</li> <li>• RTSP (RealTime Streaming Protocol)</li> <li>• SIP v1/v2</li> <li>• IPsec</li> </ul> </li> <li>• Internet Control Message Protocol (ICMP)</li> <li>• Virtual server (Port forwarding)</li> <li>• Simple Network Time Protocol (SNTP)</li> </ul> | <ul style="list-style-type: none"> <li>• 802.1d MAC Bridge (up to 256*8 MAC addresses)</li> <li>• QoS               <ul style="list-style-type: none"> <li>• IPP/ToS</li> <li>• DSCP QoS in 4-priority queues</li> <li>• Application QoS in 4-priority queues</li> <li>• Strict priority</li> <li>• VLAN QoS in 4-priority queues</li> <li>• QoS remarking based on IPP/ToS, DSCP and 802.1p</li> <li>• TOS transparency through NAT</li> <li>• Mapping to queue according to DSCP bits and physical port</li> <li>• 802.1Q</li> </ul> </li> <li>• IGMP proxy v1/v2</li> <li>• IGMP snooping v1/v2/v3</li> </ul> |

## Wireless AC750 Dual-Band VDSL/ADSL Modem Router

|                                 |   |  |
|---------------------------------|---|--|
| Standards                       | <ul style="list-style-type: none"> <li>• IEEE 802.11ac</li> <li>• IEEE 802.11n</li> <li>• IEEE 802.11g</li> </ul>   | <ul style="list-style-type: none"> <li>• IEEE 802.11b</li> <li>• IEEE 802.3</li> <li>• IEEE 802.3u</li> </ul>                                  |
| Minimum System Requirements     | <ul style="list-style-type: none"> <li>• Microsoft Edge 25, Internet Explorer 8, Firefox 20, Chrome, or Safari 4</li> </ul>                                       | <ul style="list-style-type: none"> <li>• Ethernet network interface</li> <li>• Subscription with an Internet Service Provider (ISP)</li> </ul> |
| <b>Functionality</b>            |   |  |
| Universal Plug and Play Support | <ul style="list-style-type: none"> <li>• UPnP based auto-configuration</li> <li>• UPnP based port forwarding</li> </ul>   | <ul style="list-style-type: none"> <li>• UPnP IGD 1.0</li> </ul>   |
| Device Management               | <ul style="list-style-type: none"> <li>• Web configuration</li> <li>• Telnet management</li> </ul>  | <ul style="list-style-type: none"> <li>• Webpage/TFTP firmware upgrade</li> <li>• Diagnostic tools for ADSL and IP Ping</li> </ul>             |
| Advanced Features               | <ul style="list-style-type: none"> <li>• Dual-active firewall</li> <li>• Network Address Translation (NAT)</li> <li>• Stateful Packet Inspection (SPI)</li> </ul> | <ul style="list-style-type: none"> <li>• UPnP support</li> <li>• 802.1p QoS</li> </ul>   |
| <b>Physical</b>                 |   |  |
| Dimensions                      | <ul style="list-style-type: none"> <li>• 198 x 146 x 54 mm (7.79 x 5.74 x 2.12 inches)</li> </ul>   |  |
| Weight                          | <ul style="list-style-type: none"> <li>• 302 grams (9.6 oz)</li> </ul>  |  |
| Power                           | <ul style="list-style-type: none"> <li>• Input: 100 ~ 240 V AC</li> </ul>   | <ul style="list-style-type: none"> <li>• Output: 12 V DC, 1A</li> </ul>  |
| Temperature                     | <ul style="list-style-type: none"> <li>• Operating: 0 to 40 °C (32 to 104 °F)</li> </ul>  | <ul style="list-style-type: none"> <li>• Storage: -20 to 65 °C (-4 to 149 °F)</li> </ul>   |
| Humidity                        | <ul style="list-style-type: none"> <li>• 5 % to 95 % non-condensing</li> </ul>  |  |
| Certifications                  | <ul style="list-style-type: none"> <li>• CE</li> <li>• Wi-Fi</li> </ul>   | <ul style="list-style-type: none"> <li>• Wi-Fi Protected Setup (WPS)</li> </ul>  |

<sup>1</sup> Maximum wireless signal rate derived from IEEE standard specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors may adversely affect wireless signal range.



For more information: [www.dlink.com](http://www.dlink.com)

**D-Link European Headquarters.** D-Link (Europe) Ltd., D-Link House, Abbey Road, Park Royal, London, NW10 7BX. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2016 D-Link Corporation. All rights reserved. E&OE.

Updated September 2016

**D-Link**<sup>®</sup>  
Home is where the **SMART** is