



Philips Professional  
Monitor  
Video Wall Display

55"

Direct LED Backlight  
Full HD  
700 cd/m<sup>2</sup>



55BDL4007X

## Go big

Versatile videowall display.

Command attention with an X-Line professional videowall display. Crisp contrast and slim bezels enable clear, distraction-free imaging. Whether you're running an airport or hosting a conference.

### Effortless setup. Total control.

- Operate, monitor and maintain with CMND and Control
- CMND and Create. Develop and launch your own content
- Remote system management through CMND
- Add Android processing power with an optional CRD50 module

### Powerful system solution

- Energy-saving automatic backlight control
- FailOver ensures that content is always playing
- OPS slot allows for PC embedding without cabling
- Tiling mode. Create tiled 4K videowalls of any size

### Brilliant images. Endless possibilities.

- Full HD monitors. Brilliant images. Clear contrast
- IPS panel: rich colour consistency from every angle
- Extra-narrow (1.8 mm) bezels. For distraction-free images


# PHILIPS

# Highlights

## CMND

Take control of your Philips Professional Display network. CMND lets you manage, update, maintain and play via one easy-to-use interface. From installation to daily operation.

### CMND and Control



Run your display network over a local (LAN) connection. CMND and Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

### CMND and Create



Take control of your content with CMND and Create. A drag-and-drop interface makes it simple to publish your own content, whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure that your stills, text and video will be up and running in no time.


## Energy saving

Energy-saving automatic backlight control

## Extra-narrow (1.8 mm) bezels.

Extra-narrow (1.8 mm) bezels. For distraction-free images

## FailOver

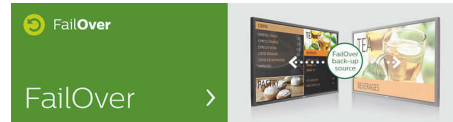

From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs, ensuring that content keeps playing even if the primary source goes down. Simply set a list of alternative inputs to be sure your business is always on.

## Full HD monitors

Full HD monitors. Brilliant images. Clear contrast

## IPS panel rich colour

IPS panel: rich colour consistency from every angle

## OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

## Optional CRD50 module

Embed an Android System-on-Chip (SoC) into your Philips Professional Display. The optional CRD50 module is an OPS device that enables Android processing power without the need for cables. Simply slide into the OPS slot, which contains all the connections needed to run the module (including power supply).

## Tiling mode

Connect two or more Philips professional displays to create a tiled videowall — without the need for external devices. A single player takes care of content, whether you have four screens or 40. 4K content is fully supported and if you're showing that content on four screens you get the best possible dot-by-dot resolution.

# Specifications

## Connectivity

- Audio output: External speaker connector, 3.5 mm Mini Jack (x 1)
- Video input: Composite (Share component Y), Component BNC (x 3), DisplayPort 1.2 (x 1), DVI-D (x 1), HDMI 1.4 (x 2), VGA (Analogue D-Sub) (x 1), USB 2.0 (x 1)
- Audio input: 3.5 mm mini jack (x 1), Audio Left/Right (RCA) x 1
- Other connections: OPS, Thermal sensor
- Video output: DVI-I (x 1), DisplayPort 1.2 (x 1)
- External control: RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack, RJ45 x 2

## Picture/Display

- Diagonal screen size (metric): 138.7 cm
- Diagonal screen size (inch): 54.6 inch
- Aspect ratio: 16:9
- Panel resolution: 1920 x 1080p
- Pixel pitch: 0.63 x 0.63 mm
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 700 cd/m<sup>2</sup>
- Display colours: 1.07 B
- Contrast ratio (typical): 1200:1
- Dynamic contrast ratio: 500,000:1
- Response time (typical): 8 ms
- Viewing angle (horizontal): 178 degree
- Viewing angle (vertical): 178 degree
- Haze: 28%

## Convenience

- Placement: Landscape (24/7), Portrait (24/7)
- Tiled Matrix: Up to 10 x 10
- Screen-saving functions: Pixel Shift, Low Bright
- Signal loop through: DisplayPort, RS232, DVI Loop through, IR Loop through
- Ease of installation: Carrying Handles, Smart Insert
- Energy-saving functions: Smart Power
- Network controllable: RS232, RJ45
- RJ45 hub: available

## Sound

- Built-in speakers: 2 x 10 W (RMS)

## Power

- Consumption (Typical): 165 W
- Consumption (Max): 360 W
- Standby power consumption: <0.5 W

## Supported Display Resolution

- Computer formats: 640 x 480, 60, 67, 72, 75 Hz, 800 x 600, 56, 60, 72, 75 Hz, 1024 x 768, 60 Hz, 1280 x 768, 60 Hz, 1280 x 800, 60 Hz, 1280 x 1024, 60 Hz, 1360 x 768, 60 Hz, 1366 x 768, 60 Hz, 1440 x 900, 60 Hz, 1600 x 1200, 60 Hz, 1920 x

1080, 60 Hz, 1920 x 1200, 60 Hz, 3840 x 2160, 30Hz

- Video formats: 480i, 60 Hz, 480p, 60 Hz, 576p, 50 Hz, 576i, 50 Hz, 720p, 50, 60 Hz, 1080i, 50, 60 Hz, 1080p, 50, 60 Hz, 3840 x 2160, 30Hz

## Dimensions

- Set Width: 1211.4 mm
- Product weight: 24.9 kg
- Set Height: 682.2 mm
- Set Depth: 97.3 (D@Handle)/98.4 (D@Wall mount) mm
- Set Width (inch): 47.69 inch
- Set Height (inch): 26.86 inch
- Wall Mount: 400 mm x 400 mm, M6
- Set Depth (inch): 3.83 (D@Handle)/3.87 (D@Wall mount) inch
- Bezel width: 0.9 mm

## Operating conditions

- Altitude: 0 ~ 3000 m
- Temperature range (operation): 0 ~ 40 °C
- MTBF: 50,000 hour(s)
- Temperature range (storage): -20 ~ 60 °C
- Humidity range (operation)[RH]: 20 - 80% (without condensation)
- Humidity range (storage) [RH]: 5 - 90% (without condensation)

## Multimedia Applications

- USB Playback Video: ISM, M2TS, M4V, Manifest, MK3D, MKV, MP4, MPEG, MPG, MPD, MT2, MTS, TS, VOB
- USB Playback Picture: BMP, GIF, JPEG, JPG, PNG
- USB Playback Audio: AAC, AIF, AIFF, ASF, M3U, M4A, MP3, MP4, PLS, WAV, WMA

## Accessories

- Included Accessories: AC Switch Cover, Gap pad x 3, Kit-1 (x1), Kit-2 (x2), Power cable (3 m), Quick start guide (x 1), Remote control and AAA batteries, RS232 Cable (3 m), RS232 daisy-chain cable, Wire Clamper (x 3), HDMI cable (1.8 m) (x 1)
- Stand: BM05462/BM05922 (Optional)

## Miscellaneous

- On-Screen Display Languages: Arabic, English, French, German, Italian, Japanese, Polish, Russian, Spanish, Simplified Chinese, Turkish, Traditional Chinese
- Warranty: 3 year warranty
- Regulatory approvals: FCC, Class A, RoHS, CB, BSMI, PSB, CE, CU, ETL, CCC, CECP



Issue date 2024-04-15

Version: 5.0.1

EAN: 87 12581 77686 2

© 2024 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)