
DS-VW765-POR




125lb (57kg)



42"*-65"

*22" minimum display height



The DS-VW765-POR's pull-out/prop-open mechanism provides quick serviceability and easy-access, so you can achieve a seamless video wall in no time

Video walls should be easy to configure, quick to install, and a snap to maintain. No, it's not a dream, it's the DS-VW765-POR Full-Service Video Wall Mount from Peerless-AV. Create any configuration imaginable, but leave the tedious calculations to the custom wall plate spacers. Just install the first mount. Then use the custom wall plate spacers to perfectly place each additional mount on the wall. No measuring, no guessing, no

mistakes. It couldn't be simpler. The innovative design combined with a mount that is



NO TOOLS REQUIRED FOR MICRO-ADJUSTMENT Simple, tool-less micro-adjustments at 8 points seamlessly align the displays







Full-service quick release access Tool-less micro Wall plate spacers adjustments (sold separately)

peerless-AV®

Additional Features

- Modular mount for unlimited video wall display configurations
- Display specific wall plate spacers eliminate the guesswork and on-site installation calculations
- 8 points of tool-less micro adjustments align the displays
- Displays click securely into place against the wall with springloaded mechanism
- Displays and mounts sit flush against the wall for a clean side appearance
- Pull-out/prop-open mechanism provides quick service access
- Integrated cable management tie-backs make display to display cabling simple
- Includes security hardware that helps deter tampering and theft
- VESA® mounting hole patterns from 200 x 200mm up to 400 x 600mm in 100mm increments. Additional patterns supported with adaptor plates.

🕼 🕄 🚯 🗴 😯 🕼

Please visit peerless-av.com/en-us/patents for patent information...

info@peerless-av.com peerless-av.com

SMARTMOUNT. Full-Service Video Wall Mount - Portrait

all in no time

NO GUESSWORK Custom wall plate spacers eliminate the guesswork and on-site installation calculations

EASY PULL-OUT SERVICE ACCESS

Easy-to-use pull-out/prop-open mechanism provides quick service access; spring-loaded mechanism securely clicks the display back into place

OPEN WALL PLATE

Allows for total wall access that increases electrical and cable management options

CLEAN LOOK

Integrated cable management tie-backs make display-to-display cabling easier

Model Numbers


DS-VW765-POR SmartMount® Full Service Video Wall Mount - Portrait for 42"* to 65" Displays

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
DS-VW765-POR	22.02" x 26.87" x 3.08"-3.83" (559 x 683 x 78-97mm)	27.9lb (12.7kg)	125lb (57kg)	Scratch resistant fused epoxy	Black

Package Specifications

	PACKAGE SIZE (W x H x D)		PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
DS-VW765-POR	28.13" x 27. (714 x 698		32.6lb (14.8kg)	735029278788	Wall mount assembly, mounting attachment rails, fasteners	1
Accessories	DS-VWSxxx-P: DS-ACC765: DS-ACC770: ACC-V800X:	Cable Releas Media Player	ignment Spacers e Kit for recessed wall app Mounting Bracket essory for 800 x 400mm m	*22" r	ninimum display height	

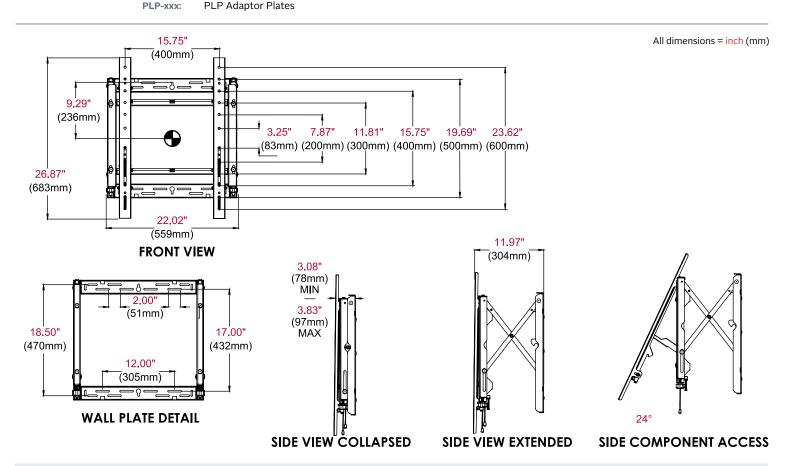

Architect Specifications

The Smartmount[®] Full-Service Video Wall Mount - Portrait shall be a Peerless-AV model DS-VW765-POR and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit **peerless-av.com** to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV 2300 White Oak Circle

Aurora, IL 60502 USA (800) 865-2112 (630) 375-5100 Fax: (800) 359-6500 Peerless-AV Europe Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom +44 (0) 1923 200100 Fax: +44 (0) 1923 200101 Peerless-AV de México Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050 +52 (81) 8384-8300 Fax: +52 (81) 8384-8360

