

Modicon X80 I/O platform

Catalog

January 2015



Schneider
Electric

How can you fit a 6000-page catalog in your pocket?

Schneider Electric provides you with the complete set of industrial automation catalogs all on a handy USB key for PC or in an application for tablets



Digi-Cat, a handy USB key for PC



- > Convenient to carry
- > Always up-to-date
- > Environmentally friendly
- > Easy-to-share format

The screenshot shows a software window titled "Library : Catalogs-EN" with the URL "file:///E/Digi-Cat/index.html". On the left is a vertical sidebar with icons for search, refresh, and navigation, labeled "Library v1.0". The main area is titled "Catalogs EN" and contains a tree view of product categories. The "Boxes, Cabling & Interfaces" category is expanded, showing sub-categories like "Control Stations", "Harmony XALD, XALK", "Harmony XALE", etc. Other collapsed categories include "Pushbuttons, Switches, Pilot Lights & Joysticks", "Signaling Units", "HMI (Terminals and Industrial PC)", "Sensors & RFID System", "Motor Protection Relays", "Motor Starters", "Drives & Soft Starters", "Motion", "Interface, Measurement & Control Relays", "PAC, PLC & other Controllers", and "Industrial Communication".

Contact your local representative to get your own Digi-Cat



e-Library, the app for tablets

If you have an iPad®:

- > Go to the App Store and search for e-Library
- > or scan the QR code



If you have an Android tablet:

- > Go to the Google Play Store™ and search for eLibrary
- > or scan the QR code



The screenshot shows the e-Library app running on an Android device. The top status bar indicates "Aucune SIM" and "16:55". The main screen features a banner with the text "Make your life easier with our innovative products for machine builders and panel builders." Below the banner are several product icons. The left sidebar has icons for search, refresh, and navigation, and is labeled "eLibrary". The main content area is organized into sections: "HMI (terminals and industrial PC)", "Industrial communication", "Interface, Measurement & Control Relays", "Motion & Drives", "Motor Starters", "PAC, PLC & other Controllers", "Power supplies & transformers", and "Pushbuttons, Switches, Pilot Lights, Control stations & Joysticks". Each section contains a list of products with small thumbnail images.

General contents

Presentation.....	1
Racks and power modules	2
I/O modules.....	3
Communication	4
Ruggedized modules.....	5
Connection interfaces.....	6
Compatibility with OsiSense XU/XS	7
Standards and certifications	8
Services, index.....	9

■ General presentation.....	page 1/2
■ Composition	page 1/4
■ Architectures, software configuration.....	page 1/5
■ Compatibility.....	page 1/6

Modicon X80 I/O platform

Compact, robust, sustainable

1

Modicon X80 I/O, a new Remote I/O system



Common I/O platform for
Modicon M340, M580, Quantum
Ethernet I/O

The Modicon X80 I/O platform serves as a common platform for Modicon M340, Modicon Quantum Ethernet I/O, Modicon M580 PACs and future Modicon Mx80 controllers. With a common platform, a much smaller stock of spare parts needs to be held, and maintenance and training costs are significantly reduced. A common configuration tool is used for all PAC modules using Unity Pro with a high level of services such as bit forcing, structured device DDT, etc. This platform offers a wide choice between several Schneider Electric I/O modules (discrete, analog, expert, communication).

Compact

- > With the latest I/O technology, the Modicon X80 I/O platform is extremely compact
- > Reduction in cabinet dimensions, with up to 64 discrete I/Os for some modules



Modicon X80 I/O platform



ATEX zone 2/22 and IECEx

Robust

- > Offering more than required by the standards
- > Certified for ATEX zone 2/22 and IECEx (depending on the model, see pages 8/2 to 8/7)

Characteristics	Modicon X80 I/O platform	IEC standards
		Values required by
Mechanical constraints	Measured values	IEC 60 068-2
Shocks	30 g	> 15 g min.
Vibrations	3 g	> 1 g min.
Electrical immunity	Measured values	IEC 61 000-4
Radiated field	15 V/m	> 10 V/m min.
Electrostatic discharges	8 kV	> 6 KV min.
Environmental immunity	Measured values	IEC 61 000-4
Temperature	0...60°C	> 0...55°C
Modicon X80 ruggedized I/O offer	-25...70°C	-



Sustainable

- > Common X80 I/O modules reduce training and maintenance costs
- > Hot swappable
- > Existing solutions for migrating from legacy I/O to the Modicon X80 I/O platform



Common I/O platform



Certifications and standards

Depending on the model, the Modicon X80 modules respect the following standards:

- > Marine standards: ABS, BV, GL, RMRS, DNV, RINA, LR and PRS compliant
 - > International standards: CE, UL/CSA, RCM, EAC and IEC61850-3 compliant
- For further information, see pages 8/2 to 8/7.

Marine standards



ABS



BV



DNV



GL



LR



RINA



RMRS



PRS

International standards



CE



UL



CSA



RCM



EAC

IEC 61850-3

Market segments

- > The Unity Pro function block software libraries make the Modicon X80 I/O platform ideally suited for the following market segments:



Water & waste water



Mining, minerals & metals



Food & beverage



Oil & gas



High level Unity services





Modicon X80 I/O platform with Modicon M580 processor




Modicon X80 I/O platform with Modicon M340 processor



Modicon X80 EIO drop with CRA bus terminal module



Ethernet Modbus/TCP DIO drop with PRA module

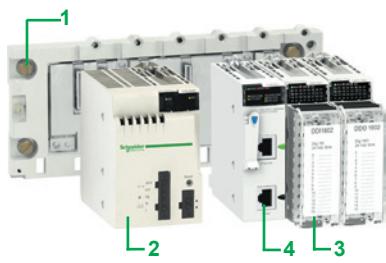

Presentation

The Modicon X80 I/O platform serves as the common base for automation platforms by simply adding a dedicated processor (1).

It may also:

- form part of a Quantum and Modicon M580 Ethernet I/O architecture as an Ethernet RIO (EIO) drop with a CRA bus terminal module
- form an Ethernet Modbus/TCP DIO drop with a PRA module

The Modicon X80 I/O platform is available in single-rack or multi-rack configuration.

This platform may also accept automation platform-dedicated modules (communication, application, etc.).

One Modicon X80 drop may support two racks separated by a cumulative distance of up to 30 metres/98.42 feet.

This platform, common to several automation platforms, can reduce maintenance and training costs as it comprises:

- a single range of spare parts in stock
- training common to several PLCs

Based on the latest I/O technology, the Modicon X80 I/O platform offers:

- high-quality ruggedness and compactness
- compliance with international certifications (ATEX, IEC, etc.)
- a wide selection of modules: discrete or analog I/O, expert modules, communication modules, etc.

This platform is programmed and configured using Unity Pro software.

Bit forcing simplifies simulation and structured data simplifies diagnostics.

Description

Modicon X80 I/O platform

The Modicon X80 I/O platform, which can be used in-rack and/or in remote I/O drops (RIO), Ethernet remote I/O drops (EIO), and/or distributed I/O drops (DIO) depending on the type of PLC (M580, M340, Quantum, etc.), comprises the following elements:

- 1 X-bus racks with 4, 6, 8, or 12 slots or Ethernet + X-bus racks with 4, 8, or 12 slots
- 2 AC or DC power supply modules
- 3 discrete and analog I/O modules
- 4 RTU (Remote Terminal Unit) serial link, AS-Interface, and other communication modules


The additional modules offered include:

- Ethernet (Modbus/TCP, Ethernet/IP) communication and supplementary modules dedicated to several automation platforms such as Modicon M340 or Modicon M580
- communication via optical transceiver modules
- application-specific modules: counting, motion control, SSI encoder, time stamping
- CAPP (Collaborative Automation Partner Program) partner modules: weighing, Wi-Fi

Treatment for harsh environments

With "ruggedized" modules, the Modicon X80 I/O platform may be used in harsh environments or within a range of operating temperatures from - 25 to + 70 °C/- 13 to + 158 °F (see page 5/2).

(1) See the compatibility guide on page 1/6.



Multi-rack configuration with
M340 processor


Architectures based on the Modicon X80 I/O platform

Single-rack or multi-rack configuration with Modicon M580 or M340 processor

This configuration comprises:

- a Modicon X80 I/O primary rack with a Modicon M340 processor
- a Modicon X80 I/O secondary rack

This configuration may comprise four racks with **BMXP342000** processors separated by a cumulative distance of up to a maximum of 30 metres/98.42 feet. It can comprise up to seven racks with M580 processors.



Quantum Ethernet I/O with Modicon X80 EIO drop

Quantum Ethernet I/O with Modicon X80 EIO drop

This architecture comprises:

- a Quantum Ethernet I/O platform comprising a processor and dedicated modules
- one or more Modicon X80 EIO drops with a standard or performance CRA drop adapter

This configuration may include:

- 16 drops with **140CPU6•1•0** processors
- 31 drops with **140CPU6•2•0** processors




Modicon M580 platform with Modicon X80
EIO drop

Modicon M580 with Modicon X80 EIO drop

This architecture comprises:

- a Modicon M580 automation platform comprising a processor and dedicated modules
- one or more Modicon X80 EIO drops with a standard or performance BMXCRA drop adapter on an X-bus rack or
- one or more Modicon X80 EIO drops with a BMECRA drop adapter on an Ethernet + X-bus rack

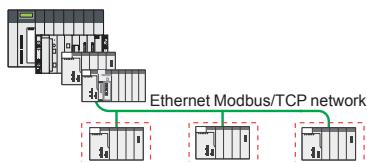

Ethernet Modbus/TCP DIO drop connected
to an automation system platform

Ethernet Modbus/TCP DIO drop connected to an automation system platform

This architecture comprises:

- a Quantum/Premium/M580/M340 automation platform
- one or more Ethernet Modbus/TCP DIO drops with a **BMXPRA0100** peripheral I/O remote adapter, a power supply and I/O



Unity Pro

Software configuration

Unity Pro programming software is required to set up the Modicon X80 I/O platform.

The Unity Pro function block software libraries make it possible to meet the needs of specialist applications in various fields of application such as:

- Water and Waste Water (WWW)
- Food & Beverage (F&B)
- Mining, Minerals, Metals (MMM)
- Oil & Gas (O&G)

Modicon X80 I/O platform

Product compatibility according to the network architecture

1	Product type	Reference	Local rack Modicon M340	EIO Quantum drop with Modicon X80 EIO drop with CRA drop adaptor type
			Single-rack or multi-rack	"standard" BMXCRA31200 "performance" BMXCRA31210
Racks	X-bus	BMXXBE1000/BMXXBE1000H		
		BMXXBE2005		
		BMXXBP0400/BMXXBP0400H		
		BMXXBP0600/BMXXBP0600H		
		BMXXBP0800/BMXXBP0800H		
		BMXXBP1200		
		BMXXEM010		
	Ethernet + X-bus	BMEXBP0400/BMEXBP0400H		
		BMEXBP0800/BMEXBP0800H		
		BMEXBP1200/BMEXBP1200H		
	Power supply modules	BMXCPS2000		
		BMXCPS2010		
		BMXCPS3020/BMXCPS3020H		
		BMXCPS3500/BMXCPS3500H		
		BMXCPS3540T		
I/Os	Analog	BMXAMI0410/BMXAMI0410H		
		BMXAMI0800		
		BMXAMI0810/BMXAMI0810H		
		BMXAMM0600/BMXAMM0600H		
		BMXAMO0210/BMXAMO0210H		
		BMXAMO0410/BMXAMO0410H		
		BMXAMO0802		
		BMXART0414/BMXART0414H		
		BMXART0814/BMXART0814H		
		BMXDAI0805		
		BMXDAI1602/BMXDAI1602H		
		BMXDAI1603/BMXDAI1603H		
		BMXDAI1604/BMXDAI1604H		
		BMXDAI0814		
	Discrete	BMXDAO1605/BMXDAO1605H		
		BMXDDI1602/BMXDDI1602H		
		BMXDDI1603/BMXDDI1603H		
		BMXDDI1604T		
		BMXDDI3202K		
	HART	BMXDDI6402K		
		BMXDDM16022/BMXDDM16022H		
		BMXDDM16025/BMXDDM16025H		
		BMXDDM3202K		
		BMXDDO1602/BMXDDO1602H		
		BMXDDO1612/BMXDDO1612H		
		BMXDDO3202K		
		BMXDRA06402K		
		BMXDRA0804T		
		BMXDRA0805/BMXDRA0805H		
		BMXDRA1605/BMXDRA1605H		
		BMEAHI0812		
		BMEAHO0412		

Compatible Not compatible

(1) Supports only one X-bus rack extension.

Local rack Modicon M580	M580 EIO drop with X-bus BMXXBP backplane and CRA drop adaptor type	M580 EIO drop with Ethernet + X-bus BMXXBP backplane and CRA drop adaptor type	Ethernet Modbus TCP DIO drop with PRA connected to a Quantum/Premium/M580/M340 platform
X-bus BMXXBP rack	Ethernet + X-bus BMEXBP rack	"standard" BMXCRA31200 "performance" BMXCRA31210	BMECRA31210 BMXPRA0100
			




More technical information on www.schneider-electric.com

1

Product type	Reference	Local rack Modicon M340	EIO Quantum drop with Modicon X80 EIO drop with CRA drop adaptor type
		Single-rack or multi-rack	"standard" BMXCRA31200 "performance" BMXCRA31210
Application-specific modules	SSI encoder	BMXEAE0300/BMXEAE0300H	
	Counter	BMXEHC0200/BMXEHC0200H	
		BMXEHC0800/BMXEHC0800H	
	Time stamping	BMXERT1604T	
	PTO (Pulse Train Output)	BMXMSP0200	
	Weighing	PMESWT0100	
Communication modules	Ethernet	BMXNOC0401	
		BMENOC03+1	
		BMXNOE0100/BMXNOE0100H	
		BMXNOE0110/BMXNOE0110H	
	Serial link	BMXNOM0200/BMXNOM0200H	
	RTU	BMXNOR0200H	
	AS-Interface	BMXEIA0100	
	Optical fibre	BMXNRP0200	
		BMXNRP0201	
	Wi-Fi	PMXNOW0300	
Communication heads		BMXCRA31200	
		BMXCRA31210/BMXCRA31210C	
		BMECRA31210/BMECRA31210C	
		BMXPRA0100	
CPU	M340	BMXP341000/BMXP341000H	
		BMXP342000	
		BMXP342010	
		BMXP3420102	
		BMXP342020H	
		BMXP3420302/BMXP3420302H	
	M580	BMEP581020/BMEP581020H	
		BMEP582020/BMEP582020H	
		BMEP582040/BMEP582040H	
		BMEP583020	
		BMEP583040	
		BMEP584020	
		BMEP584040	

Compatible

Not compatible

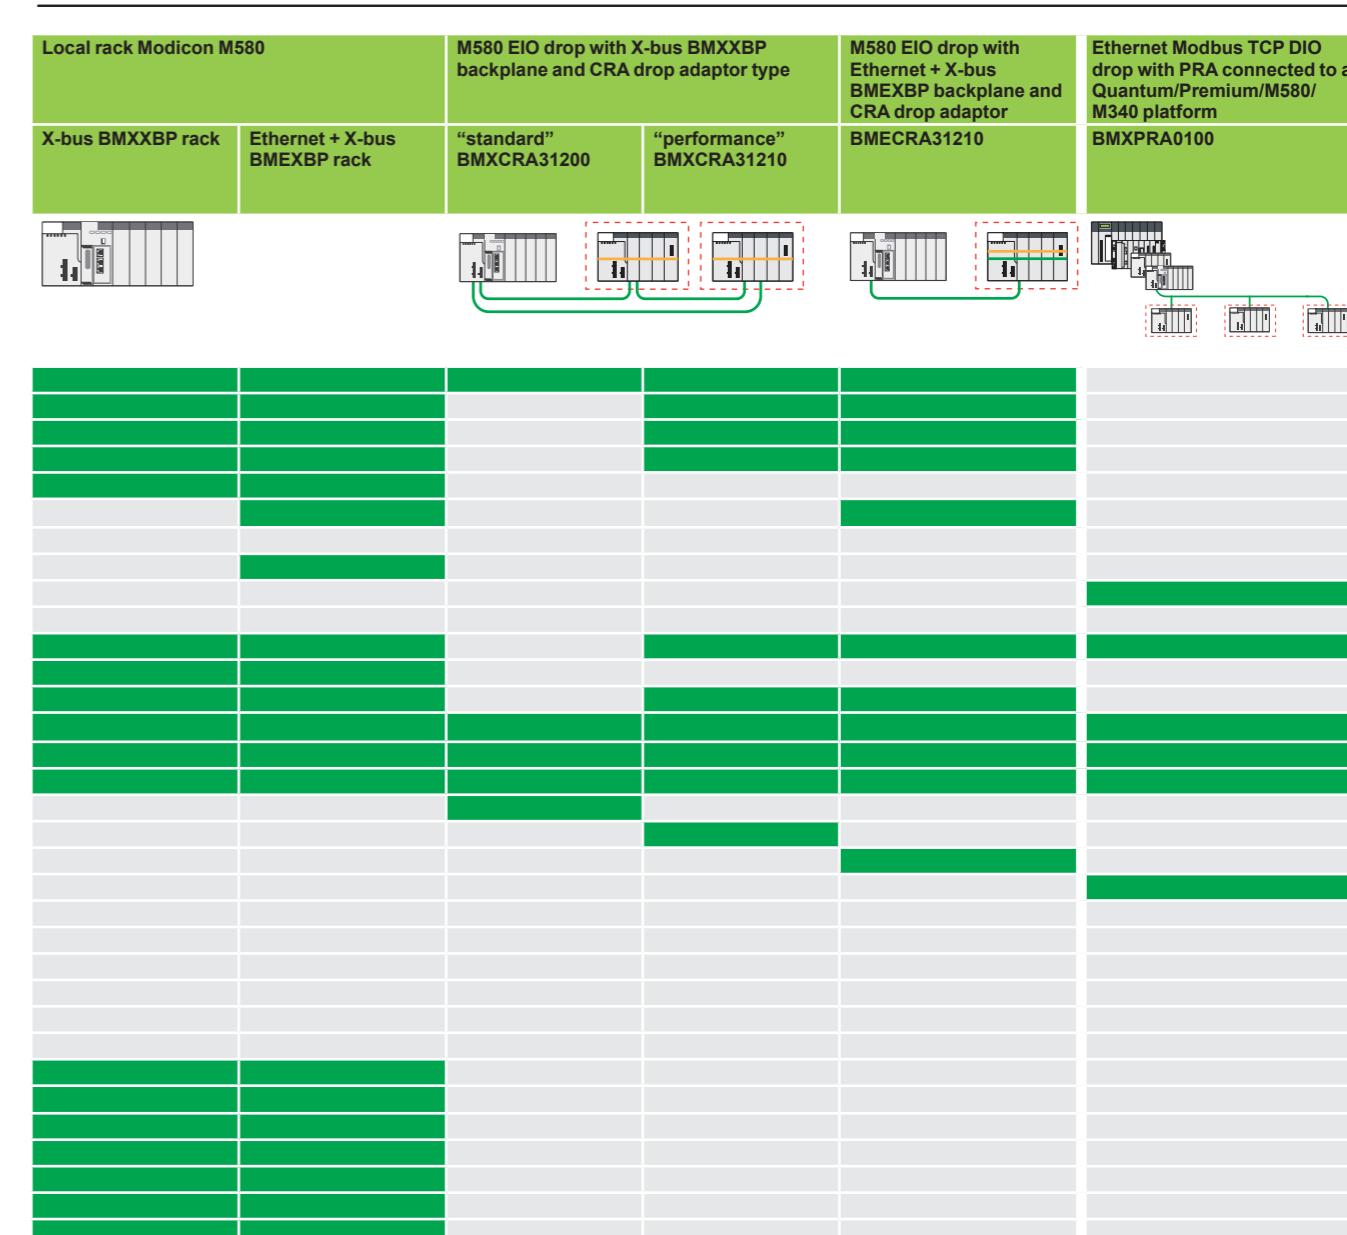

Single-rack configuration

- Presentation, description, function page 2/2
- References page 2/4

Multi-rack configuration

- Presentation, description page 2/6
- References page 2/8

Power supply modules

- Presentation, description, function page 2/10
- References page 2/11

Presentation

The Modicon X80 I/O platform is compatible with two types of backplanes: dual Ethernet and X-bus backplanes or X-bus backplanes (1). One Ethernet switch is embedded inside the backplane with connectivity to some slots on the backplane, and not all slots have Ethernet connectivity.

The X-bus functionality is preserved and conforms to the legacy implementation and specification. The X-bus will be used in a subset of modules on the Ethernet backplane.

The backplanes provide power supply for the modules in the rack.

BMXXBP●●00 racks are basic elements in Modicon X80 I/O platform single-rack and multi-rack configurations. They provide a rack number to X-bus slots. They also perform the following functions:

- Mechanical function: they are used to install modules in a PLC station (power supply, processor, discrete, analog and application-specific I/O). These racks can be mounted on a panel, plate or DIN rail:
 - Inside enclosures
 - On machine frames, etc.
- Electrical function: the racks incorporate X-bus (proprietary bus). They are used to:
 - Distribute the power supplies required for each module in the same rack
 - Distribute data and service signals for the entire PLC station
 - Hot swap modules during operation

BMEXBP●●00 provide the following services to X-bus slots:

- Provide rack number
- Provide interconnection to the slots in main and extended backplanes

The Ethernet interface is the main communication medium in the Ethernet backplane. The Ethernet modules on the Ethernet backplane are attached to one of several ports. The modules lead to the Ethernet switch chip embedded inside the Ethernet backplane.

The Ethernet backplane provides the following services to ETH slots:


- Provide ETH connection to ETH slots
- Provide point-to-point lane connection

Description

X-bus backplanes


BMXXBP●●00 racks are available in 4, 6, 8 or 12-slot versions and comprise:

- 1 A metal frame that performs the following functions:
 - Holds the X-bus electronic card and helps it withstand EMI and ESD type interference
 - Holds the modules
 - Gives the rack mechanical rigidity
- 2 An earth terminal for earthing the rack
- 3 4 holes (big enough for M6 screws) for mounting the rack on a frame
- 4 2 fixing points for the shielding connection bar
- 5 Tapped holes to take the locking screw on each module
- 6 A connector for a rack expansion module, marked **XBE**
- 7 40-way female ½ DIN connectors forming the electrical connection between the rack and each module, marked **CPS, 00...11** (the rack is delivered with each connector protected by a cover which needs to be removed before inserting the module)
- 8 Slots for anchoring the module pins

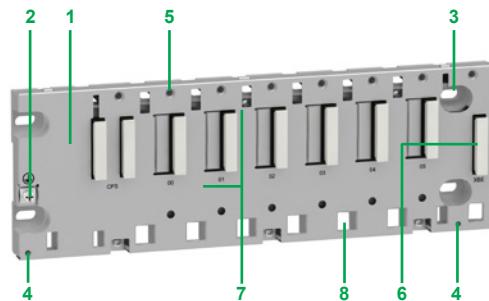

BMXXBP0600 rack with 6 slots

(1) Mandatory PV02 or later version.




BMEXBP0400 backplane

Description (continued)**Dual Ethernet and X-bus backplanes**

The quantity of X-bus and Ethernet slots found on a backplane depends on the backplane size.

The **BMEXBP0400/BMEXBP0800** are 4/8-slot dual Ethernet and X-bus backplanes with:


- 1 CPS slot for power supply
- 2 4 slots (**BMEXBP0400**) / 8 slots (**BMEXBP0800**) with:
- 2a 4/8 Ethernet and X-bus connectors for mixed modules
- 3 Extension: 1 connector for a X-bus backplane expansion
- 4 2 fixing points for the shielding connection bar
- 5 Protective earth screw
- 6 Slots for anchoring the module pin
- 7 Tapped holes for the locking screw on each module
- 8 4 holes for M4, M5, M6 or UNC #6-32 screws (from 4.32 mm to 6.35 mm/0.170 to 0.250 in.)
- 9 Rack fastened to 35 mm/1.38 in. wide and 15 mm/0.59 in. deep DIN rails.
Mounting on a 35 mm/1.38 in. wide and 7.5 mm/0.295 in. deep DIN rail is possible (in this case, the product withstands less mechanical stress).

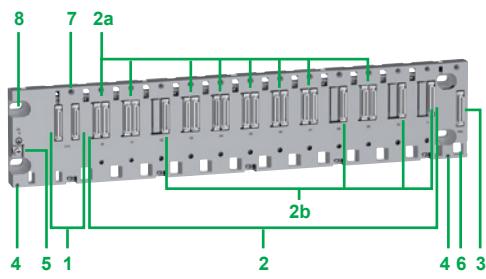

BMEXBP1200 backplane

The **BMEXBP1200** is a 12-slot dual Ethernet and X-bus backplane with:

- 1 CPS slot for power supply
- 2 12 slots with:
- 2a 8 Ethernet and X-bus connectors for mixed modules
- 2b 4 X-bus connectors for X-bus modules
- 3 Extension: 1 connector for an X-bus backplane expansion
- 4 2 fixing points for the shielding connection bar
- 5 Protective earth screw
- 6 Slots for anchoring the module pin
- 7 Tapped holes for the locking screw on each module
- 8 4 holes for M4, M5, M6 or UNC #6-32 screws (from 4.32 mm to 6.35 mm/0.170 to 0.250 in.)

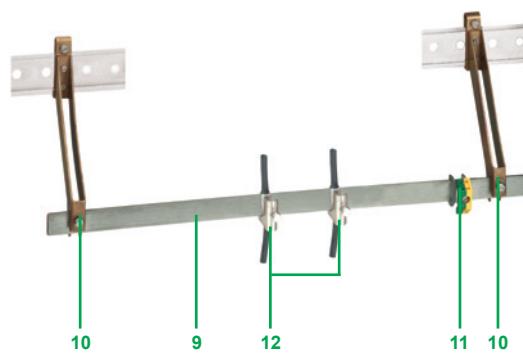

BMXXSP●00 cable shielding connection kit

To be ordered separately:

A **BMXXSP●00** cable shielding connection kit, used to protect against electrostatic discharge when connecting the shielding on cordsets for connecting:

- Analog, counter and motion control modules
- A Magelis XBT operator interface to the processor (via **BMXXCAUSBH0●0** shielded USB cable)

The **BMXXSP●00** shielding system comprises:

- 9 A metal bar that takes the clamping rings and the earthing terminal
- 10 Two sub-bases to be mounted on the rack
- 11 An earthing terminal (not included)
- 12 Not included in the shielding connection kit, the **STBXSP30●0** clamping rings (sold in lots of 10, cross-section 1.5...6 mm²/16...10 AWG or 5...11 mm²/10...7 AWG)




BMXXBP0400



BMXXBP0600



BMXXBP0800




BMXXBP1200

X-bus racks


Description	Type of module to be inserted	No. of slots (1)	Power consumption (2)	Reference	Weight kg/lb
X-bus racks	BMXCPS power supply, BMXP34 or BMEP58 processor, I/O modules, communication modules and application-specific modules (counter, motion control and serial)	4	1 W	BMXXBP0400	0.630/ 1.389
		6	1.5 W	BMXXBP0600	0.790/ 1.742
		8	2 W	BMXXBP0800	0.950/ 2.094
		12	—	BMXXBP1200	1.270/ 2.780



BMEXBP0400



BMEXBP0800



BMEXBP1200

Ethernet + X-bus racks (3) (4)

Description (5)	Type of module to be inserted	Ethernet connectors	X-bus connectors	Power consumption (6)	Reference (3)	Weight kg/lb
4-slot Ethernet + X-bus backplane	BMXCPS power supply, BMEP58 processor, I/O modules, communication modules and application-specific modules (counter, motion control and serial)	4	4	2.8 W	BMEXBP0400	0.719/ 1.500
8-slot Ethernet + X-bus backplane		8	8	3.9 W	BMEXBP0800	1.064/ 2.350
12-slot backplane (8 Ethernet + X-bus/4 X-bus)		8	12	3.9 W	BMEXBP1200	1.398/ 3.080

(1) Number of slots taking the processor module, I/O modules, communication modules and application-specific modules (excluding power supply module).

(2) Power consumption of anti-condensation resistor(s).

(3) In an M580 architecture, Ethernet backplanes can be used for RIO drop Ethernet (EIO) but not as expansion racks anywhere. For expansion racks, it is necessary to use BMXXBP0400/0600/0800/1200 racks.

(4) For multi-rack configuration, see page 2/6.


(5) Number of slots for maximum number of modules excluding power supply rack expansion modules.

(6) Power consumption of anti-condensation resistor(s).



Accessories			
Description	For use with	Reference	Weight kg/lb
Shielding connection kits comprising: - 1 metal bar - 2 support sub-bases	BM•XBP0400 rack	BMXXSP0400	0.280/ 0.617
	BMXXBP0600 rack	BMXXSP0600	0.310/ 0.683
	BM•XBP0800 rack	BMXXSP0800	0.340/ 0.750
	BM•XBP1200 rack	BMXXSP1200	0.400/ 0.882
Spring clamping rings <small>Sold in lots of 10</small>	Cables, cross-section 1.5...6 mm ² /16...10 AWG	STBXSP3010	0.050/ 0.110
	Cables, cross-section 5...11 mm ² /10...7 AWG	STBXSP3020	0.070/ 0.154
Protective covers (replacement parts) <small>Sold in lots of 5</small>	Unoccupied slots on BMXXBP••00 rack	BMXXEM010	0.005/ 0.011

(1) The earthing terminal is not included in the shielding connection kits.

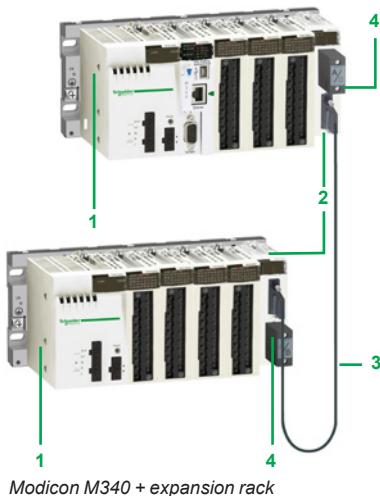

Modicon M340 + expansion rack

Composition of a multi-rack configuration

Multi-rack configurations are made up of **BMXP●●●●●** racks. They comprise:

- 2 racks maximum for a station with **BMXP341000** processor
- 4 racks maximum for a station with **BMXP3420●●●** or **BMXP3420●●●CL** processor
- 4 racks maximum for a station with **BMEP581020** or **BMEP5820●●0** processor
- 8 racks maximum for a station with **BMEP5830●●0** or **BMEP5840●●0** processor

Each rack is equipped with:

- 1 A **BMXCP●●●●●** power supply
- 2 A **BMXXBE1000** rack expansion module This module, inserted in the right-hand end of the rack (XBE slot, see page 2/2) does not occupy rack slots **00...11** (4, 6, 8 or 12 slots are still available)
- 3 The **BMXXBE1000** rack expansion modules are connected to each other by X-bus cordsets

X-bus

The racks, distributed on the X-bus, are connected to each other by X-bus extension cordsets **3** with a total length of **30 m/98.42 ft** maximum.

The racks are connected in a daisy chain using **BMXXBC●●0K** (1) X-bus extension cordsets connected to the two 9-way SUB-D connectors **7** and **8** on the front panels of the **BMXXBE1000** rack expansion modules **2**.

Line terminators **4**

Both expansion modules at the ends of the daisy chain must have a line terminator **4 TSXTLYEX** on the unused 9-way SUB-D connector.

Note: The processor module is always positioned in the rack at address 0. However, in an X-bus daisy chain, the order of the racks has no effect on operation. For example, the order of the daisy chain can be 0-1-2-3, 2-0-3-1 or 3-1-2-0, etc.

Composition of an expansion backplane configuration

The Modicon M580 CPU supports from 4 to 8 local racks (depending upon the CPU performance level), using existing X80 I/O modules and accessories. The Modicon M580 CPU can be installed in the first rack (#0) and this can be a dual bus rack. The M580 PLC will support up to 7 **BMXXBP●●●●** PV02 or higher backplanes (racks) of 4, 6, 8 or 12 slots. The main backplane (rack #0) will support the CPU.

To extend the configuration using additional racks, users can use a bus extender module (**BMXXBE1000**) and X-bus cables. The backplane extender should be plugged to the dedicated connector on the right side of the backplane. It will not occupy any module slot. The XBE extender module will not be hot-swappable, like the rest of the X80 I/O platform. Each backplane has to include a power supply module and will support up to 12 modules.

An expansion rack can be connected on: the main backplane and the X80 drop (EIO).

The rack's address is assigned as follows:

- Each rack will be assigned a physical address using 4 micro switches located in the bus extender module
- The main rack containing the CPU will be assigned the address 0
- The other racks will be assigned addresses 1 to 7

Each rack is equipped with:


- 1 A **BMXCP●●●●●** power supply
- 2 A **BMXXBE1000** rack expansion module. This module, inserted in the right-hand end of the rack (XBE slot) does not occupy rack slots **00...11** (4, 6, 8 or 12 slots are still available)
- 3 The **BMXXBE1000** rack expansion modules are connected to each other by X-bus cordsets

4 Line terminators: Both expansion modules at the ends of the daisy chain must have a line terminator **4 TSXTLYEX** on the unused 9-way SUB-D connector.

(1) **BMXXBC●●0K** extension cordsets, length 0.8 m/2.62 ft, 1.5 m/4.92 ft, 3 m/9.84 ft, 5 m/16.40 ft or 12 m/39.37 ft, with angled connectors or **TSXCBY●08K** extension cordsets, length 1 m/3.28 ft, 3 m/9.84 ft, 5 m/16.40 ft, 12 m/39.37 ft, 18 m/59.05 ft or 28 m/91.86 ft, with straight connectors.



Modicon M580 + expansion rack

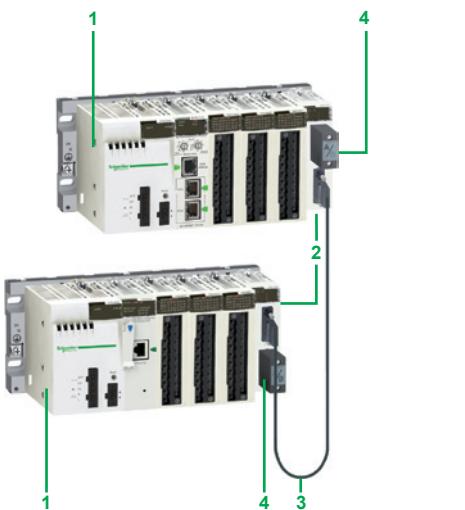

Modicon X80 drop + expansion rack

Ethernet racks

The Modicon M580 CPU supports dual bus backplanes (Ethernet and X-bus), and the processors support Ethernet ring or star architecture on their Ethernet port.

BMEP58●●2● supports Ethernet star or ring architectures (RSTP loop is supported on ports 2 and 3). The embedded scanner allows scanning distributed equipments. The CPU directly drives these devices ("NOC" embedded function).

BMEP58●●4● supports an embedded scanner that allows scanning X80 drops on Ethernet RIO (EIO) and distributed equipment.

Modicon M580 CPUs have an additional third Ethernet port dedicated to the connection of a service tool such as a PC, an HMI, a network analyser. This port is labeled "ETH 1". It does not support RSTP.

The Modicon M580 CPU will be able to communicate on the main Ethernet backplane. The M580 CPU cannot be installed in an expansion rack.

It is necessary to use an Ethernet backplane:

Reference	Description
BMEXBP0400	Standard 4-slot backplane
BMEXBP0800	Standard 8-slot backplane
BMEXBP1200	Standard 12-slot backplane
BMEXBP0400H	Ruggedized 4-slot backplane
BMEXBP0800H	Ruggedized 8-slot backplane
BMEXBP1200H	Ruggedized 12-slot backplane

Premium X-bus extension: making migration as simple as possible

The Modicon M580 CPU supports revamping of an existing Premium installation by replacing the Premium rack 0 (CPU and communication modules) with an M580 rack, it is also possible to combine Premium racks **TSXRKY4EX/6EX/8EX/12EX** with X80

I/O based on an X-bus rack. The majority of existing configurations are supported. The number of expanded racks allowed depends on which CPU is being used:

- The **BMEP581020**, **BMEP582020**, and **BMEP582040** CPUs support a main local rack and up to 3 expansion racks. If you are using 4, 6, or 8-slot Premium expansion racks, you can install 2 physical racks at each assigned rack address, allowing up to 6 Premium expansion racks (up to 6 backplanes and 100 m/328.083 ft. between 2 drops).

- The **BMEP583020**, **BMEP583040**, **BMEP584020**, and **BMEP584040** CPUs support a main local rack with up to 7 expansion racks. If you are using 4, 6, or 8-slot Premium expansion racks, you can install 2 physical racks at each assigned rack address, allowing up to 14 Premium expansion racks.

The maximum number of supported X-bus drops is as follows:

- 4 for **BMEP581●●2●●**
- 8 for **BMEP583●●4●●**

The maximum number of X-bus drops is calculated as follows:

- Max number = 1 (CPU rack: **BMXXBP●●00** or **BMEXBP●●00**)
- + $\frac{1}{2}$ Nb. **TSXRKY4/6/8EX** racks + Nb. **TSXRKY12EX** racks + Nb. **BMXXBP●●00** racks

Description

The front panel of the **BMXXBE1000** rack expansion module comprises:


- 5 A screw for locking the module in its slot (at the far right-hand end of the rack)
- 6 A display block with 5 LEDs:
 - RUN LED (green): module running
 - COL LED (red): several racks have the same address, or rack address 0 does not contain the **BMXP34●●0** or **BMXP58●●0** processor module
 - LEDs 0, 1, 2 and 3 (green): rack address 0, 1, 2 or 3
- 7 A 9-way female SUB-D connector, marked X-bus, for the incoming X-bus cordset
 - 3 connected to the upstream rack, or if it is the first rack, for the **A**/line terminator included in the **TSXTLYEX 4** pack
- 8 A 9-way female SUB-D connector, marked X-bus, for the outgoing X-bus cordset
 - 3 to the downstream rack, or if it is the last rack, for the **B**/line terminator included in the **TSXTLYEX 4** pack

On the right-hand side panel


A flap for accessing the 3 rack addressing micro-switches: 0...3.

Installation rules for BM●XB●●● racks

Rules for installing racks in enclosures (see our website www.schneider-electric.com).

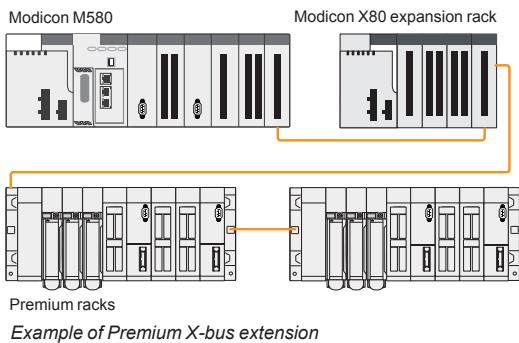

Example of Premium X-bus extension

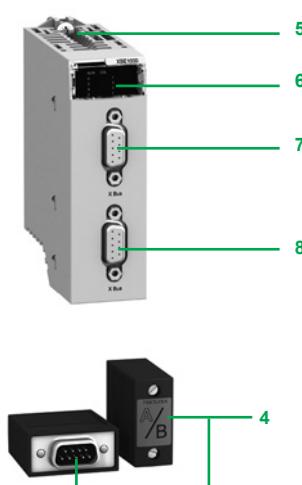



BMXXBE1000



BMXXBC•••K

Rack expansion

Description	Use	Reference	Weight kg/lb
Modicon X80 I/O rack expansion module	Standard module for mounting in each rack (XBE slot) and used to interconnect: - Up to 2 racks with BMXP341000 processor module - Up to 4 racks with BMXP342•••• processor module - Up to 3 racks with BMEP581020/20•••• processor module - Up to 7 racks with BMEP5830••/40•• processor module - 1 rack with X80 drop (EIO)	BMXXBE1000	0.178/ 0.392
Modicon X80 I/O rack expansion kit	Complete kit for 2-rack configuration comprising: - 2 BMXXBE1000 rack expansion modules - 1 BMXXBC008K extension cordset, length 0.8 m/2.62 ft - 1 TSXTLYEX line terminator (set of 2)	BMXXBE2005	0.700/ 1.543

Cordsets and connection accessories

Description	Use	Composition	Type of connector	Length m/ft	Reference	Weight kg/lb
X-bus extension cordsets total length 30 m/98.42 ft max.	Between 2 BMXXBE1000 rack expansion modules	2 x 9-way SUB-D connectors	Angled	0.8/ 2.62 1.5/ 4.92 3/ 9.84 5/ 16.40 12/ 39.37	BMXXBC008K BMXXBC015K BMXXBC030K BMXXBC050K BMXXBC120K	0.165/ 0.363 0.250/ 0.551 0.420/ 0.926 0.650/ 1.433 1.440/ 3.175
			Straight	1/ 3.28 3/ 9.84 5/ 16.40 12/ 39.37 18/ 59.05 28/ 91.86	TSXCBY010K TSXCBY030K TSXCBY050K TSXCBY120K TSXCBY180K TSXCBY280KT	0.160/ 0.353 0.260/ 0.573 0.360/ 0.794 1.260/ 2.778 1.860/ 4.101 2.860/ (1) 6.305
Cable reel	Length of cable to be fitted with TSXCBYK9 connectors	Cable with ends with flying leads, 2 line testers	-	100/ 328.08	TSXCBY1000	12.320/ 27.161

(1) Cable supplied with a set of 2 TSXTVSY100 electrical transient suppressors.



TSXTLYEX

Cordsets and connection accessories (continued)					
Description	Use	Composition	Sold in lots of	Reference	Weight kg/lb
Line terminators	Required on both BMXXBP●●●0 modules located at either end of the daisy chain	2 x 9-way SUB-D connectors marked A and /B	2	TSXTLYEX	0.050/0.110
X-bus straight connectors	For TSXCBY1000 cables	2 x 9-way SUB-D straight connectors	2	TSXCBYK9	0.080/0.176
Connector assembly kit	Fitting TSXCBYK9 connectors	2 crimping pliers, 1 pen (1)	-	TSXCBYACC10	-


(1) To fit the connectors on the cable, you also need a wire stripper, a pair of scissors and a digital ohmmeter.

Presentation

BMXCPS•••• power supply modules provide the power supply for each **BMEXBP••00** or **BMXXBP••00** Modicon X80 I/O rack and the modules installed on it.

The Modicon X80 I/O power supply module offer comprises:

- Three power supply modules for DC line supplies:
 - 24 V \equiv isolated power supply module, **BMXCPS2010**
 - 24...48 V \equiv isolated power supply module, **BMXCPS3020**
 - 125 V \equiv power supply module, **BMXCPS3540T** (extended operating temperature -25 to +70 °C/-13 to +158 °F)
- Two power supply modules for AC line supplies:
 - 100...240 V \sim , 20 W power supply module, **BMXCPS2000**
 - 100...240 V \sim , 36 W power supply module, **BMXCPS3500**

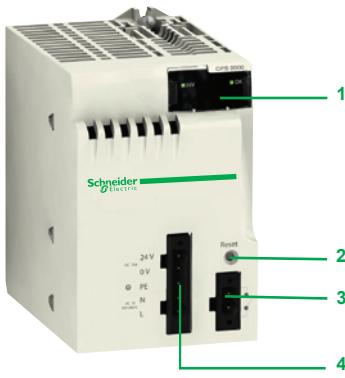

Description

The power supply module is selected according to:

- The electrical line supply: 24 V \equiv , 48 V \equiv , 125 V \equiv , or 100...240 V \sim
- The required power (see the power consumption table available on our website www.schneider-electric.com) (1)

BMXCPS•••• power supply modules have the following on the front panel:

- 1 A display block comprising:
 - OK LED (green), lit if rack voltages are present and correct
 - 24 V LED (green), lit when the sensor voltage is present (BMXCPS2000/3500/3540T AC power supply modules only)
- 2 A pencil-point RESET pushbutton for a cold restart of the application
- 3 A 2-way connector that can take a removable terminal block (cage clamp or spring-type) for connecting the alarm relay
- 4 A 5-way connector that can take a removable terminal block (cage clamp or spring-type) for connecting the following:
 - \equiv or \sim line supply
 - Protective earth ground
 - Dedicated 24 V \equiv power supply for the input sensors (for BMXCPS2000/3500/3540T AC power supply modules only)

Included with each power supply module:

- Set of two cage clamp removable terminal blocks (5-way and 2-way)
BMXXTSCPS10

To be ordered separately (if necessary):

- Set of two spring-type removable terminal blocks (5-way and 2-way)
BMXXTSCPS20

Functions

Alarm relay

The alarm relay incorporated in each power supply module has a volt-free contact accessible on the front panel, on the 2-way connector.

The operating principle is as follows:

In normal operation, with the PLC in RUN, the alarm relay is energized and its contact is closed (state 1).

The relay de-energizes and its associated contact opens (state 0) whenever the application stops, even partially, due to any of the following:

- Occurrence of a detected blocking fault
- Incorrect rack output voltages
- Loss of supply voltage

(1) This power consumption calculation for the rack can also be performed by the Unity Pro programming software.

Functions (continued)

RESET pushbutton

The power supply module in each rack has a RESET button on the front panel which, when pressed, triggers an initialization sequence on the processor and the modules in the rack it supplies.

Pressing this pushbutton triggers a sequence of service signals, which is the same as that for:

- A power break, when the pushbutton is pressed
- A power-up, when the pushbutton is released

In terms of the application, these operations represent a cold start (forcing the I/O modules to state 0 and initializing the processor).

Sensor power supply

BMXCP2000/3500 AC power supply modules and **BMXCP3540T** DC power supply modules have an integrated 24 V --- supply for powering the input sensors.

Connection to this 24 V --- sensor power supply is via the 5-way connector on the front panel.

The available power depends on the power supply module (0.45 A or 0.9 A).

References

Each **BMEXP●●00** or **BMXP●●00** rack must be equipped with a power supply module. These modules are inserted in the first two slots of each rack (marked CPS).

The power required to supply each rack depends on the type and number of modules installed in the rack. It is therefore necessary to draw up a power consumption table for each rack in order to determine which **BMXCP●●●0** power supply module is the most suitable for each rack (please consult our website www.schneider-electric.com).



BMXCP2010/3020

Power supply modules (1)

Line supply	Available power (2)				Nominal current 24 V --- rack (3)	Reference	Weight kg/lb
	3.3 V --- (3)	24 V --- rack (3)	24 V --- sensors (4)	Total			
24 V --- isolated	8.3 W	16.8 W	—	16.8 W	0.7 A	BMXCP2010	0.290/ 0.639
24...48 V --- isolated	15 W	31.2 W	—	31.2 W	1.3 A	BMXCP3020	0.340/ 0.750
100...150 V ---	15 W	31.2 W	21.6 W	36 W (5)	1.3 A	BMXCP3540T	0.340/ (5) 0.750
100...240 V ---	8.3 W	16.8 W	10.8 W	20 W	0.7 A	BMXCP2000	0.300/ 0.661
	15 W	31.2 W	21.6 W	36 W	1.3 A	BMXCP3500	0.360/ 0.794



BMXCP2000/3500

Separate part

Description	Type	Composition	Reference	Weight kg/lb
Set of 2 removable connectors	Spring-type	One 5-way terminal block and one 2-way terminal block	BMXXTSCPS20	0.015/ 0.033

Replacement part

Description	Type	Composition	Reference	Weight kg/lb
Set of 2 removable connectors	Cage clamp	One 5-way terminal block and one 2-way terminal block	BMXXTSCPS10	0.020/ 0.044

(1) Include a set of 2 cage clamp removable connectors. Spring-type connectors available separately under reference **BMXXTSCPS20**.

(2) The sum of the power consumed on each voltage (3.3 V --- and 24 V ---) must not exceed the total power of the module. See the power consumption table available on our website www.schneider-electric.com.

(3) 3.3 V --- and 24 V --- rack voltages for powering modules in the Modicon X80 I/O rack.

(4) 24 V --- sensor voltage for powering the input sensors (voltage available via the 2-way removable connector on the front panel).

(5) Extended operating temperature -25 to +70 °C/-13 to +158 °F (with power derating at extreme temperatures: 27 W between -25 and 0 °C/-13 and 0 °F and between 60 and 70 °C/140 and 158 °F).

Discrete I/O modules*Selection guide* **page 3/2**

- Presentation, description page 3/8
- Connections page 3/9
- Functions page 3/10
- Complementary characteristics page 3/11
- References page 3/12

Analog I/O modules*Selection guide* **page 3/14**

- Presentation page 3/18
- Description page 3/19
- Connections, combinations page 3/20
- Complementary characteristics page 3/21
- References page 3/22

HART analog I/O modules*Selection guide* **page 3/24**

- Presentation, description page 3/26
- References page 3/27

BMXEHC0200/0800 counter modules

- Presentation, description page 3/28
- Functions page 3/29
- References page 3/31

BMXEAE0300 SSI encoder interface module

- Presentation, description page 3/32
- Functions, references page 3/33

BMXMSP0200 motion control module

- Presentation, description page 3/34
- Operation, references page 3/35

MFB motion control

- Presentation, functions page 3/36
- Setup page 3/37

Modicon X80 I/O platform

Discrete I/O modules

Input modules

Applications

8-channel input modules | 16-channel input modules

Connection via cage clamp, screw clamp, or spring-type removable block terminal



Type

~	~	---	
---	---	-----	--

200...240 V	100...120 V	24 V	48 V
-------------	-------------	------	------

10.4 mA (for U = 220 V to 50 Hz)	5 mA	3.5 mA	2.5 mA
-------------------------------------	------	--------	--------

8 isolated inputs and 1 common	8 isolated channels and no common point	16 isolated inputs and 1 common	
--------------------------------	---	---------------------------------	--

Via 20-way cage clamp, screw clamp, or spring-type removable terminal block
BMXFTB2000/2010/2020

Isolated inputs

IEC/EN 61131-2 conformity

Type 2	Type 3	Type 3	Type 1
--------	--------	--------	--------

Logic	–	Positive (<i>sink</i>)	
-------	---	--------------------------	--

Type of input	Capacitive	Capacitive	Current sink
---------------	------------	------------	--------------

2-wire ~	2-wire ~	2-wire ---, 3-wire --- PNP or NPN any type	
----------	----------	--	--

170...264 V	85...132 V (no sensor power monitoring)	19...30 V	38...60 V
-------------	---	-----------	-----------

Use one 0.5 A fast-blow fuse per group of channels	Use one 0.25 A fast-blow fuse per channel	Use one 0.5 A fast-blow fuse per group of channels	
--	---	--	--

4.73 W	2.35 W	2.5 W	3.6 W
--------	--------	-------	-------

0...60 °C/0...140 °F			
----------------------	--	--	--

Protection of inputs

Use one 0.5 A fast-blow fuse per group of channels	Use one 0.25 A fast-blow fuse per channel	Use one 0.5 A fast-blow fuse per group of channels	
--	---	--	--

4.73 W	2.35 W	2.5 W	3.6 W
--------	--------	-------	-------

0...60 °C/0...140 °F			
----------------------	--	--	--

Compatibility with TeSys Quickfit installation system

–			
---	--	--	--

Compatibility with Modicon Telefast ABE7 pre-wired system

Passive connection sub-bases	–		
------------------------------	---	--	--

Adapter sub-bases with relays	–		
-------------------------------	---	--	--

References

BMXDAI0805 | BMXDAI0814 | BMXDDI1602 | BMXDDI1603

Pages

3/12

16-channel input modules

Connection via cage clamp, screw clamp, or spring-type removable block terminal



Type

~ or ---	~	---
----------	---	-----

24 V (~ or ---)	48 V	100...120 V	125 V
-----------------	------	-------------	-------

3 mA (~ or ---)	5 mA	2.4 mA
-----------------	------	--------

16 isolated inputs and 1 common

Via BMXFTB2000/2010/2020 20-way cage clamp, screw clamp, or spring-type removable block terminal

Type 1 (~)

Type 3

Negative (source) (---)

Resistive

2-wire ---/~, 3-wire --- PNP or NPN any type

19...30 V ---
20...26 V ~

Use one 0.5 A fast-blow fuse per group of channels

3 W

0...60 °C/0...140 °F

–

–

BMXDAI1602 | BMXDAI1603 | BMXDAI1604 | BMXDDI1604T

3/12



More technical information on www.schneider-electric.com



More technical information on www.schneider-electric.com

Modicon X80 I/O platform

Discrete I/O modules

Input modules and mixed I/O modules

Applications		32 or 64-channel high-density input modules		16 or 32-channel mixed I/O modules	
Type	---	Voltage	24 V	Connection via cage clamp, screw clamp, or spring-type removable block terminal	Connection via 40-way connector with preassembled cordsets
Current per channel	Inputs	2.5 mA	1 mA		
	Outputs	–	–		
Modularity (Number of channels and commons)		32 isolated inputs and 2 commons	64 isolated inputs and 4 commons		
Connection		Via one 40-way connector	Via two 40-way connectors		
Isolated inputs	IEC/EN 61131-2 conformity	Type 3	Non-IEC		
	Logic	Positive (sink)			
	Type of input	Current sink			
	Sensor compatibility IEC/EN 60947-5-2	2-wire ---, 3-wire --- PNP any type	–		
Sensor power supply (ripple included)		19...30 V			
Protection of inputs		Use one 0.5 A fast-blow fuse per group of channels			
Isolated outputs	Fallback IEC/EN 61131-2 conformity	–			
	Protection	–			
	Logic	–			
Preactuator power supply (ripple included)		–			
Output fuse protection		–			
Maximum dissipated power		3.9 W	4.3 W		
Operating temperature		0...60 °C/0...140 °F			
Compatibility with TeSys Quickfit installation system		LU9 G02 splitter boxes (8 motor starters) and BMXFCC●●1●●3 preassembled cordsets. See pages 3/9 and 3/13.			
Compatibility with Modicon Telefast ABE7 pre-wired system	Passive connection sub-bases	Depending on model, 8 or 16-channel passive sub-bases, with or without LED, with common or 2 terminals per channel. See pages 6/2 and 6/8.			
	Adapter sub-bases with relays	Depending on model, active sub-bases with solid state or electromagnetic relays (fixed or removable), 16 channels, with common or 2 terminals per channel (screw or spring-type connection). See pages 6/2 and 6/8.			
References	BMXDDI3202K	BMXDDI6402K	BMXDDM16022	BMXDDM16025	BMXDDM3202K
Pages	3/12		3/13		

More technical information on www.schneider-electric.comMore technical information on www.schneider-electric.com

Modicon X80 I/O platform

Discrete I/O modules

Output modules

Applications		32 or 64-channel high-density output modules		16-channel output modules		8 or 16-channel output modules	
Connection via 40-way connectors with preassembled cordsets		Connection via cage clamp, screw clamp, or spring-type removable block terminal		Connection via cage clamp, screw clamp, or spring-type removable block terminal		Connection via cage clamp, screw clamp, or spring-type removable block terminal	
 		 					
Type		— transistor		— transistor		— triac	
Voltage		24 V		24 V		100...240 V	
Current per channel		0.1 A		0.5 A		0.6 A	
Modularity (Number of channels and commons)		32 protected outputs and 2 commons		16 protected outputs and 1 common		0.3 A (Ith)	
Connection		Via one 40-way connector		Via two 40-way connectors		24 V —, 24...240 V ~	
Isolated outputs	Fallback	Configurable output fallback, continuous monitoring of output control, and resetting of outputs in case of internal detected fault		Configurable output fallback, continuous monitoring of output control, and resetting of outputs in case of internal detected fault		Configurable output fallback	
	IEC/EN 61131-2 conformity	Yes		Yes		Yes	
	Protection	Yes		Yes		—	
	Logic	Positive		Positive (source) Negative (sink)		—	
Preactuator power supply (ripple included)		19...30 V —		19...30 V		100...240 V	
Output fuse protection		Use one 2 A fast-blow fuse per group of channels		Use one 6.3 A fast-blow fuse per group of channels		100...150 V	
Maximum dissipated power		3.6 W		4 W		19...30 V —	
Operating temperature		0...60 °C/0...140 °F		0...60 °C/0...140 °F		2.26 W	
Compatibility with TeSys Quickfit installation system		LU9 G02 splitter boxes (8 motor starters) and BMXFCC●●1/●●3 preassembled cordsets. See pages 3/9 and 3/13.		—		—	
Compatibility with Modicon Telefast ABE7 pre-wired system	Passive connection sub-bases	Depending on model, passive sub-bases with 8 or 16 channels, with or without LED, with common or with 2 terminals per channel. See pages 6/2 and 6/8.		—		3.17 W	
	Adapter sub-bases with relays	Depending on model, active sub-bases with solid state or electromagnetic relays (fixed or removable). 16 channels with 1 common or 2 terminals per channel, screw or spring-type connection. See pages 6/2 and 6/8.		—		2.7 W	
References		BMXDDO3202K		BMXDDO6402K		BMXDDO1602	
Pages		3/12		3/12		3/12	

More technical information on www.schneider-electric.comMore technical information on www.schneider-electric.com

Presentation

Discrete I/O modules in the Modicon X80 I/O offer are standard modules occupying a single slot on the rack. These modules are equipped with either of the following:

- A connector for a screw or spring-type 20-way removable terminal block
- One or two 40-way connectors

This wide range of "discrete" I/O can be used to meet whatever requirements arise in terms of:

- Functions, AC or DC I/O, positive or negative logic
- Modularity, 8, 16, 32 or 64 channels per module


The inputs receive signals from the sensors and perform the following functions:

- Acquisition
- Adaptation
- Electrical isolation
- Filtering
- Protection against interference signals

The outputs memorize commands issued by the processor to enable control of the preactuators via the decoupling and amplification circuits.

Description

BMXD•I/D•O/DRA discrete I/O modules are standard format (1 slot). They have an IP 20 case to protect the electronics, and are locked into position with a captive screw.

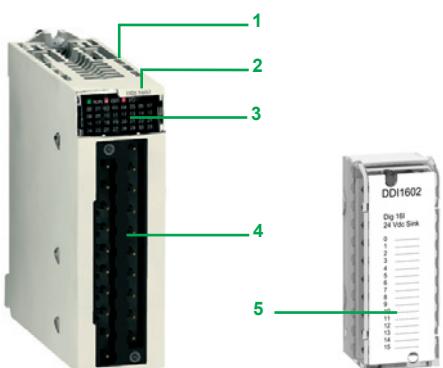


Module for connection via 20-way removable terminal block

I/O modules connected via 20-way removable terminal block

- 1 Rigid body providing support and protection for the electronic card
- 2 Module reference marking (a label is also visible on the right-hand side of the module)
- 3 Channel status display block
- 4 Connector taking the 20-way removable terminal block for connection of sensors or preactuators

To be ordered separately:

- 5 A **BMXFTB20•0** 20-way removable terminal block (identification label supplied with each I/O module) or a preassembled cordset with a 20-way removable terminal block at one end and flying leads at the other (see page 3/9).

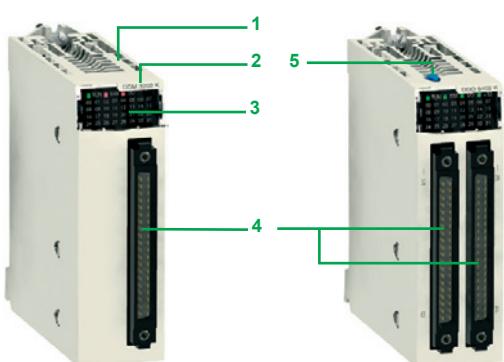

32 and 64-channel modules for connection via one or two 40-way connector(s)


I/O modules connected via 40-way connector(s)

- 1 Rigid body providing support and protection for the electronic card
- 2 Module reference marking (a label is also visible on the right-hand side of the module)
- 3 Channel status display block
- 4 One or two 40-way connectors (32 or 64 channels) (1) for connection of sensors or preactuators
- 5 With the 64-channel module, a pushbutton which, with successive presses, displays the state of channels 0...31 or 32...63 on the display block 3 (see page 3/10)


To be ordered separately, depending on the type of module:

One or two preassembled cordset(s) with a 40-way connector (see page 3/9)


(1) Fujitsu FCN 40-way connector

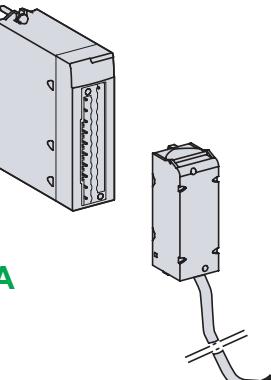**A**


Preassembled cordset with
20-way removable terminal block at one end and
flying leads at the other

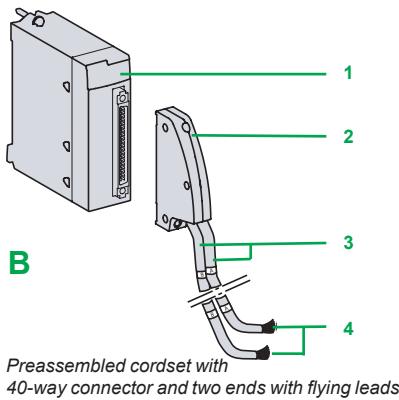**B**

Preassembled cordset with
40-way connector and two ends with flying leads

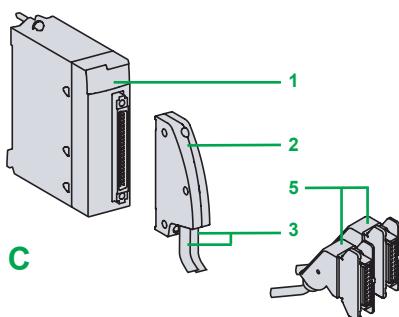

Preassembled cordset with
40-way connectors and HE10 connectors for
Modicon Telefast ABE7 system

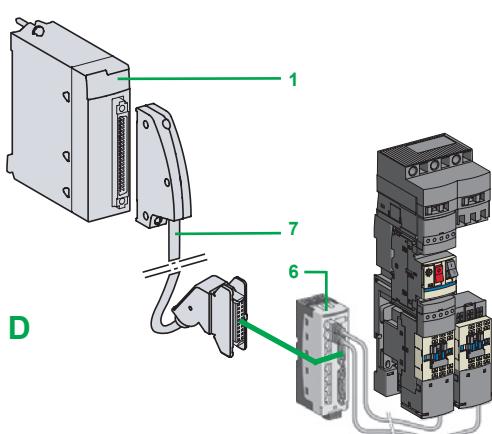

Example of connection to the TeSys Quickfit installation help
system

Connecting modules with removable terminal blocks

There are three types of 20-way removable terminal block:

- Screw clamp terminal block
 - Cage clamp terminal block
 - Spring-type terminal block
- Each removable terminal block can take:
- Bare wires
 - Wires equipped with **DZ5CE** cable ends

A: One version of the removable terminal block is equipped with 3, 5 or 10 m cordsets with color-coded flying leads (**BMXFTW●●1**). Use limited to voltages of ≤ 48 V.

Cage clamp terminal blocks

The capacity of each terminal is:

- Minimum: One 0.34 mm^2 wire (AWG 22)
- Maximum: One 1 mm^2 wire (AWG 18)

BMXFTB2000 cage clamp connectors are equipped with captive screws (maximum tightening torque $0.5\text{ N.m}/0.37\text{ lb-ft}$).

Screw clamp terminal blocks

The capacity of each terminal is:

- Minimum: One or two 0.34 mm^2 wires (AWG 22)
- Maximum: Two 1.5 mm^2 wires (AWG 15)

BMXFTB2010 screw clamp connectors are equipped with captive screws (maximum tightening torque $0.5\text{ N.m}/0.37\text{ lb-ft}$).

Spring terminals

The capacity of each terminal in the **BMXFTB2020** spring-type terminal blocks is:

- Minimum: One 0.34 mm^2 wire (AWG 22)
- Maximum: One 1 mm^2 wire (AWG 18)

Connecting modules with 40-way connectors

Preassembled cordsets with 40-way connector at one end and flying leads at the other

B: Preassembled cordsets can be used for easy direct wire-to-wire connection between the I/O of modules with 40-way connectors **1** and the sensors, preactuators or intermediate terminal blocks.

These preassembled cordsets comprise:

- At one end, a 40-way connector **2** with either of the following:
 - One sheath containing 20 wires with a cross-section of 0.34 mm^2 (AWG 22) (**BMXFCW●●1**)
 - Two sheaths **3**, each containing 20 wires with a cross-section of 0.34 mm^2 (AWG 22) (**BMXFCW●●3**)
- At the other end, color-coded flying leads **4** conforming to standard DIN47100.

Preassembled cordsets with 40-way connector and HE 10 connector(s)

C: Two types of cordset can be used for connecting the I/O of modules **1** with 40-way connectors to Modicon Telefast ABE7 rapid wiring connection and adaptation interfaces, (see page 6/8).

These preassembled cordsets comprise:

- At one end, a 40-way connector **2** with either of the following:
 - One sheath containing 20 wires (**BMXFCC●●1**)
 - Two sheaths **3** each containing 20 wires (**BMXFCC●●3**)
- At the other end, one or two HE 10 connectors **5**.

Connection to TeSys Quickfit system

D: **1 BMXDDI3202K/6402K** input modules, **BMXDDO3202K/6402K** output modules and **BMXDDM3202K** mixed I/O modules with 40-way connectors are designed, amongst other things, for use in conjunction with the TeSys Quickfit mounting system via the **LUG02 splitter module** **6** (for 8 motor starters).

The splitter modules are easily connected using **7 BMXFCC●●1/●●3** preassembled cordsets.

Functions (1)

The discrete I/O modules provide the following functions:

- **Hot swapping:** Due to their special integrated devices, I/O modules (including application-specific modules) can be removed or added while the power is on.
- **I/O assignment:** The channels of discrete I/O modules are grouped into blocks of 4, 8 or 16 consecutive channels depending on the type of module. Each group of channels can be assigned to a specific application task, namely master or fast.
- **Protection of DC inputs:** The 24 V --- and 48 V --- inputs are constant-current type. This characteristic limits the current consumed at the inputs.
- **Protection of DC outputs:** Active transistor outputs can withstand overloads, short-circuits, reverse polarity and inductive over-voltage.
- **Reactivation of DC outputs:** If a line fault has caused an output to trip, the output can be reactivated using this parameter if no other terminal line fault is present. Reactivation is controlled by means of a group of 8 channels. It can be programmed or automatic.
- **RUN/STOP command:** An input can be configured to control the RUN/STOP changeover for the PLC.
- **Output fallback:** This parameter defines the fallback mode used by the DC transistor outputs when the PLC stops. It can assume the "fallback" value at state 0 or state 1 for the corresponding group of 8 channels or the "maintain" value representing the state of the outputs before the PLC stops.
- **I/O module diagnostics:** Each discrete I/O module is equipped with a display block on the front panel centralizing the information necessary for module control, diagnostics and maintenance.

Diagnostics via Unity Pro:

Using the integrated diagnostics in Unity Pro, local diagnostics on the module front panel is complemented by system diagnostics based on predefined screens at global hardware configuration level, module level and channel level.

Remote diagnostics using a web browser on a "Thin Client" PC:

In addition, the diagnostics described above can be performed remotely using a simple web browser thanks to the standard web server integrated in the Modicon X80 I/O platform (processor with integrated Ethernet port or Ethernet module), using the "ready-to-use" Rack Viewer function.

- **Compatibility with 2-wire and 3-wire sensors:** The discrete input modules can be used in conjunction with OsiSense XS inductive proximity sensors (for compatibility, see page 7/4) and with OsiSense XU photo-electric sensors (for compatibility, see page 7/2).

(1) For further information, please consult our website at www.schneider-electric.com.

Run	Err	I/O		+32			
0	1	2	3	4	5	6	7
8	9	10	11	12	13	14	15
16	17	18	19	20	21	22	23
24	25	26	27	28	29	30	31

Display block for module BMXDDO6402K

Complementary characteristics

The following characteristics complement those introduced in the selection guide on pages 3/2 to 3/7.

DC input modules BMXDDI16••/1604T/3202K/6402K and BMXDAI1602

- Input impedance at nominal voltage: 6.4 to 19.2 kΩ, depending on model
- Reverse polarity: Protection for modules BMXDDI1602/1603/3202K
- Paralleling of inputs (1): Yes, for modules BMXDDI1602/1603
- Dielectric strength between groups of channels: 500 V --- for modules BMXDDI3202K/6402K
- Temperature derating for module BMXDDI1604T: No derating up to 40°C/104°F, a maximum of 25% of inputs at state 1 at 70°C/158°F

AC input modules BMXDAI16••/08••

- Input frequency: 47 to 63 Hz
- Current peak on activation at nominal voltage: 5 to 240 mA depending on model
- Input impedance at nominal voltage and F = 55 Hz: 6 to 21 kΩ, depending on model

Triac output modules BMXDAO1605

- Current via common: 2.4 A
- Current for the 4 commons together: 4.8 A

DC transistor output modules BMXDDO16••/3202K/6402K

- Dielectric strength between groups of channels: 500 V --- for modules BMXDDO3202K/6402K

Relay output modules BMXDRA080••/1605

- Protection against AC inductive overvoltage: Use an RC circuit or ZNO surge limiter appropriate to the voltage in parallel on each output.
- Protection against DC inductive overvoltage: Use a discharge diode on each output.

Mixed I/O relay module BMXDDM16025

- Input impedance at nominal voltage: 6.8 kΩ
- Dielectric strength between groups of inputs: 500 V ---

DC mixed I/O modules BMXDDM16022/3202K

- Input impedance at nominal voltage: 6.8 to 9.6 kΩ, depending on model
- Reverse polarity on the inputs: Protection
- Paralleling of outputs: Yes, for a maximum of 2 outputs for module BMXDDM16022 and a maximum of 3 outputs for module BMXDDM3202K

(1) This characteristic allows several inputs to be wired in parallel on the same module or on different modules for input redundancy.

BMXDDI1602
BMXDAI●●●●

BMXDDI3202K



BMXDDI6402K

References						
Discrete input modules (1)						
Type of current	Input voltage	Connection via (2)	IEC/EN 61131-2 conformity	No. of channels (common)	Reference	Weight kg/lb
---	24 V (positive logic)	Screw or spring-type 20-way removable terminal block	Type 3	16 isolated inputs (1 x 16)	BMXDDI1602	0.115/ 0.254
		One 40-way connector	Type 3	32 isolated inputs (2 x 16)	BMXDDI3202K	0.110/ 0.243
		Two 40-way connectors	Non-IEC	64 isolated inputs (4 x 16)	BMXDDI6402K	0.145/ 0.320
~	24 V (negative logic)	Screw or spring-type 20-way removable terminal block	Non-IEC	16 isolated inputs (1 x 16)	BMXDAI1602	0.115/ 0.254
	48 V (positive logic)	Screw or spring-type 20-way removable terminal block	Type 1	16 isolated inputs (1 x 16)	BMXDDI1603	0.115/ 0.254
	125 V (positive logic)	Screw or spring-type 20-way removable terminal block		16 isolated inputs (1 x 16)	BMXDDI1604T	0.144/ 0.317
~	24 V	Screw or spring-type 20-way removable terminal block	Type 1	16 isolated inputs (1 x 16)	BMXDAI1602	0.115/ 0.254
	48 V	Screw or spring-type 20-way removable terminal block	Type 3	16 isolated inputs (1 x 16)	BMXDAI1603	0.115/ 0.254
	100...120 V	Screw or spring-type 20-way removable terminal block	Type 3	16 isolated inputs (1 x 16)	BMXDAI1604	0.115/ 0.254
	200...240 V	Screw or spring-type 20-way removable terminal block	Type 2	8 isolated inputs (1 x 8)	BMXDAI0805	0.152/ 0.335
	100...120 V	Screw or spring-type 20-way removable terminal block	Type 3	8 isolated inputs (8 x 1)	BMXDAI0814	0.115/ 0.254



BMXDDO1602

BMXDRA0805/
1605

BMXDDO3202K

Discrete output modules (1)						
Type of current	Output voltage	Connection via (2)	IEC/EN 61131-2 conformity	No. of channels (common)	Reference	Weight kg/lb
---	24 V/0.5 A (positive logic)	20-way removable terminal block, screw or spring-type	Yes	16 protected outputs (1 x 16)	BMXDDO1602	0.120/ 0.265
	24 V/0.5 A (negative logic)	20-way removable terminal block, screw or spring-type	–	16 protected outputs (1 x 16)	BMXDDO1612	0.120/ 0.265
	24 V/0.1 A (positive logic)	One 40-way connector	Yes	32 protected outputs (2 x 16)	BMXDDO3202K	0.110/ 0.243
~ triac	100...240	20-way removable terminal block, screw or spring-type	–	64 protected outputs (4 x 16)	BMXDDO6402K	0.150/ 0.331
		20-way removable terminal block, screw or spring-type		16 outputs (4 x 4)	BMXDAO1605	0.140/ 0.309
		20-way removable terminal block, screw or spring-type		8 non-protected outputs	BMXDRA0804T	0.178/ 0.392
--- or ~ relay	24 V ---/2 A 24...240 V ~/ 2 A	20-way removable terminal block, screw or spring-type	Yes	8 non-protected outputs (without common)	BMXDRA0805	0.145/ 0.320
		20-way removable terminal block, screw or spring-type	Yes	16 non-protected outputs (2 x 8)	BMXDRA1605	0.150/ 0.331

(1) Typical consumption: See the power consumption table available on our website www.schneider-electric.com.

(2) 64-channel modules have 2 connectors and therefore require 2 connection cables.



BMXDDM1602 • BMXDDM3202K

References (continued)

Discrete mixed I/O modules (1)

Number of connection I/O	No. of input channels (common)	No. of output channels (common)	IEC/EN 61131-2 conformity	Reference	Weight kg/lb
16	Screw or spring-type 20-way removable terminal block	8 (positive logic) (1 x 8)	8, transistor 24 V .../0.5 A (1 x 8)	Inputs, type 3	BMXDDM16022 0.115/ 0.254
			8, relay 24 V ... or 24...240 V ~ (1 x 8)	Inputs, type 3	BMXDDM16025 0.135/ 0.298
32	One 40-way connector	16 (positive logic) (1 x 16)	16, transistor 24 V .../0.1 A (1 x 16)	Inputs, type 3	BMXDDM3202K 0.110/ 0.243



BMXFTB2000

Removable terminal blocks

Description	For use with	Type	Reference	Weight kg/lb
20-way removable terminal blocks	For module with 20-way removable terminal block Cage clamp	Cage clamp	BMXFTB2000	0.093/ 0.205
		Screw clamp	BMXFTB2010	0.075/ 0.165
		Spring	BMXFTB2020	0.060/ 0.132



BMXFTW01

Preassembled cordsets for 16-channel I/O modules with removable terminal block

Description	Composition	Cross-section	Length m/ft	Reference	Weight kg/lb
Preassembled cordsets with one end with flying leads for 16-channel I/O modules Operating voltage ≤ 48 V	One 20-way spring-type removable terminal block (BMXFTB2020) and one end with color-coded flying leads	0.324 mm ² / AWG 22	3/9.84	BMXFTW301	0.850/ 1.874
			5/16.40	BMXFTW501	1.400/ 3.086
			10/32.81	BMXFTW1001	2.780/ 6.129



BMXFCW01

Preassembled cordsets for 16, 32 and 64-channel I/O modules with 40-way connectors

Description	No. of sheaths	Composition	Cross-section	Length m/ft	Reference	Weight kg/lb
Preassembled cordsets with one end with flying leads	1 x 20 wires (16 channels)	One 40-way connector and one end with color-coded flying leads	0.324 mm ² / AWG 22	3/9.84	BMXFCW301	0.820/ 1.808
				5/16.40	BMXFCW501	1.370/ 3.020
				10/32.81	BMXFCW1001	2.770/ 6.107



BMXFCW03

Description	No. of sheaths	Composition	Cross-section	Length m/ft	Reference	Weight kg/lb
Preassembled cordsets for Modicon Telefast ABE7 sub-bases	2 x 20 wires (32 channels)	One 40-way connector and two ends with color-coded flying leads (2)	0.324 mm ² / AWG 22	3/9.84	BMXFCW303	0.900/ 1.984
				5/16.40	BMXFCW503	1.490/ 3.285
				10/32.81	BMXFCW1003	2.960/ 6.526



BMXFCC01

Description	No. of sheaths	Composition	Cross-section	Length m/ft	Reference	Weight kg/lb
Preassembled cordsets for Modicon Telefast ABE7 sub-bases	1 x 20 wires (16 channels)	One 40-way connector and one HE 10 connector	0.324 mm ² / AWG 22	0.5/1.64	BMXFCC051	0.140/ 0.309
				1/3.28	BMXFCC101	0.195/ 0.430
				2/6.56	BMXFCC201	0.560/ 1.235
Preassembled cordsets for 2 x 20 wires (32 channels)	2 x 20 wires (32 channels)	One 40-way connector and two HE 10 connectors (2)	0.324 mm ² / AWG 22	3/9.84	BMXFCC301	0.840/ 1.852
				5/16.40	BMXFCC501	1.390/ 3.064
				10/32.81	BMXFCC1001	2.780/ 6.123
				0.5/1.64	BMXFCC053	0.210/ 0.463
				1/3.28	BMXFCC103	0.350/ 0.772
				2/6.56	BMXFCC203	0.630/ 1.389
				3/9.84	BMXFCC303	0.940/ 2.072

(1) Typical consumption: See the power consumption table available on our website www.schneider-electric.com.
(2) 64-channel modules have 2 connectors and therefore require 2 connection cables.

Modicon X80 I/O platform

Analog I/O modules
Input modules

Applications		Analog inputs	
			
Type of input		Isolated low-level inputs, voltage, thermocouples, temperature probes, resistors	
Type		Multirange	
Range	Voltage	$\pm 40 \text{ mV}, \pm 80 \text{ mV}, \pm 160 \text{ mV}, \pm 320 \text{ mV}, \pm 640 \text{ mV}, \pm 1.28 \text{ V}$	
	Current	–	
	Thermocouple Temperature probe Resistor	Thermocouples, type B, E, J, K, L, N, R, S, T, U 2, 3 or 4-wire temperature probes, type Pt100, JPt100, Pt1000, JPt1000, Ni100, Ni1000 (in accordance with DIN43760) and Cu 10 2, 3 or 4-wire resistors, 400 Ω or 4000 Ω	
Modularity		4 inputs	8 inputs
Acquisition period		400 ms for the 4 inputs	400 ms for the 8 inputs
Conversion time		–	
Resolution		15 bits + sign	
Isolation	Between channels	750 V ---	
	Between channels and bus	1400 V ---	
	Between channels and ground	750 V ---	
Connection	Directly to the module	Via 40-way connector	Via two 40-way connectors
	Via preassembled cordsets	Cordsets with one end with color-coded flying leads BMXFCA•01S (3 or 5 m/9.84 or 16.40 ft long)	
Compatibility with Modicon Telefast ABE7 pre-wired system	Connection sub-base	4-channel sub-base for direct connection of 4 thermocouples plus connection and provision of cold junction compensation (see page 6/8)	
	Type of connection sub-base	ABE7CPA412	
	Type of preassembled cordsets	BMXFCA•02 (1.5, 3 or 5 m/4.92, 9.84 or 16.40 ft long)	
References		BMXART0414	BMXART0814
Pages		3/22	

Analog inputs		
		
Isolated high-level inputs	Non-isolated high-level inputs	Isolated high-level inputs
Voltage/current		
$\pm 10 \text{ V}, 0...10 \text{ V}, 0...5 \text{ V}, 1...5 \text{ V}, \pm 5 \text{ V}$		
0...20 mA, 4...20 mA, $\pm 20 \text{ mA}$		
–		
4 inputs	8 inputs	
Fast: 1 + (1 x no. of declared channels) ms Default: 5 ms for the 4 channels	Fast: 1 + (1 x no. of declared channels) ms Default: 9 ms for the 8 channels	
–		
16 bits	15 bits + sign	
300 V ---	–	300 V ---
1400 V ---		1400 V ---
1400 V ---		1400 V ---
Via 20-way removable terminal block (screw or spring-type) BMXFTB20•0	Via 28-way removable terminal block (cage clamp-type) BMXFTB2800 or (spring-type) BMXFTB2820	
Cordsets with one end with color-coded flying leads BMXFCA•01S (3 or 5 m/9.84 or 16.40 ft long)	Cordsets with one end with color-coded flying leads BMXFCA•08S (3 or 5 m/9.84 or 16.40 ft long)	Cordsets with one end with color-coded flying leads BMXFCA•08S (3 or 5 m/9.84 or 16.40 ft long)
4-channel sub-base for direct connection of 4 inputs, delivers and distributes 4 protected isolated power supplies (see page 6/8)	8-channel sub-base for direct connection of 8 current/voltage inputs (see page 6/8)	
ABE7CPA410	ABE7CPA02/03/31/31E	ABE7CPA02/31/31E
BMXFCA•00 (1.5, 3 or 5 m/4.92, 9.84 or 16.40 ft long)	BMXFCA•00 (1.5, 3 or 5 m/4.92, 9.84 or 16.40 ft long)	BMXFCA•00 (1.5, 3 or 5 m/4.92, 9.84 or 16.40 ft long)
References		BMXAMI0410
Pages		3/22

Modicon X80 I/O platform

Analog I/O modules

Output modules and mixed I/O modules

Applications

Analog outputs



Type of I/O

Type

Range

Voltage

Current

Modularity

Acquisition period (inputs)

Conversion time (outputs)

Resolution

Inputs

Outputs

Isolation

Connection

Directly to the module

Via preassembled cordsets

Compatibility with Modicon Telefast ABE7 pre-wired system

Connection sub-base

Type of connection sub-base

Type of preassembled cordsets

References

Isolated high-level outputs

Isolated high-level outputs

Non-isolated high-level outputs

Voltage/current

± 10 V

0–20 mA, 4–20 mA

2 outputs

4 outputs

8 outputs

–

≤ 1 ms

≤ 4 ms

–

15 bits + sign

Between channels: 750 V $\equiv\equiv$

Between channels and bus: 1400 V $\equiv\equiv$

Between channels and ground: 1400 V $\equiv\equiv$

Via 20-way removable terminal block (screw or spring-type) BMXFTB20●0

Cordsets with one end with color-coded flying leads

BMXFTW●01S (3 or 5 m/9.84 or 16.40 ft long)

4-channel sub-base for direct connection of 2/4 current/voltage outputs (see page 6/8)

8-channel sub-base for direct connection of 8 current/voltage inputs (see page 6/8)

ABE7CPA21

ABE7CPA02

BMXFCA●●0 (1.5, 3 or 5 m/4.92, 9.84 or 16.40 ft long)

BMXFTA●●2 (1.5 or 3 m/4.92, 9.84 or 16.40 ft long)

BMXAMO0210

BMXAMO0410

BMXAMO0802

Mixed analog I/O



Non-isolated high-level inputs and outputs

Voltage/current

Inputs: ± 10 V, 0...10 V, 0...5 V, 1...5 V

Outputs: ± 10 V

Inputs: 0–20 mA, 4–20 mA

Outputs: 0–20 mA, 4–20 mA

4 inputs and 2 outputs

Fast: 1 + (1 x no. of declared channels) ms

Default: 5 ms for the 4 channels

≤ 1 ms

14...12-bit in U range

12-bit in I range

12-bit in U range

11-bit in I range

Between groups of input or output channels: 750 V $\equiv\equiv$

Between channels and bus: 1400 V $\equiv\equiv$

Between channels and ground: 1400 V $\equiv\equiv$

Via 20-way removable terminal block (screw or spring-type) BMXFTB20●0

BMXFTW●01S cordsets with one end with color-coded flying leads (3 or 5 m/9.84 or 16.40 ft long)

–

–

–

BMXAMM0600

3/22

Presentation

The Modicon X80 I/O analog I/O module offer comprises:

- 5 analog input modules:
 - 2 modules with 4 and 8 isolated channels, low-level voltage, thermocouples, Pt, JPt, Ni, or Cu temperature probes and resistors, 15 bits + sign **BMXART0414/0814**
 - 1 module with 4 high-speed isolated analog channels, high-level voltage or current, 16 bits **BMXAMI0410**
 - 2 modules with 8 high-speed non-isolated analog channels, high-level voltage or current, 15 bits + sign **BMXAMI0800/0810**
- 3 analog output modules:
 - 1 module with 2 isolated analog channels, high-level voltage or current, 15 bits + sign **BMXAMO0210**
 - 1 module with 4 isolated analog channels, high-level voltage or current, 15 bits + sign **BMXAMO0410**
 - 1 module with 8 non-isolated analog channels, high-level current, 15 bits + sign **BMXAMO0802**
- 1 mixed analog I/O module with 4 input channels and 2 output channels (non-isolated), voltage or current, 12 to 14 bits according to type of channel and range **BMXAMM0600**

Analog I/O modules are equipped with a connector for a 20 or 28-way removable terminal block, except for **BMXART0414/0814** analog input modules for thermocouples/temperature probes, which are equipped with one or two 40-way connector(s).

All analog modules occupy a single slot in **BMEXBP***** or **BMXXBP***** racks. These modules can be installed in any slot in the rack, except the first two (PS and 00), which are reserved for the power supply module and the processor module respectively.

The power supply for the analog functions is supplied by the backplane bus (3.3 V and 24 V). Analog I/O modules are hot-swappable (see page 3/10).

Description

BMXAM•/ART analog I/O modules are standard format (1 slot). They have a case, which provides IP 20 protection of the electronics, and are locked into position by a captive screw.


I/O modules connected via 20 or 28-way removable terminal block

BMXAM• analog I/O modules feature the following:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module)
- 3 A module and channel status display block
- 4 A connector taking the 20 or 28-way removable screw or spring-type terminal block for directly connecting the sensors or preactuators to the module

To be ordered separately:

- 5 A **BMXFTB20•0** or **BMXFTB28•0** 20 or 28-way removable terminal block (referencing label supplied with each I/O module) or pre-wired cables with:
 - A 20-way terminal block at one end and flying leads at the other (**BMXFTW•01S**)
 - A 28-way terminal block at one end and flying leads at the other (**BMXFTW•08S**)
 - A 20 or 28-way terminal block and a 25-way SUB-D connector (**BMXFCA••0** or **BMXFTA••0**), for connection to Modicon Telefast ABE7 sub-bases (see page 3/23).

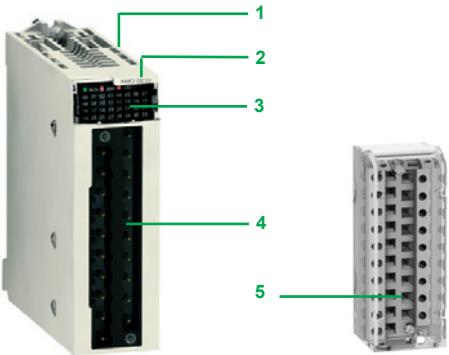

Module for connection via 20 or 28-way removable terminal block


I/O modules connected via 40-way connector

BMXART analog input modules have the following on the front panel:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module)
- 3 A module and channel status display block
- 4 One (or two) 40-way connector(s) for connecting the sensors

To be ordered separately:


- 5 Pre-wired cables with:
 - A 40-way connector at one end and flying leads at the other (**BMXFCW•01S**)
 - A 40-way connector and a 25-way SUB-D connector (**BMXFCA••2**) for direct connection to the Modicon Telefast ABE7 sub-bases (see page 3/23)

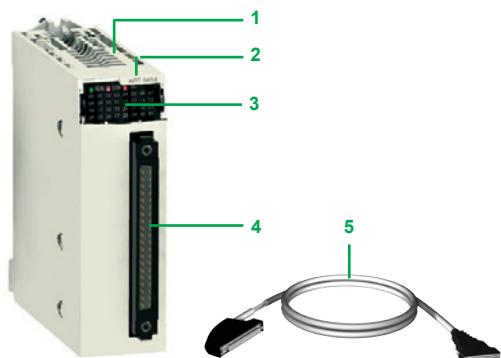



Module for connection for 40-way connector

Must be ordered separately:

- A shielding connection kit to help protect against electrostatic discharge, consisting of a metal bar and two sub-bases for mounting on the rack supporting the analog modules
- A set of **STBXSP3020** clamping rings for the shielding braids of analog signal cables

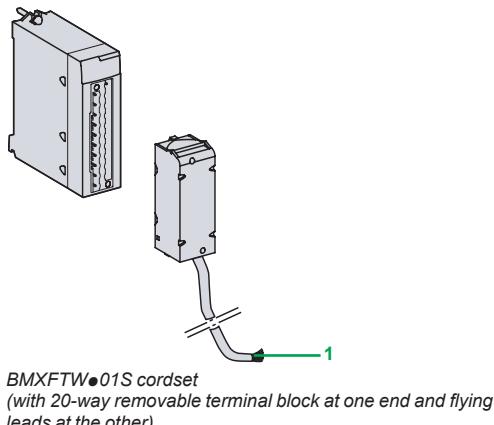

3

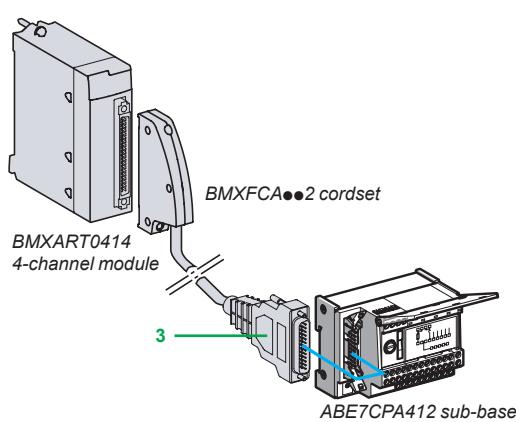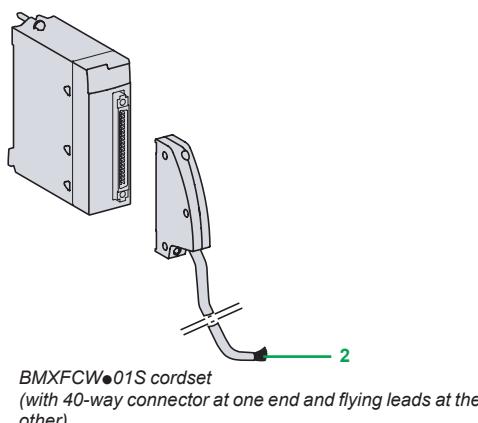

Connecting modules with removable terminal blocks

BMXAMI0410, BMXAMO, and BMXAMM modules with 20-way terminal block

The 20-way removable terminal blocks (**BMXFTB20•0**) are the same as those used for discrete I/O modules (screw clamp, cage clamp, or spring-type) (see page 3/9). One version of the removable terminal block is equipped with a 3 or 5 m/9.84 or 16.40 ft cordset with color-coded flying leads (**BMXFTW•01S**). These preassembled cordsets with reinforced shielding have color-coded flying leads at the other end **1**.

BMXAMI0800/0810 modules with 28-way terminal block

The 28-way removable terminal blocks are cage clamp-type (**BMXFTB2800**) or spring-type (**BMXFTB2820**).

One version of the removable terminal block is equipped with a 3 or 5 m/9.84 or 16.40 ft cordset with color-coded flying leads (**BMXFTW•08S**). These preassembled cordsets with reinforced shielding have color-coded flying leads at the other end **1**.

Connecting modules with 40-way connectors

BMXART0•14 modules with 40-way connectors

Two types of cordset are available:

- Preassembled cordsets with reinforced shielding (**BMXFCW•01S**) which have color-coded flying leads at the other end **2**. Available in 3 or 5 m/9.84 or 16.40 ft lengths, they enable easy direct wire-to-wire connection of the analog sensors via terminal blocks.
- Preassembled cordsets with reinforced shielding (**BMXFCA•02**) which have a 25-way SUB-D connector at the other end **3**. Available in 1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft lengths, they enable direct connection to the Modicon Telefast **ABE7CPA412** sub-base (see below).

Use with Modicon Telefast ABE7 sub-bases

Using the Modicon Telefast ABE7 pre-wired system makes it easier to install the modules since the inputs (or outputs) can be accessed via screw terminals. 7 special sub-bases are available:

Modicon Telefast ABE7CPA410 sub-base

The Modicon Telefast ABE7CPA410 sub-base is mainly used in conjunction with the **BMXAMI0410** voltage/current analog 4-input module. This sub-base allows you to:

- Directly connect 4 sensors
- Remotely locate the input terminals in voltage mode
- Power the 4 to 20 mA conditioning units one channel at a time with a 24 V voltage, protected and limited to 25 mA, while maintaining isolation between channels
- Help protect the current impedance matching resistors integrated in the sub-base against overvoltages

Connection is via the **BMXFCA••0** cordset (1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft long).

Modicon Telefast ABE7CPA412 sub-base

The Modicon Telefast ABE7CPA412 sub-base is specially designed as a wiring interface for the **BMXART0414** and **BMXART0814** thermocouple modules. This sub-base allows you to:

- Connect 4 thermocouple probes
- Provide external cold junction compensation with a temperature probe integrated in the sub-base
- Provide continuity of the shielding

The **BMXART0814** module requires two Modicon Telefast **ABE7CPA412** sub-bases. The connection with each sub-base is made via a **BMXFCA••2** cordset (1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft long).

Modicon Telefast ABE7CPA21 sub-base

The Modicon Telefast ABE7CPA21 sub-base is compatible with the **BMXAMO0210** output module. This sub-base allows you to:

- Directly connect 2 current/voltage outputs
- Provide continuity of the shielding

Connection is via the **BMXFCA••0** cordset **3** (1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft long).

Use with Modicon Telefast ABE7 sub-bases (continued)

Modicon Telefast ABE7CPA02 sub-base

The Modicon Telefast **ABE7CPA02** sub-base can be used in combination with:

- The **BMXAMI0800/0810** analog current input modules with 8 inputs
- The **BMXAMO0802** analog current output modules with 8 outputs

This sub-base allows you to:

- Connect the 8 analog inputs or outputs point-to-point
- Provide continuity of the shielding

The **BMXAMI0800/0810** modules are connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA●●0** cables.

The **BMXAMO0802** module is connected by means of the 1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft long **BMXFTA●●2** cables.

Modicon Telefast ABE7CPA03 sub-base

The Modicon Telefast **ABE7CPA03** sub-base can be used in combination with the **BMXAMI0800** voltage/current analog 8-input module.

This sub-base allows you to:

- Directly connect 8 analog inputs
- Power the current inputs one channel at a time with a voltage of 24 V that is protected and limited to 25 mA
- Provide continuity of the shielding

The **BMXAMI0800** module is connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA●●0** cables.

Modicon Telefast ABE7CPA31/31E sub-bases

The Modicon Telefast **ABE7CPA31/31E** sub-bases can be used in combination with the **BMXAMI0800/0810** voltage/current analog 8-input modules.

These sub-bases allow you to:

- Directly connect 8 analog inputs
- Power the current inputs one channel at a time with 24 V converters
- Provide continuity of the shielding

The **BMXAMI0800/0810** modules are connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA●●0** cables.

Complementary characteristics

BMXART0414/0814 analog input modules

The **BMXART0414/0814** modules are multirange input modules with 4 or 8 low-level isolated inputs (15 bits + sign) respectively.

Depending on the choice made during configuration, the modules offer, for each of the inputs, the following ranges:

- Temperature probe: Pt100, JPt100, Pt1000, JPt1000, Cu10, Ni100, or Ni1000 (in accordance with DIN43760), with open-circuit detection
- Thermocouple: B, E, J, K, L, N, R, S, T, or U with broken wire detection
- Resistor: 0...400 or 0...4000 Ω, 2, 3, or 4-wire
- Voltage: ± 40 mV, ± 80 mV, ± 160 mV, ± 320 mV, ± 640 mV, ± 1.28 V

BMXAMI0410 analog input modules

The **BMXAMI0410** module is a high-level analog input module with 4 isolated inputs (16 bits).

Used with sensors or transmitters, it performs monitoring, measurement, and process control functions for continuous processes.

The module offers the following ranges for each of the inputs depending on the choice made during configuration:

- Voltage ± 10 V, ± 5 V, 0...10 V, 0...5 V, and 1...5 V
- Current 0–20 mA, 4–20 mA, and ± 20 mA

BMXAMI0800/0810 analog input modules

BMXAMI0800/0810 analog input modules are modules with 8 high-level isolated/non-isolated analog inputs (15 bits + sign).

The modules offer the following ranges for each of the inputs depending on the choice made during configuration:

- Voltage: ± 10 V, 0...10 V, 0...5 V, 1...5 V, ± 5 V
- Current: 0–20 mA and 4–20 mA

Complementary characteristics (continued)

BMXAMO0210 analog output module

The **BMXAMO0210** module is a module with 2 high-level isolated outputs (15 bits + sign).

The **BMXAMO0210** module offers the following ranges for each of the inputs depending on the choice made during configuration:

- Voltage: ± 10 V
- Current: 0–20 mA and 4–20 mA

BMXAMO0410/0802 analog output modules

The **BMXAMO0410/0802** analog output modules are modules with 4 or 8 high-level isolated/non-isolated analog outputs (16 bits/15 bits + sign).

The **BMXAMO0410** module offers the following ranges for each of the outputs depending on the choice made during configuration:

- Voltage: ± 10 V
- Current: 0–20 mA and 4–20 mA

The **BMXAMO0802** module offers the current ranges 0–20 mA and 4–20 mA.

BMXAMM0600 analog mixed I/O module

The **BMXAMM0600** mixed module is a non-isolated I/O module with 4 inputs (14/12 bits) and 2 outputs (12 bits).

The module offers the following ranges for each of the inputs or outputs depending on the choice made during configuration:

- Voltage: ± 10 V, 0...10 V, 0...5 V, and 1...5 V
- Current: 0–20 mA and 4–20 mA

References

Analog input modules (1)

Type of input	Input signal range	Resolution	Connection	No. of channels	Reference	Weight kg/lb
Isolated high-level inputs	± 10 V, 0...10 V, 0...5 V, 1...5 V, ± 5 V, 0–20 mA, 4–20 mA, ± 20 mA	16 bits	Removable terminal block, 20-way cage clamp, screw clamp, or spring-type	4 channels	BMXAMI0410	0.143/0.315
Non-isolated high-level inputs	± 10 V, 0...10 V, 0...5 V, 1...5 V, ± 5 V, 0–20 mA	15 bits + sign	Removable terminal block, 28-way, cage clamp or spring-type	8 channels	BMXAMI0800	0.175/0.386
Isolated high-level inputs	± 10 V, 0...10 V, 0...5 V, 1...5 V, ± 5 V, 0–20 mA	15 bits + sign	Removable terminal block, 28 way, cage clamp or spring-type	8 channels	BMXAMI0810	0.175/0.386
Isolated low-level inputs	Temperature probe, thermocouple, ± 40 mV, ± 80 mV, ± 160 mV, ± 320 mV, ± 640 mV, ± 1.28 V	15 bits + sign	40-way connector	4 channels	BMXART0414	0.135/0.298
				8 channels	BMXART0814	0.165/0.364



BMXAM•0••0



BMXART0414


Analog output modules (1)

Type of outputs	Output signal range	Resolution	Connection	No. of channels	Reference	Weight kg/lb
Isolated high-level outputs	± 10 V, 0–20 mA, 4–20 mA	16 bits	Removable terminal block, 20-way, cage clamp, screw clamp, or spring-type	2 channels	BMXAMO0210	0.144/0.317
High-level outputs isolated	± 10 V, 0–20 mA, 4–20 mA, ± 20 mA	15 bits + sign	Removable terminal block, 20-way, cage clamp, screw clamp, or spring-type	4 channels	BMXAMO0410	0.175/0.386
Non-isolated high-level inputs	0–20 mA, 4–20 mA	15 bits + sign	Removable terminal block, 20-way, cage clamp, screw clamp, or spring-type	8 channels	BMXAMO0802	0.175/0.386

Analog mixed I/O module (1)

Type of I/O	Signal range	Resolution	Connection	No. of channels	Reference	Weight kg/lb
Mixed I/O, non-isolated	± 10 V, 0...10 V, 0...5 V, 1...5 V, 0–20 mA, 4–20 mA	14 bits or 12 bits depending on the range	Removable terminal block, 20-way, cage clamp, screw clamp, or spring-type	Inputs: 4 channels Outputs: 2 channels	BMXAMM0600	0.155/0.342

(1) Typical consumption: See the power consumption table available on our website www.schneider-electric.com.



BMXFTB20•0



BMXFTW•01S



ABE7CPA41•21



BMXFCA••0



BMXFCA••2

References (continued)

Connection accessories for analog modules (1)

Description	For use with modules	Type, composition	Length	Reference	Weight kg/lb
20-way removable terminal blocks	BMXAMI0410	Cage clamp	—	BMXFTB2000	0.093/0.205
	BMXAMO0210	Screw clamp	—	BMXFTB2010	0.075/0.165
	BMXAMO0410	Spring	—	BMXFTB2020	0.060/0.132
28-way removable terminal block	BMXAMI0800	Cage clamp	—	BMXFTB2800	0.111/0.245
	BMXAMI0810	Spring	—	BMXFTB2820	0.080/0.176
Preassembled cordsets	BMXAMI0410	One 20-way terminal block (BMXFTB2020) and one end with color-coded flying leads	3 m/9.84 ft	BMXFTW301S	0.470/1.036
	BMXAMO0210		5 m/16.40 ft	BMXFTW501S	0.700/1.543
ABE7CPA41•21	BMXAMI0410	One 28-way MX FTB 2820, and one end with color-coded flying leads	3 m/9.84 ft	BMXFTW308S	0.435/0.959
	BMXAMI0810		5 m/16.40 ft	BMXFTW508S	0.750/1.653
BMXFCA••0	BMXART0414	One 40-way connector and one end with color-coded flying leads	3 m/9.84 ft	BMXFCA150	0.480/1.058
	BMXART0814		5 m/16.40 ft	BMXFCA300	0.710/1.565

Modicon Telefast ABE7 pre-wired system

Description	For use with modules	Type, composition	Length or connection technology	Reference	Weight kg/lb
Modicon Telefast ABE7 sub-bases	BMXAMI0410	Distribution of isolated power supplies. Delivers 4 protected isolated power supplies for 4–20 mA inputs. Direct connection of 4 inputs	Screws	ABE7CPA410	0.180/0.397
	BMXART0414	Connection and provision of cold-junction compensation for thermocouples	Screws	ABE7CPA412	0.180/0.397
	BMXART0814 (2)	Direct connection of 4 inputs			
	BMXAMO0210	Direct connection of 2/4 outputs	Screws	ABE7CPA21	0.210/0.463
	BMXAMO0410				
	BMXAMI0800	Point-to-point connection of 8 I/O	Screws	ABE7CPA02	0.317/0.699
	BMXAMI0810				
BMXFCA••2	BMXAMI0802				
	BMXAMI0800	Direct connection of 8 inputs. Delivers 8x 24 V ... power supplies limited to 25 mA to the 8 current inputs	Screws	ABE7CPA03	0.307/0.677
	BMXAMI0800				
	BMXAMI0800	Delivers 8x 24 V ... power supplies isolated and limited to 25 mA to the 8 current inputs	Screws	ABE7CPA31	0.498/1.098
	BMXAMI0810			ABE7CPA31E	0.508/1.120
	BMXFCA••0				
	BMXFCA••2				
Preassembled cordsets for Modicon Telefast ABE7 sub-bases	BMXAMI0410	One 20-way removable terminal block and one 25-way SUB-D connector for ABE7CPA410/CPA21 sub-base	1.5 m/4.92 ft	BMXFCA150	0.320/0.705
	BMXAMO0210		3 m/9.84 ft	BMXFCA300	0.500/1.102
	BMXAMO0410		5 m/16.40 ft	BMXFCA500	0.730/1.609
	BMXART0414	One 40-way connector and one 25-way SUB-D connector for ABE7CPA412 sub-base	1.5 m/4.92 ft	BMXFCA152	0.330/0.728
	BMXART0814 (2)		3 m/9.84 ft	BMXFCA302	0.510/1.124
	BMXFCA••0		5 m/16.40 ft	BMXFCA502	0.740/1.631
	BMXFCA••2				
ABE7CPA41•21	BMXAMI0800	One 28-way removable terminal block and one 25-way SUB-D connector for sub-bases ABE7CPA02/03/31/31E	1.5 m/4.92 ft	BMXFTA150	0.374/0.825
	BMXAMI0810		3 m/9.84 ft	BMXFTA300	0.500/1.102
	BMXAMO0802	One 20-way removable terminal block and one 25-way SUB-D connector for ABE7CPA02 sub-bases	1.5 m/4.92 ft	BMXFTA152	0.374/0.825
	BMXFCA••0		3 m/9.84 ft	BMXFTA302	0.500/1.102

(1) The shielding on the cordsets carrying the analog signals must always be connected to the BMXXSP••000 shielding connection kit mounted under the rack holding the analog modules (see page 2/3).

(2) The BMXART0814 8-channel module requires two ABE7CPA412 sub-bases and two BMXFCA••2 cordsets.


Modicon X80 I/O platform

HART analog I/O modules

Applications		HART analog inputs
		
Type of I/O	Isolated analog inputs with HART	
Number of channels	8	
Range	Current	4-20 mA
Maximum load impedance	–	600 Ω (0-20 mA)
Operating temperature	0...60°C/32...140°F	0...60°C/32...140°F
Compatible devices	BMEP58●●● processors, BMECRA31210 head module, BMEXBP●●0(H) Ethernet + X-bus backplanes	BMEP58●●● processors, BMECRA31210 head module, BMEXBP●●0(H) Ethernet + X-bus backplanes
Resolution	15 bits + sign	15 bits + sign
Isolation	Between channels	1000 V ∙∙∙ for 1 minute
	Between channels and bus	1400 V ∙∙∙ for 1 minute
	Between channels and earth	1400 V ∙∙∙ for 1 minute
Connection	Directly to the module	Via 20-way removable terminal blocks (screw or spring-type) BMXFTB20●0
Compatibility with pre-wired ABE7	Connection sub-base	8-channel sub-base for direct connection of 8 current/voltage inputs
	Type of connection sub-base	ABE7CPA02/03/31
	Type of preassembled cordsets	BMXFFTA1522/3022 (1.5 or 3 m/4.92 or 9.84 ft long)
Field device support	2-wire/4-wire	2-wire/4-wire
HART specification	HART field device compliance	HART V5, V6, V7
	HART field device connection	Point to point
	HART I/O mapping	Yes
References	BMEAHI0812	
Page	3/27	

HART analog outputs		
		
Isolated analog outputs with HART		
Number of channels	4	
Range	4-20 mA	
Maximum load impedance	600 Ω (0-20 mA)	
Operating temperature	0...60°C/32...140°F	
Compatible devices	BMEP58●●● processors, BMECRA31210 head module, BMEXBP●●0(H) Ethernet + X-bus backplanes	
Resolution	15 bits + sign	
Isolation	1000 V ∙∙∙ for 1 minute	
	1400 V ∙∙∙ for 1 minute	
	1400 V ∙∙∙ for 1 minute	
Connection	Via 20-way removable terminal blocks (screw or spring-type) BMXFTB20●0	
Compatibility with pre-wired ABE7	4-channel sub-base for direct connection of 2/4 current/voltage outputs	
	ABE7CPA21	
	BMXFCA150/300/500 (1.5, 3 or 5 m/4.92, 9.84 or 16.4 ft long)	
Field device support	2-wire/4-wire	
HART specification	HART V5, V6, V7	
	Point to point	
	Yes	
References	BMEAHO0412	
Page	3/27	



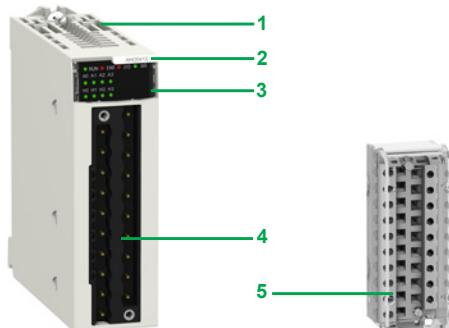

Module for connection via 20-way removable terminal block

3

Presentation

BMEAHI0812 HART analog I/O modules contain transceivers that master HART devices and information through the module. They can be managed by the AMS (Asset Management System) or by the automation platform CPU.

These modules require an Ethernet + X-bus backplane and can only be installed in the main local rack with the CPU or in RIO drops with a **BMECRA31210** performance EIO adapter module. They cannot be installed in expansion racks.

Description

BMEAHI0812 HART analog I/O modules are standard format (1 slot). They have a case, which provides IP 20 protection of the electronics, and are locked into position by a captive screw. They are connected via a 20-way removable terminal block.

BMEAHI0812 HART analog I/O modules feature the following:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module)
- 3 A module and channel status display block
- 4 A connector taking the 20-way removable screw or spring-type terminal block for directly connecting the sensors or preactuators to the module

To be ordered separately:

- 5 A **BMXFTB20●0** 20-way removable terminal block (referencing label supplied with each I/O module) or pre-wired cables with:
 - A 20-way terminal block at one end and flying leads at the other (**BMXFTW●01S**)
 - A 20-way terminal block and a 25-way SUB-D connector (**BMXFCA●●0** or **BMXFTA●●22**), for connection to Modicon Telefast ABE 7 sub-bases



BMXFTW●01S



BMXFCA●●0

Connecting modules using 20-way removable terminal blocks

The 20-way removable terminal blocks (**BMXFTB20●0**) are the same as those used for discrete I/O modules (screw clamp, cage clamp or spring-type) (see page 3/13).

One version of the removable terminal block is equipped with a 3 or 5 m/9.84 or 16.4 ft cordset with color-coded flying leads (**BMXFTW●01S**). These preassembled cordsets with reinforced shielding have color-coded flying leads at the other end.

Use with Modicon Telefast ABE7 sub-bases

Modicon Telefast ABE7CPA21 sub-base

The Modicon Telefast **ABE7CPA21** sub-base is compatible with the **BMEAHO0412** output module.

This sub-base allows you to:

- Directly connect two current/voltage outputs
- Ensure continuity of the shielding

Connection is via the **BMXFCA●●0** cordset (1.5, 3, or 5 m/4.92, 9.84, or 16.4 ft long).

Modicon Telefast ABE7CPA02 sub-base

The Modicon Telefast **ABE7CPA02** sub-base can be used with the **BMEAHI0812** HART analog input module.

This sub-base allows you to:

- Connect the 8 analog inputs point-to-point
- Ensure continuity of the shielding

The **BMEAHI0812** module is connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA1522/3022** cables.

Use with Modicon Telefast ABE7 sub-bases (continued)

Modicon Telefast ABE7CPA03 sub-base

The Modicon Telefast **ABE7CPA03** sub-base can be used with the **BMEAHI0812** HART analog input module.

This sub-base allows you to:

- Directly connect the 8 analog inputs
- Power the current inputs one channel at a time with a voltage of 24 V that is protected and limited to 25 mA
- Ensure continuity of the shielding

The **BMEAHI0812** module is connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA1522/3022** cables (1).

Modicon Telefast ABE7CPA31 sub-base

The Modicon Telefast **ABE7CPA31** sub-base can be used with the **BMEAHI0812** HART analog input module.

This sub-base allows you to:

- Directly connect the 8 analog inputs
- Power the current inputs one channel at a time with 24 V converters
- Ensure continuity of the shielding

The **BMEAHI0812** module is connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA1522/3022** cables.

Additional characteristics

BMEAHI0812 HART analog input module

The **BMEAHI0812** module is a module with 8 high-level isolated inputs (15 bits + sign).

The **BMEAHI0812** module offers the current range 4 - 20 mA for each of the inputs depending on the choice made during configuration.

BMEAHO0412 HART analog output module

The **BMEAHO0412** module is a module with 4 high-level isolated outputs (15 bits + sign).

The **BMEAHO0412** module offers the current range 4 - 20 mA for each of the outputs depending on the choice made during configuration.



BMEAHI0812

References

HART analog input module

Type of input	Input signal range	Resolution	Connection	No. of channels	Reference	Weight kg/lb
Isolated high-level inputs	4 - 20 mA	15 bits + sign	Removable terminal block, 20-way, cage clamp, screw clamp, or spring-type	8 channels	BMEAHI0812	0.233/ 0.514

HART analog output module

Type of input	Output signal range	Resolution	Connection	No. of channels	Reference	Weight kg/lb
Isolated high-level outputs	4 - 20 mA	15 bits + sign	Removable terminal block, 20-way, cage clamp, screw clamp, or spring-type	4 channels	BMEAHO0412	0.223/ 0.492

(1) The **BMEAHI0812** HART analog input module loses its isolation between channels when connected to the Modicon Telefast **ABE7CPA03** sub-base.

Presentation

BMXEHC0200 and **BMXEHC0800** counter modules for the Modicon X80 I/O platform are used to count the pulses generated by a sensor or to process the signals from an incremental encoder.

The two modules differ in their number of counter channels, maximum input frequencies, functions, and auxiliary input and output interfaces:

Counter module	No. of channels	Maximum frequency	Integrated functions	No. of physical inputs	No. of physical outputs
BMXEHC0200	2	60 KHz	Upcounting Downcounting Period meter Frequency meter Frequency generator Axis control	6	2
BMXEHC0800	8	10 KHz	Upcounting Downcounting Measurement	2	—

The sensors used on each channel can be:

- 2-wire 24 V proximity sensors
- 3-wire 24 V proximity sensors
- 10/30 V output signal incremental encoders with push-pull outputs

BMXEHC0200/0800 counter modules can be used to meet the demands of applications such as:

- Alarm generation on empty unwinder status using the ratio
- Sorting small parts using the period meter
- Single electronic cam using the dynamic setting thresholds
- Speed control using the period meter

These standard format modules can be installed in any available slot of a Modicon X80 I/O PLC. They are hot-swappable.

In a Modicon X80 I/O PLC configuration, the number of **BMXEHC0200/0800** counter modules should be added to the number of application-specific modules (communication).

The function parameters are set by configuration using the Unity Pro software.


Description

BMXEHC0200/0800 counter modules are standard format. They occupy a single slot in **BM**•**XBP●●●** racks. They come in a plastic case, which provides IP 20 protection of the electronics, and are locked into position by a captive screw.


BMXEHC0200 module, 2 channels, 60 KHz

The front panel of the **BMXEHC0200** counter module features:


- 1 Module and channel status display block
- 2 16-way connector for connecting the sensors of counter 0
- 3 16-way connector for connecting the sensors of counter 1
- 4 10-way connector for connecting:
 - Auxiliary outputs
 - Sensor power supplies

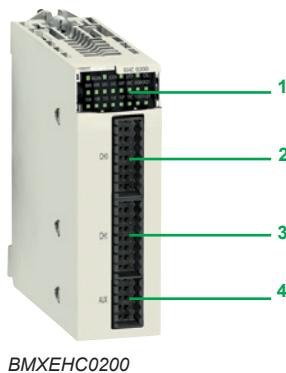

BMXEHC0200

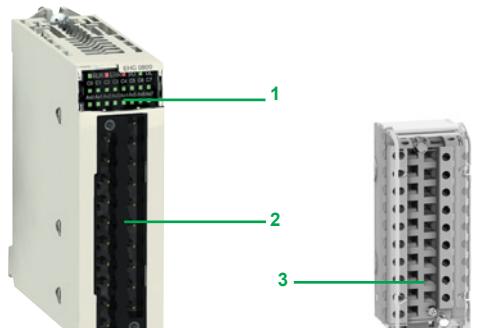

BMXEHC0800



BMXFTB20●0

To be ordered separately:

- A **BMXXTSHSC20** kit containing two 16-pin connectors and one 10-pin connector
- A **BMXXSP●●00** shielding connection kit if the rack is not already equipped with one (see page 2/3)

BMXEHC0800 module, 8 channels, 10 KHz

The front panel of the **BMXEHC0800** counter module features:

- 1 Module and channel status display block
- 2 Connector taking the **BMXFTB20●0** 20-way removable terminal block 3 (same as that of I/O modules)

To be ordered separately:

- A 20-way removable terminal block 3 (cage clamp, screw clamp, or spring-type)
- **BMXFTB20●0**
- A **BMXXSP●●00** shielding connection kit if the rack is not already equipped with one (see page 2/3)

Operating modes for module BMXEHC0200

8 configurable modes	Frequency meter	<p>This mode measures a frequency, speed, data rate, or an event stream. As standard, this mode measures the frequency received on the IN_A input. This frequency is expressed in Hz (number of pulses/second), with a precision of 1 Hz.</p> <p>The maximum frequency on the IN_A input is 60 kHz. The maximum cyclic ratio at 60 kHz is 60%.</p>
	Event counting	<p>This mode is used to determine the number of events received. In this mode, the counter calculates the number of pulses applied to the IN_A input at time intervals defined by the user.</p> <p>The module counts the pulses applied to the IN_A input each time the pulse for this input lasts longer than 5 µs (without anti-bounce filter).</p>
	Period measurement	<p>This mode is used to:</p> <ul style="list-style-type: none"> ■ Determine the duration of an event ■ Determine the time between 2 events ■ Time and measure the execution time of a process <p>It measures the time elapsed during an event or between 2 events (IN_A input) according to a selectable time base of 1 µs, 100 µs, or 1 ms. The IN_SYNC input can be used to enable or stop a measurement. The module can carry out a maximum of 1 measurement every 5 ms. The shortest measurable pulse is 100 µs, even if the unit defined by the user is 1 µs. The maximum measurable duration is 4,294,967,295 units (unit to be defined).</p>
	Ratio counting	<p>Ratio counting mode only uses the IN_A and IN_B inputs. There are 2 possible modes:</p> <ul style="list-style-type: none"> ■ Ratio 1: Used to divide 2 frequencies. This is intended for applications such as flowmeters, mixers, etc. ■ Ratio 2: Used to subtract 2 frequencies. This is intended for the same applications, but for those requiring more precise regulation (more similar frequencies). <p>Ratio 1 mode gives the results in thousandths for better accuracy (a display of 2000 corresponds to a value of 2) and ratio 2 mode gives the results in Hz.</p> <p>The maximum frequency that the module can measure on the IN_A and IN_B inputs is 60 kHz.</p>
	Downcounting	<p>This mode is used to list a group of operations. In this mode, activating the synchronization function starts the counter which, starting from a user-defined preset value, decreases with each pulse applied to the IN_A input, until it reaches 0. This downcounting is made possible when the enable function has been activated. The counting register is thus updated at 1 ms intervals.</p> <p>One basic use of this mode is to signal, using an output, the end of a group of operations (when the counter reaches 0).</p> <p>The shortest pulse applied to the IN_SYNC input is 100 µs. The maximum frequency applied to the IN_SYNC input is 1 pulse every 5 ms. The maximum user-defined preset value is 4,294,967,295. The maximum count value is 4,294,967,295 units.</p>
	Loop (modulo) counting	<p>This mode is used in packaging and labelling applications where actions are repeated on sets of moving objects:</p> <ul style="list-style-type: none"> ■ In upcounting, the counter increases until it reaches the user-defined "modulo - 1" value. On the next pulse, the counter is reset to 0 and upcounting restarts. ■ In downcounting, the counter decreases until it reaches 0. On the next pulse, the counter is reset to the user-defined "modulo - 1" value. Downcounting can then restart. <p>The maximum frequency applied to the IN_A and IN_B inputs is 60 kHz. The maximum frequency of the modulo event is 1 event every 5 ms. The maximum modulo value is 4,294,967,296 (possible by declaring 0 in the modulo adjust value).</p>
	32-bit counter counting	<p>This mode is mainly used in axis following.</p> <p>The maximum frequency applied simultaneously to the IN_A and IN_B inputs is 60 kHz. The maximum frequency of the referencing event is 1 event every 5 ms. The counter value is between -2,147,483,648 and +2,147,483,647.</p>
	Width modulation	<p>In this operating mode, the module uses an internal clock generator to supply a periodic signal on the module's O0 output. Only the O0 output is affected by this mode, as the O1 output is independent of it.</p> <p>The maximum output frequency is 4 kHz. As O0 is a source output, a load resistor is necessary for the O0 output signal to change to 0 at the correct frequency. The cyclic ratio adjustment range varies according to the frequency of the O0 output.</p>

Operating modes for module BMXEHC0800


5 configurable 16-bit modes	Frequency meter	<p>This mode measures a frequency, speed, rate, or data stream control. As standard, this mode measures the frequency received on the IN_A input. This frequency is expressed in Hz (number of pulses per second), with a precision of 1 Hz.</p> <p>The maximum frequency on the IN_A input is 10 kHz. The maximum cyclic ratio at 10 kHz is 60%.</p>
	Event counting	<p>This mode is used to determine the number of events received. In this mode, the counter calculates the number of pulses applied to the IN_A input at time intervals defined by the user. As an option, it is possible to use the IN_AUX input during a period of time, provided that the enable bit has been configured.</p> <p>The module counts the pulses applied to the IN_A input each time the pulse for this input lasts longer than 50 µs (without anti-bounce filter). Pulses with less than 100 ms synchronization are lost.</p>
	Downcounting	<p>This mode is used to list a group of operations. In this mode, when counting is enabled (software validation via the valid_sync command), a rising or falling edge on the IN_AUX input causes a value, defined by the user, to be loaded in the counter. The latter decreases with each pulse applied to the IN_A input until it reaches the value 0. Downcounting is made possible when the force_enable command is high (software positioning).</p> <p>The smallest pulse applied to the IN_AUX input varies according to the selected filter level. The maximum frequency applied to the IN_AUX input is 1 pulse every 25 ms.</p>
	Loop (modulo) counting	<p>This mode is used in packaging and labelling applications where actions are repeated on sets of moving objects. The counter increases with each pulse applied to the IN_A input until it reaches the user-defined "modulo - 1" value. On the next pulse in the upcounting direction, the counter is reset to 0 and upcounting restarts.</p> <p>The maximum frequency applied to the IN_A input is 10 kHz. The smallest pulse applied to the IN_AUX input varies according to the selected filter level. The maximum frequency of the modulo event is 1 event every 25 ms. The maximum modulo value is 65,536 units.</p>
	Up/down counter	<p>This mode is used for an accumulation, upcounting, or downcounting operation on a single input. Each pulse applied to the IN_A input produces:</p> <ul style="list-style-type: none"> ■ Upcounting of pulses if the IN_AUX input is high ■ Downcounting of pulses if the IN_AUX input is low <p>The counter values vary between the limits - 65,536 and + 65,535. The maximum frequency applied to the IN_A input is 10 kHz. Pulses applied to the IN_A input after a change of direction are only upcounted or downcounted after a period corresponding to the delay for taking account of the state of the IN_AUX input due to the programmable filter level on this input.</p>
One 32-bit mode	32-bit counter counting	<p>32-bit counter counting mode is available for channels 0, 2, 4, and 6 (channels 1, 3, 5, and 7 are now inactive). It behaves in the same way as the up/down counting mode using up to 3 physical inputs. It enables simultaneous upcounting and downcounting.</p> <p>The counter values vary between the limits - 2,147,483,648 and + 2,147,483,647 (31 bits + sign). The maximum frequency applied to the IN_A and IN_B inputs is 10 kHz. The smallest pulse applied to the IN_AUX input is defined according to the filtering applied to this input. The maximum frequency of loading the preset value is 1 every 25 ms.</p>



BMXEHC0200



BMXEHC0800



BMXFTB20•0

References

BMXEHC0200/0800 counter modules (1)

Description	No. of channels	Characteristics	Reference	Weight kg/lb
Counter modules for 24 V ---	2	60 kHz counting	BMXEHC0200	0.112/ 0.247
2 and 3-wire sensors and 10/30 V --- incremental encoders with push-pull outputs	8	10 kHz counting	BMXEHC0800	0.113/ 0.249

Connection accessories (2)


Description	Composition	Unit reference	Weight kg/lb
Pack of connectors for BMXEHC0200 module	Two 16-way connectors and one 10-way connector	BMXXTSHSC20	0.021/ 0.046

20-way removable terminal blocks for BMXEHC0800 module	Cage clamp	BMXFTB2000	0.093/ 0.205
	Screw clamp	BMXFTB2010	0.075/ 0.165
	Spring	BMXFTB2020	0.060/ 0.132

Shielding connection kit for BMXEHC0200/0800 modules	Comprising a metal bar and two support bases for mounting on rack	See page 2/3	—
--	---	--------------	---

(1) Typical consumption: See the power consumption table available on our website www.schneider-electric.com.

(2) The shielding on the cordsets carrying the counter signals must always be connected to the **BMXXSP••00** shielding connection kit mounted under the rack that holds the **BMXEHC0200** module (see page 2/3).

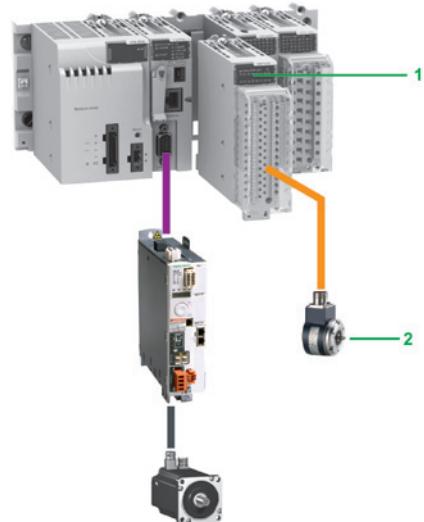

Modicon X80 I/O platform with Modicon M340 processor

3

Presentation

The **BMXEAEO300** SSI encoder interface module **1** for the Modicon automation platform **(1)** is a 3-channel standard synchronous serial interface module designed for use with SSI absolute encoders **2**.

The **BMXEAEO300** module enables SSI encoder values to be processed on PAC platforms for applications requiring accurate and reliable position/angular control, such as:

- Hydro power, e.g. dam inlet gate position control
- Wind power, e.g. wind turbine blade pitch control
- Complex motion loop control, e.g. ship elevator, blast furnace, flame cutting, etc.

The **BMXEAEO300** module provides a migration path from Premium (with **TSXCTY2C** measurement and counter module) to the Modicon X80 I/O platform SSI solution to compete in the above market segments.

Like any other application-specific module, the **BMXEAEO300** module is installed in the rack slots **(01 to 11)**. The number of modules is limited by the maximum number of application-specific channels, permitted according to the CPU type (consult our website www.schneider-electric.com).

Dam inlet gate control

Inlet gate control enables the water level in a dam to be monitored and controlled:

- The SSI encoder provides the PLC with accurate feedback of the gate position for precise monitoring of gate opening, adjustment, and positioning.
- The SSI interface converts the signals from the SSI encoders and transmits them to the CPU.

Wind turbine blade pitch control

Pitch control is required for adjusting the angle of the wind turbine blades in relation to the wind direction and strength, in order to achieve optimum energy conversion efficiency.

- The SSI absolute encoder is frequently used to feedback the position of the blade due to its reliability and robustness.
- Typically, the position of each of the 3 blades are read by the SSI encoders and then transmitted to the CPU via the SSI interface for motion loop control. Sometimes, 3 additional SSI inputs act as backup. Therefore, this new offer is adequately sized for the channel density.

Description

The **BMXEAEO300** SSI encoder interface module is standard format **(1 slot)**. Its housing provides IP 20 protection of the electronics and it is locked in each slot **(01 to 11)** by a captive screw.


The front panel of the **BMXEAEO300** module features:

- 1** A rigid housing providing support and protection for the electronic card
- 2** The module reference marking (a label is also visible on the right-hand side of the module)
- 3** A display block indicating:
 - Module status, 4 LEDs:
 - RUN (green): module's operational status
 - ERR (red): internal fault detected in the module or a fault detected between the module and the rest of the configuration
 - I/O (red): external fault detected
 - DL (green): firmware download status
 - Status of the 3 SSI channels, 8 LEDs:
 - Sx (green): channel x input ($x = 0, 1, \text{ or } 2$)
 - Qx (green): reflex output for channel x ($x = 0, 1, \text{ or } 2$)
 - IO/I (green): capture inputs for the 3 SSI channels
- 4** A connector for a 28-way terminal block, for connecting to a removable cage clamp or spring terminal block on sensors and preactuators

To be ordered separately:

- 5** A 28-way removable cage clamp terminal block **BMXFTB2800** or spring terminal block **BMXFTB2820**, supplied with a channel identification label
- A shielding connection kit to help protect against electrostatic discharge, consisting of a metal bar and two sub-bases for mounting on the rack: **BMXXSP●00** (reference dependent on the number of slots in the rack) (see page 2/3)
- A set of clamping rings **STBXSP30●0** for the connection cable shielding braids (reference dependent on the cable diameter) (see page 2/3)

(1) Only for the Modicon automation platforms compatible with Modicon X80 I/O platform

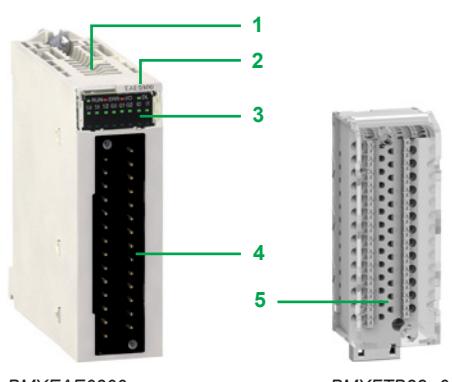

BMXEAEO300

BMXFTB28●0

Module specifications and functions

Specifications

The SSI module **BMXEAEO300** is a 3-channel, synchronous serial interface, absolute encoder interface for Modicon PLCs.

It supports:

- 3 channels of SSI inputs (DATA pair, CLK pair, 24 VDC field power supply to encoder)
- 1 reflex output for each SSI channel (Q)
- 2 capture inputs for the 3 SSI channels (CAP_IN0, CAP_IN1)
- 8 to 31 bits data width
- 4 ranks of baud rates (100 kHz, 200 kHz, 500 kHz, 1 MHz)
- capture and compare functions

Basic and optional functions

The following table presents the main functionalities of the **BMXEAEO300** module:

Function	Basic/ optional	Description
Absolute SSI encoder value acquisition	Basic	The position values of the SSI channel are automatically read by the module within 1 ms, unless the channel is disabled.
Modulo	Optional for motion	The modulo function limits the dynamics of the position value within the power of 2. An event (if enabled) detects the modulo passing. The reflex output can also be asserted at the passing of modulo (if configured).
Reduction	Optional for motion	This function reduces the intrinsic resolution of the encoder by a value defined by the "reduction" parameter. This reduction is carried out by a shift in the bit field provided by the encoder.
Offset	Optional for motion	The correction function of the encoder offset systematically corrects the offset produced by the encoder at mechanical position "0". The user enters the absolute encoder offset parameter.
Capture	Optional for events	The two capture input registers (per channel) enable the PLC program to carry out a dynamic measurement function between two points. The capture action can be triggered by two capture inputs. The event will be triggered at each occurrence of capture.
Compare	Optional for events	Two independent comparators (per channel), with thresholds that can be modified by adjustment (explicit exchange), are able to generate an event or reflex output when the threshold is crossed.

Main features

- Supported by Unity Pro V6.0 (or higher).
- Supports absolute encoder 24 V model with standard SSI interface, including Telemecanique Sensors OsiSense SSI encoders. For further information, consult the website www.tesensors.com.
- Standards and approvals: CE, UL, CSA, C-Tick, GOST, etc.

References

SSI encoder interface module (1)

Description	Number of channels	Description per channel	Reference	Weight kg/lb
SSI encoder interface module	3 SSI channels	1 reflex output for each SSI channel 2 capture inputs for the 3 SSI channels 8 to 31 bits data width 4 ranks of baud rates: 100 kHz, 200 kHz, 500 kHz, 1 MHz Capture and compare functions	BMXEAEO300	0.138/ 0.304



BMXEAEO300




BMXFETB2800

Cabling accessories

Description	Description, use	Reference	Weight kg/lb
28-way removable terminal block	Cage clamp	BMXFETB2800	0.111/ 0.245
	Spring	BMXFETB2820	0.080/ 0.176
Shielding connection kit for module BMXEAEO300 (2)	Comprising a metal bar and two support bases for mounting on rack	See page 2/3	–

(1) Typical consumption: See the power consumption table available on our website www.schneider-electric.com.

(2) The shielding on the cables carrying the power supply to the module, each SSI channel, the capture inputs and the reflex outputs (if any of them is wired) must always be connected to the **BMXXSP••00** shielding connection kit mounted under the rack holding the **BMXEAEO300** module (see page 2/3).

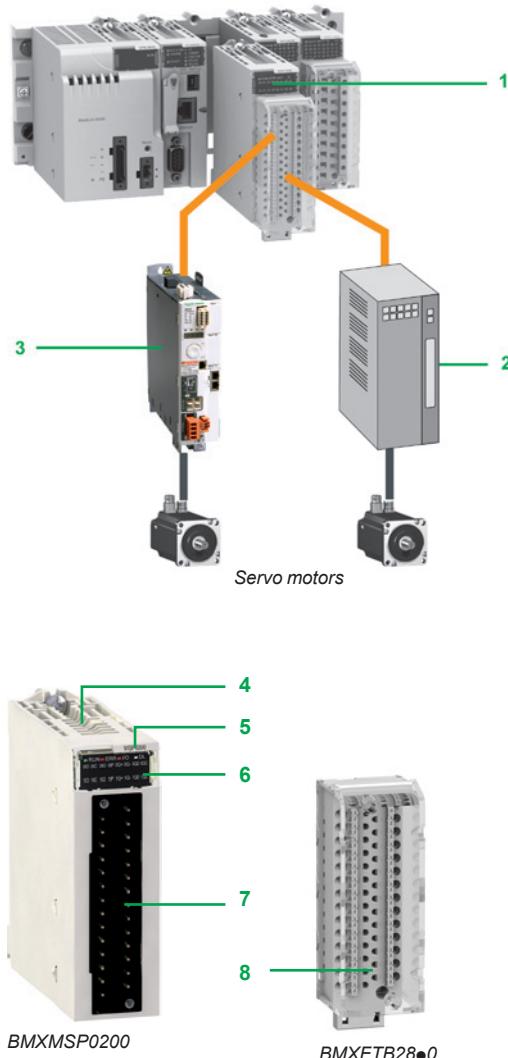

Presentation

The **BMXMSP0200** motion control *pulse train output* (PTO) module for the Modicon X80 I/O platform is used for controlling third-party variable speed drives **2**, which have an integrated position loop and inputs that are compatible with open collector outputs.

The **BMXMSP0200** control module is also directly compatible with the Lexium 32C and 32M **3** servo drive ranges, which have an integrated pulse control interface.

The **BMXMSP0200** motion control PTO module has two independent PTO channels. Like any other application-specific module, it is installed in the rack slots (labelled **01** to **11**). The number of modules is limited by the maximum number of application-specific channels permitted according to the CPU type:

- Standard **BMXP34100**: Maximum of 20 application-specific channels (1)
- Performance **BMXP3420•0**: Maximum of 36 application-specific channels (1)
- **BMEP5810**: Maximum of 24 application-specific channels (1)
- **BMEP5820**: Maximum of 32 application-specific channels (1)
- **BMEP5830** and **BMEP5840**: Maximum of 64 application-specific channels (1)

Description

The **BMXMSP0200** motion control module is standard format (1 slot). Its housing provides IP 20 protection of the electronics and it is locked in each slot (**01** to **11**) by a captive screw.


The front panel of the **BMXMSP0200** motion control module features:

- 4** A rigid body providing support and protection for the electronic card
- 5** A module reference marking (a label is also visible on the right-hand side of the module)
- 6** A display block indicating:
 - Module status, 4 LEDs (RUN, ERR, I/O and DL)
 - Status of the auxiliary inputs, 4 per channel
 - Status of the PTO outputs, 2 per channel
 - Status of the auxiliary outputs, 2 per channel
- 7** A connector for a 28-way terminal block, for connecting to a removable spring terminal block on sensors and preactuators

To be ordered separately:

- 8** A 28-way removable cage clamp terminal block **BMXFIB2800** or spring terminal block **BMXFIB28•0**, supplied with a channel identification label
- A shielding connection kit to help protect against electrostatic discharge, consisting of a metal bar and two sub-bases for mounting on the rack: **BMXXSP••000** (reference dependent on the number of slots in the rack) (see page 2/3)
- A set of clamping rings **STBXSP30•0** for the connection cable shielding braids (reference dependent on the cable diameter) (see page 2/3)

(1) Application-specific channels: **BMXEHC0200** (2-channel) and **BMXEHC0800** (8-channel) counter modules, **BMXMSP0200** (2-channel) motion control module, **BMXNOM0200** (2-channel) and **BMXNOR0200H** (1-channel) serial communication modules, **BMEAHI0812** (8-channel) analog input module and **BMEAHO0412** (4-channel) analog output module, **BMXAE0300** (3-channel) SSI module and **BMXERT1604T** (16-channel) discrete input module.

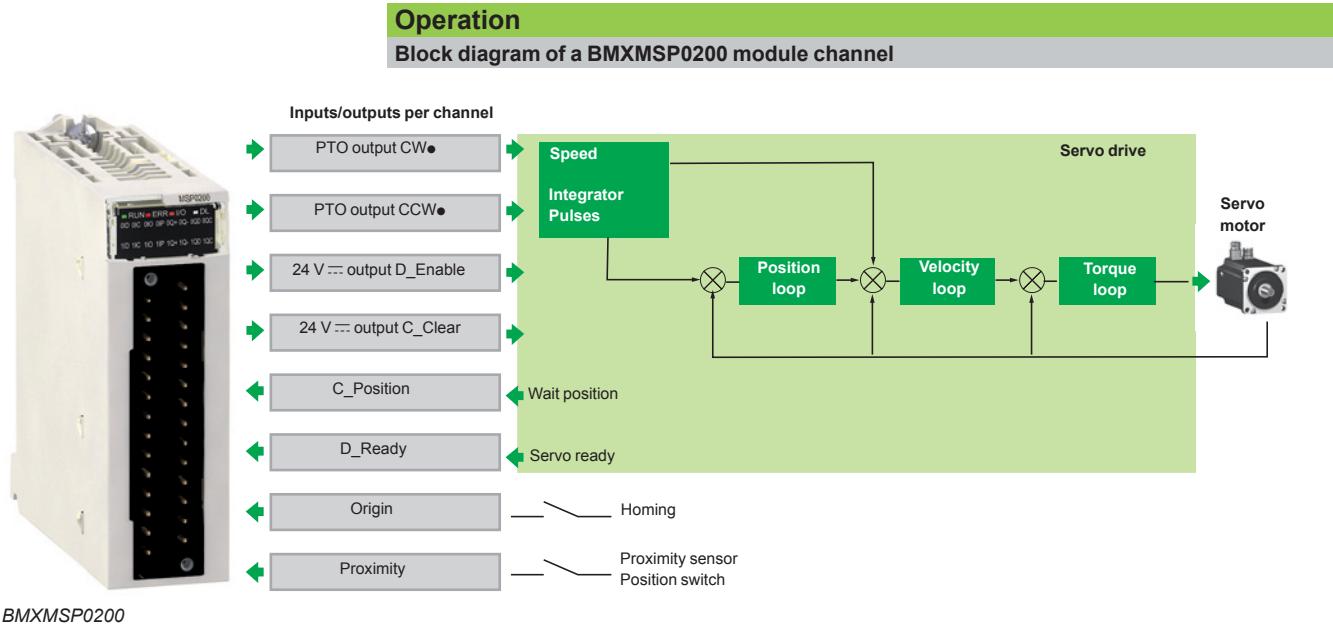

BMXMSPO200

3

References

Motion control modules (1)

Description	Number of channels	Description per channel	Reference	Weight kg/lb
PTO module (PTO = Pulse Train Output)	2	2 x 200 kHz max. PTO outputs 2 x 24 V .../50 mA auxiliary outputs 4 x 24 V ... auxiliary inputs	BMXMSPO200	0.145/ 0.320




BMXMSPO200

Cabling accessories

Description	Description, use	Length	Reference	Weight kg/lb
28-way removable terminal block	Cage clamp	–	BMXFTB2800	0.111/ 0.245
	Spring	–	BMXFTB2820	0.080/ 0.176
Connection cable for daisy chain or pulse control (2)	From BMXMSPO200 (screw terminal block) module to Lexium 32C or 32M (RJ45 connector) (cable with flying leads at one end and an RJ45 connector at the other)	3 m/9.84 ft	VW3M8223R30	–
Shielding connection kit for module BMXMSPO200	Comprising a metal bar and two support bases for mounting on rack	–	See page 2/3	–

(1) Typical consumption: See the power consumption table available on our website www.schneider-electric.com.

(2) The shielding on the cordsets carrying the motion control signals must always be connected to the BMXXSP●000 shielding connection kit mounted under the rack holding the BMXMSPO200 module (see page 2/3).

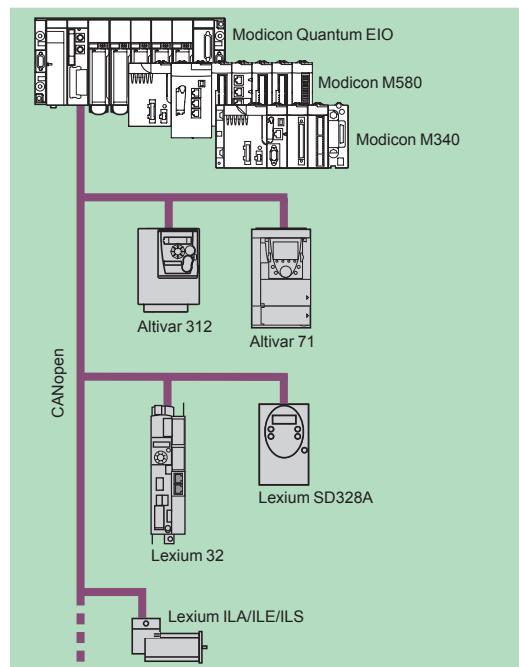

MFB: Motion control distributed over CANopen



Presentation

MFB (*Motion Function Blocks*) is a library of function blocks integrated in Unity Pro used to set up motion control in the architectures of drives and servo drives on CANopen buses:

- Altivar 312: For asynchronous motors from 0.18 to 15 kW
- Altivar 71: For synchronous or asynchronous motors from 0.37 to 500 kW
- Lexium 32: For servo motors from 0.15 to 7 kW
- Lexium ILA/ILE/ILS: Integrated motor drives from 0.10 to 0.35 kW
- Lexium SD328A: For 3-phase stepper motors from 0.35 to 0.75 kW.

In compliance with PLCoopen specifications, the MFB library allows both easy and flexible motion programming with Unity Pro, as well as axis diagnosis.

In maintenance operations, drives can be replaced quickly thanks to drive parameter download blocks.

Setting up drives on the CANopen network is facilitated through *Motion Tree Manager* organization in the Unity Pro browser, making it easy for users to access the application drives.

Applications

The features of the *Motion Function Blocks* library are particularly suitable for machines with independent axes. In the case of these modular/special machines, MFB function blocks are an ideal solution for controlling single axes. The following are typical applications for this type of architecture:

- Automatic storage/removal
- Material handling
- Palletizers/depalletizers
- Conveyors
- Packaging, simple label application
- Grouping/ungrouping
- Adjustment axes in flexible machines, etc.

Functions


The table below lists the function blocks of the MFB library and the drives compatible with them. The prefix indicates the block family:

- MC: Function block defined by the Motion Function Blocks PLC Open standard
- TE: Function block specific to Schneider Electric products
- Lxm: Function block specific to Lexium servo drives

Type	Function	Function block	Altivar 312	Altivar 71	Lexium 32	Lexium ILA/ILE/ILS	Lexium SD328A
Management and motion	Read an internal parameter	MC_ReadParameter					
	Write an internal parameter	MC_WriteParameter					
	Read the current position	MC_ReadActualPosition					
	Read the instantaneous speed	MC_ReadActualVelocity					
	Acknowledge detected error messages	MC_Reset					
	Stop any active movement	MC_Stop					
	Axis coming to standstill	MC_Power					
	Movement to absolute position	MC_MoveAbsolute					
	Relative movement	MC_MoveRelative					
	Additional movement	MC_MoveAdditive					
	Homing	MC_Home					
	Movement at given speed	MC_MoveVelocity					
	Read diagnostic data	MC_ReadAxisError					
	Read servo drive status	MC_ReadStatus					
	Torque control	MC_TorqueControl					
	Read actual torque value	MC_ReadActualTorque					
	Manual control	MC_Jog					
Save and restore parameters (FDR)	Read drive parameters and store in PLC memory	TE_UploadDriveParam					
	Write drive parameters from PLC memory	TE_DownloadDriveParam					
Advanced Lexium functions	Read a motion task	Lxm_UploadMTTask					
	Write a motion task	Lxm_DownloadMTTask					
	Start a motion task	Lxm_StartMTTask			(1)		
	Set the reduction ratio, signed	Lxm_GearPosS			(1)		
System	Communication with the servo drive	TE_CAN_Handler					

Compatible

(1) The Lxm_StartMTTask and Lxm_GearPosS function blocks are only compatible with the type Lexium 32 (LXM32M) servo drives.

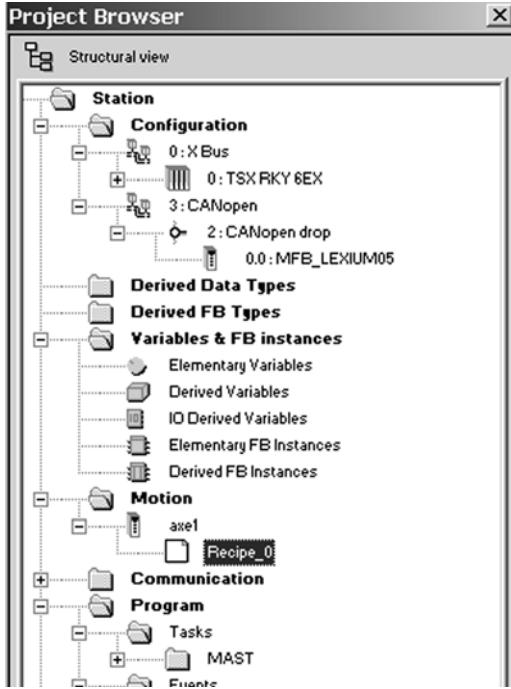

Motion Tree Manager integrated in the Unity Pro browser

Motion Tree Manager

Motion Tree Manager is associated with Unity Pro's MFB library and integrated in its browser. It provides specific assistance for:

- Axis object management
- Axis variable definition
- Drive parameter management

Motion Tree Manager automatically creates links between the CANopen bus configuration and the MFB function block data using a limited amount of configuration data.

General axis parameters

In this tab, the designer is prompted to define:

- The name of the axis that will identify it in the browser for the entire application
- The address of the drive on the CANopen bus


Axis parameters

The drop-down lists in this tab are used to determine the exact type of drive: family, version.

Variable names

This last tab is used to identify data structures:

- **Axis_Reference:** Used by the function block instances for the axis in question
- **CAN_Handler:** Used to manage communication with the drive via the CANopen network

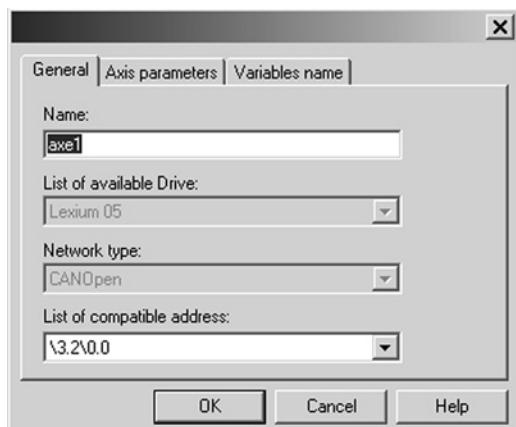

General parameters: Axis name and address

Recipe definition

The “recipes” attached to the axis are the data structures containing the adjustment parameters of a given drive. This data is used when:


- Changing the drive with restoration of the context during “Faulty Device Replacement” (FDR) maintenance
- Changing the manufacturing program of the machine and calling up an appropriate set of parameters: servo control gains, limitations, etc. adapted to the weight and size of the moving parts
- Saving parameters in the initial values of the PLC application

Programming, diagnostics, and maintenance

Communication between the PLC and drive is automatically set up by the system as soon as a TE_CAN_Handler instance is declared in the Unity Pro task with which the axis is associated. Movements are then programmed by sequencing function blocks from the library in the user's chosen Unity Pro editor (LD, ST, FBD).

The two function blocks, MC_ReadStatus, and in some cases MC_ReadAxisError, are useful for determining the overall status of the axis, as well as the code of the active detected errors.

The function blocks TE_UploadDriveParam and TE_DownloadDriveParam allow the application to save the drive parameters (recipe) and to then quickly reload them into another drive when it is necessary to change the original one.

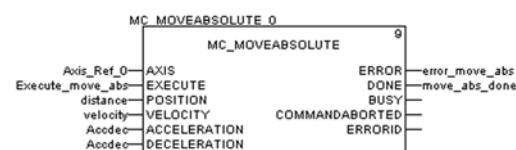

MFB: Programming a movement in absolute mode


Drop adapters

- Modicon X80 CRA Ethernet drop adapters page 4/2
- Modicon X80 NRP RIO drop optical repeaters page 4/3
- Peripheral Remote I/O Adapter page 4/4
- Time stamping system page 4/6
- Modicon X80 performance EIO drop adapter page 4/8

Communication, integrated ports and modules

- Selection guide* **page 4/10**

- RTU communication systems page 4/12
 - Presentation page 4/12
 - Description, functions page 4/14
 - References page 4/15
- BMXEIA0100 master module **page 4/16**
 - Presentation, description page 4/16
 - References page 4/17
- Modbus and Character mode serial links **page 4/18**
 - Presentation, description page 4/18
 - Complementary characteristics, references page 4/19
- PMXNOW0300 Wi-Fi access point **page 4/20**
 - Presentation, characteristics page 4/20
 - References page 4/21
- PMESWT0100 weighing module **page 4/22**
 - Presentation, description page 4/22
 - References page 4/23

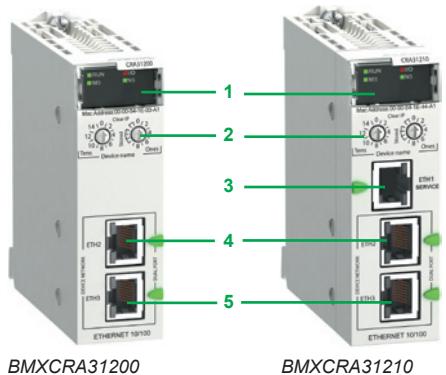

Modicon X80 CRA Ethernet drop adapters (1)/(2)

Presentation

A Quantum EIO architecture with Modicon X80 EIO drops requires the use of a dedicated CRA drop adapter in each Modicon X80 drop:

- “Standard” drop adapter BMXCRA31200 (capacity, see below)
- “Performance” drop adapter BMXCRA31210 (capacity, see below)

These drop adapters are connected by Ethernet cordsets fitted with RJ45 connectors. The dual Ethernet network connection port on each drop adapter allows *Daisy Chain Loop* connections using the RSTP protocol (*Rapid Spanning Tree Protocol*).

Each module uses one slot in the Modicon X80 rack.

The BMXCRA31210 adapter is also available in a conformal coating version for harsh environments.

Capacity of Quantum EIO architectures with Modicon X80 EIO

- 1 Quantum CPU drop that can have one primary rack and one secondary rack (3), equipped with a 140CPU651●●● advanced CPU
- With 140CPU651●● standard CPUs and the 140CPU67160 HSBY CPU:
 - Up to 16 Modicon X80 EIO drops, limited to a maximum of 31 EIO drops (Quantum + Modicon X80)
 - With the 140CPU65260 standard CPU and 140CPU6726● HSBY CPUs:
 - Up to 31 Modicon X80 EIO drops, limited to a maximum of 31 EIO drops (Ethernet Quantum and Modicon X80)
 - Each Modicon X80 EIO drop can comprise one primary rack and one secondary rack (3)
 - Distance:
 - 100 m/328.08 ft between stations (copper medium)
 - 2 km/1.24 mi between Modicon X80 drops, with BMXNRP0200 multimode optical fibre repeaters
 - 16 km/9.94 mi between Modicon X80 drops, with BMXNRP0201 multimode optical fibre repeaters

Capacity of Modicon X80 CRA drop adapters

Type of module	BMXCRA31200 “standard”	BMXCRA31210 “performance”
Primary racks per drop	Up to 2	Up to 2
SERVICE port	–	1
Discrete I/O modules	Up to 128	Up to 1024
Analog I/O modules	Up to 16	Up to 256
Expert modules supported:		
■ serial link	–	BMXNOM0200
■ time and date stamping at 1 ms	–	BMXERT1604T
■ counting	–	BMXEHC0200/0800
CCOTF function	–	Yes
Time and date stamping	–	10 ms

Description

- 1 Display block indicating the module status
- 2 Rotary switches for addressing EIO drops (00...159)
- 3 On BMXCRA31210 module: dedicated RJ45 SERVICE port for remote service tools such as a PC, an HMI terminal, or Ethernet DIO devices (identical to the SERVICE port on Quantum CRP/CRA modules, see page 2/6)
- 4 RJ45 DEVICE NETWORK port for connection to the Ethernet network
- 5 RJ45 DEVICE NETWORK port for connection to the Ethernet network

(1) For additional characteristics, see our website www.schneider-electric.com.

(2) Requires Unity Pro Extra Large software ≥ V7.0.

(3) Requires two BMXXBE1000 rack expansion modules (one in the primary rack and one in the secondary rack) and a BMXXBC●●●K extension cable (0.8, 2, or 28 m/2.62, 6.56, or 91.86 ft) for connecting these two modules. See page 2/8.

Modicon X80 EIO drop optical repeaters (1)(2)

Presentation

BMXNRP0200/0201 optical fibre repeaters are an alternative to the use of ConneXium managed dual ring switches (DRS), for optical fibre communications over long distances, in Ethernet I/O systems.


When inserted in Modicon X80 EIO drops, BMXNRP0200/0201 optical fibre repeaters make it possible to:

- Extend the total distance of the EIO network, when EIO drops are located in areas of the factory more than 100 m/328.08 ft away
- Enhance immunity to noise
- Resolve grounding incompatibilities, between sites with different grounding methods NRP repeaters can be installed on the primary ring or on secondary rings. These modules cannot however be used to connect secondary rings to the primary ring.

The BMXNRP0200 repeater for multimode optical fibre allows remote location up to 2 km/1.48 mi.

The BMXNRP0201 repeater or single mode optical fibre allows remote location up to 16 km/11.80 mi.

Depending on the configuration, the NRP repeater must be linked to the CRA adapter of the drop where it is installed, via one or two Ethernet Interlink cables.

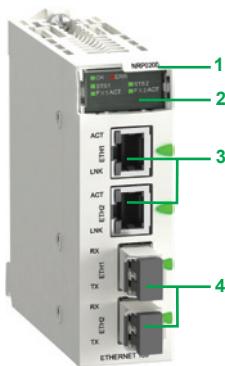

BMXNRP0200

Description

- 1 Module reference
- 2 Display block indicating the module status
- 3 RJ45 Ethernet ports. Two LEDs LNK and ACT indicate the state of each port
- 4 Optical fibre ports with SFP transceiver for LC type connector

References (1)

Modicon X80 EIO drop optical repeaters (2)


Description	Optical fibre	Reference	Weight kg/lb
Modicon X80 EIO drop optical repeaters	multimode	BMXNRP0200	—
	single mode	BMXNRP0201	—

Ethernet head and drop adapters (2)

Description	SERVICE port	Reference	Weight kg/lb
Modicon X80 EIO drop adapter	—	BMXCRA31200	—
	Provide 1 module per Modicon X80 EIO drop	1	BMXCRA31210

(1) For additional characteristics, see our website www.schneider-electric.com.

(2) Requires Unity Pro Extra Large software ≥ V7.0, see our website www.schneider-electric.com.

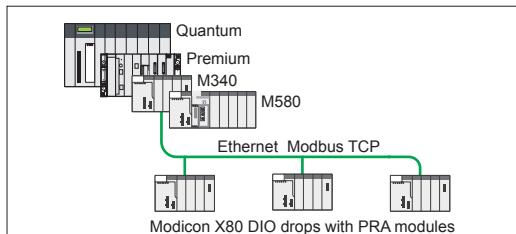

Modicon X80 DIO drops in a Quantum/Premium/M340/M580 I/O architecture using Ethernet Modbus TCP

Presentation

The Peripheral Remote I/O Adapter (PRA) is specifically dedicated for Modicon X80 DIO drops in a Quantum/Premium/M340/M580 I/O architecture using Ethernet Modbus TCP.

The BMXPRA0100 module manages a remote X80 I/O rack on Ethernet Modbus TCP which includes:

- discrete I/O modules
- analog I/O modules

It communicates by I/O scanning with the master PAC (Quantum/ Premium/M340/ M580).

In case of a redundant Ethernet link, the use of a BMXNOE0100 Ethernet module is necessary.

Principal characteristics

Primary racks per drop

Up to 4

Discrete I/O modules

Up to 1024

Analog I/O modules

Up to 256

Intern memory

Up to 448 kBits

Memory card capacity

Up to 96 kBits

Average consumption

95 mA

Dissipated power

2.3 W

Savable real time clock

Yes

Description

- 1 Module reference
- 2 Display block indicating the module status
- 3 Protected memory card port
- 4 RJ45 Ethernet port



PF122939A



BMXPRA0100

Reference (1)

Description	Reference	Weight kg/lb
Peripheral Remote I/O Adapter Provide 1 module per Ethernet Modbus TCP DIO drop	BMXPRA0100	—

(1) Requires Unity Pro software ≥ V4.1.



BMXERT1604T module

Presentation

The time stamping system is a complete solution providing a SCADA with a sequence of events that are time-stamped at source, enabling the user to analyze the source of any abnormal behaviour in an automated system.

The SOE (sequence of events) is displayed in the alarms log or in the list of events for a client such as a SCADA.

Each event in the SOE is a change of value (transition) of a discrete I/O detected by a time stamping module.

Advantages

Using the time stamping system has the following advantages:

- No PLC programming
- Direct communication between the time stamping modules and the client; if the time stamping modules are in a Quantum Ethernet I/O drop, the bandwidth of the PLC communication is not used
- Consistency of the I/O values between the process (time stamping modules) and the client
- Consistency is maintained irrespective of the operating mode
- No loss of events under normal operating conditions
- Management of Hot Standby configurations on the PLC and/or SCADA redundancy

Composition of a time stamping architecture

BM•CRA312•0 module

This time stamping module can be at the source of any discrete I/O signal located in the drop with a resolution of 10 ms.

To help ensure no event is lost, all events are stored and kept in a buffer located in the product until OFS takes them.

Synchronization of the CRA module uses the NTP protocol.

BMXERT1604T module

This module has 16 discrete inputs which carry out the time stamping at source outputs with a resolution of 1 ms.

To help ensure no event is lost, all events are stored and kept in a buffer located in the product until OFS takes them.

This module can be placed either in an RIO drop, or in a local rack equipped with a BM•CRA31210 module.

The CRA module is synchronized via the DCF 77 or IRIG-B standards.

OFS V3.50

OFS V3.50 is used to access events stored in the various buffers in the architecture and to place them in the SCADA via the standard OPC DA protocol. For further information, consult our website www.schneider-electric.com.

Vijeo Citect V7.30

Vijeo Citect V7.30 receives events transmitted by OFS and displays them in the SOE or in the list of alarms.

Performance		
Performance	Event source module	Value
Between two identical source modules in the same rack	BMXERT1604T	1.6 < resolution < 3.3 ms
	BM•CRA31210	10 ms
Between two different inputs in the same source module	BMXERT1604T	1 ms
	BM•CRA31210	1 scan
Maximum number of events scanned	BMXERT1604T	400 events (1)
	BM•CRA31210	2048 events (1)
Maximum number of I/O and memory available	BMXERT1604T	16 discrete inputs on module 512 events in internal buffer
	BM•CRA31210	256 discrete I/O configured 4000 events in internal buffer
Maximum number of source modules in an Ethernet remote drop	BM•CRA31210	1 per drop
	BMXERT••••	9 per drop
Maximum number of event sources controlled	BMXERT••••	500 sources per second (1)

References			
Description	Input type	Reference	Weight kg/lb
Multifunction time stamping input module	16 discrete inputs	BMXERT1604T	–

(1) This maximum value is not an absolute value. It depends on the overall system dynamics (total number of scanned items and number of events generated by the system).



BMECRA31210

Modicon X80 performance EIO adapter

Presentation

A M580 EIO architecture with Modicon X80 I/O drops requires the use of a dedicated adapter in each Modicon X80 drop.

The **BMECRA31210** adapter supports Ethernet and X-bus communications across the remote backplane.

This EIO adapter module supports several expert modules such as counting and weighing modules and CCOTF.

For Modicon X80 RIO drops on an Ethernet backplane, time stamping can be managed with a resolution of 10 ms when using a **BMECRA31210** performance EIO adapter.

Only one **BMECRA31210** module can be installed per Modicon X80 RIO drop.

This module can also support an expansion rack.

The **BMECRA31210** adapter is designed to be installed on an Ethernet backplane in the main remote rack. The adapter supports the Modicon X80 I/O and partner modules with both Ethernet and X-bus connections (1).

The keying pin on the rear side of the module helps ensure that the **BMECRA31210** adapter is not installed on unsupported backplanes.


These adapters are connected by Ethernet cordsets fitted with RJ45 connectors. The dual Ethernet connection port on each adapter allows Daisy Chain Loop connections using the RSTP protocol (Rapid Spanning Tree Protocol).

The **BMECRA31210** adapter is also available in a "Conformal Coating" version for harsh environments.

Capacity of the Modicon BMECRA31210 adapter

Primary racks per drop	Up to 2
SERVICE port	1
Discrete I/O modules	Up to 1024
Analog I/O module	Up to 256
Expert modules supported:	<ul style="list-style-type: none"> ■ serial link BMXNOM0200 ■ time and date stamping at 1 ms BMXERT1604T ■ counting BMXEHC0200/BMXEHC0800 ■ weighing PMESWT0100 ■ HART integrated analog I/O modules BMEAHI0812/BMEAHO0412
CCOTF function	Yes
Time and date stamping	10 ms

(1) The module is also compatible with X-bus backplane (PV02 or later) via the connector on the rear left side. In this case it has the same functionalities as a **BMXCRA31210** "performance" Ethernet drop adapter.



BMECRA31210

Description

- 1 LED display block indicating the module status
- 2 Rotary switches for addressing EIO drops (00...159)
- 3 Dedicated RJ45 service port (ETH 1) for remote service tools such as a PC, an HMI terminal module, or Ethernet DIO devices
- 4 RJ45 device network port (ETH 2) for connection to the Ethernet network
- 5 RJ45 device network port (ETH 3) for connection to the Ethernet network



References

Ethernet drop adapter

Description	SERVICE port	Reference	Weight kg/lb
X80 EIO drop adapter Provide one module per Modicon X80 EIO drop	1	BMECRA31210	-

Modicon X80 I/O platform

Communication, integrated ports and modules

Applications		RTU communication	
Type of device	RTU module		
			
			
Network protocols		Structure	Physical interface
Medium	Type of connector	One RJ45 connector	Non-isolated RS 232/485 (Serial link), Non-isolated RS 232 (Radio, PSTN, GSM, GPRS/3G external modem link)
Configuration	Access method	CSMA-CD (Modbus/TCP), Master/slave (IEC 104/DNP3)	One RJ45 connector
Standard services	Data rate	10/100 Mbps (Modbus/TCP)	0.3...38.4 Kbps (Serial link)
Transparent Ready communication services	Max. length	Double twisted pair copper cable, category CAT 5E, optical fibre via ConneXium cabling system	Double shielded twisted pair copper cable, crossover serial cable (Serial link), direct serial cable (External modem link)
RTU communication services	Number of modules of the same type per station	128 (Modbus/TCP), 64 slaves/servers (IEC 104/DNP3)	32 max.
		100 m/328.08 ft (copper cable), 4000 m/13123.3 ft (multi-mode optical fibre), 32,500 m/106627 ft (single-mode optical fibre)	1000 m/3280.83 ft (Serial link with insulating case)
		2 Ethernet or RTU modules per station with any BMXP34 or BMEP58 processor	Depending on application-specific channels (20/64 application-specific channels with BMXP34/BMEP58)
		Modbus/TCP messaging	Reading/writing discrete and analog I/O, counters
		C30	–
		Rack Viewer PLC diagnostics, Data Editor access to PLC data and variables	–
		–	–
		Hosting and display of user Web pages	–
		–	–
		–	–
		Yes	–
		Yes (client)	–
		Yes	–
		Server	–
		Yes (agent)	–
		–	–
		Yes, IEC101/104 and DNP3	–
		Time and date stamped data exchange	Interrogation via polling and exchanges on change of status (RBE), unsolicited messaging
		RTU time synchronization	Yes, IEC101/104 and DNP3
		Management and buffering of time and date stamped events	Yes, IEC101/104 and DNP3
		Automatic transfer of time and date stamped events to the Master/SCADA	Yes, IEC101/104 and DNP3 Buffer holding 10,000 events (per connected client, 4 clients max.)
Data Logging service	Compatibility with processor	No other integrated port references depending on other type of integrated port	Yes, on SD 128 MB memory card, in CSV files, access via FTP or sent by e-mail
		Serial link	Standard and Performance M340 processors All M580 processors
		Ethernet Modbus/TCP	–
		CANopen	
Page		BMXNOR0200H	
		BMXNOR0200H	
		4/15	

Applications		AS-Interface communication		Serial link communication	
Type of device	AS-Interface actuator/sensor bus module	2-channel serial link module	Serial link communication		
					
Network protocols	AS-Interface	Modbus and Character mode			
Structure	AS-Interface V3 standard	Non-isolated RS 232, 8-wire Isolated RS 485, 2-wire			
Medium	3-way SUB-D	2 RJ45 and 1 RJ45			
Configuration	Master/slave	–			
Standard services	167 Kbps	0.3...115.2 Kbps in RS 232 0.3...57.6 Kbps in RS 485			
Transparent Ready conformity class	Two-wire AS-Interface cable	Shielded twisted pair copper cable			
Embedded Web server services	62 slaves	2 per drop, 16 per Ethernet remote I/O (R/I/O) network max.			
Transparent Ready communication services	Max. length	100 m/328.08 ft, 500 m/1640.42 ft max. with 2 repeaters	15 m/49.21 ft with non-isolated RS 232, 1000 m/3280.83 ft with non-isolated RS 485		
RTU communication services	Number of links of the same type per station	BMXP341000 processor: 2 AS-Interface modules	20/36 application-specific channels with BMXP341000/P342•••• (1 application-specific channel = 1 counter, motion control module or serial link channel)		
		BMXP3420•0 or BMEP58 processor: 4 AS-Interface modules	36 application specific channels max. 2 BMXNOM0200 modules per BM•CRA31210 Ethernet drop adapter		
		BM•CRA31210 Ethernet drop adapter: 2 AS-Interface module	All M580 processors: 36 application-specific channels		
		Transparent exchanges with the sensors/actuators	Read/write bits and words, diagnostics in Modbus mode Send and receive character string in Character mode		
		M4 profile	–		
		–	–		
		Compatibility with processor	Standard and Performance M340 processors All M580 processors		
		Type of processor or None module depending on other integrated port	BMXEIA0100	BMXNOM0200	
		Serial link			
		Ethernet Modbus/TCP			
		CANopen			
		Page	4/17		


Presentation

RTU systems are designed to meet the needs of the water industry, the oil and gas sector, and other infrastructures, where remote monitoring and telecontrol are essential to the good management of sites and substations spread over a wide geographical area.

RTU protocols and Telemetry systems provide robust, reliable means of communication which are suitable for the process values, maintenance, and remote monitoring needs of infrastructures disseminated over a vast geographical area which may be difficult to access.

An RTU system consists of the following elements:

- A Telemetry Supervisor (SCADA) in a central control room
- A network infrastructure and a variety of suitable communication methods (LAN, WAN, modems, etc)
- A large number of RTU substations geographically distributed throughout the field

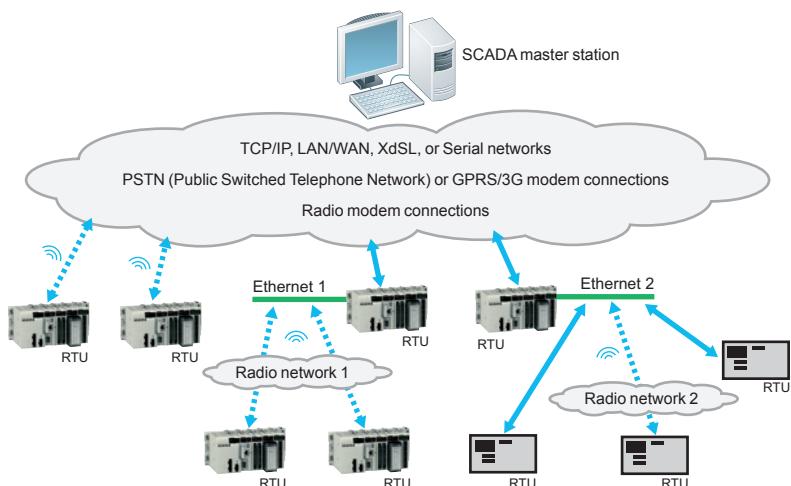

Example of an RTU system architecture

Main functions

The main RTU system functions are as follows:

- Remote communications:
 - Between remote RTU sites (coordination, synchronization)
 - With the SCADA host system, controlling the central operator station (monitoring, alarm reports) and centralized databases (archiving of alarms or events)
 - With the on-call staff (alarm indication)
 - With the technical station (diagnostics, maintenance)
- Data acquisition, processing, and memorization:
 - Process data sampling using standard or dedicated sensors, validation
 - Exchange of data with other devices within the station, including controllers and operator consoles
 - Use of discrete or analog I/O, serial links, fieldbuses, and LANs
 - Event detection, time and date stamping, prioritization, and logging as required by the application
- Other functions:
 - IEC 1131-3 programmable control: forcing, access control, load sharing, servo control
 - Data logging
 - Alarm and report notification by e-mail/SMS
 - Web HMI: displaying the process, alarm handling, trend analysis, telecontrol

Presentation (continued)

Currently, people working in the industrial Telemetry sectors use standard protocols for communication between control centres (SCADA) and RTU stations.

The most commonly used protocols are as follows:

- IEC 60870-5: IEC (International Electrotechnical Commission), in particular IEC 60870-5-101/104 (commonly known as IEC 101 or 104)
- DNP3: Distributed Network Protocol version 3

DNP3 is the predominant protocol in North America, Australia, and South Africa whereas, in certain European countries, the IEC protocol is required by the legislation. IEC is also commonly used in the Middle East.

The geographical distribution of these protocols is as follows:

- DNP3: North America, Australia, New Zealand, UK, Asia, South America, etc.
- IEC 60870-5: Europe, Middle East, Asia, South America, etc.

These protocols offer similar functions.

They are both particularly suited to “transient communications” (modem, radio) and data exchanges with limited bandwidth for the following reasons:

- They transfer data in a very robust and reliable manner between the SCADA system and the RTU devices
- They are essentially “event-triggered” protocols (exchanges on changes of state, exchanges of time and date stamped events).

They offer the following transmission modes:

- Interrogation via polling
- Data exchanges on changes of state (*RBE: Report By Exception*)
- Unsolicited messaging (a slave station can start an exchange of data with the master station)

Both protocols offer native data management and time and date stamped events:

- Time synchronization between the master station and auxiliary stations via protocol functions
- Time and date stamping of data and events
- Automatic transfer of time and date stamped events between the RTU stations and SCADA (control room)

Presentation (continued)

The **BMXNOR0200H** communication module integrates the RTU (*Remote Terminal Unit*) functions and protocols in the Modicon X80 I/O platform for industrial Telemetry applications and other widely distributed infrastructures.

The **BMXNOR0200H** module can be used to connect an RTU X80 I/O PLC directly to a Telemetry supervisor or to other RTU stations, via the standard DPN3 protocols (subset level 3) or IEC 60870-5-101/104 with different connection methods: Ethernet TCP/IP, LAN, WAN, serial link, or modem connections (radio, PSTN, GSM, GPRS/3G, ADSL).

The **BMXNOR0200H** module is designed to operate in a harsh environment (conformal coating), in an extended temperature range (-25 to +70 °C/-13 to +158 °F).

Functions

The **BMXNOR0200H** module offers the following functions:

- Upstream RTU communication to the SCADA (server or slave mode)
- Downstream RTU communication to field devices (master mode)
- RTU protocols: Time synchronization, exchanges of time and date stamped data via polling (on change of state and unsolicited), management of time and date stamped events
- Application Data Logging with time and date stamping in the module Flash memory card
- Event notifications via e-mail or SMS
- Embedded Web server for setting the RTU protocol parameters, diagnostics, and monitoring
- Communications on Ethernet port:
 - 10BASE-T/100BASE-TX physical interface
 - Modbus/TCP protocol (client and server)
 - Integrated RTU protocols for Ethernet communications: DNP3 IP (client or server) and IEC 60870-5-104 (over IP) (client or server)
 - Connection of ADSL external modem on the Ethernet port, via the PPPoE (*Point-to-Point Protocol over Ethernet*) protocol
 - Advanced Ethernet functions: NTP client, FTP client or server, HTTP server, SOAP/XML server, SNMP agent, SMTP agent
- Communications on serial port:
 - Isolated RS232/RS485 point-to-point serial links
 - Integrated RTU protocols for serial and modem communications: IEC 60870-5-101 (master or slave) and DNP3 serial (master or slave)
 - Connection of external modems (radio, PSTN, GSM, GPRS/3G) via the PPP (*Point-to-Point Protocol*) protocol

Description

The **BMXNOR0200H** module can be installed in either a standard or "ruggedized" configuration, equipped with a standard **BMXP34••••• /BMEP58•••••** or "ruggedized" **BMXP34•••••H/BMEP58••••H** processor.

The front panel of the **BMXNOR0200H** module features:

- 1 A screw for locking the module in a slot in the rack
- 2 A display block with 8 LEDs, 4 of which relate to the serial and Ethernet communication ports
- 3 A slot for a Flash memory card (SD card), with protective cover
- 4 An RJ45 connector for the connection to the Ethernet network
- 5 An RJ45 connector for connection of the serial link or an external modem

On the rear panel, 2 rotary switches for selecting the IP address assignment method for the module.





BMXNOR0200H

References				
Description	Communication port	Protocol	Reference	Weight kg/lb
RTU communication module (1)	Ethernet 10BASE-T 100BASE-TX	<ul style="list-style-type: none"> ■ Modbus/TCP (client or server), Transparent Ready class C30 ■ DNP3 IP (client or server) ■ IEC 60870-5-104 (over IP) (client or server) 	BMXNOR0200H (2)	0.205/ 0.452
Serial, External modems		<ul style="list-style-type: none"> ■ Isolated RS232/RS485 point-to-point serial links ■ DNP3 serial (master or slave) ■ IEC 60870-5-101 (master or slave) 		


Spare parts				
Description	Usage	Supplied with module	Reference	Weight kg/lb
128 MB Flash memory card supplied as standard with the module	Web pages, Storage of data logging files (CSV)	BMXNOR0200H	BMXRWS128MWF	0.002/ 0.004

(1) See ruggedized module characteristics, page 5/2.

(2) The Web Designer software is supplied on CD-ROM with the module. This software can be used to configure and download the embedded website and to configure advanced services: data logging, sending alarm notifications via SMS or e-mail. For further information, please consult our website www.schneider-electric.com.

Presentation

The **BMXEIA0100** master module for AS-Interface cabling system provides the AS-Interface system master function for the Modicon X80 I/O platform.

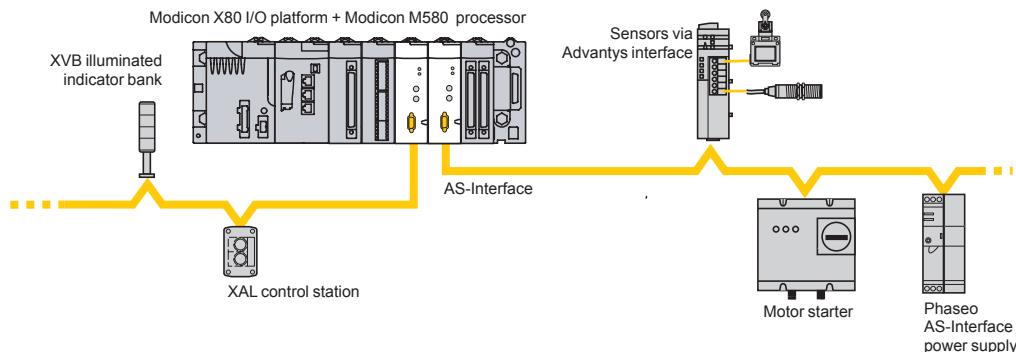

The AS-Interface cabling system consists of a master station (Modicon X80 I/O platform) and slave stations. The master supporting the AS-Interface profile interrogates the devices connected on the AS-Interface line one by one and stores the information (actuator/sensor status, device operating status) in the PLC memory. Communication on the AS-Interface line is managed totally transparently in relation to the application PLC program.

The **BMXEIA0100** master module supports the latest management profile for AS-Interface devices (*AS-Interface V3*), which is able to manage level V1, V2, and V3 AS-Interface slaves:

- Discrete slave devices (up to 62 devices of 4 inputs/4 outputs organized in 2 banks (A/B) of 31 addresses each)
 - Analog devices (up to 31 devices (4 channels) in bank A)
 - Safety interfaces (up to 31 devices in bank A)
- An AS-Interface power supply is essential for powering the various devices on the line. Ideally it should be placed near stations that consume a great deal of energy. Please refer to the "Phaseo power supplies and transformers - AS-Interface range" catalog.


A Modicon M340 Performance configuration with a **BMXP3420•0/20•02** processor or a Modicon M580 configuration with a **BMEP58••••** processor can take 4 **BMXEIA0100** modules. A Standard configuration with **BMXP341000** processor can take 2 **BMXEIA0100** modules.

Description


The **BMXEIA0100** AS-Interface master module is standard format (1 slot). Its housing provides IP 20 protection of the electronics and it is locked into each rack slot (**01** **11**) by a captive screw.

The front panel of the **BMXEIA0100** AS-Interface master module features:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking
- 3 A display block with 5 LEDs indicating the module operating modes:
 - RUN (green): Module running
 - ERR (red): Detected module fault
 - A/B (green): Displays the group of 31 slaves
 - I/O (red): Detected I/O fault on AS-Interface line
 - 32 LEDs for diagnostics of the AS-Interface line and each slave connected on the line depending on the A/B pushbutton selection (1)
- 4 2 LEDs marked ASI POWER and FAULT: AS-Interface external power supply present and AS-Interface line fault (see diagnostics on page 4/17)
- 5 Two pushbuttons marked A/B and MODE (see diagnostics on page 4/17)
- 6 A 3-way male SUB-D connector for the AS-Interface cable (female screw connector supplied)

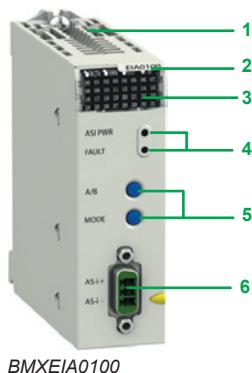

(1) Depending on whether A or B is selected, this displays either the first 31 slaves (standard addressing) or the last 31 slaves (extended addressing).

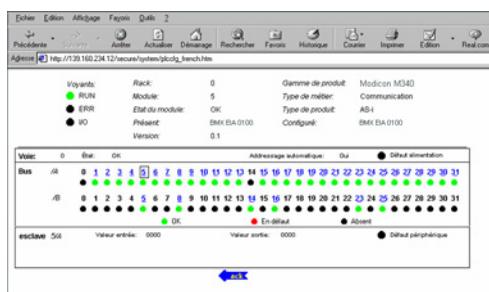

Diagnostics

BMXEIA0100 module

The two LEDs **4** on the module front panel are used in conjunction with the two pushbuttons **5** for module diagnostics:

LEDs

4 ASI PWR:
AS-Interface power supply present

Pushbuttons

5 A/B: Selects the group of slaves on the display block **3**

5 MODE: Module Offline/Online


The display block on the front panel of the **BMXEIA0100** master module can be used to perform simplified local diagnostics by displaying the slave devices present on the AS-Interface line.

Detailed diagnostics of each of the slave devices is also possible using:

- The **ASITERV2** adjustment terminal
- A web browser using the Rack Viewer function in the standard Web server on the Modicon X80 I/O platform. For further information, please consult our website www.schneider-electric.com.


References

Description	Usage	Reference	Weight kg/lb
AS-Interface master module supplied with 3-way male SUB-D connector	M4 AS-Interface profile for level V1, V2, and V3 slaves	BMXEIA0100	0.340/ 0.750
Adjustment terminal	For addressing and diagnostics of AS-Interface level V1, V2, and V3 interfaces Powered by LR6 batteries	ASITERV2	1.000/ 2.205



ASITERV2

Presentation

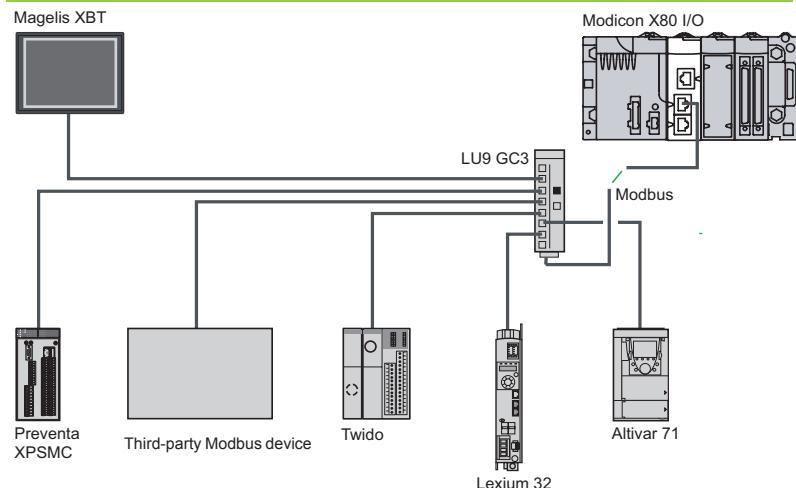

The Modbus serial link is used for master/slave architectures (it is necessary, however, to check that the Modbus services used by the application have been implemented on all relevant devices).

The bus consists of a master station and slave stations. Only the master station can initiate the exchange (direct communication between slave stations is not possible). Two exchange mechanisms are available:

- Question/response, where requests from the master are addressed to a given slave. The master then waits for the response from the slave that has been interrogated.
- Broadcasting, where the master broadcasts a message to all slave stations on the bus. The latter execute the order without transmitting a reply.
- It is necessary to use **BM•CRA31210** modules as drop adapters. On one drop it is possible to plug a maximum of two **BMXNOM0200** modules.

The following services are not available in the slave stations:

- Modbus slave
- Modem services

Although most processors have a serial link that can support modems, the **BMXNOM0200** 2-channel serial link module is particularly recommended for this type of use.


Its performance and numerous parameter-setting options make it ideal for any type of configuration, especially when using radio modems.

Description

BMXNOM0200 serial link module

The front panel of the **BMXNOM0200** serial link module features:

- 1 A screw for locking the module in a slot in the rack
- 2 A display block with 4 LEDs:
 - RUN (green) and ERR (red): Module status
 - For each of the two channels: SER COM (green): Activity on the serial link (lit)/detected fault on a device present on the serial link (flashing)
- 3 Two RJ45 connectors (exclusive use) for connection of channel 0 (with black indicator):
 - 3a A connector for RS 232C connection, marked COM Port 0 RS232
 - 3b A connector for RS 485 connection, marked COM Port 0 RS485
- 4 An RJ45 connector for RS 485 connection of channel 1, marked COM Port 1 RS485, with black indicator

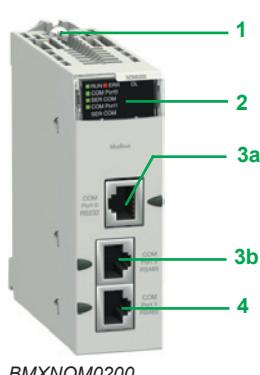

BMXNOM0200

To be ordered separately:

RS 485 cordsets (see our "Modicon M580 automation platform" catalog available on our website www.schneider-electric.com) or RS 232 cordsets for DCE terminal (see page 4/19).

Complementary characteristics

The following characteristics complement those indicated in the selection guide on page 4/11.

BMXNOM0200 module serial links

- Physical interface:
 - RS 232 port 0: RS 232 8-wire, non-isolated
 - RS 485 port 0 and port 1: RS 485 2-wire, isolated
- Frame:
 - Modbus: RTU/ASCII, full duplex in RS 232, half duplex in RS 485
 - Character mode: full duplex in RS 232, half duplex in RS 485
- Data rate:
 - RS 232 port 0: 0.3...115 Kbps (Modbus/Character mode)
 - RS 485 port 0 and port 1: 0.3...57.6 Kbps (Modbus/Character mode)
- Line polarization:
 - Modbus RS 485: automatic
 - RS 485 character mode: configurable with Unity Pro software
- Maximum length of a tap link in RS 485 2-wire:
 - 15 m/49.21 ft in a non-isolated link
 - 40 m/131.23 ft in an isolated link
- Expert mode (from version V1.2 of the module and version V5 of Unity Pro): used to configure the time out links individually from the application and thus adapt to the specific characteristics of certain modems.



BMXNOM0200

References (1)

Serial link module

Designation	Protocol	Physical layer	Reference	Weight kg/lb
2-channel serial link module (2)	Modbus master/slave RTU/ASCII, Character mode, GSM/GPRS modem	1 non-isolated RS 232 channel (Port 0) 2 isolated RS 485 channels (Port 0 and Port 1)	BMXNOM0200	0.230/ 0.507

Cordsets for RS 232 serial link (3)

Designation	Description	Length m/ft	Reference	Weight kg/lb
Cordset for Data Terminal Equipment (DTE) (printer)	Equipped with an RJ45 connector and a 9-way female SUB-D connector	3/ 9.84	TCSMCN3M4F3C2	0.150/ 0.331
Cordset for Data Communication Equipment (DCE) (modem, etc.)	Equipped with an RJ45 connector and a 9-way male SUB-D connector RTS, CTS)	4-wire (RX, TX, 9.84	TCSMCN3M4M3S2	0.150/ 0.331
	8-wire (excluding RI signal)	3/ 9.84	TCSXCN3M4F3S4	0.165/ 0.364

(1) Requires Unity Pro software ≥ V1.4.

(2) For the ruggedized version, **BMXNOM0200H**, see characteristics on page 5/8.

(3) RS 485 serial link connection (see our "Modicon M580 automation platform" catalog available on our website www.schneider-electric.com).



PMXNOW0300 Wi-Fi access point

Modicon X80 I/O platform

Wi-Fi network

PMXNOW0300 Wi-Fi access point

Presentation

The PMXNOW0300 Wi-Fi access point consists of a WLAN wireless connection combined with a 3-port 10/100 Ethernet switch.

This module is designed to be integrated in the Modicon X80 I/O platform Modicon processor (1). It retrieves the 24 V voltage from the backplane rack and occupies one slot in it. An Ethernet cable, supplied with the module, must be used to connect the Wi-Fi module to the processor or the communication module (BMXNO*****).

This module offers the following functions:

- access point
- Ethernet bridge
- Wi-Fi repeater

The PMXNOW0300 is compatible with the majority of Ethernet-based protocols, including Modbus TCP, EtherNet/IP, etc.

It also allows Wi-Fi access to the associated Modicon processor from Vijeo Citect and Unity Pro software as well as exchange of data between automation platforms.

The PMXNOW0300 module can be removed and replaced while the rack is powered up. It is compatible with Vijeo Design' Air and Vijeo Design' Air Plus, allowing the HMI to be remotely located on a tablet or smartphone (2).

Main characteristics

Type of device

Wi-Fi access point, client and repeater

Wi-Fi standards

IEEE 802.11 a/b/g/h

Operating frequencies

2.4 GHz and 5 GHz

IP rating

IP 30

Mounting

On the rack

Number of radios

1

Nominal data rate

≤108 Mbps (Super AG mode, 54 Mbps in standard mode)

Antenna connections

1 x RP-SMA

Ethernet connections

3 x 10/100 BASE TX, MDI-MDIX

Wi-Fi connections

1 x WLAN interface

Range

Up to 300 m/984.25 ft in free field with the antenna supplied as standard and up to 5 km/3.11 mi with external antenna (frequency range and data rate dependent on antenna type)

Dimensions

97 x 32 x 104 mm/3.82 x 1.26 x 4.09 in.

Storage temperature

- 40 °C to + 80 °C/- 40 °F to + 176 °F

Humidity

Max. 95% (non-condensing)

Supply voltage

+ 24 V ... from the Modicon X80 I/O platform rack

Consumption

3.5 W typical

(1) Only for processors compatible with the Modicon X80 I/O platform (see page 1/6).

(2) For more information, please consult our website www.schneider-electric.com.

References**Wi-Fi access points**

Description	Number of radios	Data rate	IP rating	Reference	Weight
		Mbps			kg/lb
Wi-Fi 802.11a/b/g/h access point with antenna and 50 cm/19.69 in. long Ethernet cable equipped with two RJ45 connectors, plus CD-ROM	1	≤108 (Super AG mode, 54 Mbps in standard mode)	IP 30	PMXNOW0300 (1)	0.205/0.452

Technology approved
by
Schneider
Electric


(1) To order this product, please consult our Customer Care Centre.

Technology approved



PMESWT0100 Scaime partner
weighing module

4

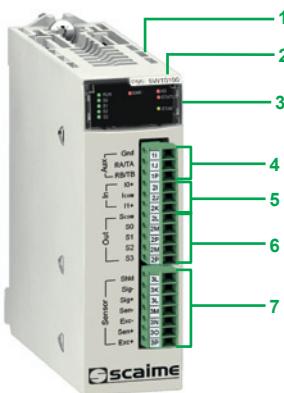

PMESWT0100

Presentation

The **PMESWT0100** Scaime partner weighing module is integrated in a Modicon X80 I/O platform with an Ethernet + X-bus **BMEXBPO●00(H)** rack and a Modicon M580 **BMEP58●0●0** PLC or in a Modicon X80 RIO drop with an Ethernet + X-bus **BMEXBPO●00(H)** rack and a **BMECRA31210** adapter.

With this module it is possible to go beyond the scope a of simple weighing application.

It is suitable for static weighing applications such as silo level measurement and scale weighing and it also suits well for low speed dynamic weighing applications such as filling, dosing, and material transfer.

The Modicon X80 I/O platform can manage the whole weighing environment as well as the whole machine or industrial process associated with the weighing system. Indeed, weighing data is accessible by the PLC via implicit exchanges or explicit commands. Once the weighing signal is received, it is processed and transferred by the weighing module to the Modicon M580 PLC via the Ethernet backbone. This Ethernet weighing transmitter offline configuration, online calibration, monitoring, and weighing diagnostics are done by Unity Pro software via FDT/DTM. The Scaime partner weighing module has been developed to comply with the general standards and certifications of the Modicon X80 I/O platform. For more information, see page 8/2 or consult our website www.schneider-electric.com.

Description

The **PMESWT0100** weighing module features the following:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module)
- 3 A module and channel status display block
- 4 Screw terminals for connecting an external HMI output
- 5 Screw terminals for connecting discrete reflex inputs
- 6 Screw terminals for connecting discrete reflex outputs
- 7 Screw terminals for connecting input load cells

Main characteristics

Measurement input

1 weighing channel per module, comprising up to 8 load cells connected via junction box

Input load cell supply voltage

5 V

Internal resolution

24 bit converter

User resolution

up to 1,000,000, factory-calibrated 500,000 at 2 mV/V

Internal measurement rate

6 to 400 measurements per second

External measurement rate

100 measurements per second

Discrete reflex outputs

Number of applications

4 positive logic outputs, 2 for dosing and 2 for threshold monitoring

Maximum voltage

55 V

Nominal current

400 mA

Response time

2 ms discrimination

Discrete inputs

Number of applications

2 positive logic inputs, weighing functions

Low voltage range

0...3 V

High voltage range

9...28 V

High current

20 mA at 24 V



PMESWT0100

References				
Weighing module				
Description	Composition	Reference	Weight kg/lb	
Scaime partner weighing module (1 weighing channel per module)	- Load cell input 100 measurements/s (for 1 to 8 load cells) - 4 discrete reflex outputs (for threshold monitoring and dosing) - 2 discrete inputs (for weighing functions) - 1 output for an external HMI	PMESWT0100 (1)	0.233/ 0.514	
Technology approved by Schneider Electric				

(1) To order this product, please consult our Customer Care Centre.

Treatment for severe environments	
■ Presentation.....	page 5/2
■ Harsh chemical environments.....	page 5/2
■ Extreme climatic environments.....	page 5/2
Ruggedized power supply modules	
■ References	page 5/3
Ruggedized racks and rack expansion module	
■ References	page 5/4
Ruggedized discrete I/O modules	
■ References	page 5/6
Ruggedized analog I/O modules	
■ References	page 5/7
Ruggedized communication modules and network gateway	
■ References	page 5/9
Ruggedized application-specific modules	
■ References	page 5/11

Modicon X80 I/O platform

Treatment for harsh environments

Ruggedized modules

Presentation

Protective treatment of Modicon X80 I/O platform

The Modicon X80 I/O platform complies with "TC" treatment requirements (Treatment for all Climates). They are designed as standard to operate in temperatures of 0 to + 60 °C/32 to 140 °F.

For installations in industrial production workshops or environments corresponding to "TH" (Treatment for Hot and humid environments), devices must be housed in enclosures providing at least IP 54 protection as specified by standard IEC/EN 60529, or an equivalent level of protection according to NEMA 250.

The Modicon X80 I/O platform offers **IP 20 degree of protection** (1). It can therefore be installed without an enclosure in reserved access areas that do not exceed **pollution level 2** (control room with no dust-producing machinery or activity). **Pollution level 2** does not take account of harsher environments, such as those where the air is polluted with dust, fumes, corrosive or radioactive particles, vapours or salts, moulds, insects, etc.

Treatment for harsh environments

If the Modicon X80 I/O platform has to be used in harsh environments or is required to start and operate in an extended temperature range, from

- 25 °C to + 70 °C/- 13 °F to 158 °F, the "**ruggedized**" offer features industrially hardened processor and power supply modules, X-bus and Ethernet I/O modules and racks that have a protective coating on their circuit boards.

Note: Capable of starting within an extended temperature range (from - 25 °C to + 70 °C/- 13 °F to 158 °F, a single-rack configuration is also able to operate at extremely low temperatures (to - 40 °C/- 40 °F) if placed in an appropriate enclosure. Please consult our Customer Care Center.

This protection increases the isolation capability of the circuit boards and their resistance to:

- Condensation
- Dusty atmospheres (conducting foreign particles)
- Chemical corrosion, in particular during use in sulphurous atmospheres (oil refinery, purification plant, etc.) or atmospheres containing halogens (chlorine, etc.)

This protection, combined with appropriate installation and maintenance, enables Modicon X80 I/O products to be used in the following environments:

- **Harsh chemical environments:**
 - **IEC/EN 60721-3-3 class 3C3:**
 - 14 days; 25 °C/77 °F relative humidity 75%
 - Concentrations (mm³/m³): H₂S: 2100/SO₂: 1850/Cl₂: 100
 - **ISA S71.04 classes G1 to G3:**
 - 14 days; 25 °C/77 °F relative humidity 75%
 - Concentrations (mm³/m³): H₂S: 50/SO₂: 300/Cl₂: 10/NO₂: 1250
 - **IEC/EN 60068-2-52 salt mist, Kb test severity level 2:**
 - 3 x 24-hour cycles
 - 5% NaCl
 - 40 °C/104 °F relative humidity 93%
- **Extreme climatic environments:**
 - Temperatures from - 25 to + 70 °C/- 13 to 158 °F
 - Relative humidity levels:
 - up to 93% from - 25 °C/- 13 °F to + 60 °C/140 °F
 - up to 95% from - 25 °C/- 13 °F to + 55 °C/131 °F
 - Formation of ice
 - Altitudes from 0 to 5000 m/0 to 16404 ft

Three modules are specifically designed for extended temperature ranges from - 25 to + 70 °C/- 13 to 158 °F (the product references include the suffix "T") :

- 125 V --- power supply module **BMXCP3540T** (see page 2/11)
- 125 V --- discrete input module, 16 channels, **BMXDDI1604T** (see page 3/12)
- 125 V --- discrete relay output module, 8 channels, **BMXDRA0804T** (see page 3/12)

(1) Each slot in a **BMXPB●●00** rack is equipped as standard with a protective cover that should only be removed when inserting a module. If any covers are subsequently misplaced, replacements can be ordered under reference **BMXXEM010** (sold in lots of 5).

Composition

References and characteristics

To order ruggedized modules and racks, see the reference pages 5/3 to 5/11 (the references of the ruggedized products available include the suffix "H").

The standard separate parts (cordsets, cables, sub-bases, etc.) that are compatible with the ruggedized modules offer are listed in the reference pages (see pages 5/3 to 5/11).

The majority of operating and electrical characteristics of ruggedized modules are identical to those of their equivalent standard versions. However, some characteristics are subject to either derating or limitation. Please consult our website www.schneider-electric.com.

Ruggedized power supply modules

Each **BM**XBP**••00H** rack must be equipped with a power supply module. These modules are inserted in the first two slots of each rack (marked CPS).

The available power values given below in ***bold italic*** correspond to operation at - 25 °C/- 13 °F and + 70 °C/158 °F (see temperature derating curves on our website www.schneider-electric.com).

The power required to supply each rack depends on the type and number of modules installed in the rack. It is therefore necessary to draw up a power consumption table for each rack in order to determine which is the most appropriate **BM**CPS**••0H** power supply module for your requirements (consult our website www.schneider-electric.com).

Power supply modules (1)

Line supply	Available power (2)				Reference	Weight kg/lb
	3.3 V --- (3)	24 V --- rack (3)	24 V --- sensors (4)	Total		
24...48 V --- isolated	15 W 11.3 W	31.2 W 23.4 W	—	31.2 W 23.4 W	BMCPS3020H	0.340/ 0.750
100...240 V ---	15 W 11.3 W	31.2 W 23.4 W	21.6 W 16.2 W	36 W 27 W	BMCPS3500H	0.360/ 0.794



BMXCP3020H



BMXCP3500H

Standard separate part

Description	Type	Composition	Reference	Weight kg/lb
Set of 2 removable connectors	Spring-type	One 5-way terminal block and one 2-way terminal block	BMXXTSCPS20	0.015/ 0.033

Standard replacement part

Description	Type	Composition	Reference	Weight kg/lb
Set of 2 removable connectors	Cage clamp	One 5-way terminal block and one 2-way terminal block	BMXXTSCPS10	0.020/ 0.044

(1) Includes a set of 2 cage clamp removable connectors **BMXXTSCPS10**.

(2) The total power consumed on each voltage (3.3 V --- and 24 V ---) must not exceed the total power of the module. See the power consumption table on our website www.schneider-electric.com.


(3) 3.3 V --- and 24 V --- rack voltages for powering Modicon M340 and M580 PLC modules.

(4) 24 V --- sensor voltage for powering the input sensors (voltage available via the 2-way removable connector on the front panel).


Modicon X80 I/O platform

Dedicated parts for harsh environments

Ruggedized racks and rack expansion module



BMXXBP0400H



BMEXBP0800H



BMXXBE1000H

5



BMXXSP0●00 + BMXXSP30●0

Ruggedized racks

Description	Type of module to be inserted	No. of slots (1)	Power consumption (2)	Reference	Weight kg/lb
Ruggedized X-bus racks	BMXCPS power supply, BMXP34 or BMEP58 processor, I/O modules and application-specific (counter and communication) modules	4	1 W	BMXXBP0400H	0.630/ 1.389
		6	1.5 W	BMXXBP0600H	0.790/ 1.742
		8	2 W	BMXXBP0800H	0.950/ 2.094
		12	–	BMXXBP1200H	1.270/ 2.800
Ruggedized Ethernet + X-bus racks	BMXCPS power supply, BMEP58 processor, I/O modules and application-specific (counter and communication) modules	4	2.8 W	BMEXBP0400H	0.715/ 1.576
		8	3.9 W	BMEXBP0800H	1.070/ 2.359
		12	3.9 W	BMEXBP1200H	1.387/ 3.058

Description Use

Description	Use	Reference	Weight kg/lb
Ruggedized rack	Standard module to be installed in each rack (XBE slot) expansion module (3) Used to daisy chain up to 4 racks	BMXXBE1000H	0.178/ 0.392

Standard accessories for racks

Description	For use with	Sold in lots of	Reference	Weight kg/lb
Shielding connection kits comprising: - A metal bar - 2 support bases	BM●XBP0400H rack	–	BMXXSP0400	0.280/ 0.617
	BMXXBP0600H rack	–	BMXXSP0600	0.310/ 0.683
	BM●XBP0800H rack	–	BMXXSP0800	0.340/ 0.750
	BM●XBP1200H rack	–	BMXXSP1200	0.400/ 0.882
Spring clamping rings	Cables, cross-section 1.5...6 mm ² /AWG 16...9	10	STBXSP3010	0.050/ 0.110
	Cables, cross-section 5...11 mm ² /AWG 10...7	10	STBXSP3020	0.070/ 0.154
Protective covers (replacement parts)	Unoccupied slots on BM●XBP●●00H rack	5	BMXXEM010	0.005/ 0.011

(1) Number of slots taking the processor module, I/O modules and application-specific modules (excluding power supply module).

(2) Power consumption of anti-condensation resistor(s)

(3) Module and cordsets do not operate properly at temperatures lower than - 25 °C/- 13 °F.



Angled connector on
extension cordsets

Standard cordsets and connection accessories

Description	Use	Composition	Type of connector	Length	Reference	Weight kg/lb
X-bus extension cordsets total length 30 m/ 98.425 ft max. (1)		Between two BMXXBE1000H rack expansion modules.	Angled	0.8 m/ 2.625 ft	BMXXBC008K	0.165/ 0.364
				1.5 m/ 4.921 ft	BMXXBC015K	0.250/ 0.551
				3 m/ 9.843 ft	BMXXBC030K	0.420/ 0.926
				5 m/ 16.404 ft	BMXXBC050K	0.650/ 1.433
				12 m/ 39.370 ft	BMXXBC120K	1.440/ 3.175
			Straight	1 m/ 3.281 ft	TSXCBY010K	0.160/ 0.353
				3 m/ 9.843 ft	TSXCBY030K	0.260/ 0.573
				5 m/ 16.404 ft	TSXCBY050K	0.360/ 0.794
				12 m/ 39.370 ft	TSXCBY120K	1.260/ 2.778
				18 m/ 59.055 ft	TSXCBY180K	1.860/ 4.101
				28 m/ 91.864 ft	TSXCBY280KT	2.860/ 6.305
Cable reel (1)	Length of cable to be fitted with TSXCBYK9 connectors	Ends with flying leads, 2 line testers		100 m/ 328.084 ft	TSXCBY1000	12.320/ 27.161



TSXTLYEX

Description	Use	Composition	Sold in lots of	Reference	Weight kg/lb
Line terminator	Required on both BM•XP•••0H modules at each end of the daisy chain	2 x 9-way SUB-D connectors marked A/and/B	2	TSXTLYEX	0.050/ 0.110
X-bus straight connectors	For ends of TSXCBY1000 cables	2 x 9-way SUB-D straight connectors	2	TSXCBYK9	0.080/ 0.176
Connector assembly kit	Fitting TSXCBYK9 connectors	2 crimping pliers, 1 pen (3)	—	TSXCBYACC10	—

(1) Module and cordsets do not operate properly at temperatures lower than - 25 °C/- 13 °F.

(2) Cable supplied with a set of 2 TSXTVSY100 electrical transient suppressors.

(3) To fit the connectors on the cable, you also need a wire stripper, a pair of scissors and a digital ohmmeter.

Modicon X80 I/O platform

Dedicated parts for harsh environments

Ruggedized discrete I/O modules



BMXDDI1602H

References

Ruggedized discrete input modules

Type of current	Input voltage	Connection via (1)	IEC/EN 61131-2 conformity	No. of channels (common)	Reference	Weight kg/lb
—	24 V (positive logic)	Screw or spring-type 20-way removable terminal block	Type 3	16 isolated inputs (1 x 16)	BMXDDI1602H	0.115/ 0.254
	24 V (negative logic)	Screw or spring-type 20-way removable terminal block	Non-IEC	16 isolated inputs (1 x 16)	BMXDAI1602H	0.115/ 0.254
	48 V (positive logic)	Screw or spring-type 20-way removable terminal block	Type 1	16 isolated inputs (1 x 16)	BMXDDI1603H	0.115/ 0.254
~	24 V	Screw or spring-type 20-way removable terminal block	Type 1	16 isolated inputs (1 x 16)	BMXDAI1602H	0.115/ 0.254
	48 V	Screw or spring-type 20-way removable terminal block	Type 3	16 isolated inputs (1 x 16)	BMXDAI1603H	0.115/ 0.254
	100...120 V	Screw or spring-type 20-way removable terminal block	Type 3	16 isolated inputs (1 x 16)	BMXDAI1604H	0.115/ 0.254



BMXDDO1602H BMXDRA0805H/1605H

Ruggedized discrete output modules


Type of current	Output voltage	Connection via (1)	IEC/EN 61131-2 conformity	No. of channels (common)	Reference	Weight kg/lb
— transistor	24 V/0.5 A (positive logic)	Screw or spring-type 20-way removable terminal block	Yes	16 protected outputs (1 x 16)	BMXDDO1602H	0.120/ 0.265
	24 V/0.5 A (negative logic)	Screw or spring-type 20-way removable terminal block	—	16 protected outputs (1 x 16)	BMXDDO1612H	0.120/ 0.265
~ triac	100...240 V	Screw or spring-type 20-way removable terminal block	—	16 outputs (4 x 4)	BMXDRA0805H	0.140/ 0.309
— or ~ relay	12...24 V —/2 A	Screw or spring-type 20-way removable terminal block	Yes	8 non-protected outputs (without common)	BMXDRA0805H	0.145/ 0.320
	24...240 V ~/2 A	Screw or spring-type 20-way removable terminal block	Yes	16 non-protected outputs (2 x 8)	BMXDRA1605H	0.150/ 0.331
	24 V —/2 A, 240 V ~/2 A	Screw or spring-type 20-way removable terminal block	Yes			



BMXDDM1602H

Ruggedized mixed discrete I/O modules

Number of I/O	Connection via (1)	No. of input channels (common)	No. of output channels (common)	IEC/EN 61131-2 conformity	Reference	Weight kg/lb
16	Screw or spring-type 20-way removable terminal block	8 (positive logic) (1 x 8)	8, transistor 24 V —/0.5 A (1 x 8)	Inputs, type 3	BMXDDM1602H	0.115/ 0.254
		8, 24 V — or 24...240 V ~ relay (1 x 8)	8, 24 V — or 24...240 V ~ relay (1 x 8)	Inputs, type 3	BMXDDM1602H	0.135/ 0.298



BMXFTB2000

Standard removable connection blocks

Description	Use	Type	Reference	Weight kg/lb
20-way removable terminal blocks	For module with 20-way removable terminal block	Cage clamp	BMXFTB2000	0.093/ 0.205
		Screw clamp	BMXFTB2010	0.075/ 0.165
		Spring-type	BMXFTB2020	0.060/ 0.132

Standard preformed cordsets for I/O modules with removable terminal block

Description	Composition	Length	Reference	Weight kg/lb
Preassembled cordsets with one end with flying leads	One 20-way spring-type removable terminal block (BMXFTB2020) One end with color-coded flying leads	3 m/ 9.843 ft	BMXFTW301	0.850/ 1.874
		5 m/ 16.404 ft	BMXFTW501	1.400/ 3.086
		10 m/ 32.808 ft	BMXFTW1001	2.780/ 6.129


(1) By connector, module supplied with cover(s)



BMXAMI0410H



BMXART0810H



BMXART0414H

BMXAMO0210H

BMXAMO0410H

BMXAMM0600H

References

Ruggedized analog input modules

Type of inputs	Input signal range	Resolution	Connection	No. of channels	Reference	Weight kg/lb
Isolated high-level inputs	$\pm 10 \text{ V}, 0...10 \text{ V}, 0...5 \text{ V}, 1...5 \text{ V}, \pm 5 \text{ V}$	16 bits	Via cage clamp, screw clamp or spring-type removable terminal block	4 high-speed channels	BMXAMI0410H	0.143/ 0.315
	0...20 mA, 4...20 mA, $\pm 20 \text{ mA}$		Via cage clamp or spring-type removable terminal block	8 isolated high-speed channels	BMXAMI0810H	0.175/ 0.386
Isolated low-level inputs	Temperature probe, thermocouple $\pm 40 \text{ mV}, \pm 80 \text{ mV}, \pm 160 \text{ mV}, \pm 320 \text{ mV}, \pm 640 \text{ mV}, \pm 1.28 \text{ V}$	15 bits + sign	40-way connector	4 channels	BMXART0414H	0.135/ 0.298
				8 channels	BMXART0814H	0.165/ 0.364

Ruggedized analog output module

Type of outputs	Output signal range	Resolution	Connection	No. of channels	Reference	Weight kg/lb
Isolated high-level outputs	$\pm 10 \text{ V}, 0...20 \text{ mA}, 4...20 \text{ mA}$	16 bits	Via cage clamp, screw clamp or spring-type removable terminal block	2 channels	BMXAMO0210H	0.144/ 0.317
				4 channels	BMXAMO0410H	0.175/ 0.386

Ruggedized mixed analog I/O module

Type of outputs	Signal range	Resolution	Connection	No. of channels	Reference	Weight kg/lb
Mixed I/O, non-isolated	$\pm 10 \text{ V}, 0...10 \text{ V}, 0...5 \text{ V}, 1...5 \text{ V}, 0...20 \text{ mA}, 4...20 \text{ mA}$	14 bits or 12 bits depending on the range	Via cage clamp, screw clamp or spring-type removable terminal block	I: 4 channels Q: 2 channels	BMXAMM0600H	0.155/ 0.342

Modicon X80 I/O platform

Dedicated parts for harsh environments

Ruggedized I/O modules



BMXFTW●01S



ABE7CPA41●



BMXFCA●●0



BMXFCA●●2

References

Standard connection accessories for analog modules (1)

Description	For use with modules	Type, composition	Length	Reference	Weight kg/lb
20-way removable terminal blocks	BMXAMI0410H	Cage clamp	–	BMXFTB2000	0.093/0.205
	BMXAMO0210H	Screw clamp	–	BMXFTB2010	0.075/0.165
	BMXAMM0600H	Spring-type	–	BMXFTB2020	0.060/0.132
Preassembled cordsets	BMXAMI0410H	One 20-way removable terminal block (BMXFTB2020)	3 m/9.843 ft	BMXFTW301S	0.470/1.036
	BMXAMO0210H	One end with color-coded flying leads	5 m/16.404 ft	BMXFTW501S	0.700/1.543
	BMXAMM0600H	One 40-way connector One end with color-coded flying leads	3 m/9.843 ft 5 m/16.404 ft	BMXFCW301S BMXFCW501S	0.480/1.058 0.710/1.565

Modicon Telefast ABE7 pre-wired system

Modicon Telefast ABE7 sub-bases	BMXAMI0410H	Distribution of isolated power supplies Delivers 4 protected isolated power supplies for 4...20 mA inputs Direct connection of 4 inputs	–	ABE7CPA410	0.180/0.397
	BMXART0414H BMXART0814H (2)	Connection and provision of cold-junction compensation for thermocouples Direct connection of 4 inputs	–	ABE7CPA412	0.180/0.397
Preformed cordsets for Modicon Telefast ABE7CPA41●	BMXAMI0410H BMXAMO0210H	One 20-way removable terminal block and one 25-way SUB-D connector for ABE7CPA410/CPA21 sub-base	1.5 m/4.921 ft 3 m/9.843 ft 5 m/16.404 ft	BMXFCA150 BMXFCA300 BMXFCA500	0.320/0.705 0.500/1.102 0.730/1.609
	BMXART0414H BMXART0814H	One 40-way connector and one 25-way SUB-D connector for ABE7CPA412 sub-base	1.5 m/4.921 ft 3 m/9.843 ft 5 m/16.404 ft	BMXFCA152 BMXFCA302 BMXFCA502	0.330/0.728 0.510/1.124 0.740/1.631

(1) The shielding on the cordsets carrying the analog signals must always be connected to the BMXXSP●●00 shielding connection kit mounted under the rack holding the analog modules (see page 2/3).

(2) The BMXART0814H 8-channel module requires two ABE7CPA412 sub-bases and two BMXFCA●●2 cordsets.



BMXNOE0100H/0110H



BMXNOM0200H



BMXNOR0200H

Communication**BMXNOE0100H/0110H ruggedized Ethernet communication modules**

Description	Data rate	Transparent Ready Class	Reference	Weight kg/lb
Ethernet Modbus/ TCP network modules	10/100 Mbps	B30	BMXNOE0100H	0.200/ 0.441
		C30	BMXNOE0110H	0.200/ 0.441

BMXNOM0200H ruggedized serial link module

Description	Protocol	Physical layer	Reference	Weight kg/lb
Serial link module 2-channels	Modbus master/slave RTU/ASCII, Character mode, Modem GSM/GPRS	1 non-isolated RS 232 channel (SL0) 2 isolated RS 485 channels (SL0 and SL1)	BMXNOM0200H	0.230/ 0.507

RTU BMXNOR0200H ruggedized communication module

Description	Protocols	Physical layer	Reference	Weight kg/lb
RTU communication module	Modbus TCP, IEC 60870-5-104 or DNP3 IP (client or server)	1 Ethernet port 10BASE-T/ 100BASE-TX	BMXNOR0200H	0.205/ 0.452
	IEC 60870-5-101 or DNP3 serial (master or slave)	1 non-isolated RS 232/485 serial link port		

References (continued)

Modicon X80 I/O platform

Dedicated parts for harsh environments
Ruggedized communication modules and network gateway



BMECRA31210

Communication

“Conformal Coating” EIO drop adapters

Description	Service port	Reference	Weight kg/lb
Modicon X80 EIO drop adapter for Ethernet + X-bus racks	1	BMECRA31210C	—
Modicon X80 EIO performance drop adapter	1	BMXCRA31210C	—



BMXCRA31210



TCSE GPA23F14FK

Ruggedized Profibus DP network gateway

Description	Protocols	Physical layer	Reference	Weight kg/lb
Profibus Remote Master (PRM) module	Modbus TCP	1 Ethernet switch, 2 ports 10BASE-T/100BASE-TX	TCSE GPA23F14FK	—
	Profibus DP V1 and Profibus PA (via gateway)	1 isolated RS 485 Profibus DP port		

Standard connection accessory

Designation	Description	RS 232 interface	Reference	Weight kg/lb
Cordset for DCE terminal (modem, etc.)	Equipped with 1 x RJ45 connector and 1 x 9-way male SUB-D connector Length 3 m/9.843 ft	Simplified 4-wire (RX, TX, RTS and CTS)	TCSMCN3M4M3S2	0.150/0.331
		Full 8-wire (except RI signal)	TCSXCN3M4F3S4	0.165/0.364



Application-specific modules


BMXEHC0200H/0800H ruggedized counter modules

Description	No. of channels	Characteristics	Reference	Weight kg/lb
Counter modules for 24 V :: 2- and 3-wire sensors and 10/30 V :: incremental encoders with push-pull outputs	2	60 kHz counting	BMXEHC0200H	0.112 0.247
	8	10 kHz counting	BMXEHC0800H	0.113 0.249



BMXEAEO300H ruggedized SSI encoder interface module

Description	No. of channels	Characteristics	Reference	Weight kg/lb
SSI encoder interface module	3	8 to 31 bits data width 4 ranks of baud rates: 100 kHz, 200 kHz, 500 kHz, 1 MHz	BMXEAEO300H	0.138 0.304



Standard connection accessories (1)

Description	Composition	Unit reference	Weight kg/lb
Connector kit for BMXEHC0200H module	Two 16-way connectors and one 10-way connector	BMXXTSOSHSC20	0.021/ 0.046
20-way removable terminal blocks for BMXEHC0800H module	Cage clamp	BMXFTB2000	0.093/ 0.205
	Screw clamp	BMXFTB2010	0.075/ 0.165
	Spring-type	BMXFTB2020	0.060/ 0.132
28-way removable terminal blocks for BMXEAEO300H module	Cage clamp	BMXFTB2800	0.111/ 0.245
	Spring-type	BMXFTB2820	0.080/ 0.176
Shielding connection kits for BMXEHC0200H/0800H and BMXEAEO300H modules	Comprising a metal bar and two support bases for mounting on rack	See page 2/3	—

(1) The shielding on the cordsets carrying the counter signals must always be connected to the **BMXXSP••00** shielding connection kit mounted under the rack holding the **BMXEHC0200H** module (see page 2/3).

Modicon Telefast ABE7 pre-wired system

<i>Modicon Telefast ABE7 selection guide</i>	page 6/2
■ Interface with Modicon X80 I/O modules	page 6/8
■ References	page 6/12
□ Passive connection sub-bases	page 6/12
□ Adaptor sub-bases with fixed relays and removable terminal blocks.....	page 6/14
□ Input/output adaptor sub-bases for or with plug-in relays.....	page 6/15
□ Output adaptor sub-bases for plug-in relays	page 6/16
□ Plug-in relays	page 6/17
□ Connection sub-bases for analog channels and application-specific channels	page 6/18
□ Cabled connectors for Modicon Quantum I/O modules.....	page 6/19
□ Accessories for connection sub-bases	page 6/20

Connection interfaces

Modicon Telefast ABE7 pre-wired system
Discrete input and/or output sub-bases

Applications	Discrete inputs or outputs				
	Optimum "Economy"	Optimum "Miniature"			
Compatibility	TSX Micro, Modicon Premium, Modicon M340, Modicon M580	TSX Micro, Modicon Quantum, Modicon M340, Modicon M580			
Sub-base type	Passive connection sub-bases				
Equipped with relays	–				
Control voltage	24 V ---				
Output voltage	24 V ---				
Output current per channel	0.5 A				
Modularity	16	8 -12 -16			
No. of terminals per channel	1	1 to 3	1	2	
Type of connection terminals	Signal	Signal, common (configurable as 24 V --- or 0 V)	Signal	Signal, common (configurable as 24 V --- or 0 V)	
Connectors	20-way HE10 connector				
Terminal block	Removable	No			
	Terminal type	Screw			
Additional or optional* function	Low-cost version fitted with cable	Miniature sub-bases	Compact size *	Input type 2 * (1)	Isolator *
Type of device	ABE7H•E•00	ABE7H16C••	ABE7H•R1• ABE7H•R50	ABE7H•R2•	ABE7H•S21
Page	6/12	6/13			

(1) For Modicon TSX Micro and Modicon Premium PLCs

Discrete inputs or outputs	Outputs for solid state and/or electromechanical relays
	Optimum and Universal
Discrete inputs or outputs	
Optimum "Miniature"	Optimum and Universal
Compatibility	TSX Micro, Modicon Premium, Modicon Quantum, Modicon M340, Modicon M580
Sub-base type	Passive connection sub-bases
Equipped with relays	Plug-in electromechanical or solid state relays
Control voltage	24 V ---
Output voltage	24 V ---
Output current per channel	0.5 A
Modularity	16
No. of terminals per channel	1
Type of connection terminals	Signal, common (2 common connections between the inputs and the outputs)
Connectors	20-way HE10 connectors
Terminal block	No
	Screw
Additional or optional* function	Miniature sub-base Synergy with Tego Power and Micro PLC
Type of device	ABE7H16CM11
Page	6/12

Connection interfaces

Modicon Telefast ABE7 pre-wired system
Discrete input and output sub-bases

Applications	Discrete outputs				
	Optimum	Universal	Optimum	Universal	
Compatibility	TSX Micro, Modicon Premium, Modicon Quantum, Modicon M340, Modicon M580				
Relay sub-base	Electromechanical, fixed		Electromechanical or solid state		
Equipped with relays	Yes		Yes	No	No
Control voltage	24 V---				
Output voltage	5 V... 30 V---	5 V... 150 V---	24 V--- (solid state) 5 V... 24 V---, 230 V~ (E.M.)	5 V... 150 V---	230 V~
Output current per channel	2 A (th)	3 A (th)	5 A (th)	2 A (solid state) 6 A (electromechanical)	0.5 to 10 A (dependent on relay)
Modularity	8	8 - 16		16	8 or 16
No. of terminals per channel	2	1	2	1	2 to 3
Type of connection terminals	1 N/O contact and common Volt-free	1 N/O contact	1 N/O contact and common	1 N/O contact	Signal, Polarities
Connectors	20-way HE 10 connector				
Terminal block	Yes	Yes	Yes	No	No
Terminal type	Screw or spring			Screw	
Additional or optional* function	Miniature sub-base Latching relay	Volt-free or common per group of 8 channels		Miniature sub-bases Common per group of 4 channels	Isolator and fuse
Type of device	ABE7R08S216•	ABE7R•S1••	ABE7R•S2••	ABE7R16T111	ABE7P16T111 ABE7P08T3•••
Page	6/14		6/15	6/16	

(1) For TSX Micro and Modicon Premium PLCs

Discrete outputs	Discrete inputs or outputs					
	Universal	Universal				
Compatibility	TSX Micro, Modicon Premium, Modicon Quantum, Modicon M340, Modicon M580					
Relay sub-base	Electromechanical, plug-in		Solid state, fixed	—	—	Solid state, fixed Solid state, plug-in
Equipped with relays	Yes		Yes	—	—	Yes No
Control voltage	24 V---					
Output voltage	5 V... 150 V---	230 V~	24 V---			From 24 V--- to 230 V~
Output current per channel	5 A (th)	8 A (th)	0.5 to 2 A	125 mA	0.5 A	125 mA
Modularity	16					
No. of terminals per channel	2 to 3	2 to 6	2		3	2
Type of connection terminals	1 C/O contact or 1 N/O contact and common	1 C/O contact or 2 C/O contacts and common	Signal and 0 V	24 V--- and 0 V signal	Signal can be isolated, Protected common	Signal Signal and common
Connectors	20-way HE 10 connector					
Terminal block	No		Yes	No	No	Yes No
Terminal type	Screw		Screw or spring		Screw	Screw or spring
Additional or optional* function	Volt-free or common per group of 8 channels	4 channels	Fault signal	Isolator and fuse (indicator)	3-wire proximity sensor	Isolator and fuse (indicator) —
Type of device	ABE7R16T2••	ABE7R16T3••	ABE7S•S2B•	ABE7H16F43	ABE7H16R3•	ABE7H16S43
Page	6/15		6/14	6/13		6/14 6/15



Connection interfaces


Modicon Telefast ABE7 pre-wired system
Analog and application-specific sub-bases

Applications		Analog signals and special functions				
 						
Compatibility		TSX Micro: <input type="checkbox"/> TSX3722 <input type="checkbox"/> TSXCTZ●A	Modicon Premium: <input type="checkbox"/> TSXCTY●A <input type="checkbox"/> TSXCAY●1	Modicon Premium: <input type="checkbox"/> TSXASY800 <input type="checkbox"/> TSXAET1600 <input type="checkbox"/> TSXA●Y800 Modicon X80 I/O: <input type="checkbox"/> BMXAMO0210 <input type="checkbox"/> BMXAMO0800 <input type="checkbox"/> BMXAMO0810 <input type="checkbox"/> BMXAMO0802 Modicon Quantum: <input type="checkbox"/> 140AVI02000 <input type="checkbox"/> 140AVI03000 <input type="checkbox"/> 140ACI03000 <input type="checkbox"/> 140ACI04000 <input type="checkbox"/> 140ACO13000	Modicon Premium: <input type="checkbox"/> TSXASY410 <input type="checkbox"/> TSXAET420 Modicon X80 I/O: <input type="checkbox"/> BMXAMO410 <input type="checkbox"/> BMXAMO410 Modicon X80 I/O: <input type="checkbox"/> BMXAMO0210 <input type="checkbox"/> BMXAMO0410 <input type="checkbox"/> BMXAMO0412 Modicon Quantum: <input type="checkbox"/> 140AVI02000 <input type="checkbox"/> 140AVI03000 <input type="checkbox"/> 140ACO02000	Modicon X80 I/O: <input type="checkbox"/> BMXART0414 <input type="checkbox"/> BMXART0814 Modicon Premium: <input type="checkbox"/> TSXAET1614
Type of signal	Counter inputs and analog I/O	Counter inputs Axis control Position control	Analog inputs Current/Voltage Pt 100	Analog outputs Current Voltage	Analog inputs	
Functions	Passive connection, point-to-point with shield continuity			Connection of cold junction compensation or provision, distribution of isolated power supplies		
Modularity	1 counter channel or 8 analog inputs + 2 analog outputs	8 channels	4 channels	4 channels		
Control voltage	24 V ...			—		
Output voltage	24 V ...			—		
Output current per channel	25 mA			—		
No. of terminals per channel	2	2 or 4	2 or 4	2 or 4		
Connector type	15-way SUB-D + 9-way SUB-D	25-way SUB-D	25-way SUB-D			
Terminal block	Removable terminal type	No Screw	No Screw	No Screw		
Type of device	ABE7CPA01	ABE7CPA02	ABE7CPA21	ABE7CPA412 ABE7CPA410		
Page	6/18					

Analog signals and special functions				
 				
Modicon Premium: <input type="checkbox"/> TSXAEY800 <input type="checkbox"/> TSXAEY1600 Modicon Quantum: <input type="checkbox"/> 140AVI03000 <input type="checkbox"/> 140ACI03000 <input type="checkbox"/> 140ACI04000 <input type="checkbox"/> 140ACO4000	Modicon Premium: <input type="checkbox"/> TSXAEY1610 Modicon X80 I/O: <input type="checkbox"/> BMXAMI0800 <input type="checkbox"/> BMXAMI0810 <input type="checkbox"/> BMXAMI0410 Modicon Quantum: <input type="checkbox"/> 140AVI03000 <input type="checkbox"/> 140ACI03000 <input type="checkbox"/> 140ACI04000	Modicon Premium: <input type="checkbox"/> TSXCAET1●1, <input type="checkbox"/> TSXCTY●A	Modicon Premium: <input type="checkbox"/> TSXCAET1●1, <input type="checkbox"/> TSXCTY●A	Modicon Premium: <input type="checkbox"/> TSXAEY1614 Modicon Premium: <input type="checkbox"/> TSXPAY2●2
Analog inputs Current Voltage Pt 100	Isolated analog inputs	Counter inputs	Inputs for thermocouples	I/O
Distribution of sensor power supplies by limiter (25 mA)	Distribution of isolated sensor power supplies by converter	Acquisition of value from an absolute encoder	Connection of 16 thermocouples with cold junction compensation	Safety module (BG)
8 channels	8 channels	1 channel	16 channels	12 Emergency stops
24 V ...				
24 V ...				
25 mA				—
2 or 4		—	2 or 4	1
25-way SUB-D	25-way SUB-D	15-way SUB-D	25-way SUB-D	50-way SUB-D
No Screw	No Screw or spring	No Screw	No Screw	No Screw
ABE7CPA03	ABE7CPA31●	ABE7CPA11	ABE7CPA12	ABE7CPA13
6/18				

Connection interfaces

Modicon Telefast ABE7 pre-wired system
ABE7 interfaces with Modicon X80 I/O modules

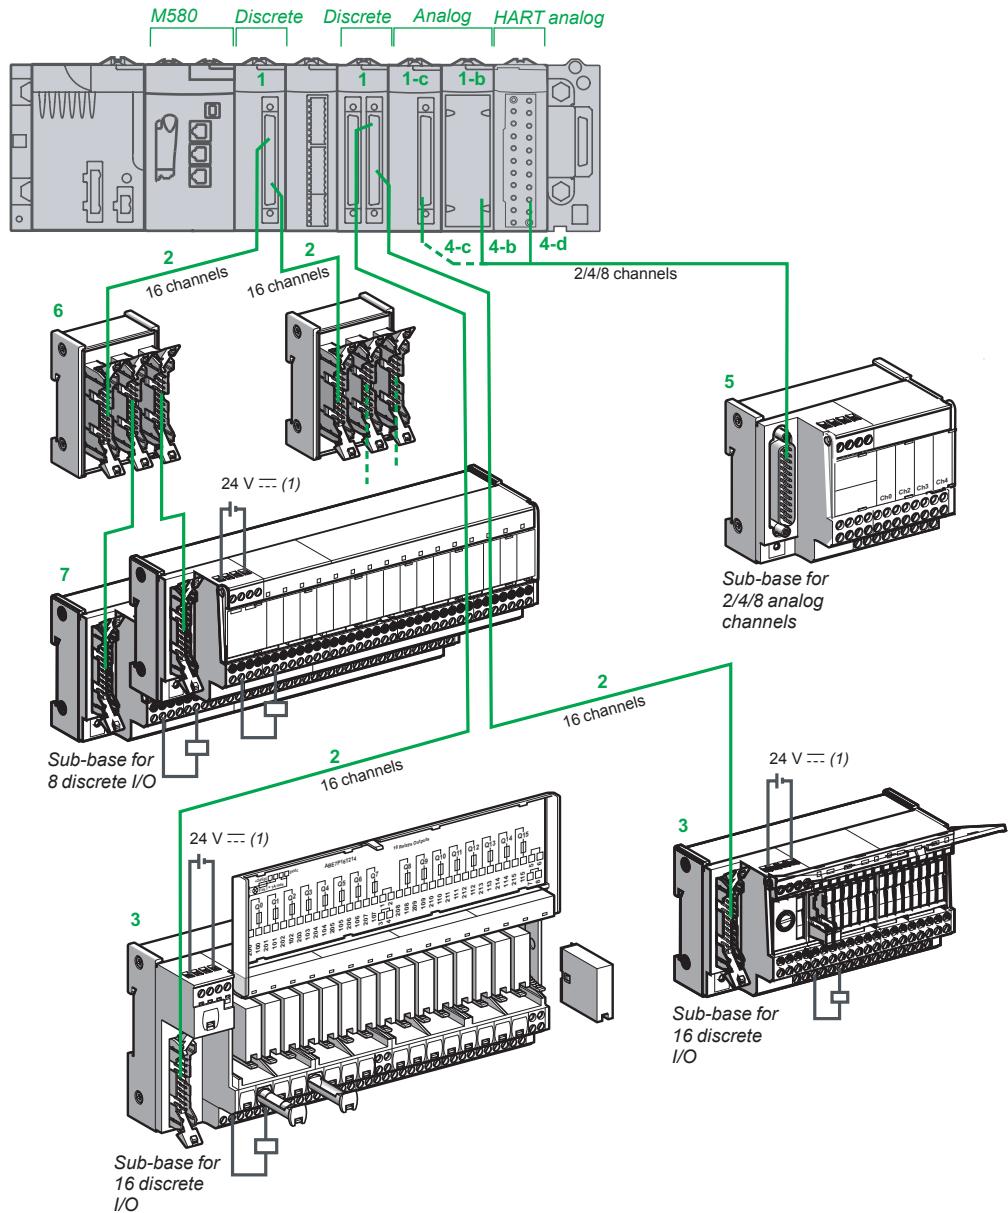

Presentation

I/O modules on the Modicon X80 platform

- 1 Discrete input modules (BMXDDI $\bullet\bullet$ 02K), discrete output modules (BMXDDO $\bullet\bullet$ 02K) and discrete mixed I/O modules (BMXDDM3202K) equipped with one or two 40-way FCN connectors. The modularity of each module ($\bullet\bullet$) is 32 or 64 channels.
- 1-b Analog input or output modules:
 - Analog inputs: **BMXAMI0410** (4 channels), **BMXAMI0800** (4 channels) and **BMXAMI0810** (8 channels)
 - Analog outputs: **BMXAMO0210** (2 channels), **BMXAMO0410** (4 channels) and **BMXAMO0802** (8 channels)
- 1-c Analog input modules **BMXART0414** (4 channels) and **BMXART0814** (8 channels)
- 1-d HART analog I/O modules **BMEAHI0812** (8 channels) and **BMEAHO0412** (4 channels)
- 2 2 types of cordset are available depending on the type of discrete module connected to the sub-base (for combinations, see page 6/10). These cordsets are available in 0.5, 1, 2, 3, 5 or 10 m/1.640, 3.281, 6.562, 9.843, 16.404, 32.808 ft lengths:
 - **BMXFCC $\bullet\bullet\bullet$ 1** cordsets with one 20-wire sheath (AWG 22) equipped with one 40-way FCN connector and one HE 10 moulded connector on the Telefast sub-base end
 - **BMXFCC $\bullet\bullet\bullet$ 3** cordsets with two 20-wire sheaths (AWG 22) equipped with one common 40-way FCN connector on the module end and two HE 10 moulded connectors on the Telefast sub-base end
- 3 16-channel Modicon Telefast ABE7 Optimum or Universal passive connection sub-bases or adaptor sub-bases.
- 4 4 types of cordset are available depending on the type of analog module connected to the sub-base (for combinations, see page 6/11).
 - 4-b: Connection to analog module with 20-way or 28-way removable terminal block:
 - **BMXFCA $\bullet\bullet$ 0** cordsets with a 20-way removable terminal block on the module end and a 25-way SUB-D connector on the Telefast sub-base end. Cordsets available in 1.5 or 3m/4.92 or 9.84 ft lengths.
 - **BMXFTA $\bullet\bullet$ 2** cordsets with a 20-way removable terminal block on the module end and a 25-way SUB-D connector on the Telefast sub-base end. Cordsets available in 1.5 or 3m/4.92 or 9.84 ft lengths.
 - **BMXFTA $\bullet\bullet$ 0** cordsets with a 28-way removable terminal block on the module end and a 25-way SUB-D connector on the Telefast sub-base end. Cordsets available in 1.5 or 3m/4.92 or 9.84 ft lengths.
 - 4-c: Connection to analog module with 40-way FCN connector:
 - **BMXFCA $\bullet\bullet$ 2** cordsets with a 40-way FCN connector on the module end and a 25-way SUB-D connector on the Telefast sub-base end. Cordsets available in 1.5 or 3m/4.92 or 9.84 ft lengths.
 - 4-d: Connection to HART analog input module:
 - **BMXFTA1522/3022** cordsets with a 20-way removable terminal block on the module end and a 25-way SUB-D connector on the Telefast sub-base end. Cordsets available in 1.5 or 3m/4.92 or 9.84 ft lengths.
 - For connection to HART analog output module:
 - **BMXFCA $\bullet\bullet$ 0** (see description in section 4-b)
- 5 Modicon Telefast ABE7CPA analog and application-specific connection sub-bases (for combinations, see pages 6/11):
 - **ABE7CPA410** allows connection on a screw terminal block of 4 current/voltage inputs, with provision and distribution of 4 isolated power supplies for the current loop inputs
 - **ABE7CPA412** allows connection on a screw terminal block of 4 thermocouple inputs, with cold-junction compensation supplied for these inputs
 - **ABE7CPA21** allows connection on a screw terminal block of 4 current/voltage outputs
 - **ABE7CPA02** allows connection on a screw terminal block of 8 current/voltage I/O
 - **ABE7CPA03** allows connection on a screw terminal block of 8 inputs, with provision and distribution of the power supply (with limitation of each current loop) for the current/voltage outputs of the **BMXAMO0210** analog module
 - **ABE7CPA31, ABE7CPA31E** allows connection on a screw terminal block (ABE7CPA31) or a spring-type terminal block (ABE7CPA31E) of 8 inputs, with provision and distribution of the power supply (limited to 25 mA per input)
- 6 **ABE7ACC02** sub-base for splitting 16 into 2 x 8 channels, allowing connection of 8-channel sub-bases.
- 7 8-channel Modicon Telefast ABE7 Optimum or Universal passive connection sub-bases or adaptor sub-bases.

Combinations of discrete inputs/outputs on the Modicon X80 platform with ABE7 sub-bases

(items 1...7), see Presentation on page 6/8

		Discrete I/O modules on the Modicon X80 platform				
		Reference for 24 V := discrete I/O modules (item 1)				
		Inputs	Outputs	Inputs/outputs		
2 x 16 I	4 x 16 I	2 x 16 Q	4 x 16 Q	1 x 16 I, 1 x 16 Q		
BMXDDI3202K	BMXDDI6402K	BMXDDO3202K	BMXDDO6402K	BMXDDM3202K		
Required cordsets						
Preassembled cordsets (at both ends)	BMXFCC●●1, BMXFCC●●3 (item 2) (1)	Yes	Yes	Yes	Yes	No
	BMXFCC●●3 (item 2) (1)	No	No	No	No	Yes
	Quantities to be ordered	1	2	1	2	1
Passive connection sub-bases						
Optimum 16 channels (item 3)	ABE7H34E●00 "economy" (2)					
	ABE7H16C●● "miniature"					
Universal 8 channels (item 7)	ABE7H08R●●	(3)	(3)	(3)	(3)	(3)
	ABE7H08S21	(3)	(3)	(3)	(3)	(3)
Universal 16 channels (item 3)	ABE7H16R1●●					
	ABE7H16R50●					
	ABE7H16R2●●					
	ABE7H16S21●					
	ABE7H16R3●					
	ABE7H16R23					
	ABE7H16S43					
	ABE7H16F43					
Input adaptor sub-bases with solid state relays						
Universal 16 channels (item 3)	ABE7S16E2●●●					
	Fixed solid state relays, removable terminal blocks					
	ABE7P16F31●					
	Plug-in solid state relays					
Output adaptor sub-bases with fixed relays, removable terminal blocks						
Optimum & Universal 8 channels (item 7)	ABE7S08S2B●●			(3)	(3)	(3)
	Solid state relays					
	ABE7R08S111●, ABE7R08S21●●			(3)	(3)	(3)
	Electromechanical relays					
Optimum & Universal 16 channels (item 3)	ABE7S16S●B●●					
	Solid state relays					
	ABE7R16S111●, ABE7R16S210●, ABE7R16S212					
	Electromechanical relays					
Output adaptor sub-bases with plug-in relays						
Universal 8 channels (item 7)	ABE7P08T330●			(3)	(3)	(3)
	Solid state relays					
Optimum & Universal 16 channels (item 3)	ABE7R16T●●●, ABE7R16M111					
	Electromechanical relays					
	ABE7P16T●●●					
	Solid state and/or electromechanical relays					
Sub-bases for analog I/O						
4 channels (item 5)	ABE7CPA410					
	ABE7CPA412					
2 channels (item 5)	ABE7CPA21					
8 channels (item 5)	ABE7CPA02					
	ABE7CPA03					
	ABE7CPA31, ABE7CPA31E					

Compatible
Not compatible

(1) References for cordsets: to be completed, see page 3/13.

(2) ABE7H34E●00 "economy" sub-bases: the cordset is supplied.

(3) Via the splitter sub-base 6 ABE7ACC02 used to separate 16 channels into 2 x 8 channels

Combinations of analog inputs/outputs on the Modicon X80 platform with ABE7 sub-bases

(items 1...7), see Presentation on page 6/8

Analog I/O modules on the Modicon X80 platform										
Reference for analog I/O modules (item 1-b, 1-c and 1-d)										
	Inputs						Outputs			
	4 I	4 I	2 x 4 I	8 I	8 I	8 I	2 Q	4 Q	8 Q	4 Q
Preassembled cordsets (at both ends)	BMXFCA●●0 (item 4-b) (1)	Yes	No	No	No	No	Yes	Yes	No	Yes
	BMXFCA●●2 (item 4-c) (1)	No	Yes	Yes	No	No	No	No	No	No
	BMXFTA●●0 (item 4-c) (1)	No	No	No	Yes	Yes	No	No	Yes	No
	BMXFTA●●2 (item 4-c) (1)	No	No	No	No	No	No	No	Yes	No
	BMXFTA●●22 (item 4-d) (1)	No	No	No	No	No	Yes	No	No	No
Quantities to be ordered	1	1	2	1	1	1	1	1	1	1
Required cordsets										
Optimum 16 channels (item 3)	ABE7H16C●● "miniature"									
Universal 8 channels (item 7)	ABE7H08R●●									
	ABE7H08S21									
Universal 16 channels (item 3)	ABE7H16R1●●									
	ABE7H16R50●									
	ABE7H16R2●●									
	ABE7H16S21●									
	ABE7H16R3●									
	ABE7H16R23									
	ABE7H16S43									
	ABE7H16F43									
Passive connection sub-bases										
Optimum 16 channels (item 3)	ABE7H16C●● "miniature"									
Universal 8 channels (item 7)	ABE7H08R●●									
	ABE7H08S21									
Universal 16 channels (item 3)	ABE7H16R1●●									
	ABE7H16R50●									
	ABE7H16R2●●									
	ABE7H16S21●									
	ABE7H16R3●									
	ABE7H16R23									
	ABE7H16S43									
	ABE7H16F43									
Input adaptor sub-bases with solid state relays										
Universal 16 channels (item 3)	ABE7S16E2●●●									
	Fixed solid state relays, removable terminal blocks									
	ABE7P16F31●									
	Plug-in solid state relays									
Output adaptor sub-bases with fixed relays, removable terminal blocks										
Optimum & Universal 8 channels (item 7)	ABE7S08S2B●●									
	Solid state relays									
	ABE7R08S111●, ABE7R08S21●●									
	Electromechanical relays									
Optimum & Universal 16 channels (item 3)	ABE7S16S●B●●									
	Solid state relays									
	ABE7R16S111●, ABE7R16S210●, ABE7R16S212									
	Electromechanical relays									
Output adaptor sub-bases with plug-in relays										
Universal 8 channels (item 7)	ABE7P08T330●									
	Solid state relays									
Optimum & Universal 16 channels (item 3)	ABE7R16T●●●, ABE7R16M111									
	Electromechanical relays									
	ABE7P16T●●●									
	Solid state and/or electromechanical relays									
Sub-bases for analog I/O										
4 channels (item 5)	ABE7CPA410									
	ABE7CPA412									
2 channels (item 5)	ABE7CPA21									
8 channels (item 5)	ABE7CPA02									
	ABE7CPA03									
	ABE7CPA31									
	ABE7CPA31E									

Compatible

Not compatible

(1) References for cordsets: to be completed, see page 3/23.

Connection interfaces

Modicon Telefast ABE7 pre-wired system Passive connection sub-bases



ABE7H20E***



ABE7H16C21



ABE7H16CM21

6

Passive connection sub-bases for discrete signals

Optimum "Economy" sub-bases

Function	No. of channels	No. of terminals per channel number	For PLCs	Length of PLC connection cable	Type of connection	Reference	Weight kg lb
Input or output	16	1	Modicon TSX Micro Modicon Premium	1 m 3.281 ft.	Screw	ABE7H20E100	0.330 0.728
				2 m 6.562 ft.	Screw	ABE7H20E200	0.410 0.904
				3 m 9.843 ft.	Screw	ABE7H20E300	0.480 1.058
			Siemens S7	1.5 m 4.921 ft.	Screw	ABE7H32E150	0.360 0.794
				3 m 9.843 ft.	Screw	ABE7H32E300	0.460 1.014

Optimum "Miniature" sub-bases

Function	No. of channels	No. of terminals per channel number	LED per channel	Polarity distribution	Type of connection	Reference	Weight kg lb
Input or output	16	1	No	No	Screw	ABE7H16C10	0.160 0.353
						ABE7H16C11	0.160 0.353
			Yes	0 or 24 V	Screw	ABE7H16C21	0.205 0.452
						ABE7H16C31	0.260 0.573
Input and output (1)	16	1	Yes	No	Screw	ABE7H16CM11	0.160 0.353
						ABE7H16CM21	0.200 0.441

(1) 8 I + 8 Q: these products have 2 common connections which enable inputs and outputs to be connected to the same sub-base at the same time.

Passive connection sub-bases for discrete signals (continued)

Universal sub-bases

Function	No. of channels	No. of terminals per row on channel number	LED per channel polarity	LED per channel distribution	Isolator (I) Fuse (F) per channel	Type of connection	Reference	Weight kg lb
Input or output	8	1	1	No	No	–	Screw	ABE7H08R10 0.187 0.412
				Yes	No	–	Screw	ABE7H08R11 0.187 0.412
		2	2	Yes	0 or 24 V	–	Screw	ABE7H08R21 0.218 0.481
						I	Screw	ABE7H08S21 0.245 0.540
	12	1	1	No	No	–	Screw	ABE7H12R10 0.274 0.604
				Yes	No	–	Screw	ABE7H12R11 0.274 0.604
		2	No	No	–	Screw	ABE7H12R50 0.196 0.432	
		2	2	No	0 or 24 V	–	Screw	ABE7H12R20 0.300 0.661
				Yes	0 or 24 V	–	Screw	ABE7H12R21 0.300 0.661
						I	Screw	ABE7H12S21 0.375 0.827
	16	1	1	No	No	–	Screw	ABE7H16R10 0.274 0.604
				Yes	No	–	Screw	ABE7H16R11 0.274 0.604
		2	No	No	–	Screw	ABE7H16R50 0.196 0.432	
		2	2	No	0 or 24 V	–	Screw	ABE7H16R20 0.300 0.661
				Yes	0 or 24 V	–	Screw	ABE7H16R21 0.300 0.661
						I	Screw	ABE7H16S21 0.375 0.827
	3	3	No	0 or 24 V	–	Screw	ABE7H16R30 0.346 0.763	
				Yes	0 or 24 V	–	Screw	ABE7H16R31 0.346 0.763
Input type 2 (1)	16	2	2	Yes	0 or 24 V	–	Screw	ABE7H16R23 0.320 0.705
Input	16	2	1	Yes	24 V	I, F (2)	Screw	ABE7H16S43 0.640 1.411
Output	16	2	1	Yes	0 V	I, F (2)	Screw	ABE7H16F43 0.640 1.411

(1) For TSX Micro, Modicon Premium.

(2) With LED to indicate blown fuse.

Connection interfaces

Modicon Telefast ABE7 pre-wired system
Adaptor sub-bases with fixed relays and removable terminal blocks


ABE7H16E2••

Adaptor sub-bases with fixed solid state relays, removable terminal blocks

Universal input sub-bases with solid state relays

Number of channels	No. of terminals per channel	Isolation of PLC/Operative part	Voltage	Type of connection	Reference	Weight kg lb
16	2	Yes	— 24 V	Screw	ABE7S16E2B1	0.370 0.816
			— 48 V	Spring	ABE7S16E2B1E	0.370 0.816
			~ 48 V	Screw	ABE7S16E2E1	0.370 0.816
			~ 110 V	Screw	ABE7S16E2E0	0.386 0.851
			~ 230 V	Screw	ABE7S16E2F0	0.397 0.875
			~ 230 V	Spring	ABE7S16E2M0	0.407 0.897
			~ 230 V	Spring	ABE7S16E2M0E	0.407 0.897

Universal output sub-bases with solid state relays

Number of channels	Isolation of PLC/Operative part	Output voltage	Output current	Fault detection signal (1)	Type of connection	Reference	Weight kg lb
16	No	24 V —	0.5 A	Yes (2)	Screw	ABE7S16S2B0	0.405 0.893
					Spring	ABE7S16S2B0E	0.405 0.893
		—	0.5 A	No	Screw	ABE7S16S1B2	0.400 0.882
					Spring	ABE7S16S1B2E	0.400 0.882


ABE7R08S216

Optimum and Universal output sub-bases with electromechanical relays

Number of channels	Number of contacts	Output current	Polarity distribution/operative part	Type of connection	Reference	Weight kg lb
8	1 N/O	2 A	Contact common per group of 4 channels	Screw	ABE7R08S111	0.252 0.556
				Spring	ABE7R08S216	0.448 0.988
	Latching	2 A	Volt-free	Screw	ABE7R08S210	0.448 0.988
16	1 N/O	2 A	Contact common per group of 8 channels	Screw	ABE7R16S111	0.405 0.893
				Spring	ABE7R16S111E	0.405 0.893
	1 N/O	5 A	Volt-free	Screw	ABE7R16S210	0.405 0.893
				Spring	ABE7R16S210E	0.405 0.893
	Common per group of 8 channels on both poles	5 A	Common per group of 8 channels on both poles	Screw	ABE7R16S212	0.400 0.882

(1) A fault on a sub-base output Qn will set PLC output Qn to safety mode, which will be detected by the PLC.

(2) Can only be used with modules with protected outputs.

Connection interfaces

Modicon Telefast ABE7 pre-wired system

Input/output adaptor sub-bases for or with plug-in relays

Adaptor sub-bases with plug-in relays

Universal input sub-bases for solid state relays, supplied without relays

Number of channels	No. of terminals per channel	For relay type	Isolation of PLC/ Operative part	Input connection	Type of connection	Reference	Weight kg lb
16	2	ABS7E ABR7 ABS7S33E	Yes	Volt-free	Screw	ABE7P16F310	0.850 1.874
				Polarity distribution	Screw	ABE7P16F312	0.850 1.874

Optimum and Universal output sub-bases, supplied with electromechanical relays (1)

Number of channels	Relay width	Relay type supplied	Number and type of contacts	Polarity distribution/operative part	Reference	Weight kg lb	
16	5 mm 0,197 in.	ABR7S11	1 N/O	Contact common per group of 4 channels	ABE7R16T111	0.600 1.323	
				Contact common per group of 4 output channels + 2 common input terminals	ABE7R16M111 (2)	0.600 1.323	
	10 mm 0,394 in.		1 N/O	Volt-free	ABE7R16T210	0.735 1.620	
				Common on both poles (3)	ABE7R16T212	0.730 1.609	
	12 mm 0,472 in.	ABR7S23	1 C/O	Volt-free	ABE7R16T230	0.775 1.709	
				Contact common (3)	ABE7R16T231	0.730 1.609	
	12 mm 0,472 in.		1 C/O	Volt-free	ABE7R16T330	1.300 2.866	
				Common on both poles (4)	ABE7R16T332	1.200 2.646	
	12 mm 0,472 in.	ABR7S37	2 C/O	Volt-free	ABE7R16T370	1.300 2.866	



ABE7R16M111



ABE7R16T210

(1) The sub-bases are supplied as standard with electromechanical relays, all or part of which can be replaced by solid state relays of the same width (it is possible to combine these different technologies on a single sub-base).

(2) Two connection methods are available, enabling inputs and outputs to be connected to the same sub-base at the same time.

(3) Per group of 8 channels.

(4) Per group of 4 channels.

Connection interfaces

Modicon Telefast ABE7 pre-wired system

Output adaptor sub-bases for plug-in relays

Output adaptor sub-bases for plug-in relays

Optimum and Universal output sub-bases for solid state relays and/or electromechanical relays (1)

No. of channels	Relay width	For relay type	Isolator per channel	Fuse per channel	Polarity distribution/operative part	Type of connection	Reference	Weight kg lb
16	5 mm 0.197 in.	ABR7S11 ABS7SC1B	No	No	Contact common per group of 4 channels	Screw	ABE7P16T111	0.550 1.213
	10 mm 0.394 in.	ABR7S2● ABS7SA2● ABS7SC2● ABE7ACC20	No	No	Volt-free	Screw	ABE7P16T210 (2)	0.615 1.356
							ABE7P16T230 (2)	0.655 1.444
				Yes	Volt-free	Screw	ABE7P16T214	0.675 1.488
				No	Common on both poles (3)	Screw	ABE7P16T212	0.615 1.356
				Yes	Common on both poles (3)	Screw	ABE7P16T215	0.670 1.477
8	12 mm 0.472 in.	ABR7S33 ABS7A3● ABS7SC3●● ABE7ACC21	No	No	Volt-free	Screw	ABE7P08T330	0.450 0.992
16	12 mm 0.472 in.	ABR7S33 ABS7A3● ABS7SC3●● ABE7ACC21	No	No	Volt-free	Screw	ABE7P16T330	0.900 1.984
		ABR7S33 ABS7SA3M ABS7SC3E ABE7ACC21	No	Yes	Volt-free	Screw	ABE7P16T332	0.900 1.984
			Yes	Yes	Common on both poles (4)	Screw	ABE7P16T318	1.000 2.205



ABE7P16T2●●

(1) Not equipped with relays.

(2) With relay ABR7S21 for sub-base ABE7P16T210, with relay ABR7S23 for sub-base ABE7P16T230●.

(3) Per group of 8 channels.

(4) Per group of 4 channels.

References (continued)

Connection interfaces

Modicon Telefast ABE7 pre-wired system

Plug-in relays

571152



ABS7SC1B

Plug-in solid state relays

Relay width	Functions	Input circuit		Output circuit		Unit reference	Weight kg lb
		Current	Nominal voltage	Current	Nominal voltage		
5 mm ,, 197 in.	Output	—	24 V	2A	24 V —	ABS7SC1B	0.010 0.022
10 mm 0.394 in.	Output	—	24 V	0.5A	5...48 V —	ABS7SC2E	0.016 0.035
					24...240 V ~	ABS7SA2M	0.016 0.035
12 mm 0.472 in.	Input	—	5 V TTL	—	24 V —	ABS7EC3AL	0.014 0.031
			24 V Type 2	—	24 V —	ABS7EC3B2	0.014 0.031
			48 V Type 2	—	24 V —	ABS7EC3E2	0.014 0.031
		50 Hz ~	48 V	—	24 V —	ABS7EA3E5	0.014 0.031
		60 Hz ~	110...130 V	—	24 V —	ABS7EA3F5	0.014 0.031
		50 Hz ~	230...240 V	—	24 V —	ABS7EA3M5	0.014 0.031
	Output	—	24 V	2A Self-protected	24 V —	ABS7SC3BA	0.016 0.035
				1.5 A	5...48 V —	ABS7SC3E	0.016 0.035
				1.5 A	24...240 V ~	ABS7SA3M	0.016 0.035

816476



ABR7S2●

816474



ABR7S3●

Plug-in electromechanical relays

Relay width	Control voltage	Output current (1)	Number of contacts	Order in lots of	Unit reference	Weight kg lb
5 mm 0.197 in.	24 V —	5 A (lth)	1 N/O	4	ABR7S11	0.005 0.011
10 mm 0.394 in.	24 V —	5 A (lth)	1 N/O	4	ABR7S21	0.008 0.018
			1 C/O	4	ABR7S23	0.008 0.018
12 mm 0.472 in.	2 V —	10 A (lth)	1 C/O	4	ABR7S33	0.017 0.037
		8 A (lth)	2 C/O	4	ABR7S37	0.017 0.037
	48 V —	8 A (lth)	1 C/O	4	ABR7S33E	0.017 0.037

Accessory

Description	Reference	Weight kg lb
Extractor for 5 mm (0.197 in.) miniature relay	ABE7ACC12	0.010 0.022

Connection interfaces

Modicon Telefast ABE7 pre-wired system
Connection sub-bases for analog channels and application-specific channels



ABE7CPA01



ABE7CPA11



ABE7CPA21
ABE7CPA410
ABE7CPA412

Connection sub-bases for counter and analog channels						
Functions	For platforms	Compatible modules	Type of connection on Telefast end	Type of connection	Reference	Weight kg lb
Analog and counter	TSX Micro	Analog and integrated counter TSX3722 TSXCTZ●A	15-way SUB-D	Screw	ABE7CPA01	0.300 0.661
Counter, axis control, position control	Modicon Premium	TSXCTY●A TSXCAY●1	15-way SUB-D	Screw	ABE7CPA01	0.300 0.661
Connection of absolute encoder with parallel output	Modicon Premium	TSXCTY●A TSXCAY●1	15-way SUB-D	Screw	ABE7CPA11	0.330 0.728
Distribution of 4 thermocouples	Modicon X80 I/O	BMXART0414 BMXART0814	25-way SUB-D	Screw	ABE7CPA412	0.180 0.397
Distribution of 16 thermocouples	Modicon Premium	TSXAELY1614	25-way SUB-D	Screw	ABE7CPA12	0.300 0.661
Passive distribution of 8 analog EIS channels on screw terminals, with shield continuity	Modicon Premium	TSXASY800 TSXAELY1600 TSXA●Y800	25-way SUB-D	Screw	ABE7CPA02	0.290 0.639
	Modicon X80 I/O	BMXAMI0800 BMXAMI0810 BMEAHI0812 BMXAMO0802				
	Modicon Quantum	140AVI03000 140ACI03000 140ACI04000 140ACO13000				
Provision and distribution of protected isolated power supplies for 4 analog input channels	Modicon M340	BMXAMI0410	25-way SUB-D	Screw	ABE7CPA410	0.180 0.397
Distribution of 4 analog output channels	Modicon Premium	TSXASY410 TSXAELY420	25-way SUB-D	Screw	ABE7CPA21	0.210 0.463
	Modicon X80 I/O	BMXAMO0210 BMXAMO0410 BMEAHO0412				
	Modicon Quantum	140AVO02000 140ACO02000				
Distribution and supply of 8 analog input channels with limitation of each current loop	Modicon Premium	TSXAELY800 TSXAELY1600	25-way SUB-D	Screw	ABE7CPA03	0.330 0.728
	Modicon Quantum	140AVI03000 140ACI03000 140ACI04000				
Distribution and supply of 8 analog input channels isolated from one another with 25 mA/channel limitation	Modicon Premium	TSXAELY810	25-way SUB-D	Screw	ABE7CPA31	0.410 0.904
	Modicon X80 I/O	BMXAMI0800 BMXAMI0810 BMEAHI0812 (1)		Spring	ABE7CPA31E	0.410 0.904
	Modicon Quantum	140AVI03000 140ACI03000 140ACI04000				
Safety	Modicon Premium	TSXPAY2●2	25-way SUB-D	Screw	ABE7CPA13	0.290 0.639


(1) The BMEAHI0812 module is not compatible with the ABE7CPA31E connection sub-base.

Connection interfaces

Modicon Telefast ABE7 pre-wired system

Cabled connectors for Modicon Quantum I/O modules

819500

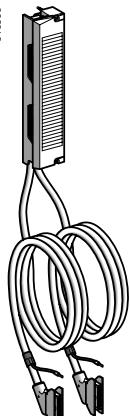

ABFM32H●●1

570464



TSXCDP●03


Type of signal	I/O modules	Type of connector	Gauge	Cross-section	Length	No. of channels	Reference	Weight
			AWG	mm ²	m ft			kg lb
Inputs and relay outputs	Consult our website www.schneider-electric.com	2 x 20-way HE10	22	0.324	1.5 4.921	2 x 16	ABFM32H150	0.650 1.433
					3 9.843	2 x 16	ABFM32H300	1.150 2.535
0.5 A outputs	Consult our website www.schneider-electric.com	2 x 20-way HE10 + external power supply	22	0.324	1.5 4.921	2 x 16	ABFM32H151	0.650 1.433
					3 9.843	2 x 16	ABFM32H301	1.150 2.535
Inputs or outputs (96 channels)	140DDI36400 140DDO36400	2 x 20-way HE10	22	0.324	0.5 1.640	6 x 16	TSXCDP053	0.085 0.187
					1 3.281	6 x 16	TSXCDP103	0.150 0.331
					2 6.562	6 x 16	TSXCDP203	0.280 0.617
					3 9.843	6 x 16	TSXCDP303	0.410 0.904
					5 16.404	6 x 16	TSXCDP503	0.670 1.477
Analog inputs	140AVI03000	1 x 25-way SUB-D	24	0.22	2 6.562	8	ABFM08S201	0.600 1.323
	140ACI03000							
Analog outputs	140ACI04000	2 x 25-way SUB-D	24	0.22	2 6.562	16	ABFM16S201	0.620 1.367
	140AVO02000	1 x 25-way SUB-D	24	0.22	2 6.562	4	ABFM04S200	0.450 0.992
	140ACO02000	1 x 25-way SUB-D	24	0.22	2 6.562	4	ABFM04S201	0.450 0.992
	140ACO13000	1 x 25-way SUB-D	24	0.22	2 6.562	8	(1)	0.450 0.992

(1) For further information, please consult our Customer Care Center.


Connection interfaces

Modicon Telefast ABE7 pre-wired system


Accessories for connection sub-bases




ABE7ACC02



ABE7ACC80 + ABE7ACC81




ABE7BV20




ABE7TES160

Accessories					
Description	No. of channels	Characteristics	Order in multiples of	Unit reference	Weight kg lb
Splitter sub-base	–	16 as 2 x 8 channels	1	ABE7ACC02	0.075 0.165
Redundant output sub-base	–	16 as 2 x 16 channels	1	ABE7ACC10	0.075 0.165
Redundant input sub-base	–	16 as 2 x 16 channels	1	ABE7ACC11	0.075 0.165
Plug-in continuity blocks	–	Width 12 mm (0.472 in.)	4	ABE7ACC21	0.010 0.022
Additional snap-on terminal blocks (shunted terminals)	8 16	10 screw terminals 20 screw terminals	5	ABE7BV10 ABE7BV20	0.030 0.066 0.060 0.132
I/O simulator sub-base	16	For display, forcing, inhibition, continuity	1	ABE7TES160	0.350 0.772
Self-adhesive marker tag holder	–	For 6 characters	50	AR1SB3	0.001 0.002
Quick-blow fuses 5 x 20, 250 V, UL	–	0.125 A 0.5 A 1 A 2 A 4 A 6.3 A	10 10 10 10 10 10	ABE7FU012 ABE7FU050 ABE7FU100 ABE7FU200 ABE7FU400 ABE7FU630	0.010 0.022 0.010 0.022 0.010 0.022



AR1SB3



ABEC08R***

Commoning link accessories

Description	For common	Colour	Distance between cable ends	Reference	Weight kg /lb
Commoning links Modularity 8 x 1 mm ²	Coil	White	12 cm 4.724 in.	ABFC08R12W	0.020 0.044
			2 cm 0.787 in.	ABFC08R02W	0.010 0.022
	~	Red	12 cm 4.724 in.	ABFC08R12R	0.020 0.044
			2 cm 0.787 in.	ABFC08R02R	0.010 0.022
	---	Blue	12 cm 4.724 in.	ABFC08R12B	0.020 0.044
			2 cm 0.787 in.	ABFC08R02B	0.010 0.022

Compatibility with sensors

- OsiSense XU photo-electric sensors page 7/2
- OsiSense XS inductive proximity sensors page 7/4

Photo-electric sensors			--- inputs, BMXDDI	1602	1603	1604T	3202K	6402K
Type	Reference							
General purpose								
Design Ø 18	Metal	3 wire, PNP 24V	XUB0/1/2/4/5/9B•P●●	■				
		3 wire, NPN 24V	XUB0/1/2/4/5/9B•N●●					
	Plastic	3 wire, PNP 24V	XUB0/1/2/4/5/9A•P●●	■				
		3 wire, NPN 24V	XUB0/1/2/4/5/9A•N●●					
Design	Miniature	3 wire, PNP 24V	XUM0/2/5/9AP●●●●	■				
		3 wire, NPN 24V	XUM0/2/5/9AN●●●●					
	Compact 50x50	3 wire, PNP 24V	XUK1/2/5/8/9AP●●●	■				
		3 wire, NPN 24V	XUK1/2/5/8/9AN●●●					
		3 wire, programmable PNP/NPN DC	XUK0AK●●●	■				
		5 wire, programmable AC/DC	XUK0/1/2/5/8/9AR					
	Compact 92x71	3 wire, programmable PNP/NPN DC	XUX0/1/2/5/8/9AK	■				
		5 wire, programmable AC DC	XUX0/1/2/5/8/9AR					
Application								
Material handling	Optical fork	3 wire, PNP 24V	XUVR●●●●P●●	■				
		3 wire, NPN 24V	XUVR●●●●N●●					
		3 wire, PNP 24V	XUVA●●●●P●●	■				
		3 wire, NPN 24V	XUVA●●●●N●●					
		4 wire, PNP, or NPN 24V	XUYF●●●●●	■				
		4 wire, PNP, or NPN 24V	XUVU06●●●●	■				
		4 wire, PNP, or NPN 24V	XUVK●●●●	■				
		3 wire, PNP 24V	XUVH●●●●	■				
		3 wire, NPN 24V	XUVJ●●●●					
		4 wire, PNP, or NPN 24V	XUVF●●●●	■				
Packaging	Fiber	4 wire, PNP, or NPN 24V	XUYDCF●●●●	■				
	Compact	4 wire, PNP, or NPN 24V	XUKS●●●●●					
	M 18, threaded	3 wire, PNP 24V	XU5M18U1D	■				
	Fiber	4 wire, PNP, or NPN 24V	XUYAFL●●●●	■				
	M 18, threaded	3 wire, PNP 24V	XUBT●P●●●●	■				
		3 wire, NPN 24V	XUBT●N●●●●					
	Compact	4 wire, PNP, or NPN 24V	XUKT●●●●	■				
		3 wire, PNP 24V	XUKC1N●●●●	■				
		3 wire, NPN 24V	XUKC1P●●●●					
		3 wire, PNP 24V	XURC3P●●●●					
		3 wire, NPN 24V	XURC3N●●●●					
		4 wire, PNP, or NPN 24V	XUMW●●●●	■				
	M 18, threaded	3 wire, PNP 24V	XUB0SP●●●●	■				
		3 wire, NPN 24V	XUB0SN●●●●					
		3 wire, PNP 24V	XU●N18P●●●●	■				
		3 wire, NPN 24V	XU●N18N●●●●					
	M 8, threaded	3 wire, PNP 24V	XUAH●●●●	■				
		3 wire, NPN 24V	XUAJ●●●●					
	Miniature	3 wire, PNP 24V	XUYP●●●●P●●●	■				
		3 wire, NPN 24V	XUYP●●●●N●●●					
		3 wire, PNP 24V	XUM2/5/9BP●●●●	■				
		3 wire, NPN 24V	XUM2/5/9BN●●●●					
		3 wire, PNP 24V	XUY●●●●929●●●	■				
Hoisting	M 18, threaded	3 wire, PNP 24V	XUBLBP●●●●	■				
		3 wire, NPN 24V	XUBLBN●●●●					
	Compact	2 wire 4...20 mA; 3 wire 0...10V	XUJK803538					
	M 18, threaded	2 wire 4...20 mA	XU5M18AB20D					
		PNP, 2 wire 4...20 mA	XU2M18AB20D					
	Compact	PNP, 2 wire 4...20 mA	XUYP●●●●925					
		4 wire, PNP, or NPN 24V	XUYP●●●●●	■				
	Fiber	3 wire, PNP 24V	XUDA●P●●●●	■				
		3 wire, NPN 24V	XUDA●N●●●●					
		4 wire, PNP, or NPN 24V	XUYAF●●●●	■				
	Other formats	3 wire, programmable PNP/NPN DC	XUC2/8/9AK●●●●	■				
		5 wire, programmable AC/DC	XUC2/8/9ARC●●●●					
		3 wire, NPN 24V + analog	XUE●AA●●●●					
		2 wire, AC	XULA●●●●					
		5 wire, programmable AC/DC	XULM●●●●					
		3 wire, programmable PNP/NPN DC	XUYB●●●●S	■				
		5 wire, programmable AC/DC	XUYB●●●●R					
	M 18, threaded	2 wire, AC/DC	XU5/8/9M18MA●●●●					

Compatible

Incompatible

Type	Reference	--- inputs, BMXDDI			
		1602	1603	1604T	3202K
General purpose					
Cylindrical, flush, standard sensing distance, short barrel	Ø 6.5 plain short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS506B1P●●● XS506B1N●●● XS506BSC●●●			
	M8, threaded short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS508B1P●●● XS508B1N●●● XS508BSC●●●			
	M12, threaded short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS512B1P●●● XS512B1N●●● XS512BSD/C●●●			
	M18, threaded short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS518B1P●●● XS518B1N●●● XS518BSD/C●●●			
	M30, threaded short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS530B1P●●● XS530B1N●●● XS530BSD/C●●●			
Cylindrical, flush, standard sensing distance, long barrel	M8, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V 2 wire, DC 24V-48V	XS508BLP●●● XS508BLN●●● XS508B1D/C●●●			
	M12, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V 2 wire, DC 24V-48V	XS512BLP●●● XS512BLN●●● XS512B1D/C●●●			
	M18, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V 2 wire, DC 24V-48V	XS518BLP●●● XS518BLN●●● XS518B1D/C●●●			
	M30, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V 2 wire, DC 24V-48V	XS530BLP●●● XS530BLN●●● XS530B1D/C●●●			
	M12, threaded long 2 wire, AC/DC	XS512B1M●●●			
	M18, threaded long 2 wire, AC/DC	XS518B1M●●●			
	M30, threaded long 2 wire, AC/DC	XS530B1M●●●			
Cylindrical, flush, extended sensing distance, short barrel	Ø 6.5 plain short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS106B3P●●● XS106B3N●●● XS606B3C●●●			
	M8, threaded short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS108B3P●●● XS108B3N●●● XS608B3C●●●			
	M12, threaded short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS112B3P●●● XS112B3N●●● XS612B3D●●●			
	M18, threaded short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS118B3P●●● XS118B3N●●● XS618B3D●●●			
	M30, threaded short 3 wire, PNP 24V 3 wire, NPN 24V 2 wire, DC 24V	XS130B3P●●● XS130B3N●●● XS630B3D●●●			
Cylindrical, flush, extended sensing distance, long barrel	M8, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V 2 wire, DC 24V-48V	XS608B1P●●● XS608B1N●●● XS608B1D●●●			
	M12, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V 2 wire, DC 24V-48V	XS612B1P●●● XS612B1N●●● XS612B1D●●●			
	M18, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V 2 wire, DC 24V-48V	XS618B1P●●● XS618B1N●●● XS618B1D●●●			
	M30, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V 2 wire, DC 24V-48V	XS630B1P●●● XS630B1N●●● XS630B1D●●●			
	M12, threaded long 2 wire, AC/DC	XS612B1M●●●			
	M18, threaded long 2 wire, AC/DC	XS618B1M●●●			
	M30, threaded long 2 wire, AC/DC	XS630B1M●●●			
Cylindrical, non flush, extended sensing distance, long barrel	M12, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V	XS612B4P●●● XS612B4N●●●			
	M18, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V	XS618B4P●●● XS618B4N●●●			
	M30, threaded long 3 wire, PNP 24V-48V 3 wire, NPN 24V-48V	XS630B4P●●● XS630B4N●●●			
	M12, threaded long 2 wire, AC/DC	XS612B4M●●●			
	M18, threaded long 2 wire, AC/DC	XS618B4M●●●			
	M30, threaded long 2 wire, AC/DC	XS630B4M●●●			

Compatible
Incompatible

Proximity sensors		Reference	--- inputs, BMXDDI			
Type			1602	1603	1604T	3202K
General purpose						
Flat, flush mountable, Format J 8x22x8 standard sensing distance		XS7J1A1P●●● XS7J1A1N●●● XS7J1A1D●●●				
Format F 15x22x8		XS7F1A1P●●● XS7F1A1N●●● XS7F1A1D●●●				
Format E 26x26x13		XS7E1A1P●●● XS7E1A1N●●● XS7E1A1D/C●●●				
Format C 40x40x15		XS7C1A1P●●● XS7C1A1N●●● XS7C1A1D/C●●●				
Format D 80x80x26		XS7D1A1P●●● XS7D1A1N●●● XS7D1A1D/C●●●				
Format 40X40X70 and 40X40X117 Plastic, with turret head: 5 positions	NO + NC NO/NC programmable	XS7/XS8C2/C4A1/A4P●●● XS7/XS8C2/C4A1/A4N●●● XS7/XS8C2/C4A1/A4D●●● XS7/XS8C2/C4A1/A4M●●●				
Flat, flush mountable, Format E 26x26x13 extended sensing distance		XS8E1A1P●●● XS8E1A1N●●● XS8E1A1M●●●				
	Format C 40x40x15	XS8C1A1P●●● XS8C1A1N●●● XS8C1A1M●●●				
	Format D 80x80x26	XS8D1A1P●●● XS8D1A1N●●● XS8D1A1M●●●				
Cylindrical multi-voltage	M12, threaded M18, threaded M30, threaded	XS1/2M12M●250 XS1/2M18M●250 XS1/2M30M●250				
Cylindrical Metal, 4 wire	Ø 6.5, plain M8, threaded M12, threaded M18, threaded M30, threaded	XS1L06PC410 XS1L06NC410 XS1/2M08PC410● XS1/2M08NC410● XS1/2N12PC410● XS1/2N12NC410● XS1/2N18PC410● XS1/2N18NC410● XS1/2N30PC410● XS1/2N30NC410●				
Cylindrical Metal, 4 wire PNP + NPN	M12, threaded M18, threaded M30, threaded	XS1/2/4M12KP340● XS1/2/4M18KP340● XS1/2/4M30KP340●				
Cylindrical Plastic, non flush, standard sensing distance	M8, threaded M12, threaded M18, threaded M30, threaded	XS4P08P●340● XS4P08P●370● XS4P08N●340● XS4P08N●370● XS4P08M●230●●● XS4P12P●340● XS4P12P●370● XS4P12N●340● XS4P12N●370● XS4P12M●230●●● XS4P18P●340● XS4P18P●370● XS4P18N●340● XS4P18N●370● XS4P18M●230●●● XS4P30P●340● XS4P30P●370● XS4P30N●340● XS4P30N●370● XS4P30M●230●●●				
Compatible						
Incompatible						

Proximity sensors			Reference	--- inputs, BMXDDI			
Type				1602	1603	1604T	3202K
General purpose							
Cylindrical basic flush or non flush, standard sensing distance, Plastic or Metal	Ø 6.5 plain	3 wire, PNP 24V	XS1/206BLP●●●				
		3 wire, NPN 24V	XS1/206BLN●●●				
	M8, threaded	3 wire, PNP 24V	XS1/208A/BLP●●●				
		3 wire, NPN 24V	XS1/208A/BLN●●●				
	M12, threaded	3 wire, PNP 24V	XS1/212A/BLP●●●				
		3 wire, NPN 24V	XS1/212A/BLN●●●				
	M18, threaded	3 wire, PNP 24V	XS1/218A/BLP●●●				
		3 wire, NPN 24V	XS1/218A/BLN●●●				
	M30, threaded	3 wire, PNP 24V	XS1/230A/BLP●●●				
		3 wire, NPN 24V	XS1/230A/BLN●●●				
Cylindrical, almost flush, extended sensing distance	M18, threaded	3 wire, PNP 24V	XS1N18P●349●				
		3 wire, NPN 24V	XS1N18N●349●				
	M30, threaded	3 wire, PNP 24V	XS1N30P●349●				
		3 wire, NPN 24V	XS1N30N●349●				
Cylindrical, miniature	Ø 4 plain	3 wire, PNP 24V	XS1L04P●31●●				
		3 wire, NPN 24V	XS1L04N●31●●				
	M5, threaded	3 wire, PNP 24V	XS1N05P●31●●				
		3 wire, NPN 24V	XS1N05N●31●●				
	Ø 6.5 plain	3 wire, PNP 24V	XS2L06P●340●				
		3 wire, NPN 24V	XS2L06N●340●				
Application							
Cylindrical, adjustable sensing distance	M12, threaded	3 wire, PNP 24V	XS612B2P●●●				
		3 wire, NPN 24V	XS612B2N●●●				
	M18, threaded	3 wire, PNP 24V	XS618B2P●●●				
		3 wire, NPN 24V	XS618B2N●●●				
	M30, threaded	3 wire, PNP 24V	XS630B2P●●●				
		3 wire, NPN 24V	XS630B2N●●●				
Rotation monitoring	M18, threaded	3 wire, PNP 24V-48V	XSAV11/2373				
		2 wire, AC/DC	XSAV11/2801				
	Format E 26x26x13	3 wire, PNP 24V	XS9●11RP●●●●				
	Format C 40x40x15	2 wire, AC/DC	XS9●11RM●●●●				
Analog output	M12, threaded	2 wire 4...20mA; 3 wire 0...10V	XS●12AB●●●●				
	M18, threaded	2 wire 4...20mA; 3 wire 0...10V	XS●18AB●●●●				
	M30, threaded	2 wire 4...20mA; 3 wire 0...10V	XS●30AB●●●●				
	Block format	2 wire 4...20mA; 3 wire 0...10V	XS9C2/C4A2A●●●●				
		2 wire 4...20mA; 3 wire 0...10V	XS9●111A●●●●				
Food and beverage	Cylindrical threaded Metal	3 wire, PNP 24V	XS2●●SAP●●●				
		3 wire, PNP 24V	XS908/12/18/30R/S●P●●●				
		3 wire, NPN 24V	XS2●●SAN●●●				
		2 wire, AC/DC	XS2●●SAM●●●				
	Cylindrical threaded Plastic	3 wire, PNP 24V-48V	XS2●●AAP●●●				
		3 wire, NPN 24V	XS2●●AAN●●●				
		2 wire, AC/DC	XS2●●AAAMA●●●				
Factor 1	Cylindrical threaded Metal	4 wire, PNP+NPN 24V	XS1M●●KPM40				
	Format C, 40 x 117 x 41	4 wire, PNP+NPN 24V	XS9C2/C4A●●●●				
	Cylindrical threaded Metal	3 wire, PNP 24V	XS1M18PAS●●				
Packaging	Format 12x26x40	3 wire, PNP 24V	XS7G12P●140				
		3 wire, NPN 24V	XS7G12N●140				
		4 wire, PNP 24V-48V	XS7G12P●440				
		4 wire, NPN 24V-48V	XS7G12N●440				
		2 wire, AC/DC	XS7G12M●230				
Material handling	Format C 40x40x40	2 wire, DC 24V-48V	XS7T4DA●●●				
		4 wire, PNP 24V-48V	XS7T4PC●●●				
		4 wire, NPN 24V-48V	XS7T4NC●●●				
	Format D 80x80x26	2 wire, DC 24V-48V	XS7D1●●●●				
Welding	Cylindrical Metal	3 wire, PNP 24V	XS1M●●PAW●●				
		2 wire, DC 24V-48V	XSLC●●●				
Compatible							
Incompatible							

Technical appendices

- Standards, certifications and environmental conditions page 8/2
- Certifications for automation products and EC regulations page 8/6

Standards and certifications

The Modicon X80 I/O platform has been developed to comply with the principal national and international standards concerning electronic equipment for industrial automation systems.

- Requirements specific to programmable controllers: functional characteristics, immunity, resistance, safety, etc.: **IEC/EN 61131-2**, UL and CSA standards for industry (**UL 508**, **CSA E61131-2**).
- Requirements specific to power utility automation systems: **IEC/EN 61850-3**.
- Merchant navy requirements of the major international organizations: unified in IACS (International Association of Classification Societies).
- Compliance with European Directives for CE marking:
- Low Voltage: 2006/95/EC
- Electromagnetic Compatibility: 2004/108/EC
- Ex areas:
- For USA and Canada: Hazardous location class I, division 2, groups A,B,C and D
- For other countries: CE ATEX (directive 94/9/EC) or IECEx in defined atmosphere Zone 2 (gas) and/or Zone 22 (dust).
- Up-to-date information on which certifications have been obtained is available on our website.

Characteristics

Service conditions and recommendations relating to the environment

		Modicon X80 I/O platform			Modicon X80 harsh I/O platform	
Temperature	Operation	°C	0...+ 60		- 25...+ 70	
	Storage	°C	- 40...+ 85		- 40...+ 85	
Relative humidity (without condensation)	Cyclical humidity	%	+ 5 ... + 95 up to 55°C		+ 5 ... + 95 up to 55°C	
	Continuous humidity	%	+ 5 ... + 93 up to 55°C		+ 5 ... + 93 up to 60°C	
Altitude	Operation	m	0...2000 (full specification: temperature and isolation) 2000 ... 5000 (temperature derating: 1°C/400 m, isolation lost: 150 V ---/1000 m)			
Supply voltage			Modicon X80 I/O power supply modules			
Nominal voltage	V	24 ---	24...48 ---	125 ---	100...240 ~	100...240 ~
	V	18...31.2 ---	18...62.4 ---	100...150 ---	85...264 ~	85...264 ~
Nominal frequencies	Hz	—	—	—	50/60	50/60
Limit frequencies	Hz	—	—	—	47/63	47/63

Protective treatment of the Modicon X80 I/O platform

The Modicon X80 I/O platform meets the requirements of "TC" treatment (*Treatment for all Climates*).

For installations in industrial production workshops or environments corresponding to "TH" treatment (*treatment for hot and humid environments*), Modicon X80 I/O must be embedded in enclosures with minimum IP 54 protection.

The Modicon X80 I/O platform offers **protection to IP 20 level** and **protection against pins** (enclosed equipment) (1). They can therefore be installed without an enclosure in reserved-access areas which do not exceed **pollution level 2** (control room with no dust-producing machine or activity). Pollution level 2 does not take account of more severe environmental conditions: air pollution by dust, smoke, corrosive or radioactive particles, vapors or salts, attack by fungi, insects, etc.

(1) In cases where a position is not occupied by a module, a **BMXXEM010** protective cover must be installed.

(CE): tests required by European directives (CE) and based on IEC/EN 61131-2 standards.

Environment tests		
Name of test	Standards	Levels
Immunity to LF interference (CE) (1)		
Voltage and frequency variations	IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-11 IACS E10; IEC 61000-4-11	0.85...1.10 Un - 0.94...1.04 Fn; 4 steps t = 30 min 0.80 Un...0.90 Fn; 1.20 Un...1.10 Fn; t = 1.5 s/5 s
Direct voltage variations	IEC/EN 61131-2; IEC 61000-4-29; IACS E10 (PLC not connected to charging battery)	0.85...1.2 Un + ripple: 5% peak; 2 steps t = 30 min
Third Harmonic	IEC/EN 61131-2	H3 (10% Un), 0°/180°; 2 steps t = 5 min
Immunity to conducted low frequency (only IACS) IACS E10		
Voltage interruptions	IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-11; IEC 61000-4-29; IACS E10 IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-11	Power supply immunity: ■ 1 ms for --- PS1/10 ms for ~ PS2 ■ Check operating mode for longer interruptions For IACS: ■ 30 s for ~ or ---
Voltage shut-down and start-up	IEC/EN 61131-2	For ~ PS2: ■ 20% Un, t0: ½ period ■ 40% Un, cycle 10/12 ■ 70% Un, cycle: 25/30 ■ 0% Un, cycle 250/300 ■ Un...0...Un; t = Un/60 s ■ Umin...0...Umin; t = Umin/5 s ■ Umin...0.9 Udl...Umin; t = Umin/60 s
Magnetic field	IEC/EN 61131-2; IEC/TS 61000-6-5; IEC 61000-4-8 (for MV power stations: IEC 61850-3) IEC 61000-4-10 (for MV power stations: IEC 61850-3)	Power frequency: 50/60 Hz, 100 A/m continuous ...1000 A/m; t = 3 s; 3 axes Oscillatory: 100 kHz...1 MHz, 100 A/m; t = 9 s; 3 axes
Conducted common mode disturbances range 0 Hz ...150 kHz	IEC 61000-4-16 (for MV power stations: IEC 61850-3)	For remote systems: ■ 50/60 Hz and ---, 300 V, t = 1s ■ 50/60 Hz and ---, 30 V, t = 1 min ■ 5 Hz...150 kHz, sweep 3 V...30 V

Where:

- PS1 applies to PLC supplied by battery, PS2 applies to PLC energized from ~ or --- supplies
- Un: nominal voltage, Fn: nominal frequency, Udl: detection level when powered

Name of test	Standards	Levels
Immunity to LF interference (CE) (1)		
Electrostatic discharges	IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-2; IACS E10	6 kV contact; 8 kV air; 6 kV indirect contact
Radiated radio frequency electromagnetic field	IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-3; IACS E10	15 V/m, 80 MHz ... 3 GHz Sinus amplitude modulated 80%, 1 kHz + internal clock frequencies
Electrical fast transient bursts	IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-4; IACS E10	For ~ or --- main supplies: ■ 2 kV in common mode/2 kV in wire mode For ~ or --- auxiliary supplies, ~ unshielded I/O: ■ 2 kV in common mode For analog, --- unshielded I/O, communication and shielded lines: ■ 1 kV in common mode
Surge	IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-5; IACS E10	For ~/--- main and auxiliary supplies, ~ unshielded I/O: ■ 2 kV in common mode/1 kV in differential mode For analog, --- unshielded I/O: ■ 0.5 kV in common mode/0.5 kV in differential mode For communication and shielded lines: ■ 1 kV in common mode
Conducted disturbances induced by radiated electromagnetic fields	IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-6; IACS E10	10 V; 0.15 MHz...80 MHz Sinus amplitude 80%, 1 kHz + spot frequencies
Damped oscillatory wave	IEC/EN 61131-2; IEC 61000-4-18; IACS E10	For ~/--- main supplies and ~ auxiliary supplies, ~ unshielded I/O: ■ 2.5 kV in common mode/1 kV in differential mode For --- auxiliary supplies, analog, --- unshielded I/O: ■ 1 kV in common mode/0.5 kV in differential mode For communication and shielded lines: ■ 0.5 kV in common mode

(1) Devices must be installed, wired and maintained in accordance with the instructions provided in the manual "Grounding and Electromagnetic Compatibility of PLC Systems".

(2) These tests are performed without an enclosure, with devices fixed on a metal grid and wired as per the recommendations in the manual "Grounding and Electromagnetic Compatibility of PLC systems".

(CE): tests required by European CE directives and based on IEC/EN 61131-2.

Environment tests (continued)

Name of test	Standards	Levels
Electromagnetic emissions (CE) (1)		
Conducted emission	IEC/EN 61131-2; FCC part 15; IEC/EN 61000-6-4; CISPR 11 & 22, Class A, Group 1	150 kHz ... 500 kHz: quasi-peak 79 dB (μ V/m); average 66 dB (μ V/m) 500 kHz ... 30 MHz: quasi-peak 73 dB (μ V/m); average 60 dB (μ V/m)
	IACS E10	■ ~/- power (general power distribution zone): 10 kHz ... 150 kHz: quasi-peak 120...69 dB (μ V/m); 150 kHz ... 0.5 MHz: quasi-peak 79 dB (μ V/m) 0.5 MHz ... 30 MHz: quasi-peak 73 dB (μ V/m) ■ ~/- power (bridge and deck zone for evaluation): 10 kHz ... 150 kHz: quasi-peak 96...50 dB (μ V/m) 150 kHz ... 0.35 MHz: quasi-peak 60...50 dB (μ V/m) 0.35 MHz ... 30 MHz: quasi-peak 50 dB (μ V/m)
Radiated emission	IEC/EN 61131-2; FCC part 15; IEC/EN 61000-6-4; CISPR 11 & 22, Class A, Group 1	30 MHz ... 230 MHz: quasi-peak 40 dB (μ V/m) (at 10 m); 50 dB (μ V/m) (at 3 m) 230 MHz ... 1 GHz: quasi-peak 47 dB (μ V/m) (at 10 m); 57 dB (μ V/m) (at 3 m)
	IACS E10	■ For general power distribution zone 0.15 MHz ... 30 MHz: quasi-peak 80...50 dB (μ V/m) (at 3 m) 30 MHz-100 MHz: quasi-peak 60...54 dB (μ V/m) (at 3 m) 100 MHz - 2 GHz: quasi-peak 54 dB (μ V/m) (at 3 m) 156 ... 165 MHz: quasi-peak 24 dB (μ V/m) (at 3 m)
Name of test	Standards	Levels
Immunity to climatic variations (1) (power on)		
Dry heat	IEC 60068-2-2 (Bb & Bd)	60°C, t = 16 hrs [for ruggedized range: 70°C, t = 16 hrs] (2)
	IACS E10	60°C, t = 16 hrs + 70°C, t = 2 hrs [for ruggedized range: 70°C, t = 18 hrs] (2)
Cold	IEC 60068-2-1 (Ab & Ad) IACS E10	0°C ... -25°C, t = 16 hrs + power on at 0°C [for ruggedized range: power on at -25°C] (2)
Damp heat, steady state (continuous humidity)	IEC 60068-2-78 (Cab); IACS E10	55°C, 93% relative humidity, t = 96 hrs [for ruggedized range: 60°C] (2)
Damp heat, cyclic (cyclical humidity)	IEC 60068-2-30 (Db); IACS E10	55°C ... 25°C, 93...95% relative humidity, 2 cycles t = 12 hrs +12 hrs
Change of temperature	IEC 60068-2-14 (Na & Nb)	0°C ... 60°C, 5 cycles t = 6 hrs + 6 hrs [for ruggedized range: -25 ... 70°C] (2)
Name of test	Standards	Levels
Withstand to climatic variations (1) (power off)		
Dry heat	IEC/EN 61131-2; IEC 60068-2-2 (Bb & Bd) IEC/EN 60945	85°C, t = 96 hrs
Cold	IEC/EN 61131-2; IEC 60068-2-1 (Ab & Ad); IACS E10	-40°C, t = 96 hrs
Damp heat, cyclic (cyclical humidity)	IEC/EN 61131-2; IEC 60068-2-30 (Db)	55°C ... 25°C, 93...95% relative humidity, 2 cycles t = 12 hrs +12 hrs
Change of temperature (thermal shocks)	IEC/EN 61131-2; IEC 60068-2-14 (Na & Nb)	-40°C ... 85°C, 5 cycles t = 3 hrs + 3 hrs

(1) Devices must be installed, wired and maintained in accordance with the instructions provided in the manual "Grounding and Electromagnetic Compatibility of PLC Systems".

(2) Refer also to the chapter "Treatment for severe environments".

(CE): tests required by European CE directives and based on IEC/EN 61131-2 standards.

Environment tests (continued)

Name of test	Standards	Levels
Immunity to mechanical constraints (1) (power on)		
Sinusoidal vibrations	IEC/EN 61131-2; IEC 60068-2-6 (Fc)	Basic IEC/EN 61131-2: 5 Hz ... 150 Hz, ± 3.5 mm amplitude (5 Hz 8.4 Hz), 1 g (8.4 Hz 150 Hz) Specific profile: 5 Hz ... 150 Hz, ± 10.4 mm amplitude (5 Hz 8.4 Hz), 3 g (8.4 Hz 150 Hz) For basic and specific: endurance: 10 sweep cycles for each axis
	IACS E10	3 Hz ... 100 Hz, 1 mm amplitude (3 Hz 13.2 Hz), 0.7 g (13.2 Hz 100 Hz) Endurance at each resonance frequency: 90 min for each axis, amplification coefficient < 10
	IEC 60068-2-6	Seismic analysis: 3 Hz ... 35 Hz, 22.5 mm amplitude (3 Hz 8.1 Hz), 6 g (8.1 Hz 35 Hz)
Shocks	IEC/EN 61131-2; IEC 60068-2-27 (Ea)	30 g, 11 ms; 3 shocks/direction/axis (2) 25 g, 6 ms; 100 bumps/direction/axis (bumps) (3)
Free fall during operation	IEC/EN 61131-2; IEC 60068-2-32 (Ed Method 1)	1 m, 2 falls
Name of test	Standards	Levels
Withstand to mechanical constraints (power off)		
Random free fall with packaging	IEC/EN 61131-2; IEC 60068-2-32 (Method 1)	1 m, 5 falls
Flat free fall	IEC/EN 61131-2; IEC 60068-2-32 (Ed Method 1)	10 cm, 2 falls
Controlled free fall	IEC/EN 61131-2; IEC 60068-2-31 (Ec)	30° or 10 cm, 2 falls
Plugging/Unplugging	IEC/EN 61131-2	For modules and connectors: Operations: 50 for permanent connections, 500 for non-permanent connections
Name of test	Standards	Levels
Equipment and personnel safety (1) (CE)		
Dielectric strength and insulation resistance	IEC/EN 61131-2; IEC 61010-2-201; UL; CSA	Dielectric: 2 Un + 1000 V; t = 1 min Insulation: Un \leq 50 V: 10 MΩ, 50 V \leq Un \leq 250 V : 100 MΩ
Continuity of earth	IEC/EN 61131-2; IEC 61010-2-201; UL; CSA	30A, R \leq 0,1Ω; t = 2 min
Leakage current	UL; CSA	\leq 3.5 mA after disconnecting
Protection offered by enclosures	IEC/EN 61131-2; IEC61010-2-201;	IP20 and protection against standardized pins
Impact withstand	IEC/EN 61131-2; IEC 61010-2-201; UL; CSA	Sphere of 500 g, fall from 1.30 m (energy 6.8 J minimum)
Stored energy injury risk	IEC/EN 61131-2; IEC 61010-2-201	Transient connection: 37% Un after 1 s Permanent connection: 37% Un after 10 s
Overload	IEC/EN 61131-2; IEC 61010-2-201; UL; CSA	50 cycles, Un, 1.5 In; t = 1 s ON + 9 s OFF
Endurance	IEC/EN 61131-2; IEC 61010-2-201; UL; CSA	In, Un; 12 cycles: t=100 ms ON + 100 ms OFF, 988 cycles : t = 1 s ON + 1 s OFF, 5000 cycles : t = 1 s ON + 9 s OFF
Temperature rise	IEC/EN 61131-2; UL; CSA; ATEX; IECEx	Ambient temperature 60°C [for ruggedized range: 70°C] (4)
Name of test	Standards	Levels
Specific Environment (1)		
Corrosion areas - gas, salt, dust	ISA S71.4	Mixed flowing gases: class G3, 25°C, 75% relative humidity, t = 14 days (4)
	IEC 60721-3-3	Mixed flowing gases: class 3C3, 25°C, 75% relative humidity, t = 14 days (4)
	IEC 60068-2-52	Salt spray: test Kb, severity 2 (4)

(1) Devices must be installed, wired and maintained in accordance with the instructions provided in the manual "Grounding and Electromagnetic Compatibility of PLC Systems".

(2) When using fast actuators (response time \leq 5 ms) driven by relay outputs: 15 g, 11 ms; 3 shocks/direction/axis.

(3) When using fast actuators (response time \leq 15 ms) driven by relay outputs: 15 g, 6 ms; 100 bumps/direction/axis.

(4) Refer also to the chapter "Treatment for severe environments".

(CE): tests required by European CE directives and based on IEC/EN 61131-2 standards.

Technical appendices

Automation product certifications EC regulations

Some countries require certain electrical components to undergo certification by law. This certification takes the form of a certificate of conformity to the relevant standards and is issued by the official body in question. Where applicable, certified devices must be labelled accordingly. Use of electrical equipment on board merchant vessels generally implies that it has gained prior approval (i.e. certification) by certain shipping classification societies.

Abbreviation	Certification body	Country
CSA	Canadian Standards Association	Canada
RCM (formerly C-Tick)	Australian Communications and Media Authority	Australia, New Zealand
EAC (formerly GOST)	Eurasian conformity	Russia and customs union
UL	Underwriters Laboratories	USA

Abbreviation	Classification authority	Country
IACS	International Association of Classification Societies	International
ABS	American Bureau of Shipping	USA
BV	Bureau Veritas	France
DNV	Det Norske Veritas	Norway
GL	Germanischer Lloyd	Germany
LR	Lloyd's Register	UK
RINA	Registro Italiano Navale	Italy
RMRS	Russian Maritime Register of Shipping	Russia
RRR	Russian River Register	Russia
CCS	China Classification Society	China

The tables below provide an overview of the situation as at 9th January 2014 in terms of which certifications (listed next to their respective bodies) have been granted or are pending for our automation products.

Up-to-date information on which certifications have been obtained by products bearing the Schneider Electric brand can be viewed on our website: www.schneider-electric.com

Product certifications

Certified	Certifications						
	UL	CSA	RCM	EAC (9)	Hazardous locations (1) Class I, div 2	IEC	IECEx
	USA	Canada	Australia	Russia	USA, Canada	(6)	Ex
Modicon OTB							
Modicon STB					FM	Zone 2 (2)(5)	
Modicon Telefast ABE 7							
ConneXium					(2)		
Magelis iPC/GTW	(3)			(2)	(3)	Zone 2/22 (2)	
Magelis XBT GT	(3)			(2)	(2) (3)	Zone 2/22 (2)(5)	
Magelis XBT GK	(3)				(3)		
Magelis XBT N/R/RT					CSA	Zone 2/22 (2)(5)	
Magelis HMI GTO	(3)			(2)	(3)	(2)	
Magelis HMI STO/STU	(3)			(2)	(2)(3)	(2)	
Modicon M340					CSA	Zone 2/22 (2)(8)	
Modicon M580							
Modicon X80 I/O					CSA	Zone 2/22 (2)(8)	
Modicon Momentum					FM		
Modicon Premium				(2)	CSA		
Modicon Quantum				(2)	CSA, FM (2)	Zone 2/22 (2)	
Modicon Quantum Safety				(2)	CSA	Zone 2/22 (2)	SIL 2, SIL 3 (7)
Preventa XPSMF							SIL 3 (7)
Modicon TSX Micro					CSA		
Phaseo	(3)						
Twido	(4)	(4)			CSA/UL (4)		

(1) Hazardous locations: According to ANSI/ISA 12.12.01, CSA 22.2 No. 213 and FM 3611, certified products are only approved for use in hazardous locations categorized as Class I, division 2, groups A, B, C and D, or in non-classified locations.

(2) Depends on product; please visit our website: www.schneider-electric.com.

(3) North American certification cULus (Canada and USA).

(4) Except for AS-Interface module TWD NOI 10M3, € only.

(5) For zones not covered by this specification, Schneider Electric offers a solution as part of the CAPP (Collaborative Automation Partner Program). Please consult our Customer Care Centre.

(6) Refer to the instructions supplied with each ATEX and/or IECEx certified product.

(7) According to IEC 61508. Certified by TÜV Rheinland for integration into a safety function of up to SIL 2 or SIL 3.

(8) Can be used in gassy mines under certain conditions.

(9) Formerly GOST. GOST will be replaced by EAC after certificates are renewed.

Technical appendices

Automation product certifications EC regulations

Merchant navy certifications

Certified Certification pending	Shipping classification societies											
	 ABS	 BV	 DNV	 GL	 KR KOREAN REGISTER	 Lloyd's Register	 LR	 RINA	 RMRS	 RRR	 PRS	 CCS CHINESE CLASSIFICATION SOCIETY
	USA	France	Norway	Germany	Korea	Great Britain	Italy	Russia	Russia	Poland	China	
	Modicon OTB											
Modicon STB	(1) (2)	(2)	(2)	(2)		(2)	(2)					
Modicon Telefast ABE 7												
ConneXium												
Magelis iPC/GTW				Bridge (2)								
Magelis XBT GT	(2)	(2)	(2)	(2)		(2)	(2)	(2)	(2)			
Magelis XBT GK												
Magelis XBT N/R												
Magelis XBT RT												
Magelis HMI GTO												
Magelis HMI STO/STU		(2)	(2)									
Modicon M340								(2)	(2)			
Modicon M580												
Modicon X80 I/O								(2)	(2)			
Modicon Momentum												
Modicon Premium												
Modicon Quantum												
Modicon TSX Micro												
Phaseo												
Twido												

(1) Also covers US Navy requirements ABS-NRV part 4.

(2) Depends on product; please visit our website: www.schneider-electric.com.

EC regulations

European Directives

The open nature of the European markets assumes harmonization between the regulations set by the member states of the European Union. European Directives are texts whose aim is to remove restrictions on free circulation of goods and which must be applied within all European Union states.

Member states are obligated to incorporate each Directive into their national legislation, and to simultaneously withdraw any regulations that contradict it.

Directives - and particularly those of a technical nature with which we are concerned - merely set out the objectives to be fulfilled (referred to as "essential requirements"). Manufacturers are responsible for taking the necessary measures to establish that their products conform to the requirements of each Directive applicable to their equipment.

As a general rule, manufacturers certify compliance with the essential requirements of the Directive(s) that apply to their products by applying a CE mark. The CE mark is affixed to our products where applicable.

Significance of the CE mark

The CE mark on a product indicates the manufacturer's certification that the product conforms to the relevant European Directives; this is a prerequisite for placing a product which is subject to the requirements of one or more Directives on the market and allowing its free circulation within European Union countries. The CE mark is intended for use by those responsible for regulating national markets.

Where electrical equipment is concerned, conformity to standards indicates that the product is fit for use. Only a warranty by a well-known manufacturer can provide reassurance of a high level of quality.

As far as our products are concerned, one or more Directives are likely to apply in each case; in particular:

- The Low Voltage Directive (2006/95/EC)
- The Electromagnetic Compatibility Directive (2004/108/EC)
- The ATEX CE Directive (94/9/EC)

Hazardous substances

These products are compatible with:

- The WEEE Directive (2002/96/EC)
- The RoHS Directive ((2011/65/EU))
- The China RoHS Directive (Standard SJ/T 11363-2006)
- The REACH regulations Directive (EC 1907/2006)

Note: Documentation on sustainable development is available on our website www.schneider-electric.com (product environmental profiles and instructions for use, ROHS and REACH directives).

End of life (WEEE)

End of life products containing electronic cards must be dealt with by specific treatment processes.

When products containing backup batteries are unusable or at end of life they must be collected and treated separately. Batteries do not contain a percentage by weight of heavy metals above the limit specified by European Directive 2006/66/EC.

A dedicated services offer for your installed base


- Maintenance and support services page 9/2
- Consultancy services page 9/3
- Modernization solutions page 9/3
- Customization services page 9/3

Migration solutions

- TSX7 PLCs to Modicon X80 I/O platform page 9/4
 - Presentation page 9/4
 - TSX7 module - X80 I/O platform compatibility page 9/4
- Modicon Compact PLCs to Modicon X80 I/O platform page 9/6
 - Presentation page 9/6
 - Compact module - X80 I/O platform compatibility page 9/6

Index

- Product reference index page 9/10

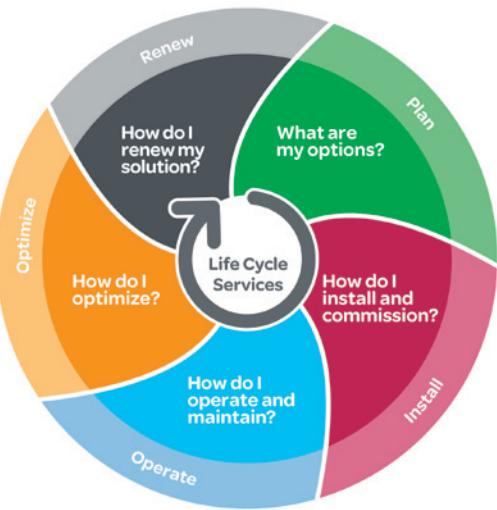

Schneider Electric, with its experts, products and dedicated tools, provides services such as system design, consultancy, maintenance contracts, modernisation of facilities or delivering projects.

The Schneider Electric services offer is structured around several key areas:

- Maintenance and support services:
 - A set of services to help maintain reliability and availability of automated control systems. These services may be the subject of a bespoke maintenance contract to meet your requirements more closely.
- Consultancy services:
 - Diagnostics of the installed base
- Modernization solutions:
 - Migration solutions including consultancy, expertise, tools and technical support to help ensure a smooth transition to newer technology while keeping the wiring and the encoding in most cases.

Customization services are also available to accommodate specific requirements. For more information, please consult the specific pages on our website www.schneider-electric.com/automationservices

Maintenance and support services

Spare parts, exchanges and repairs

Everything you need to get equipment working again as quickly as possible

Solutions to respond very quickly to requests for spare parts, exchanges and repairs to your installed automation equipment (automation platforms, Human Machine Interfaces, drives, distributed I/O):

- Spare parts management:
 - Identification of critical parts
 - Stock of spare parts: a Schneider Electric owned stock of spare parts, on your site or in one of our warehouses, with immediate availability on site or a contractually agreed delivery time if stored off site
 - Testing of spare parts stored on site
 - Automatic stock filling
- Repairs:
 - Broken down products are repaired in a network of worldwide repair centres. For each repaired product, our experts provide a detailed report.
- On-site repair:
 - Our experts' knowledge and expertise
 - Monitoring of specific repair procedures
 - Availability of our teams to respond 24/7
- Exchanges:
 - With standard replacements, receive a new or reconditioned product before the broken down product has even been sent back
 - Fast exchanges offer the option to receive the replacement product within 24 hours (in Europe)

Preventive maintenance

Improving and guaranteeing the long-term reliability and performance of your installations

Schneider Electric's preventive maintenance expert assesses your site, the equipment to be managed and sets up a maintenance program to accommodate specific requirements. A list is provided of the tasks to be performed and their frequency, including site-specific tasks, describing how preventive maintenance is to be managed.

Extended warranty

An additional manufacturer warranty covering replacement or repair of the equipment

The extended warranty offers the option to take out a 3-year warranty. The warranty period can vary according to the geographical area, consult your Customer Care Centre.

Online support

Access to dedicated experts

Priority access to experts who can answer technical questions promptly concerning equipment and software both on sale and no longer commercially available.

Software subscription

Access to software upgrades and new features

By subscribing to software updates, users are able to:

- Purchase licences
- Receive updates, upgrades, software migrations and transitions
- Download software from Schneider Electric's software library

Consultancy services

M2C (Maintenance and Modernization Consultancy)

Professional tools and methods, proven experience of managing obsolescence and updating installed bases, to reduce downtimes and improve performance

With our maintenance and modernization consultancy offer, Schneider Electric will help you check the state of your installed base by:

- Defining the scope and depth of the analysis in collaboration with you
- Collecting the technical data without shutting down production
- Analyzing and identifying avenues for improvement
- Producing a recommendation plan

Customer benefits:

- Learning about the components that make up the installed base and how up-to-date they are
- Better downtime anticipation
- Expert advice designed to improve performance

Modernization solutions

Migration to PlantStruxure

Proven expertise, tools and methods to give you a clear vision of the improvement opportunities and guide you toward a successful modernization project



To find out more about PlantStruxure architectures, please visit our website
www.schneider-electric.com/PlantStruxure

Schneider Electric offers a gradual program of modernization through a series of products, tools and services that allow you to upgrade to newer technology. There are several stages in this gradual modernization program:

- Partial program: replacement of an old component with a new one
- Staggered program: gradual incorporation of new offers in the system
- Total program: total renovation of the system

The table below lists our various migration offers:

Wide range of migration offers		Change the CPU	Keep the I/O racks & wiring	Change the I/O racks & keep the wiring	Migrate your application	Manage your project	Execute your project
Platform (1)	TSX47 to TSX107	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	April series 1000			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Modicon ■84, Compact	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	April SMC				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Merlin Gerin PB				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	AEG	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Symax	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Rockwell SLC500			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Service available

(1) Our migration service offer also includes SCADA, Human Machine Interfaces, drives, communication networks and distributed I/O.

Customization services

Schneider Electric is able to meet your specific requirements and provide you with adapted products:

- Protective coating for Human Machine Interfaces, automation platforms and distributed I/O modules for use in harsh environments
- Customized cable lengths to match your specific needs
- Customized front panels for Human Machine Interfaces

Presentation

The quick wiring adapters comprise a set of connectors designed to simplify the replacement of legacy TSX7 PLCs by automation platforms integrating the Modicon X80 I/O platform, such as Modicon M340, M580, Quantum Ethernet RIO, etc.

Replacement is carried out using the cabling of the existing installation. The adapters enable the I/O connectors of the TSX7 automation module in an existing installation to be matched to the equivalent I/O modules of the Modicon X80 I/O by using a corresponding pre-wired cable assembly.

Thirty-two references (four swing arm rack supports and twenty-eight quick wiring adapters) cover the main migration requirements between the TSX7 I/O modules and the Modicon X80 I/O platform and they conform to the specifications of the Modicon M340, M580 ranges.

Description of the solution

The electromechanical migration solution comprises a migration rack that includes a hinged door on which the Modicon X80 I/O backplane (8 or 12 slots), either for an M340 or either for an M580, is fixed, combined with a set of quick wiring adapters.

- The rear of the chassis replaces the TSX7 rack. It is designed to accommodate the adapters according to the modules present in the original TSX7 rack.
- The existing TSX7 wiring connector of the installation is mounted on the matching adapter attached to the rack support behind the hinged door. The other end of the adapter cable is connected to the corresponding I/O module of the Modicon X80 I/O platform.
- The M340 PLC or the M580 PLC is mounted at the front on the hinged door.
- The adapters transmit the same control signals to the installations without any changes to the wiring.

Advantages of the solution

This TSX7 PLC to the Modicon X80 I/O platform migration system offers the following advantages:

- Reduced production downtimes.
- Migration can be made during normal stoppage times (approximately 1 hour installation time per rack), as opposed to manual rewiring that requires a specific production stoppage. Backtracking is possible in the event of a detected problem.
- Cost savings due to use of existing wiring to sensors/actuators in the enclosures. Rewiring, tests, validation and update of wiring diagrams no longer required. This solution is therefore easier to implement.
- Choice of the range of M340 or M580 processors.

This migration solution is part of a complete set of TSX7 modernization solutions that comprise methods, dedicated solutions and tools. It can be implemented with the help of our experts so as to optimize suitability with the existing installation.

A correspondence table between TSX7 modules and the Modicon X80 I/O platform modules is shown on the next page. It lists only the possible compatibilities. However, TSX module terminal, modularity, common or power supply differences can be taken into account according to the setting up, installations and configurations. It is therefore recommended that compatibility conditions be checked with our Customer Care Center.

TSX7 module - X80 I/O platform compatibility

Type of module	TSX7 modules		X80 I/O platform	Quick wiring adapters	
	Reference	Description	Reference	Description	Reference
Rack	TSXRKN8/RKS8	8-slot rack	BMEXPB0800	Support and 8-slot Ethernet rack	TSX7SWAEBP0800
	TSXRKN8/RKS8	8-slot rack	BMEXPB1200	Support and 12-slot Ethernet rack	TSX7SWAEBP1200
	TSXRKN8/RKS8	8-slot rack	BMXXBP0800	Support and 8-slot rack	TSX7SWAXBP0800
	TSXRKN8/RKS8	8-slot rack	BMXXBP1200	Support and 12-slot rack	TSX7SWAXBP1200
Discrete inputs	TSXDET802	8-point 24 VAC input	BMXDAI1602	Adapter, 40 cm/1.312 ft., between modules - TSXDET8●● - and BMXDAI16●● or BMXDDI16●●	DET08XXDXI160X
	TSXDET803	8-point 48 VAC input	BMXDAI1603		
	TSXDET812	8-point 24 VDC input	BMXDDI1602		
	TSXDET813	8-point 48 VDC input	BMXDDI1603		
	TSXDET814	8-point 130 VDC input	BMXDDI1604T		
	TSXDET824	8-point 110 VDC/115 VAC input	BMXDAI1604		
	TSXDET1603	16-point 48 VAC input	BMXDAI1603	Adapter, 40 cm/1.312 ft., between modules - TSXDET16●● - and BMXDAI16●● or BMXDDI16●●	DET16XXDXI160X
	TSXDET1604	16-point 110...120 VAC input	BMXDAI1604		
	TSXDET1612	16-point 24 VDC input	BMXDDI1602		
	TSXDET1613	16-point 48 VDC input	BMXDDI1603		
	TSXDET1633	16-point 48 VDC input	BMXDDI1603		
	TSXDET3232	32-point 24 VDC input	BMXDDI3202K		
	TSXDET3242	32-point 24 VDC input	BMXDDI3202K	Adapter, 1 m/3.281 ft., between modules - TSXDET32●2 - and BMXDDI3202K	DET32X2DDI3202K
	TSXDET3252	32-point 24 VDC input	BMXDDI3202K		

TSX7 module - X80 I/O platform compatibility

Type of module	TSX7 modules		X80 I/O platform	Quick wiring adapters	
	Reference	Description	Reference	Description	Reference
Discrete outputs	TSXDST835	8-point 24 VDC/24...240 VAC relay outputs	BMXDRA0805	Adapter, 40 cm/1.312 ft., between modules TSXDST835 (24 VDC/24...240 VAC/relay) and BMXDRA0805	DST835DRA0805
	TSXDST1612	16-point 24 VDC outputs	BMXDDO1612	Adapter, 40 cm/1.312 ft., between modules TSXDST1612 (24 VDC) and BMXDDO1612	DST1612DDO1612
	TSXDST1632	16-point 24 VDC outputs	BMXDDO1602	Adapter, 40 cm/1.312 ft., between modules TSXDST1632 (24 VDC) and BMXDDO1602	DST1632DDO1602
	TSXDST1632	16-point 24 VDC outputs	BMXDRA1605	Adapter, 40 cm/1.312 ft., between modules TSXDST1632 (24 VDC/relay) and BMXDRA1605	DST1632DRA1605
	TSXDST1633	16-point 24...240 VAC outputs	BMXDRA1605	Adapter, 40 cm/1.312 ft., between modules TSXDST1633 (24...240 VAC/relay) and BMXDRA1605	DST1633DRA1605
	TSXDST1634	16-point 48...130 VDC outputs	2 BMXDRA0804T modules	Adapter, 40 cm/1.312 ft., between 1 TSXDST1634 (125 VDC) module and 2 BMXDRA0804T modules	DST1634DRA0804T
	TSXDST1635	16-point 24...240 VAC outputs	BMXDAO1605	Adapter, 40 cm/1.312 ft., between modules TSXDST1635 (24...240 VAC/triac) and BMXDAO1605	DST1635DAO1605
	TSXDST1635	16-point 24...240 VAC outputs	BMXDRA1605	Adapter, 40 cm/1.312 ft., between modules TSXDST1635 (48...240 VAC/relais) and BMXDRA1605	DST1635DRA1605
	TSXDST1682	16-point 24 VDC outputs	BMXDDO1602	Adapter, 40 cm/1.312 ft., between modules TSXDST1682 (24 VDC) and BMXDDO1602	DST1682DDO1602
	TSXDST2472	24-point 24 VDC outputs	2 BMXDDO1602 modules	Adapter, 50 cm/1.640 ft., between 1 TSXDST24•2 (24 VDC) module and 2 BMXDDO1602 modules	DST24X2DDO1602
	TSXDST2482	24-point 24 VDC outputs	2 BMXDDO1602 modules		
	TSXDST2472	24-point 24 VDC outputs	BMXDDO3202K	Adapter, 1 m/3.281 ft, between modules TSXDST24•2 (24 VDC) and BMXDDO3202K	DST24X2DDO3202K
Analog Inputs	TSXAEM411	4-channel voltage/current inputs	BMXAMI0410	Adapter, 40 cm/1.312 ft, between modules TSXAEM411 and BMXAMI0410 (Current type)	AEM0411AMI0410C
	TSXAEM411	4-channel voltage/current inputs	BMXAMI0410	Adapter, 40 cm/1.312 ft, between modules TSXAEM411 and BMXAMI0410 (Voltage type)	AEM0411AMI0410V
	TSXAEM413	4-channel Pt100 inputs 3 or 4-wire	BMXART0414	Adapter, 40 cm/1.312 ft, between modules TSXAEM413 and BMXAMI0414 (RTD type)	AEM0413ART0414
	TSXAEM811	8-channel voltage/current inputs	BMXAMI0810	Adapter, 40 cm/1.312 ft, between modules TSXAEM811 and BMXAMI0810 (Current type)	AEM0811AMI0810C
	TSXAEM811	8-channel voltage/current inputs	BMXAMI0810	Adapter, 40 cm/1.312 ft, between modules TSXAEM811 and BMXAMI0810 (Voltage type)	AEM0811AMI0810V
	TSXAEM821	8-channel voltage/current inputs	BMXAMI0800	Adapter, 40 cm/1.312 ft, between modules TSXAEM821 and BMXAMI0800 (Current type)	AEM0821AMI0800C
	TSXAEM821	8-channel voltage/current inputs	BMXAMI0800	Adapter, 40 cm/1.312 ft, between modules TSXAEM821 and BMXAMI0800 (Voltage type)	AEM0821AMI0800V
	TSXAEM1601	16-channel inputs	2 BMXAMI0800 modules	Adapter, 50 cm/1.640 ft, between 1 TSXAEM1601 module and 2 BMXAMI0800 modules (Voltage type)	AEM1601AMI0800V
	TSXAEM1602	16-channel inputs	2 BMXAMI0800 modules	Adapter, 50 cm/1.640 ft, between 1 TSXAEM1602 module and 2 BMXAMI0800 (Current type) modules	AEM1602AMI0800C
	TSXASR200	2-channel voltage/current output	BMXAMO0210	Adapter, 50 cm/1.640 ft, between modules TSXASR200 and BMXAMO0210	ASR0200AMO0210
Analog outputs	2 TSXASR200 modules	2 x 2-channel voltage/current outputs	BMXAMO0410	Adapter, 50 cm/1.640 ft, between 2 TSXASR200 modules and 1 BMXAMO0410 module	2ASR0200AMO0410
	TSXASR0401	4-channel voltage output	BMXAMO0410	Adapter, 40 cm/1.312 ft, between modules TSXASR040• and BMXAMO0410	ASR040XAMO0410
	TSXASR0402	4-channel current output	BMXAMO0410		
	TSXASR0403	4-channel current output	BMXAMO0410		
	TSXAST200	2-channel voltage/current output	BMXAMO0210	Adapter, 40 cm/1.312 ft, between modules TSXAST200 and BMXAMO0210	AST0200AMO0210

Presentation

The quick wiring adapters comprise a set of connectors designed to simplify the replacement of legacy Modicon Compact PLCs by automation platforms integrating the Modicon X80 I/O platform, such as Modicon M340, Quantum Ethernet RIO, etc.

The adapters enable the I/O field connectors of the Compact PLC in an existing installation to be matched to the equivalent I/O modules of the X80 I/O platform. Thirteen references provide the wiring translations between the I/O modules of Compact PLCs and those of the Modicon M340 platform and they fully meet the mechanical and environmental specifications of the Modicon M340 range.

Quick wiring adapter features

The quick wiring adapters have the same look and feel as the standard I/O module connectors of the X80 I/O platform. The new connectors increase the depth and extend below the I/O module.

- The quick wiring adapters use the same mounting/retaining screws for attaching the adapter to the X80 I/O platform module.
- The sockets of the adapters accept 2 field wiring connectors of the Compact I/O module.
- A clear cover is sized to retain the wiring harness.
- The cover also has enough room for attaching the wiring label that was used on the Compact module.

Compact module - X80 I/O platform compatibility

Type of module	Compact module		X80 I/O platform		Compact module - X80 I/O platform compatibility	Quick wiring adapter reference
	Reference	Description	Reference	Description		
Discrete input	AS-BDEO216	16-point 24 VDC input module	BMXDDI1602	16-point 24 VDC sink input	OK	990XSM00206
	AS-BDEP208	8-point 230 VAC input module	BMXDAI0805	8-point 200 to 240 VAC input	OK	990XSM00201
	AS-BDEP209	8-point 120 VAC input module	BMXDAI1604	16-point 110 VAC input	OK	990XSM00213
	AS-BDEP210	8-point 115 VAC input module	BMXDAI1604	16-point 110 VAC input	OK	990XSM00213
	AS-BDEP211	8-point 115 VAC input module	BMXDAI1604	16-point 110 VAC input	OK	None
	AS-BDEP214	16-point 12-60 VDC input module	BMXDDI1602 BMXDDI1603	16-point 24 VDC input 16-point 48 VDC input	For the 24 VDC module ensure that the input current threshold at switch on is compatible with the application. The input voltage threshold of BMXDDI1603 is 34 V compared with 12 V for AS-BDEP214. No replacement for 12 VDC and 60 VDC.	990XSM00206
	AS-BDEP215	16-point 5 VDC TTL input module	—	—	No exact replacement but can be replaced with HMI functionality.	None
	AS-BDEP216	16-point 24 VDC input module	BMXDDI1602	16-point 24 VDC sink input	OK	990XSM00206
	AS-BDEP217	16-point 24 VDC input module	BMXDAI1602	16-point 24 VDC sink input	OK but requires negative logic.	990XSM00201
	AS-BDEP218	16-point 115 VAC input module	BMXDAI1604	16-point 110 VAC input	OK	990XSM00201
	AS-BDEP220	16-point 24 VDC fast input module	—	—	The response time is a deciding factor when selecting replacement modules.	None
	AS-BDEP254	16-point 12-60 VDC input module	BMXDDI1602H BMXDDI1603H	16-point 24 VDC input 16-point 48 VDC input	For the 24 VDC module ensure that the input current threshold at switch on is compatible with the application. The input voltage threshold of BMXDDI1603 is 34 V compared with 12 V for AS-BDEP254. The temperature range for BMXDDI1603 is 0 to 60 °C compared with -40 °C to +70 °C for ASBDEP254. No replacement for 12 VDC and 60 VDC.	990XSM00206
	AS-BDEP254C	16-point 12-60 VDC input module, extended temp. + coating	BMXDDI1602H BMXDDI1603H	16-point 24 VDC input 16-point 48 VDC input	For the 24 VDC module ensure that the input current threshold at switch on is compatible with the application. The input voltage threshold of BMXDDI1603 is 34 V compared with 12 V for AS-BDEP254. The temperature range for BMXDDI1603 is 0 to 60 °C compared with -40 °C to +70 °C for ASBDEP254. No replacement for 12 VDC and 60 VDC.	990XSM00206
	AS-BDEP256	16-point 24 VDC input module	BMXDDI1602H	16-point 24 VDC sink input	The nominal temperature range of BMXDDI1602 is only 0 to +60 °C compared with -40 to +70 °C for AS-BDEP256.	990XSM00206
	AS-BDEP256C	16-point 24 VDC input module, extended temp. + coating	BMXDDI1602H	16-point 24 VDC sink input	The nominal temperature range of BMXDDI1602 is only 0 to +60 °C compared with -40 to +70 °C for AS-BDEP256C.	990XSM00206
	AS-BDEP257	16 x 110 VDC inputs, extended temp.	BMXDDI1604T	16-point 125 VDC input	Nominal input voltage for BMXDDI1604T is 100 to 150 VDC compared with 55 to 170 VDC for AS-BDEP257. Response time for BMXDDI1604T is 9 ms compared with 6 ms for AS-BDEP257. Temperature range for BMXDDI1604T from -25 to +70 °C compared with -40 to +70 °C.	990XSM00206
	AS-BDEP257C	16-point 110 VDC input, extended temp. + coating	BMXDDI1604T	16-point 125 VDC input	Nominal input voltage for BMXDDI1604T is 100 to 150 VDC compared with 55 to 170 VDC for AS-BDEP257. Response time for BMXDDI1604T is 9 ms compared with 6 ms for AS-BDEP257. Temperature range for BMXDDI1604T from -25 to +70 °C compared with -40 to +70 °C. No conformal coating available.	990XSM00206
	AS-BDEP296	16 x 60 VDC inputs	—	—	No replacement	—
	AS-BDEP297	16 x 48 VDC inputs	BMXDDI1603	16-point 48 VDC input	OK	990XSM00206

Green background with no comments indicates full functional equivalent between the X80 I/O platform module and the Compact module.

Green background with comments indicates full functional equivalent with differences notes. Check with your application.

Orange background indicates that, in most cases, the inputs of the X80 I/O platform fully replace those of the Compact module but differences are noted. For example, maximum current per point. Check with your application.

Red background indicates that there are no direct replacements but other solutions exist. Please consult Schneider Electric.

Compatibility (continued)

Modicon X80 I/O platform

Migration solutions

Modicon Compact PLCs to Modicon X80 I/O platform

Compact module - X80 I/O platform compatibility					
Type of module	Compact module	X80 I/O platform	Compact module - X80 I/O platform compatibility	Quick wiring adapter reference	
Reference	Description	Reference	Description		
Discrete output	AS-BDAO216	16-point 24 VDC output module	BMXDDO1602	16-point 24 VDC output OK, but with slightly slower response time. BMXDDO1602 response time of 1.2 ms compared with < 1 ms for AS-BDAO216.	990XSM00206
	AS-BDAP204	4-point relay (NO) module	BMXDRA0805	8-point relay outputs OK, 4 relays on Compact, 8 on X80 I/O.	990XSM00203
	AS-BDAP204	4-point relay (NO) module	BMXDRA0804T	8-point 125 VDC output relay OK, 4 relays on Compact, 8 on X80 I/O.	990XSM00203
	AS-BDAP208	8-point relay (NO) module	BMXDRA0805	8-point relay outputs OK	990XSM00206
	AS-BDAP258	8-point relay (NO) module	BMXDRA0805H	8-point relay outputs OK, but different extended temperatures.	990XSM00206
	AS-BDAP258C	8-point 24 VDC relay (NO) module, extended temp. + coating	BMXDRA0805H	8-point relay outputs OK. Temperature between 0 and + 60 °C compared with - 40 to + 70 °C for BMXDRA0805H.	990XSM00206
	AS-BDAP209	8-point, 1 A, 120 VAC output module	BMXDAO1605	16-point 110 VAC to 230 VAC output Lower current availability. BMXDAO1605 is limited to 600 mA compared with 1 A for AS-BDAP210. For AS-BDAP210, the nominal voltage goes down to 85 V compared with 100 V for BMXDAO1605.	990XSM00204
	AS-BDAP210	8-point, 24-230 VAC output module	BMXDAO1605	16-point 110 VAC to 230 VAC output Lower current availability. BMXDAO1605 is limited to 600 mA compared with 1 A for AS-BDAP210. For AS-BDAP210, the nominal voltage goes down to 85 V compared with 100 V for BMXDAO1605.	990XSM00204
	AS-BDAP212	8-point 24 VDC input/4-point 2 A output	BMXDDM16025	8-point 24 VDC input + 8-point relay output Compact: 2 groups of 2 outputs; X80 I/O: 1 group of 8. Consequently, different input isolation.	990XSM00205
	AS-BDAP252	8-point 24 VDC input/4-point 2 A output	BMXDDM16025H	8-point 24 VDC input + 8-point relay output Compact: 2 groups of 2 outputs; X80 I/O: 1 group of 8. Consequently, different input isolation. Different extended temperatures.	990XSM00205
	AS-BDAP216	16-point 24 VDC output module	BMXDDO1602	16-point 24 VDC output Compact: 2 groups of 8; X80 I/O: 1 group of 16. Consequently, different input isolation.	990XSM00206
	AS-BDAP256	16-point 24 VDC output module	BMXDDO1602H	16-point 24 VDC output Compact: 2 groups of 8; X80 I/O: 1 group of 16. Consequently, different input isolation. Different extended temperatures.	990XSM00206
	AS-BDAP217	16-point 5-24 VDC output module	BMXDDO1612	16-point 24 VDC sink output Slightly slower response time. BMXDDO1612 response time of 1.2 ms compared with < 1 ms for AS-BDAP217. Also, Compact: 2 groups of 8; X80 I/O: 1 group of 16.	990XSM00206
	AS-BDAP218	16-point 24-240 VAC output module	BMXDAO1605	16-point 110 VAC to 230 VAC module Lower current availability. BMXDAO1605 is limited to 600 mA compared with 1 A for AS-BDAP210. For AS-BDAP210, the nominal voltage goes down to 24 V compared with 100 V for BMXDAO1605. If 24 V is required, select a different module.	990XSM00202
	AS-BDAP211	Combined press and stamp module, 120 VAC, inputs controlling the outputs	—	None	None
Discrete input/output	AS-BDAP220	8-point 24 VDC, 2 A, input/output module	BMXDDM16022	8-point 24 VDC input + 8-point 24 VDC output BMXDDM16022 is limited to 0.625 A per channel compared with 2 A for AS-BDAP220. Also, the response time is 1.2 ms compared with < 1 ms for AS-BDAP220.	990XSM00207
	AS-BDAP250	8-point, 24 VDC, input/output module	BMXDDM16022H	8-point 24 VDC input + 8-point 24 VDC output BMXDDM16022H is limited to 0.625 A per channel compared with 2 A for AS-BDAP220 and is not conformally coated. Also, the response time is 1.2 ms compared with < 1 ms for AS-BDAP220. BMXDDM16022 temperature range of 0 to + 60 °C compared with - 40 to + 70 °C for AS-BDAP250C.	990XSM00207
	AS-BDAP250C	8-point, 24 VDC, input/output module, extended temp. + coating	BMXDDM16022H	8-point 24 VDC input + 8-point 24 VDC output BMXDDM16022H is limited to per channel compared with 2 A for AS-BDAP250. Also, the response time is 1.2 ms compared with < 1 ms for AS-BDAP220. DDM16022 temperature range of 0 to + 60 °C compared with - 40 to + 70 °C for AS-BDAP250C.	990XSM00207
	AS-BDAP212	8 inputs, 4 outputs, 24 VDC	BMXDDM16025	8-point 24 VDC input + 8-point relay output Compact: 2 groups of 2 outputs; X80 I/O: 1 group of 8. Consequently, different input isolation.	990XSM00205
	AS-BDAP252	8 inputs, 4 outputs, 24 VDC	BMXDDM16025H	8-point 24 VDC input + 8-point relay output BMXDDM16025 temperature range of 0 to + 60 °C compared with - 40 to + 70 °C. Compact: 2 groups of 2 outputs; X80 I/O: 1 group of 8. Consequently, different input isolation.	990XSM00205
	AS-BDAP252C	8 inputs, 4 outputs, 24 VDC, extended temp. + coating	BMXDDM16025H	8-point 24 VDC input + 8-point relay output BMXDDM16025 temperature range of 0 to + 60 °C compared with - 40 to + 70 °C. Compact: 2 groups of 2 outputs; X80 I/O: 1 group of 8. Consequently, different input isolation.	990XSM00205
	AS-BDAP253	8 inputs, 4 outputs, 110 VDC	BMXDDM16025H	8-point 24 VDC input + 8-point relay output 1) Compact inputs: 110 VDC; X80 I/O: 24 VDC. 2) Compact: 2 groups of 2 outputs; X80 I/O: 1 group of 8. a) Different isolation b) 4 unused references	None
	AS-BDAP253C	8 inputs, 4 outputs, 110 VDC, extended temp. + coating	BMXDDM16025H	8-point 24 VDC input + 8-point relay output 1) Compact inputs: 110 VDC; X80 I/O: 24 VDC. 2) Compact: 2 groups of 2 outputs; X80 I/O: 1 group of 8. a) Different isolation b) 4 unused references	None
	AS-BDAP292	8 inputs, 4 outputs, 60 VDC	—	No exact replacement. Please consult Schneider Electric for a solution.	None

Compact module - X80 I/O platform compatibility				Compact module - X80 I/O platform compatibility	Quick wiring adapter reference	
Type of module	Compact module Reference	Description	X80 I/O platform Reference	Description		
Analog input	AS-BADU204	4-channel ± 0.5 V register, PT100, 11-bit	BMXART0414	4-channel TC/RTD, isolated, analog inputs	OK, but ± 0.5 V missing. Also, X80 I/O has channel-to-channel and channel-to-bus isolation.	None
	AS-BADU205	4-channel register input	BMXAMI0410	4-channel, isolated, analog current/voltage input	OK, scaling differences.	990XSM00208
	AS-BADU205	4-channel register input	BMXAMM0600	4-channel, non-isolated, analog current/voltage input and 2-channel, non-isolated, 2-channel current/voltage output	OK, scaling differences.	990XSM00209
	AS-BADU206	4-channel, isolated, register input	BMXAMI0410	4-channel, isolated, analog current/voltage input	OK, but X80 I/O does not have ± 1 V range.	990XSM00210
	AS-BADU206	4-channel, isolated, register input	BMXAMM0600	4-channel, non-isolated, analog current/voltage input and 2-channel, non-isolated, 2-channel current/voltage output	OK, but X80 I/O does not have ± 1 V range. No isolation.	990XSM00211
	AS-BADU210	4-channel, isolated, analog voltage/current input	BMXAMI0410	4-channel, isolated, analog current/voltage input	OK, scaling differences. X80 I/O does not have all the corresponding voltage ranges.	990XSM00210
	AS-BADU210	4-channel, isolated, analog voltage/current input	BMXAMM0600	4-channel, non-isolated, analog current/voltage input and 2-channel, non-isolated, 2-channel current/voltage output	OK, scaling differences. X80 I/O does not have all the corresponding voltage ranges. No isolation.	990XSM00211
	AS-BADU211	8-channel analog input thermal module	BMXART0814	8-channel TC/RTD, isolated, analog inputs	OK, X80 I/O does not have 2, 5 or 10 V inputs nor 4-20 mA, ± 20 mA, nor the 24 V external voltage.	None
	AS-BADU212	8-channel analog input thermal module	BMXART0814	8-channel TC/RTD, isolated, analog inputs	OK, X80 I/O does not have 2, 5 or 10 V inputs nor 4-20 mA, ± 20 mA, nor the 24 V external voltage.	None
	AS-BADU214	4/8-channel multi-range Analog/Discrete inputs	BMXART0414	4-channel TC/RTD, isolated, analog inputs	X80 I/O has no 0 - 10 V, 1 - 5 V, 2 - 10 V voltage ranges nor loop capability.	None
	AS-BADU216	4/8-channel, isolated, thermocouple	BMXART0814	8-channel TC/RTD, isolated, analog inputs	OK	None
	AS-BADU254	4-channel register input	BMXAMI0410H	4-channel, isolated, analog current/voltage input	OK and X80 I/O has CAN/CAN and CAN/bus isolation whereas Compact has none. Different extended temperatures.	None
	AS-BADU254	4-channel register input	BMXAMM0600H	4-channel analog current/voltage input and 2-channel current/voltage output	OK, X80 I/O has 4 inputs and 2 outputs. Different extended temperatures.	None
	AS-BADU254C	4-channel register input, extended temp. + coating	BMXAMI0410H	4-channel, isolated, analog current/voltage input	OK and X80 I/O has CAN/CAN and CAN/bus isolation whereas Compact has none. Different extended temperatures.	None
	AS-BADU254C	4-channel register input, extended temp. + coating	BMXAMM0600H	4-channel analog current/voltage input and 2-channel current/voltage output	OK, X80 I/O has 4 inputs and 2 outputs. No isolation. Different extended temperatures.	None
	AS-BADU256	4-channel, isolated, register input	BMXAMI0410H	4-channel, isolated, analog current/voltage input	OK, but different extended temperatures.	None
	AS-BADU256	4-channel, isolated, register input	BMXAMM0600H	4-channel analog current/voltage input and 2-channel current/voltage output	OK, X80 I/O has 4 inputs and 2 outputs. No isolation. Different extended temperatures.	None
	AS-BADU256C	4-channel, isolated, register input, extended temp. + coating	BMXAMI0410H	4-channel, isolated, analog current/voltage input	OK, but different extended temperatures.	990XSM00210
	AS-BADU256C	4-channel, isolated, register input, extended temp. + coating	BMXAMM0600H	4-channel analog current/voltage input and 2-channel current/voltage output	OK, X80 I/O has 4 inputs and 2 outputs without isolation.	990XSM00211
	AS-BADU257	8-channel thermocouple	BMXART0814H	8-channel TC/RTD, isolated, analog inputs	OK, but different extended temperatures.	None
	AS-BADU257C	8-channel thermocouple, extended temp. + coating	BMXART0814H	8-channel TC/RTD, isolated, analog inputs	OK, but different extended temperatures.	None

Green background with no comments indicates full functional equivalent between the X80 I/O platform module and the Compact module.

Green background with comments indicates full functional equivalent with differences notes. Check with your application.

Orange background indicates that, in most cases, the inputs of the X80 I/O platform fully replace those of the Compact module but differences are noted. For example, maximum current per point. Check with your application.

Red background indicates that there are no direct replacements but other solutions exist. Please consult Schneider Electric.

Compact module - X80 I/O platform compatibility					Quick wiring adapter reference
Type of module	Compact module Reference	Description	X80 I/O platform Reference	Description	Compact module - X80 I/O platform compatibility
Analog output	AS-BDAU202	2-point analog outputs, ± 10 V, ± 20 mA	BMXAMO0210	2-channel, isolated, analog current/voltage output	X80 I/O has no negative 20 mA capability.
	AS-BDAU204	4-channel, opto-isolated, analog output	BMXAMO0210	2-channel, isolated, analog current/voltage output	X80 I/O does not support 0 to 1 V, 0 to 5 V, ± 1 V ranges. + - 5 V.
	AS-BDAU204	4-channel, opto-isolated, analog output	BMXAMO0410	4-channel, isolated, analog current/voltage output	X80 I/O does not support 0 to 1 V, 0 to 5 V, ± 1 V ranges. + - 5 V.
	AS-BDAU208	8-channel register output	—	—	No 8-point analog output. Two modules need to be used.
	AS-BDAU252	2-point analog outputs, ± 10 V, ± 20 mA, extended temp.	BMXAMO0210H	2-channel, isolated, analog current/voltage output	X80 I/O has no negative 20 mA capability. Different extended temperatures.
	AS-BDAU252C	2-point analog outputs, ± 10 V, ± 20 mA, extended temp. + coating	BMXAMO0210H	2-channel, isolated, analog current/voltage output	X80 I/O has no negative 20 mA capability. Different extended temperatures.
Communication	AS-BBKF202	INTERBUS S slave	—	—	No replacement
	AS-BBKF201-16	16 word INTERBUS S Master	—	—	No replacement
	AS-BBKF201-64	64 word INTERBUS S Master	—	—	No replacement
	CM900	Auto interface	—	—	No replacement
Service communication	AS-BKOS260-24	24 word universal communication	—	—	Please consult Schneider Electric for assistance in finding the optimum solution. READ_VAR functionality could be a replacement solution.
	AS-BKOS260-64	64 word universal communication	—	—	Please consult Schneider Electric for assistance in finding the optimum solution. READ_VAR functionality could be a replacement solution.
	M7251	Programmable limit switch	—	—	No replacement, no movement
	M7350	Resolver-decoder	—	—	No replacement, no movement
Motion	AS-BMOT201	Axis motion control encoder module	—	—	Please consult Schneider Electric for assistance in finding the optimum solution.
	AS-BMOT202	Axis motion control resolver encoder module	—	—	Please consult Schneider Electric for assistance in finding the optimum solution.
Counter	AS-BFRQ204	4-point frequency module	BMXEHC0200	2-channel high speed counter	No 5 V input. Please consult Schneider Electric for the exact replacement.
	AS-BFRQ254C	4-channel frequency module, extended temp. + coating	BMXEHC0200H	2-channel high speed counter	No 5 V input. Please consult Schneider Electric for the exact replacement.
	AS-BVIC200 VRC200	4 high speed pulse or 4 VRC inputs	—	—	Please consult Schneider Electric for assistance in finding the optimum solution.
	AS-BVIC205 CTR205	4 high speed pulse or 4 x 5 TTL inputs	—	—	Please consult Schneider Electric for assistance in finding the optimum solution.
	AS-BVIC212 CTR212	4 high speed pulse or 12 VDC inputs	—	—	Please consult Schneider Electric for assistance in finding the optimum solution.
	AS-BVIC224 CTR224	4 high speed pulse or 24 VDC inputs	BMXEHC0800	8-channel high speed counter	Please consult Schneider Electric for assistance in finding the optimum solution.
	AS-BZAE201	High speed counter/positioner (2 relays)	BMXEHC0200	2-channel high speed counter	12 V counter OK, no relay outputs, no 5 V, no positioning.
	AS-BZAE204	4-channel high speed counter/positioner	BMXEHC0800	8-channel high speed counter	OK. No outputs.
CPU	AS-B984-A145 up to E984-285	—	BMXP342020 + BMXCP3020	—	Only 1 Modbus port on CPU 2-port NOM serial module available.
	AS-P120000	105...240 VAC inputs, 24 VDC 1.0 A outputs	BMXCP2000/ BMXCP3500	—	—

Note:

- Extended temperature modules for the X80 I/O platform are distinguished by having the suffix H added to the reference.
- The Modicon Compact range of PLCs had an extended temperature range of - 40 °C to + 70 °C. The extended temperature range of the X80 I/O platform is - 25 °C to + 70 °C. Derating the temperature may impose limits on some applications.
- As with any PLC migration, even an exact module to module replacement might not provide identical results (due to scan time, etc.).

Product reference index

A	ABE7H32E300	6/12	ABS7EA3E5	6/17	BMXDDI1602H	5/6	BMXFTA152	3/23	
ABE7ACC02	6/20	ABE7P08T330	6/16	ABS7EA3F5	6/17	BMXDDI1603	3/12	BMXFTA300	3/23
ABE7ACC10	6/20	ABE7P16F310	6/15	ABS7EA3M5	6/17	BMXDDI1603H	5/6	BMXFTA302	3/23
ABE7ACC11	6/20	ABE7P16F312	6/15	ABS7EC3AL	6/17	BMXDDI1604T	3/12	BMXFTB2000	3/13
ABE7ACC12	6/17	ABE7P16T111	6/16	ABS7EC3B2	6/17	BMXDDI3202K	3/12		3/23
ABE7ACC21	6/20	ABE7P16T210	6/16	ABS7EC3E2	6/17	BMXDDI6402K	3/12		3/31
ABE7BV10	6/20	ABE7P16T212	6/16	ABS7SA2M	6/17	BMXDDM3202K	3/13		5/6
ABE7BV20	6/20	ABE7P16T214	6/16	ABS7SA3M	6/17	BMXDDM16022	3/13		5/8
ABE7CPA01	6/18	ABE7P16T215	6/16	ABS7SC1B	6/17	BMXDDM16022H	5/6		5/11
ABE7CPA02	3/23	ABE7P16T230	6/16	ABS7SC2E	6/17	BMXDDM16025	3/13	BMXFTB2010	3/13
	6/18	ABE7P16T318	6/16	ABS7SC3BA	6/17	BMXDDM16025H	5/6		3/23
ABE7CPA03	3/23	ABE7P16T330	6/16	ABS7SC3E	6/17	BMXDDO1602	3/12		3/31
	6/18	ABE7P16T332	6/16	AR1SB3	6/20	BMXDDO1602H	5/6		5/6
ABE7CPA11	6/18	ABE7P16T334	6/16	ASITERV2	4/17	BMXDDO1612	3/12		5/8
ABE7CPA12	6/18	ABE7R08S111	6/14			BMXDDO1612H	5/6		5/11
ABE7CPA13	6/18	ABE7R08S210	6/14			BMXDDO3202K	3/12	BMXFTB2020	3/13
ABE7CPA21	3/23	ABE7R08S216	6/14			BMXDDO6402K	3/12		3/23
	6/18	ABE7R16M111	6/15			BMXDRA0804T	3/12		3/31
ABE7CPA31	3/23	ABE7R16S111	6/14			BMXDRA0805	3/12		5/6
	6/18	ABE7R16S111E	6/14			BMXDRA0805H	5/6		5/8
ABE7CPA31E	3/23	ABE7R16S210	6/14			BMXDRA1605	3/12		5/11
	6/18	ABE7R16S210E	6/14			BMXDRA1605H	5/6	BMXFTB2800	3/23
ABE7CPA410	3/23	ABE7R16S212	6/14			BMXEAE0300	3/33		3/33
	5/8	ABE7R16T111	6/15			BMXEAE0300H	5/11		3/35
ABE7CPA412	3/23	ABE7R16T210	6/15			BMXEHC0200	3/31		5/11
	5/8	ABE7R16T212	6/15			BMXEHC0200H	5/11	BMXFTW301	3/13
ABE7FU012	6/20	ABE7R16T230	6/15			BMXEHC0800	3/31		5/6
ABE7FU050	6/20	ABE7R16T231	6/15			BMXEIA100	4/17	BMXFTW301S	3/23
ABE7FU100	6/20	ABE7R16T330	6/15			BMXERT1604T	4/7		5/8
ABE7FU200	6/20	ABE7R16T332	6/15			BMXFCA150	3/23	BMXFTW308S	3/23
ABE7FU400	6/20	ABE7R16T370	6/15			BMXFCA152	3/23	BMXFTW501	3/13
ABE7FU630	6/20	ABE7S16E2B1	6/14			BMXFCA300	3/23		5/6
ABE7H08R10	6/13	ABE7S16E2B1E	6/14			BMXFCA302	3/23	BMXFTW501S	3/23
ABE7H08R11	6/13	ABE7S16E2E0	6/14			BMXFCA500	3/23		5/8
ABE7H08R21	6/13	ABE7S16E2E1	6/14			BMXFCA502	3/23	BMXMSP0200	3/35
ABE7H08S21	6/13	ABE7S16E2F0	6/14			BMXFCC051	3/13		5/9
ABE7H12R10	6/13	ABE7S16E2M0	6/14			BMXFCC053	3/13	BMXNOE0100H	5/9
ABE7H12R11	6/13	ABE7S16E2M0E	6/14			BMXFCC101	3/13	BMXNOE0110H	5/9
ABE7H12R20	6/13	ABE7S16S1B2	6/14			BMXFCC103	3/13	BMXNOM0200	4/19
ABE7H12R21	6/13	ABE7S16S1B2E	6/14			BMXFCC201	3/13	BMXNOM0200H	5/9
ABE7H12R50	6/13	ABE7S16S2B0	6/14			BMXFCC203	3/13	BMXNOR0200H	4/15
ABE7H12S21	6/13	ABE7S16S2B0E	6/14			BMXFCC301	3/13		5/9
ABE7H16C10	6/12	ABE7TES160	6/20			BMXFCC303	3/13	BMXNRP0200	4/3
ABE7H16C11	6/12	ABFC08R02B	6/21			BMXFCC501	3/13	BMXNRP0201	4/3
ABE7H16C21	6/12	ABFC08R02R	6/21			BMXFCC503	3/13	BMXPRA0100	4/5
ABE7H16C31	6/12	ABFC08R02W	6/21			BMXFCC1001	3/13	BMXRWS128MWF	4/15
ABE7H16CM11	6/12	ABFC08R12B	6/21			BMXFCC1003	3/13	BMXXBC008K	2/8
ABE7H16CM21	6/12	ABFC08R12R	6/21			BMXFCCW301	3/13		5/5
ABE7H16F43	6/13	ABFC08R12W	6/21			BMXFCCW303	3/13	BMXXBC015K	2/8
ABE7H16R10	6/13	ABFM04S200	6/19			BMXFCCW501	3/13		5/5
ABE7H16R11	6/13	ABFM04S201	6/19			BMXFCCW503	3/13	BMXXBC030K	2/8
ABE7H16R20	6/13	ABFM08S201	6/19			BMXFCCW501S	3/23		5/5
ABE7H16R21	6/13	ABFM16S201	6/19			BMXFCCW301S	3/23	BMXXBC050K	2/8
ABE7H16R23	6/13	ABFM32H150	6/19			BMXFCCW303	3/13		5/5
ABE7H16R30	6/13	ABFM32H151	6/19			BMXFCDI1602	5/6	BMXXBC120K	2/8
ABE7H16R31	6/13	ABFM32H300	6/19			BMXFCDI1603	3/12		5/5
ABE7H16R50	6/13	ABFM32H301	6/19			BMXFCDI1603H	5/6	BMXXBE1000	2/8
ABE7H16S21	6/13	ABR7S11	6/17			BMXFCDI1604T	3/12	BMXXBE1000H	5/4
ABE7H16S43	6/13	ABR7S21	6/17			BMXFCDI1605	3/12	BMXXBE2005	2/8
ABE7H20E100	6/12	ABR7S23	6/17			BMXFCDI1605H	5/6	BMXXBP0400	2/4
ABE7H20E200	6/12	ABR7S33	6/17			BMXFCDI1606	3/12	BMXXBP0400H	5/4
ABE7H20E300	6/12	ABR7S33E	6/17			BMXFCDI1607	3/12	BMXXBP0600	2/4
ABE7H32E150	6/12	ABR7S37	6/17			BMXFCDI1607H	5/6	BMXXBP0600H	5/4
						BMXFTA150	3/23	BMXXBP0800	2/4

BMXXBP0800H	5/4
BMXXBP1200	2/4
BMXXBP1200H	5/4
BMXXEM010	2/5 5/4
BMXXSP0400	2/5 5/4
BMXXSP0600	2/5 5/4
BMXXSP0800	2/5 5/4
BMXXSP1200	2/5 5/4
BMXXTSCPS10	2/11 5/3
BMXXTSCPS20	2/11 5/3
BMXXTSHSC20	3/31 5/11

P	
PMESWT0100	4/23
PMXNOW0300	4/21

S	
STBXSP3010	2/5 5/4
STBXSP3020	2/5 5/4

T	
TCSEGPA23F14FK	5/10
TCSMCN3M4F3C2	4/19
TCSMCN3M4M3S2	4/19 5/10
TCSXCN3M4F3S4	4/19 5/10
TSXCBY010K	2/8 5/5
TSXCBY030K	2/8 5/5
TSXCBY050K	2/8 5/5
TSXCBY120K	2/8 5/5
TSXCBY180K	2/8 5/5
TSXCBY280KT	2/8 5/5
TSXCBY1000	2/8 5/5
TSXCBYACC10	2/9 5/5
TSXCBYK9	2/9 5/5
TSXCDP053	6/19
TSXCDP103	6/19
TSXCDP203	6/19
TSXCDP303	6/19
TSXCDP503	6/19
TSXTLYEX	2/9 5/5

V	
VW3M8223R30	3/35

PlantStruxure



Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

DIA6ED2131203EN

www.schneider-electric.com/psx