

### Overview

#### HP t620/t620 PLUS Flexible Series Thin Client



**FRONT**



**BACK**

1. Power button (with integrated power indicator light)
2. Flash drive activity indicator light
3. USB 2.0 connectors (two)
4. USB 3.0 connectors (two)
5. Audio connector (mic/line in)
6. Audio connector (headphone/line out)
7. Mounting points for HP Quick Release or other VESA mount
8. Removable stand for horizontal orientation

1. Ethernet RJ-45 connector
2. USB 2.0 connectors (2)
3. DisplayPort 1.2 ports (2)
4. PS/2 keyboard connector
5. PS/2 mouse connector
6. Option connector (may be configured as Serial, VGA, or fiber SC connector from factory)
7. Audio line in
8. Audio line out
9. +19V DC power input
10. Cable lock slot
11. Power cord retention clip


### Overview

#### HP t620/t620 PLUS Flexible Series Thin Client



**FRONT**

1. Power button (with integrated power indicator light)
2. Flash drive activity indicator light
3. USB 2.0 connectors (two)
4. USB 3.0 connectors (two)
5. Audio connector (mic/line in)
6. Audio connector (headphone/line out)
7. Mounting points for HP Quick Release or other VESA mount
8. Removable stand for horizontal orientation

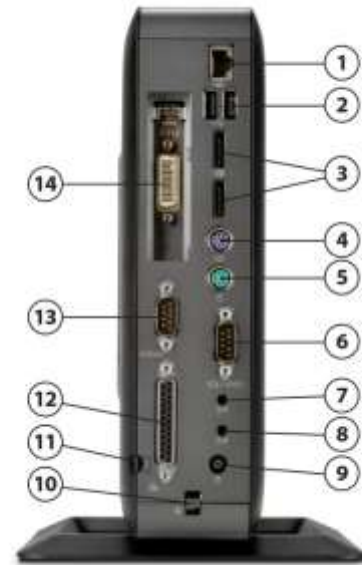

**BACK**

1. Ethernet RJ-45 connector
2. USB 2.0 connectors (2)
3. DisplayPort 1.2 ports (2)
4. PS/2 keyboard connector
5. PS/2 mouse connector
6. Option connector (may be configured as Serial, VGA, or fiber SC connector from factory)
7. Audio line in
8. Audio line out
9. +19V DC power input
10. Cable lock slot
11. Power cord retention clip
12. Parallel connector
13. Serial connector
14. PCI Express (half-height) card slot (in quad-head video configurations - 2 x DVI-I ports)

### Overview

#### Hardware features:

- Two chassis: Standard (slim) and PLUS (expansion)
- Three CPU speed/core choices: AMD GX-420CA 2.0 GHz quad-core (in PLUS chassis) with AMD Radeon HD 8400E graphics; AMD GX-415GA 1.5 GHz quad-core with AMD Radeon HD 8330E graphics; or AMD GX-217GA 1.65 GHz dual-core with AMD Radeon HD 8280E graphics 64-bit accelerated Systems-on-Chip (SoC) for excellent processing and graphics performance
- AMD Radeon HD integrated graphics with hardware acceleration of streaming video formats and DirectX 11.1 support.
- DDR3L-1600 SODIMM (two slots) up to 16 GB supported
- New mSATA SSD (minimum 16GB) boot drive and M.2<sup>6</sup> SSD secondary drive options for enhanced performance, flexibility, and longevity<sup>2</sup>
- Active thermal management monitors component operating temperatures, throttles SoC operation if appropriate, and prevents unit thermal shutdown
- HP t620 PLUS factory-installed quad-head video option: Dual-head AMD FirePro 2270 video card which, when combined with on-board video ports, provides up to 4 digital video ports output.
- LAN – 10/100/1000 Gigabit Ethernet and optional HP 100 Mbps Mini-PCIe SC Fiber NIC (cannot be installed simultaneously with Wi-Fi module)<sup>3</sup>
- Wi-Fi options: Broadcom 802.11 a/b/g/n or Broadcom 802.11ac, both with dual internal antennas for superior performance and security<sup>3</sup>
- Dual digital DisplayPort 1.2 monitor support up to 2560 X 1600, optional VGA port factory configuration for legacy monitors
- USB ports: 2 x USB 3.0 and 2 USB 2.0 on front, 2 x USB 2.0 on rear, and 2 x USB 2.0 hidden inside chassis.
- Legacy ports standard: 1 x PS/2 keyboard and PS/2 mouse, and 1 x Serial or VGA (factory-configurable port)
- Legacy ports PLUS: 1 x PS/2 keyboard and PS/2 mouse, 2 x Serial, and 1 x Parallel
- Audio ports on front and rear
- Security features: TCG certified TPM chipset<sup>1</sup>, BIOS designed to address NIST SP 800-147 guidelines, cable lock slot, and power cord retention clip to prevent accidental disconnects, Secure Port/Cable Cover & Case Intrusion Detection options; 2 internal USB 2.0 ports for securing USB Flash drives and dongles
- HP t620 PLUS expansion: Half-height PCI Express x4 (physically x16) expansion slot (not available with quad-head configuration)
- Multiple solid-state drive options
- Qualified 3<sup>rd</sup>-party Fiber NIC PCIe card options (Allied Telesis)
- HP 100 Mbps Mini PCIe SC Fiber NIC factory-installed option on either chassis
- Energy Star<sup>®</sup> 6.0 qualified<sup>4</sup> and EPEAT<sup>®</sup> Gold registered<sup>4</sup> in the United States (except for some models with quad-head video or Fiber NIC networking options installed). See <http://www.epeat.net> for registration status in other countries.
- Post-consumer recycled plastics content greater than 25% total unit plastics (by weight)
- Low halogen<sup>5</sup>
- All models TAA Compliant (in North America)

<sup>1</sup> With 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

<sup>2</sup> For SSD's GB = 1 billion bytes. Actual formatted capacity is less.

<sup>3</sup> Wireless access point and internet access required. Availability of public wireless access points required.



### Overview

- 4 ENERGY STAR and EPEAT qualification planned but not yet obtained.
- 5 This product is low halogen except for power cords, cables and peripherals, as well as the customer-configurable 100 Mbps Fiber NIC module which are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
- 6 M.2 Solid State Drives available Spring, 2014

#### Software features for HP t620 with HP ThinPro and HP Smart Zero Technology software:

- HP ThinPro and HP Smart Zero Technology are HP's purpose-built thin client operating systems built from Linux
- HP ThinPro offers an easy-to-use, easy-to-configure, locked-down interface -- HP Connection Manager -- that allows administrators to quickly create server connections for end users.
- HP Smart Zero Clients using Smart Zero Client Technology boot directly into a user log-in on the server or portal for which they are configured. No local thin client user interface means the end-user can get to work without special training on the access device. The Smart Zero Technology reduces the administrative burden by enabling the IT administrator to perform the configuration settings on the server and the settings will be automatically applied to HP thin clients plugged in to the network.
- ICA and RDP support for accessing Citrix and Windows resources
- VMware Horizon View PCoIP support for accessing VMware Horizon View sessions
- VDI broker support includes VMware Horizon View, Citrix XenDesktop (with CDA mode utility),
- Multimedia and USB redirection support
  - Citrix HDX MediaStream (multimedia redirection)
  - Citrix HDX Plug-n-Play (USB redirection)
- Improved quality of experience for end users using HP Velocity
  - Available only on HP thin clients
  - HP Velocity enables IT managers to monitor network activity and optimize end-user experience
  - HP Velocity intelligently reduces network packet loss and retransmissions providing a better experience for end users located off the LAN

#### Software features for Genuine Windows® Embedded Standard 7E (WES 7E):

- Microsoft® Windows® Embedded Standard 7 SP1 (WES 7E) with support for RemoteFX and local applications, providing a richer user experience
- Internet Explorer 9 (IE9) for genuine Internet Explorer browsing and Web-application interfaces
- Excellent rich multimedia experience and enhanced USB device support in VDI environments
- Latest protocol support from Citrix On-Line Plug in (ICA) 4.0, RDP 8 w/RemoteFX, and VMware Horizon View Mgr 5.4
- Enhanced Write Filter and File-Based Write Filter provide complete flexibility to protect the entire Flash disk, or configure areas of the disk for persistent access by local applications
- Microsoft Firewall for enhanced data security
- Support 802.1x LAN-based authentication for greater security
- HP Universal Print Driver provides instant access to a range of HP print devices without downloading separate
- Improved quality of experience for end users using HP Velocity
  - Available only on HP thin clients
  - HP Velocity enables IT managers to monitor network activity and optimize end-user experience
  - HP Velocity intelligently reduces network packet loss and retransmissions providing a better experience for end users located off the LAN



### Overview

#### Software features for Genuine Windows® Embedded Standard 8 (WES8):

- The newest Microsoft embedded software based on Windows 8
- A 64-bit OS for improved performance and support for larger memory installations (up to 16 GB)
- Smooth, immersive experiences with technologies like advanced Multi Touch and Windows 8 applications
- The latest RDP8 and Remote FX client software
- WES8 offers a secure platform that is intelligent systems ready
- Latest Internet Explorer 10 (IE10) for genuine Internet Explorer browsing, HTML 5 support and Web-application interfaces
- Latest protocol support from Citrix Receiver Standard 4.0 with Storefront support, RDP 8 w/RemoteFX, and VMware Horizon View Mgr 5.3
- Excellent rich multimedia experience and enhanced USB device support in VDI environments
- Support for up to seven (7) Full HD digital monitor configurations available
- Integrated 802.11a/b/g/N with dual internal antennas configurations available
- Standard configurations: 16 GB Flash drive and 4 GB RAM
- Improved quality of experience for end users using HP Velocity
  - Available only on HP thin clients
  - HP Velocity enables IT managers to monitor network activity and optimize end-user experience
  - HP Velocity intelligently reduces network packet loss and retransmissions providing a better experience for the end user

All Windows Embedded 8 devices must be activated. Customers have the option via Internet connection, telephone, or indirectly through a proxy for large deployments.

#### Warranty:

HP Total Care Warranty and Services: limited three-year hardware warranty in most regions. HP Care Pack Services extend service contracts beyond your standard warranties. For more details visit

<http://www.hp.com/go/lookuptool>.



### Technical Specifications

#### OPERATING SYSTEMS

HP t620 Flexible Series Thin Client models are pre-configured with one of the following operating systems.

HP ThinPro (32-bit)

HP Smart Zero Technology (32-bit)

Genuine Windows® Embedded Standard 7E (WES 7E) (32-bit)

Windows Embedded Standard 7P (WES 7P) (64-bit)\*Windows® Embedded Standard 8 (WES 8) (64-bit)\*

\* WES 7P and WES8 are planned to be available for the HP t620 in Spring 2014. Varies by region.

#### PROCESSOR / CHIPSET

##### Standard Chassis

AMD Dual-Core GX-217GA 64-bit SOC (1.65 GHz, 1 MB L2 cache) with AMD Radeon HD 8280E (450MHz GPU) Graphics

AMD Quad-Core GX-415GA 64-bit SOC (1.5 GHz, 2 MB L2 Cache) with AMD Radeon HD 8330E (500MHz GPU) Graphics

##### PLUS Chassis

AMD Quad-Core GX-420CA 64-bit SOC (2.0 GHz, 2 MB L2 Cache) with AMD Radeon HD 8400E (600MHz GPU) Graphics

#### MEMORY

	ThinPro	HP Smart Zero Technology	WES 7E	WES 7P	WES 8
Flash (boot drive) SSD	16 GB	16 GB	16 GB	16 GB	16 GB
Standard system memory	4 GB	4 GB	4 GB	4 GB	4 GB
System memory reserved for graphics (minimum)	512 MB				
Maximum system memory (memory speed is 1600 MHz)	16 GB DDR3L 1600 MHz (8 GB x 2)	16 GB DDR3L 1600 MHz (8 GB x 2)	4 GB DDR3L 1600 MHz (4 GB x 1)	16 GB DDR3L 1600 MHz (8 GB x 2)	16 GB DDR3L 1600 MHz (8 GB x 2)
Memory slots	2 SODIMMs				

#### STORAGE

Primary Boot drive 16 GB MLC mSATA SSD (32 GB and 64 GB also available)

Secondary drive options 16, 32, and 64 GB MLC M.2<sup>1</sup> SSD

1 M.2 Solid State Drives available Spring, 2014

#### GRAPHICS



### Technical Specifications

AMD Radeon HD 8280E/8330E/8400E graphics		
Mode	Color depth	Refresh rate (Hz)
800 x 600	8/16/32 bit	60, 75, 85
1024 x 600	8/16/32 bit	60, 75, 85
1024 x 768	8/16/32 bit	60, 70, 75, 85
1152 x 864	8/16/32 bit	60, 75, 85
1280 x 720	8/16/32 bit	60, 75, 85
1280 x 768	8/16/32 bit	60, 75, 85
1280 x 800	8/16/32 bit	60
1280 x 960	8/16/32 bit	60, 75, 85
1280 x 1024	8/16/32 bit	60, 75, 85
1366 x 768	8/16/32 bit	60
1400 x 1050	8/16/32 bit	60, 75, 85
1440 x 900	8/16/32 bit	60, 75, 85
1600 x 900	8/16/32 bit	60
1600 x 1200	8/16/32 bit	60, 75, 85
1680 x 1050	8/16/32 bit	60
1920 x 1080	8/16/32 bit	60, 75, 85
1920 x 1200	8/16/32 bit	60, 75
2048 x 1536 (DisplayPort, only)	8/16/32 bit	60
2560 x 1600 (DisplayPort, only)	8/16/32 bit	60

**NOTE:** This table represents a sample of possible modes that this controller is capable of displaying but various factors such as the capability and EDID information returned by the attached monitor, the interface used (DVI-I/DisplayPort or optional D-SUB with dongle), and dual monitor mode may limit the availability of modes, color depth, and/or refresh rate..

### QUAD-HEAD DIGITAL MONITOR CONFIGURATION

#### With AMD FirePro™ 2270 Multi-View Professional Graphics dual-head graphics card<sup>1</sup>

Up to two monitor ports on the dual-head card work in addition to the two monitor ports on the motherboard to provide quad-head capabilities at a bargain price. Optional output dongles can provide dual DisplayPort outputs from the graphics card if desired. With the DisplayPort adapter on the graphics card and on the motherboard, up to four 2560x1600 displays can be connected simultaneously.

- Factory Installed Option
- Requires PLUS chassis and occupies PCIe slot
- 512MB memory
- PCIe 2.1, x1
- DMS-59 (ships with dual DVI-I dongle)
- Maximum resolution as shipped
  - DisplayPort: 2 x 2560x1600 (on motherboard)
  - DVI: 2 x 1920x1200 (from graphics card)
- Maximum resolution with optional DMS-59 to DisplayPort adapter:
  - 4 x DisplayPort: 2560x1600 (2 on motherboard & 2 from graphics card)
- OpenGL 4.1

<sup>1</sup>**NOTE:** If you attach the primary display to the AMD 2270 video card, the BIOS post information will not be displayed to the monitor at system startup. The display will turn on when the operating system starts. To view BIOS post information, attach the primary display to DP connectors on



### Technical Specifications

the rear panel.

#### INPUT/OUTPUT (peripheral support)

<b>Keyboard</b>	USB or PS/2 (varies by region)
<b>Mouse</b>	USB or PS/2 (varies by region)
<b>Printer</b>	Local and/or network printers (RDP, ICA, LPD)
<b>Video</b>	<p>AMD Radeon HD 8280E graphics available on dual-core 1.65 GHz processor only.            AMD Radeon HD 8330E graphics available on quad-core 1.5 GHz processor only.            AMD Radeon HD 8400E graphics available on quad-core 2.0 GHz processor in PLUS chassis, only.</p> <p>Either 2 x DisplayPort 1.2 from factory, or 1 x DisplayPort 1.2 (active) and 1 x VGA (in option port)</p> <p>Quad-head video option: AMD FirePro™ 2270 Multi-View Professional Graphics dual-head graphics card (for up to four total digital monitors output) available as factory-installed option in PLUS models only (4 GB RAM required for quad-head WES 7 configurations): Up to 2 x 1920x1200 + 2 x 2560x1600, or with optional DMS-59 to DisplayPort adapter 4 x 2560x1600</p>

#### AUDIO/VIDEO

<b>Output</b>	<p>Internal amplified speaker</p> <p>1/8-inch stereo mini jack (headphones, on front panel)</p> <p>1/8-inch stereo mini jack (line out, on rear panel)</p> <p>Full 24-bit stereo</p> <p>up to 192-kHz sample rate.</p>
<b>Input</b>	<p>1/8-inch mini jack microphone (on front panel)</p> <p>1/8-inch stereo mini jack (line in, on rear panel)</p> <p>24-bit stereo,</p> <p>up to 192 kHz sample rate</p>
<b>Audio CODECS with hardware acceleration support</b>	<p>MP3</p> <p>AAC stereo &amp; HE AAC</p> <p>WMA stereo</p>
<b>Video CODECS with hardware acceleration support</b>	<p>MPEG-4 part 2 (DivX, Xvid)</p> <p>MPEG-4 part 10 (H.264, AVC)</p> <p>WMV 7/8/9/ VC-1 &amp; ASF Demuxer</p>

#### HARDWARE SECURITY

- Security lock slot (cable lock sold separately)
- Built-in power cord retention clip





### Technical Specifications

#### NETWORKING

<b>Hardware networking</b>			
10/100/1000 Gigabit Ethernet (RJ-45)			
Wake on LAN (WOL)			
PXE			
TCP/IP with DNS and DHCP			
<b>Software networking</b>			
	<b>ThinPro</b>	<b>HP Smart Zero Technology</b>	<b>WES 7E</b>
Point-to-Point Protocol (PPP)			<b>X</b>
Point-to-Point over Ethernet (PPPoE)			<b>X</b>
Direct Connection through RS-232	<b>X</b>	<b>X</b>	<b>X</b>
Point-to-Point Tunneling Protocol (PPTP)	<b>X</b>	<b>X</b>	<b>X</b>
Layer-2 Tunneling Protocol (L2TP)	<b>X</b>	<b>X</b>	<b>X</b>
Server Network Time Protocol (SNTP)	<b>X</b>	<b>X</b>	<b>X</b>

#### WIRELESS LAN (select models)

<b>Adapter</b>	Broadcom 802.11 a/b/g/n Wi-Fi Adapter; Broadcom 802.11ac
<b>Form Factor</b>	PCI-Express Half Mini Card with dual, internal antennas
<b>Security</b>	Supports 64- and 128-bit WEP, WPA, WPA2, AES, TKIP  <u>HP ThinPro and HP Smart Zero Technology:</u> 802.1x authentication types: EAP-TLS, EAP-TTLS, EAP-PEAP, LEAP  <u>WES 7E.:</u> 802.1x authentication types: EAP-TLS, EAP-TTLS, EAP-PEAP, EAP-FAST, LEAP

#### HP Fast Ethernet Mini PCIe SC Fiber Network Interface Card (factory-installed option)

<b>Adapter</b>	Allied Telesis AT-27MINI Fast Ethernet Fiber PCI Express MINI Network Interface Card
<b>Available in</b>	HP t620 standard and PLUS chassis configurations
<b>Form Factor</b>	Custom-designed card plugs into PCI-Express Mini Card slot, and mounts into device bay inside HP t620 chassis
<b>Management Features</b>	WMI, ACPI 2.0/w01, PXE 2.1 boot ROM, SNMP
<b>Ethernet</b>	IEEE 802.1p (Quality of Service) IEEE 802.2 (LLC) IEEE 802.3ac (MAC) IEEE 802.3u (100Mbps) IEEE 802.1as (Audio Bridging) P802.1Qav P802.1Qat (SRP)



### Technical Specifications

	1588-2000 (PTP)
<b>Network Controller</b>	Broadcom BCM57762
<b>Connectors</b>	SC
<b>Optical Specifications</b>	Output Optical Power -20 (min) -17 (typ) -14 (max) dBm Optical Sensitivity -34 (typ) -32 (max) dBm
<b>Maximum Cabling Distance</b>	Full-duplex Up to 2000 m (5,560 ft) Haf-duplex Up to 412 m (1,351 ft)
<b>Status Indicators</b>	LED 1 port On 100Mbps link up Blink Activity Off 100Mbps link down
<b>Power consumption</b>	2 Watts (typ)
<b>Compliance</b>	RoHS, UL, FCC/EN55022 Class A, TUV, EN55024, CE, C-TICK, VCCI
<b>Supported by thin client operating systems</b>	HP Smart Zero Technology and HP ThinPro Microsoft WES 7E

### I/O PORTS, SLOTS & CONNECTORS

<b>HP t620 (standard chassis)</b>	<b>HP t620 PLUS (expansion chassis)</b>
4 USB 2.0 ports (two in front, two in rear)	4 USB 2.0 ports (two in front, two in rear)
2 USB 3.0 ports (in front)	2 USB 3.0 ports (in front)
2 USB 2.0 ports (hidden inside lockable chassis)	2 USB 2.0 ports (hidden inside lockable chassis)
2 DisplayPort 1.2 (rear)	2 DisplayPort 1.2 (rear)
2 PS/2 (1, KB, 1 mouse)(rear)	2 PS/2(1, KB, 1 mouse)(rear)
1 serial (rear) or 1 VGA (rear, option) or 1 Fiber SC (rear, option provided with Fiber NIC option)	2 serial (rear) or 1 serial and 1 VGA (option) or 1 Fiber SC (option provided with Fiber NIC option)
1 RJ-45(rear)	1 parallel (rear)
1 Headphone (front)	1 RJ-45 (rear)
1 Microphone (front)	1 Headphone (front)
1 Audio line in (rear)	1 Microphone (front)
1 Audio line out (rear)	1 Audio line in (rear)
	1 Audio line out (rear)
	1 Riser Card/Expansion Slot (PCIe 2 <sup>nd</sup> Gen, x16 slot with x4 channels) (rear)

### SERVER OS COMPATIBILITY/SUPPORT

Citrix XenApp 5 and later  
Citrix XenDesktop 3 and later  
Citrix Presentation Server 4.0 and later  
Windows Server 2003  
Windows Server 2008r2 Terminal Services (WES only)  
Windows 2012 Server Remote Desktop services  
VMware Horizon View Virtual Desktop Infrastructure



### Technical Specifications

#### SOFTWARE for HP t620 and HP t620 PLUS

Host Environment	Protocol	Smart Zero	ThinPro	WES 7E
Microsoft Remote Desktop Services	RemoteFX (RFX)	✓	✓	✓
	RDP	✓	✓	✓
Citrix	ICA	✓	✓	✓
	HDX	✓	✓	✓
VMware Horizon View	RDP	✓	✓	✓
	PCoIP	✓	✓	✓
Protocol Clients		Smart Zero	ThinPro	WES 7E
Citrix Receiver*		12.1.5	12.1.5	4.0
Microsoft Remote Desktop Client				8
VMware Horizon View Client*		2.1	2.1	5.4
Remote Graphics Software (RGS)			via add-on	6.0
HP TeemTalk Terminal Emulator			7.3.3	7.3
Free RDP		1.0	1.0	
Browser Support		Smart Zero	ThinPro	WES 7E
Mozilla Firefox		19	19	
Internet Explorer				9
Security		Smart Zero	ThinPro	WES 7E
Smart Card		✓	✓	✓
logon Manager				✓
Read Only Operating System				✓
802.1x		✓	✓	✓
Enhanced Write Filter (EWF)				EWF
File-Based Write Filter (FBWF)				FBWF
Microsoft Firewall				✓
Microsoft AntiMalware & Windows Defender				
Session brokers		Smart Zero	ThinPro	WES 7E
Citrix XenDesktop		✓	✓	✓
VMware Horizon View		2.1	2.1	5.4
Leostream Desktop Connection broker (available from vendor website)				from vendor site
Management Tools		Smart Zero	ThinPro	WES 7E
HP Device Manager		✓	✓	✓
HP ThinState			✓	✓



### Technical Specifications

HP Easy Tools		✓	✓
HP Smart Zero Client Services	✓		
Microsoft SCCM/EDM agent			✓
<b>Additional Components</b>	<b>Smart Zero</b>	<b>ThinPro</b>	<b>WES 7E</b>
HP Velocity	✓	✓	✓
HP Connection Manager/ HP Cloud Connection Manager		✓	✓
HP Universal Print Driver			✓
Windows Media Player			12
Windows Touch (Multi-touch support)			
Multilanguage support			
Microsoft DirectAccess			
Microsoft BranchCache			
Microsoft AppLocker			
Microsoft Sideloading			
<b>Audio CODECs included</b>	<b>Smart Zero</b>	<b>ThinPro</b>	<b>WES 7E</b>
MP3	✓	✓	✓
WMA stereo	✓	✓	✓
AAC stereo & HE AAC	✓	✓	
Microsoft AC3 encoder			✓
<b>Video CODECs included</b>	<b>Smart Zero</b>	<b>ThinPro</b>	<b>WES 7E</b>
MPEG-1	✓	✓	
MPEG-4 part 2 (DivX, Xvid, H.263)	✓	✓	✓
MPEG-4 part 10 (H.264, AVC)	✓	✓	✓
WMV 7/8/9/ VC-1 & ASF Demuxer	✓	✓	✓

**NOTE:** Other add-on software available (see: [www.hp.com/support](http://www.hp.com/support) for latest list of available add-ons). Software performance and support may vary depending on customer environment and backend.

### TEXT AND GRAPHICS TERMINAL EMULATIONS (provided by HP TeemTalk 7 in HP ThinPro, WES 7, and operating systems)

Emulation	Terminal ID
ADDS A2	
AIXTerm	
ANSI BBS	
AT 386	
ATT4410	
HP 700-92/96	70092, 70094, 70096, 2392A, 2622A
HZ1500	
IBM3151	Mod11, Mod31
IBM3270	3278-2 (24x80), 3278-3 (32x80), 3278-4 (43x80), 3278-5 (27x132),



### Technical Specifications

	3278-2-E (24x80), 3278-3-E (32x80), 3278-4-E (43x80), 3278-5-E (27x132), 3279-2 (24x80), 3279-3 (32x80), 3279-4 (43x80), 3279-5 (27x132), 3287-1
IBM5250	5291-1, 5292-2, 5251-11, 3179-2, 3196-A1, 3180-2, 3477-FC (27x132), 3477-FG (24x80), 3486-BA, 3487-HA, 3487-HC, 3812-1
SCO Console	
Stratus V102	
TA6530	
TVI910	
TVI920	
TVI925	
TVI950	
TVI955	
VT52, VT100, VT100+, VT500 (7- or 8-bit)	VT100, VT101, VT102, VT125, VT131, VT132, M2200, VT220, VT240, VT320, VT340, VT420, VT510, VT520, VT525
VT HP220, VT UTF8	VT100, VT101, VT102, VT125, VT220, VT240, VT320, VT340, VT420, VT131, VT132, M2200, VT510, VT520, VT525
VT PCTerm	
Wyse PCTerm	
WY50	
WY50+	
WY60	

**NOTE:** Wireless features, performance and support may vary depending on environmental variables such placement, settings and firmware of your access points. Please contact your wireless vendor for support of your wireless environment.

### LANGUAGES (Local User Interface)

The following local user interface languages are available for Windows Embedded Standard 7:

English, French, German, Spanish, Dutch, Norwegian, Korean, Simplified Chinese, Traditional Chinese, Japanese, Russian, and Arabic

The following local user interface languages are available for HP ThinPro and HP Smart Zero Technology:

English, French, German, Spanish, Korean, Simplified Chinese, Traditional Chinese, and Japanese

### DIMENSIONS (WxDxH)

	HP t620 (standard chassis – vertical orientation)	HP t620 PLUS (expansion chassis – vertical orientation)
With stand	8.7 x 1.6 x 9.5 in 22 x 4 x 24 cm	8.7 x 2.6 x 9.5 in 22 x 6.5 x 24 cm

**NOTE:** Dimensions are approximate

### WEIGHT

	HP t620	HP t620 PLUS
--	---------	--------------



### Technical Specifications

	(standard chassis)	(expansion chassis)
<b>With stand</b>	3.0 lb 1.36 kg	4.5 lb 2.04 kg

**NOTE:** Weights are approximate. Optional add-ins or customer add-ins will increase these weights.

### POWER SUPPLY

HP t620 (standard chassis)	HP t620 PLUS (expansion chassis)
65W Worldwide auto-sensing 100-240 VAC, 50-60 Hz Energy-saving automatic power-down Surge-tolerant	85 W Worldwide auto-sensing 100-240 VAC, 50-60 Hz Energy-saving automatic power-down Surge-tolerant

### ENVIRONMENTAL

<b>Operating temperature range</b>	<u>Standard</u> 50° to 104° F (10° to 40° C)  <u>Using Quick Release with a flat panel monitor</u> 50° to 95° F (10° to 35° C)  <u>Using PCIe Expansion Card</u> 50° to 104° F (10° to 40° C)  <b>Standard chassis with Fiber NIC:</b> 50° to 95° F (10° to 35° C)
<b>Non-operating temperature range</b>	-22° to 140° F (-30° to 60° C)
<b>Humidity</b>	<u>Condensing</u> 20% to 80%  <u>Non-condensing</u> 10% to 90% non-condensing

**NOTE:** Specifications are at sea level with altitude derating of 1° C/300m (1.8° F/1000ft) to a maximum of 3 Km (10,000 ft), with no direct, sustained sunlight. Upper limit may be limited by the type and number of options installed.

### REGULATORY COMPLIANCE

<b>Ergonomics</b>	Approved
<b>Safety</b>	UL 1950, CSA 950; TÜV-GS (EN60 950); approved
<b>RF Interference</b>	FCC Class B; CE Mark; EN55022B; VCCI



### Environmental Data

#### ECO-LABEL CERTIFICATIONS & DECLARATIONS

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these markets:

- ENERGY STAR® Category B
- EPEAT® Gold registered where applicable/supported, see [www.epeat.net](http://www.epeat.net) for registration status by country
- Models using the factory-installed HP 100 Mbps Mini PCIe Fiber NIC may not meet ENERGY STAR® or EPEAT® requirements.\*

\* Only true for Linux SKUs. WES7E SKUs pass with Fiber NIC.

#### ENERGY CONSUMPTION

	115 VAC (60Hz)	230 VAC (50Hz)	100 VAC (60Hz)
<b>Standard models (dual core)<sup>1</sup></b>			
Idle State:	4.4236 W	4.5105 W	4.4132 W
Sleep State:	0.6241 W	0.6653 W	0.6153 W
Off Mode:	0.4825 W	0.5287 W	0.4811 W
<b>Standard models (quad core)<sup>2</sup></b>			
Idle State:	4.9246 W	4.993 W	4.9151 W
Sleep State:	0.5738 W	0.6337 W	0.5747 W
Off Mode:	0.4153 W	0.4601 W	0.4132 W
<b>PLUS chassis models (quad core)<sup>3</sup></b>			
<b>PLUS chassis</b>			
Idle State:	5.7566 W	5.9411 W	5.7543 W
Sleep State:	0.7076 W	0.7745 W	0.6989 W
Off Mode:	0.5547 W	0.6164 W	0.5497 W
<b>PLUS chassis (with video card)<sup>4</sup></b>			
Idle State:	10.976 W	11.161 W	10.959 W
Sleep State:	0.7072 W	0.7605 W	0.7052 W
Off Mode:	0.5539 W	0.6152 W	0.5506 W

1 Standard models (dual core) → Slim 15W 2C, 4G RAM, 32G mSATA, WES 7E.

2 Standard models (quad core) → Slim 15W 4C, 4G RAM, 32G mSATA, WES 7E.

3 PLUS chassis models (quad core) → Flex 25W 4C without Graphic card, 4G RAM, 32G mSATA, WES 7E

4 PLUS chassis (with video card) → Flex 25W 4C with AMD FirePro 2270 Graphic card, 4G RAM, 32G mSATA, WES 7E.

**NOTE:** These measurements represent HP t620 with WES 7E, 32 GB Flash and 4 GB RAM installed. Other OS configurations may vary, but do not significantly exceed these measurements.

**NOTE:** This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled. Off Mode measurements are made with WOL disabled.

**NOTE:** The actual power consumption at your location could vary and is dependent on many factors including but not limited to software load on the thin client, attached peripherals, and environmental factors.

#### HEAT DISSIPATION (BTU/hr)

	115 VAC (60Hz)	230 VAC (50Hz)	100 VAC (60Hz)
<b>Standard models</b>			



### Environmental Data

Idle State:	15.0933	15.389826	15.0578384
Off Mode:	1.64629	1.8039244	1.6415132
<b>PLUS chassis models</b>			
<b>PLUS chassis</b>			
Idle State:	15.0933	15.389826	15.0578384
Off Mode:	1.64629	1.8039244	1.6415132

**NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour

### DECLARED NOISE EMISSIONS

(in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
<b>Standard models</b>		
No rotating part	2.6 (Bels)	12.9 (dBA)
Configuration tested included one AMD eKabini (15W) processor, one 64 GB m-SATA primary storage module		
<b>PLUS chassis models</b> (Fans on, if applicable)		
Idle	2.8 (Bels)	17.3 (dBA)
Operation	3.4 (Bels)	24.0 (dBA)
Configuration tested included one AMD eKabini (25W) processor, one 64 GB m-SATA primary storage module		

### LONGEVITY AND UPGRADING

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 8 USB ports
- 1 Serial Port (HP t620 standard chassis) or 2 Serial Ports / 1 Parallel Port (HP t620 PLUS)
- 2 memory slots
- 1 empty PCIe x16 slot (x4 channels) (HP t620 PLUS models without quad-head option installed)
- 2 internal drive slots (mSATA and M.2 SSD mounting points)

Spare parts are available throughout the warranty period and or for up to five (5) years after the end of production.

### BATTERIES

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000ppm by weight.
- Battery size: CR2032 (coin cell)
- Battery type: Lithium

### RECYCLED MATERIAL





### Environmental Data

<b>Product</b>	<ul style="list-style-type: none"> <li>This product contains 20% or more post-consumer recycled plastics (by weight).</li> <li>This product is over 90% (by weight) recyclable when disposed of properly at end of life.</li> </ul>
<b>Packaging</b>	<ul style="list-style-type: none"> <li>The packaging for this product is 90% or more (by weight) recyclable when disposed of properly.</li> </ul>

### RoHS COMPLIANCE

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis.

### MATERIAL USAGE

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: [http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

### Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.



### *Environmental Data*

- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.

Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### **End-of-life Management and Recycling**

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>.

These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### **Hewlett-Packard Corporate Environmental Information**

For more information about HP's commitment to the environment:

Global Citizenship Report:

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications:

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>



### Options and Accessories (sold separately)

		Part #
<b>Accessories</b>	HP Quick Release Kit	EM870AA
	HP Integrated Work Center Stand	LH526AA
	HP t620 Standard Lockable Rear Port Control Security Cover	F4N53AA
	HP t620 PLUS Lockable Rear Port Control Security Cover	F4N54AA
<b>Memory Upgrade</b>	HP 4 GB DDR3L-1600 SODIMM Kit	B4U39AA/B4U39AT
	HP 8 GB DDR3L-1600 SODIMM Kit	B4U40AA / B4U40AT
<b>Communications</b> <sup>2,3</sup>	Allied Telesis PCIe x1 Fast Ethernet Fiber Network Interface Card <sup>1</sup>	AT-2711FX
	Allied Telesis PCIe x1 Gigabit Fiber Network Interface Card <sup>1</sup>	AT-2972SX
	Belkin USB-to-Serial Adapter <sup>1</sup>	EM449AA
<b>Input Devices</b>	HP PS/2 Standard Keyboard	DT527A
	HP USB Standard Keyboard	DT528A
	HP USB CCID Smartcard Keyboard	BV813AA
	HP PS/2 2-Button Optical Mouse	EY703AA
	HP USB 2-Button Optical Scroll Mouse	DC172B
<b>Monitors</b> <sup>2</sup>	HP L5009tm Touchscreen Monitor <sup>7</sup>	VK202AA
	HP EliteDisplay E221 21.5-In Monitor	C9V76AA
	HP L6015tm 15" Touchscreen Monitor <sup>8</sup> (5 touch Projective Capacitive)	A1X78AA
	HP L6017tm 17" Touchscreen Monitor <sup>8</sup> (5 touch Projective Capacitive)	A1X77AA
	LD 4220tm 42" LCD Interactive Touch Display, Digital Display <sup>8</sup>	XH216AA
	LD 4720tm 47" LCD Interactive Touch Display, Digital Display <sup>8</sup>	XH217AA
<b>Graphics</b>	HP DisplayPort to DVI-D Adapter	FH973AA FH973AT
	HP DMS-59 to dual VGA Adapter (for use with pre-configured quad-head models only)	GS567AA
	HP DMS-59 to dual DVI-I Adapter (for use with pre-configured quad-head models only)	DL139A
	HP DMS-59 to dual DisplayPort Adapter (for use with pre-configured quad-head models only))	XP688AA
<b>Storage</b>	HP 16GB MLC M.2 Solid State Drive <sup>9</sup>	F3V77AA
	HP 32GB MLC M.2 Solid State Drive <sup>9</sup>	F3V78AA
	HP 64GB MLC M.2 Solid State Drive <sup>9</sup>	F3V79AA
<b>Security</b>	HP USB CCID Smartcard Keyboard	BV813AA
	Gemalto PC USB-TR Card Reader <sup>1</sup>	HWP117685A



### Options and Accessories (sold separately)

	Gemalto.NET v2+ Smart Card <sup>1</sup>	HWP115303B HWP115647C
	SCM SCR331 USB Smart Card Reader <sup>1</sup>	904054
	HP Keyed Cable Lock	BV411AA
	HP t620 Standard Chassis Rear Port Security Cover	F4N53AA
	HP t620 PLUS Chassis Rear Port Security Cover	F4N54AA
<b>Care Pack Services<sup>4</sup></b>	9x5 Next-Business-Day Advanced Exchange - 3 Years	331653-001; U4847E <sup>5</sup>
	9x5 Next-Business-Day On-Site Coverage - 3 Years	331655-001; U4849E <sup>5</sup>
	Hardware Installation	331686-001; UJ865E

<sup>1</sup> Option, drivers, warranty, and support are available directly from third party.

<sup>2</sup> Drivers must be installed. For a complete list of monitors compatible with HP thin clients, it is important to cross-reference the supported video resolutions of the HP thin client to the supported resolutions of the monitor. Most HP monitors have one or more supported resolutions that match HP thin client products.

<sup>3</sup> Only serial is supported.

<sup>4</sup> Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Restrictions and limitations apply. For details, visit: [www.hp.com/go/carepack](http://www.hp.com/go/carepack).

<sup>5</sup> U4847E is available in all regions; U4849E is available in Latin America and Asia-Pacific/Japan.

<sup>6</sup> Not supported with HP ThinPro or HP Smart Zero Technology HP t620 thin clients.

<sup>7</sup> Supported on HP t620 WES7P and WES 8 thin clients

<sup>8</sup> Multi-touch only supported on HP t620 WES7P and WES 8 thin clients

<sup>9</sup> M.2 Solid State Drives available Spring, 2014

© 2013 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products and services are set forth in the express limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft Group of Companies. ENERGY STAR is a registered mark owned by the U.S. government.

