



# CONTENTS

**Data Communications** 



High Density Jacks Plates and Surface Mounts

TracJack® Faceplates Frames and Surface Mounts p.27

Series II<sup>®</sup> Modules and Faceplates p.33

Workstation

p.25

A/V Connectivity p.36

Multimedia Workstations p.39

### **Copper Patch Panels**

Clarity® Patch Panels p.45

Special Application Patch Panels p.52

Shielded Patch Panels p.53



**SNAP Pre-Terminated Copper Horizontal** Cabling System

Clarity SNAP™ Cable Assemblies p.57

SNAP Patch Panels p.60

SNAP Workstation Modules p.61



Clarity Patch Cords p.65

EZ Patch™ Patch Cord Dispensing Solution

Clarity Shielded Patch Cords p.69

Clarity 110 Patch Cords p.70

Custom Assemblies p.71

### **Industrial Solutions**

Industrial Jacks p.73

Industrial Plates and Surface Boxes p.73

Industrial Patch Cords p.74

# 110 Cross Connect System

Clarity® 6 and Clarity 5E 110 Block Kits

p.77

110 Accessories

p.78

110 Panels

p.79

Pre-Wired 66 Blocks

p.83



Physical Support

85

Mighty Mo® Cabinets **p.88** 

Mighty Mo 20 Cable Management Systems p.122 Standard EIA Racking Systems **p.137** 

Horizontal Cable Management, Shelves and Accessories p.153

Bonding and Grounding p.171

Runway, Mighty Mo Fiber Raceway p.189



Fiber Options

203

Enclosures and Patch Panel Systems

(Including Cassettes and Adapter Panels)

p.205

Cable Assemblies

p.233

Connector Systems

p.260

Workstation Systems

p.268



Keystone Jacks and Modules p.277

Faceplates p.279

Patch Panels p.281

Patch Cords p.282

Surface Mount Boxes p.283

Rack Mount Fiber Cabinets **p.284** 

**Adapters** 

<u> 285</u>

Gender Changer p.286

Data Adapters p.286

# CONTENTS

**Data Communications** 



Cablofil® Solutions

287

Cable Tray p.289

Under Floor System p.290

Fast Assembly System (FAS) p.292

Accessories p.294

Finishes p.295



Steel Raceways p.299

Nonmetallic Raceways **p.304** 

Poke-Thru Devices p.317

Floor Boxes and Raised Floor Solutions p.318

Fire Stop Fittings Work Surface and Vertical Solutions p.326

Wireless and Zone Cabling Enclosures and Power Distribution p.327



Infrastructure p.339

Communications p.348

Entertainment p.350

### **NEW PRODUCTS**

### **Data Communications**



# Clarity High Density Jacks







High Density Jacks

Supplied Crimping Tool



Angled High Density Jack Panels



Flat High Density Jack Panels

### Clarity High Density Jacks

Clarity® High Density Jacks incorporate patent pending mechanical and electrical advancements to provide greater performance headroom and an easier termination method. The easy to lace and crimp termination reduces time to install, while maintaining cable performance. Termination of all 8 conductors with one crimp is easy using the HDJHCT crimping tool or the free hand tool supplied in each carton. The HDJ jacks are available in Category 6a, 6 and 5e with Clarity technology that elevates a channel performance. These jacks are rear loading, utilizing an innovative locking latch for quick reliable mounting and removal.

### **Clarity High Density Jack Panels**

These unloaded panels provide up to 48-ports in a single rack unit, supporting the high destiny family with flat and angled panels. Panel choices include 24-port (1RU), 48-port (1RU), 48-port (2RU) and 72-port (2RU). All panels are supplied with front labeling bezels, rear cable management bars, straps and ties.

See page 25 for more details.


# **NEW PRODUCTS**

### **NEW PRODUCTS**

**Data Communications** 



# Mighty Mo 20 Rack System

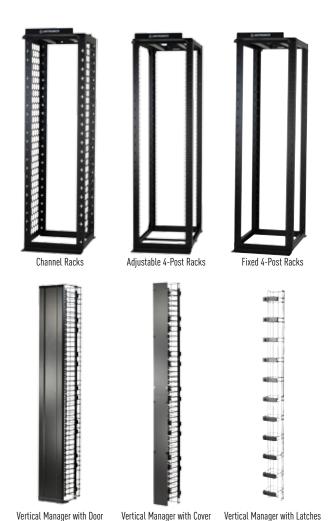

### Mighty Mo 20 Rack System

The Mighty Mo 20® rack system is a comprehensive solution that meets the needs of networks requiring greater flexibility, optimum efficiency and superior design. With over 120 new innovative products, the Mighty Mo 20 is designed for any size LAN, SAN or Data Center, any Copper or Fiber media and any Network Equipment.

A well designed physical support infrastructure maximizes network performance by minimizing signal loss caused by improper cable support, guarantees the flexibility necessary for future technology and growth and increases cooling efficiency through proper airflow management.

### **Features**


- 26 different sizes in black or white
- Channel and 4-Post versions up to 9 feet
- 2" deeper fingers for higher density networks
- Bend limiting clips provide 180° protection
- Mounting brackets for both Cablofil® tray and runway
- Available 6" tall brackets improve cable transition
- Deeper vertical managers with up to 40% more room
- Channel rack depths up to 30" for improved capacity
- Improved hex pattern on all channel racks
- Larger vertical managers reduce cable obstruction

See page 122 for more details.

**La legrand**®

### **NEW PRODUCTS**

**Data Communications** 

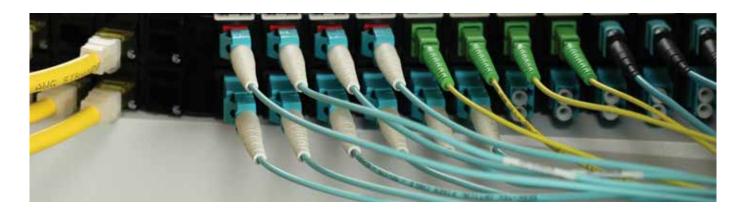

# Fiber Modules For Mixed Media







High Density SC Simplex Module High Density Duplex LC Module High Density MTP Module







Angled High Density Jack Panels



High Density Cable Manager

### **High Density Fiber Module**

Legrand® has introduced a new high density jack footprint in Category 6a, 6 and 5e - the Clarity® High Density Copper Solution – as found on page 25. To add to the options, Legrand has made optical fiber adapters and cassettes available in the same HD footprint. Now you can easily combine and readily swap out copper and fiber elements in the same patch panel.

See page 221 for more details.



# Legrand is "designed to be better"

As the leading provider of products and systems for electrical and digital building infrastructures, Legrand® delivers an unequaled depth and breadth of innovative solutions. With solutions for use in residential, commercial and industrial buildings, our products are the backbone of the electrical and communications infrastructure.

By incorporating our passion for the principles of good design across all our divisions, we create products that make the lives of all we touch better. Legrand provides the right level of technology for the job, efficient installation, exceptional fit and finish, and outstanding customer service – for a system that is simply designed to be better.

In North America, Legrand is building upon a legacy of providing smart solutions to customer needs. Our solutions include well known product lines like C26°, Cablofil°, Electrorack°, On-Q°, Ortronics°, Pass & Seymour°, Quiktron® and Wiremold®. These products – plus ranges from Bticino®, Middle Atlantic®, NuVo®, Vantage® and WattStopper® – form a strong foundation for the Legrand commitment to making life better at work and in the home.





# Data Communications

Legrand's network infrastructure and data center solutions provide a complete range of copper, fiber optic and physical infrastructure solutions. Our data communications offering features legacy product lines, as well as new additions, for a comprehensive system to support your network:

- Cablofil® cable management
- C2G® cabling and connectivity
- Electrorack® enclosures
- Ortronics® structured cabling and physical infrastructure
- Quiktron® cable connectivity
- RapidRun® modular cabling
- Wiremold® pathways and portals

This broad set of solutions supports customer needs in data center and local area network environments, providing flexibility to meet current and future networking demands and efficiency during installation and use, all united by superior design.

Our systems are supported by an extensive sales, design and support team - all backed by industry leading warranties - to ensure that your network works flawlessly, from installation and beyond.

ENGINEERING THE FUTURE OF OUR ENVIRONMENT AND WORKPLACE



# Sustainability

### Designed to Be Better - Our Commitment to Sustainability

At Legrand®, our sustainability commitment translates into greater benefits and tangible value for our customers, business partners, employees and the broader community.

### **Better Performance**

Our sustainability goals reach inside and outside Legrand. We provide building solutions to meet many building performance goals from sustainability and energy efficiency to productivity and occupant well being. The right choice in network and electrical infrastructure can play a key role in many facets of building performance. Our products help ensure electrical safety. They offer choice and flexibility in space design. They are designed to reduce installation time and material waste on site. Because we know buildings consume a great deal of energy, we offer a range of products and solutions that reduce energy consumption from lighting to plug load to data centers.

### Legrand Data Center Solutions Can Reduce Energy Usage by 30%

Today's demands necessitate a holistic approach to data center design to ensure optimal energy efficiency and performance. Our offering of active and passive cooling, power distribution, air flow control, physical support and cable management provides our customers solutions that meet the needs of today and tomorrow.

### **Better Solutions**

We offer a wide range of innovative solutions for the building, while constantly evolving our design and development processes to improve the environmental profile of our products. Through active monitoring and research, we also serve as an expert resource for market trends and building and product performance standards to keep our customers at the top of their game.

### Helping you Reduce Your Impact on the Environment

Our commitment to designing products and packaging that have less impact on the environment can be seen through our strict adherence to RoHS compliance, as well as new packaging designs like EZ Patch $^{\text{TM}}$ .

### **Better Operations**

We focus on operational excellence because we believe optimizing the way we manage energy, water and waste is not only good for the environment, it's good for business. We walk our talk when it comes to sustainability. As part of the Department of Energy's Better Building, Better Plants Challenge (BBBP) Legrand has reduced its energy intensity by over 30 percent across 14 sites in the United States in just three years. Integrating sustainability into the way we run our operations makes us more competitive – and a better business partner.

### 500,000 Gallons of Water Conserved Annually

Legrand is dedicated to the continued integration of sustainable practices into our solutions, process and culture through our certified ISO14001 management system. In 2012, our Anaheim, CA facility was able to conserve over 500,000 gallons of water annually through landscaping changes, low-flow fixtures and a powder coat paint system.

### **Designed for You**


Legrand is committed to sharing key tools and resources developed as part of our successful effort to significantly reduce energy intensity. Read more about our journey and download no-cost tools and resources at www.legrand.us/sustainability.



# Training and Education

Legrand® offers extensive training and educational programs to keep you up-to-date on the latest developments in the telecommunications industry. With both live, instructor led training and online self-paced learning, Legrand has developed a variety of courses that will provide you with training to meet your specific needs. From earning BICSI continuing education credits, to product reviews and standards updates available on-line, Legrand will help make your job easier by providing learning opportunities to stay current.

Legrand also provides contractor training and education with live and online self-paced learning that help technicians, project managers, estimators or business owners maintain current knowledge of industry standards and best design and installation practices. The structured cabling system and corresponding infrastructure management provide a necessary foundation for effective network performance. Investing in a structured cabling system that will support dependable and efficient networks is important. Identifying problems in an active network can be costly to troubleshoot and may affect mission-critical system networks.

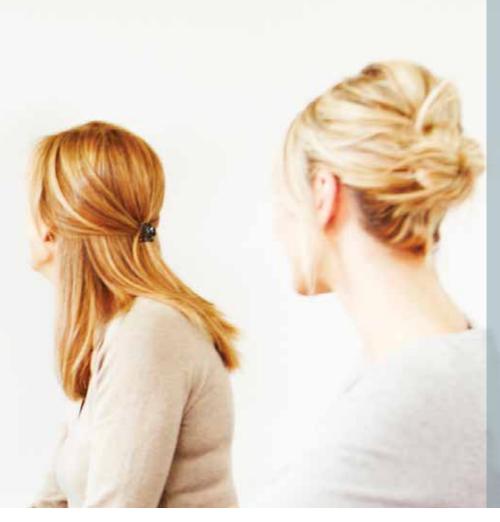

The Legrand® University, which houses all of the on-line industry, product and program training (not contractor certification), can be accessed from the Legrand website (www.legrand.us). An up-to-date course list is available. BICSI or other types of CECs will also be listed next to the course name if applicable.

Anyone can request an account by clicking on any one of the Legrand University links on many of the training pages, answer a few questions and get immediate access. All of the training on Ortronics® products and the data communications industry will be listed under the **Ortronics Training** category. You will also have access to education and training materials from other Legrand product lines like Wiremold® and Cablofil®. Contact your local Legrand representative if you have questions. ■

# Contractor Certification and Warranty

Certification by Legrand addresses critical design and installation practices. The training and educational curriculum is designed to ensure a robust network infrastructure is installed and verified.

- A select group of contractors are trained and certified throughout North America and across the globe, providing a network of qualified voice, data and infrastructure management installation companies who also guarantee their workmanship.
- The best consultants, architects and design engineers are supported through training and specification support programs on current and emerging standards and technology.



At Legrand®, we only consider the best contractors to be part of our program. Even within the certification program, there is differentiation. The top tier, Certified Installer Plus-Enterprise Solutions Partners (CIP-ESP), requires contractors to demonstrate the following capabilities:

- Support multi-site, certified installation coverage
- RCDD on staff to ensure standards based solutions
- Certified and trained technicians for high quality installation
- Ability to provide value-added solutions
- Works closely with distributor of choice for seamless logistical support
- Offers enhanced warranty assurance

# Certified Contractor Program

Knowledgeable, experienced and well trained contractors ensure a better return on investment for the end customer's network investment. Contractor certification is an important component of successful installations that is often overlooked. Legrand has developed comprehensive certification programs that provide project design and installation services assurance.

An extensive network of qualified Legrand Certified Contractors is available globally. Three distinct tier levels have been created to provide support for each project's unique requirements. A diverse range of expertise exists between contractors in each tier. The performance and logistical expectations for global, regional or local deployment will help Legrand recommend the best contractor tier and warranty coverage for your project.



# Legrand Warranty Program

### **Basic Product Warranty**

- Guarantees product repair or replacement for five years from the time of purchase, excluding labor costs
- Basic warranty issued to the end user on Ortronics® connectivity products, racks, cable management and fiber optic products when purchased from an authorized distributor

### **Extended Product Warranty**

- Guarantees product repair or replacement including labor costs
- Issued when a Legrand certified contractor installs connectivity with approved manufacturer's cable
- All requirements of the Legrand certification and warranty program must be met, which includes registering the project for warranty

### **Applications Assurance Warranty**

- Guarantees product repair or replacement including labor costs
- Applications assurance guarantees the performance of applications for the specified cabling category in accordance with the current TIA-568 version
- Issued when a Legrand Certified Contractor installs Ortronics connectivity with an approved manufacturer's cable.
- All requirements of the Legrand certification and warranty program must be met, which includes using only Ortronics patch cords
- The project must be registered for warranty and test data must be submitted to Legrand

### nCompass<sup>™</sup> Warranties


Legrand also offers the best warranty in the industry, the nCompass Limited Lifetime warranty with Superior Essex®. To qualify for an nCompass warranty, the structured cabling solution must be comprised of Ortronics connectivity and the corresponding Superior Essex cable. The complete range of nCompass structured cabling systems are defined on data sheets created for each solution. These data sheets are available at nCompass-systems.com.

When you rely on the performance of your network, it is important that you have a system you can depend on. nCompass systems are backed by extended warranty programs with performance guarantees that are unmatched in the industry, giving you the assurance and peace of mind that your network will conform to specifications and operate with maximum uptime.

The nCompass Limited Lifetime Warranty guarantees product repair or replacement from the time of purchase including labor costs. Performance is guaranteed above the standards and is stated on the specific solutions data sheet. This warranty is issued when an Ortronics Certified Contractor (CIP-ESP/CIP) installs approved Superior Essex cable and Ortronics connectivity including Clarity® patch cords by Legrand.

In addition to the Limited Lifetime Warranty, the nCompass 25-Year Standard Compliant Warranty provides enhanced warranty assurance when system performance guarantee above the standards is not a significant design consideration. This warranty may be issued when a Certified Contractor (CIP-ESP/CIP) installs approved Superior Essex cable and Ortronics connectivity including patch cords, as listed on the specific solutions data sheet.



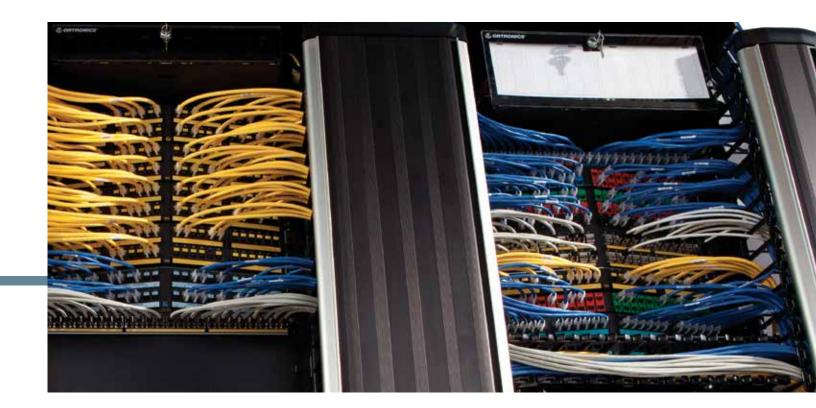

# nCompass Cabling Systems Enabled by Legrand and Superior Essex

To overcome the challenges of an ever-changing technology landscape, Legrand® and Superior Essex® have combined their leading industry expertise to create nCompass™, a suite of high-performing copper and fiber optic structured cabling systems. Built upon commitment and innovation, nCompass systems are comprehensive solutions that meet the needs of networks requiring greater support, efficiency, reliability, and flexibility.



# Complete Support

Effective project management is critical to your success. From the design phase, throughout your installation, and in the years beyond we provide you complete support:

- Accredited design specialists
- Field engineers
- National network of certified contractors
- Excellent product performance
- Extended warranties

# Complete Efficiency

nCompass cabling systems improve your network's efficiency with innovative design principles that enhance passive airflow, as well as provide product features that increase installation productivity and reduce overall network costs:

- Lower OPEX and CAPEX
- Reduced jobsite waste
- Smaller diameter cable
- Installation productivity features

# Complete Reliability

Minimize your network downtime and significantly decrease operational budgets. Support increasing bandwidth demands with reliable products that are tested to ensure performance margins:

- State-of-the-art research facilities
- In-house ETL testing lab
- Interoperability testing with leading industry development companies

# Complete Flexibility

Anticipate the next generation of network requirements with products that grow with changing demands to offer flexibility across several applications:

- Standard, high and ultra high density
- Outside plant
- Data centers, including SAN environments
- LAN applications

nCOMPASS CABLING SYSTEMS MEET THE NEEDS OF YOUR EXPANDING NETWORK

### The nCompass System Warranties

nCompass cabling systems are backed by an extended performance, applications, product and labor warranty on certified horizontal and backbone systems to assure that your network will conform to specifications and operate with maximum uptime.

### **Limited Lifetime Warranty**

- CAT 6A+ U/UTP
- CAT 6A U/UTP (LL2)
- CAT 6A U/UTP (LL3)
- CAT 6A+ F/UTP
- CAT 6e+ U/UTP
- CAT 6+ U/UTP
- CAT 6+ F/UTP
- CAT 5e+ U/UTP
- OM3/OM4
- 0S1/0S2

### 25-Year Standard Compliant Warranty

- CAT 6 U/UTP
- CAT 5e U/UTP
- OM1/OM2

Notes: nCompass copper cabling systems that include a plus (+) symbol within their name offer margin quarantees above the industry performance standards.

Refer to nCompass-systems.com for complete details on warranties and system specification information.





# Revolutionary Products, Competitive Advantages

Legrand® introduced their newest product line, Quiktron® in March of 2014. Through acquisition of the connectivity company, Legrand is able to provide customers with more integrated and complete solutions.

Quiktron products have served the datacomm and telecommunications industries since 1994. This addition brings ISO 9001:2008 certification, custom manufacturing of fiber optic and copper cable assemblies and distribution of more than 5,000 standard items. Broad manufacturing capabilities extend Legrand's expertise, advanced technology and skilled personnel to meet customers' cabling requirements.

At Legrand, the goal is to provide customers with more than just a quality product – we're committed to bringing you the most personal, knowledgeable and timely service in the industry. We take pride in the ability to save you time and money by providing free technical assistance and quick turnaround times. In addition, Legrand partners with proven distributors to offer a full line of data and communication products.

### Installer-Friendly Deployment

- Pre-terminated trunk cables eliminate costly, labor-intensive field termination and make installation effortless. Specify your cable requirements and break-out connection - then pull, plug and play.
- Legacy trunk/backbone connections are supported with our adapter panels.

- We offer shipping directly from stock as well as short lead times on custom orders.
- Our connectivity experts are available to help you design the right solution for your needs - saving you time in the ordering process.

### **Long Term Durability**

- Our factory terminations ensure the highest quality and optimum performance.
- All of our cabling and hardware components are 100% tested and quaranteed for life.\*
- You benefit from a scalable, future-proof investment - with a modular design that can grow right along with your network.
- All enclosures and modules are guaranteed for life.
- \* Test results are available upon request.



# Why Choose RapidRun? Time and money savings, High performance and quality, single cable, multiple signals

The RapidRun® product line is the most complete audio/video cabling system - built to save installation time and reduce the likelihood of return service calls due to faulty terminations.

The ingenuity behind the product line is its ability to carry multiple signals over a single runner cable. Because customers won't have to buy and install multiple cables, it saves time and money when installing the infrastructure to support projector systems, interactive whiteboards, digital signage systems, or audio/video system.

The elimination of field terminations with RapidRun reduces the installation time and the likelihood of return service calls due to human error. The simple, color-coded runners, wall plates, and flying leads require no tools, splicing, or soldering – making termination a breeze. Just connect and secure the wall plate and flying lead to the runner and vou're finished.

This revolutionary system provides ease of use, flexibility, and superior signal transfer rates. No cabling solution on the market will do more to make your installations easier or more versatile!

# Upgrade With Ease

Corporations and schools everywhere are upgrading and adding new classrooms, conference rooms, and digital signage. Architects, distributors, and integrators across North America are increasingly specifying, selling, and installing the award winning RapidRun system in order to meet the needs of today, while preparing for the ever-changing facilities of the future.

Designed to carry multiple signals over a single cable, the system offers support for a variety of A/V signals including VGA, Composite Video, S-Video, Component Video, HDMI, or DVI. RapidRun cuts initial installation to a fraction of the time it takes to field terminate. In addition, future upgrades are fast and easy. A wide assortment of wall plates and flying leads specifically designed for the education market make the RapidRun product line the perfect fit for most environments.





### SYSTEM SOLUTIONS




### 

### SYSTEM SOLUTIONS





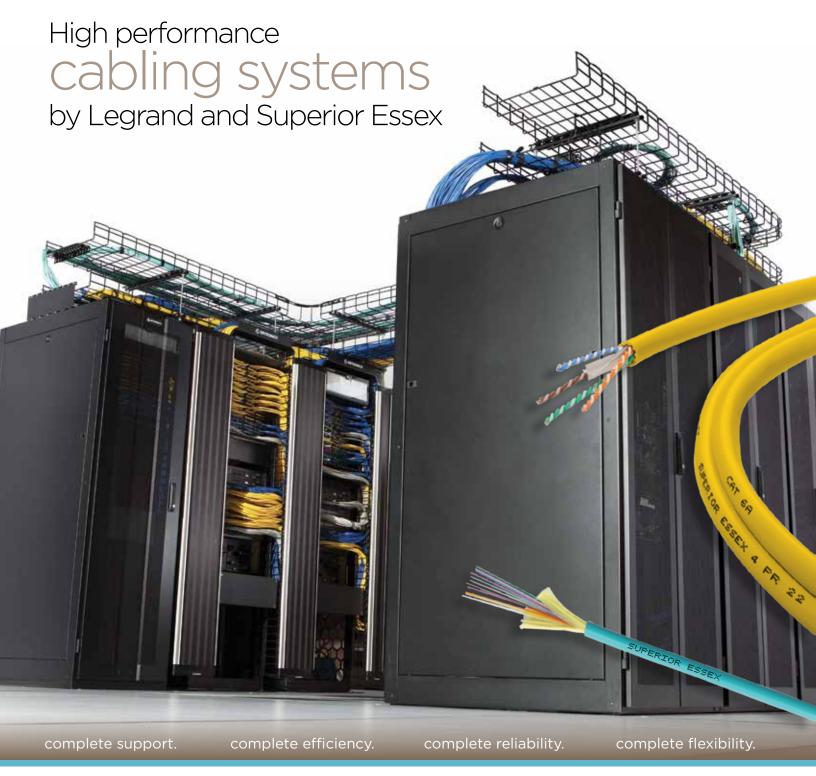

connect. completely.

### COPPER CONNECTIVITY



Copper Workstation

23



SNAP Pre-Terminated Cabling System



**Industrial Solutions** 

72



**Copper Patch Panels** 

<u>43</u>



**Copper Cords** 

67



**110 Cross Connect** 

75

### Copper Workstation



Evolving networks demand the technology to support elevated performance requirements. Reality necessitates this elevated performance be delivered through a design that will meet specific mechanical, environmental and aesthetic workstation requirements. Legrand® provides industry leading performance in both the individual footprint of TracJack® and the rugged module footprint of Series II® – all workstation approaches with a common mission to provide flexibility, efficiency and superior design.

Small and easy to terminate high density jacks, the legacy of front loading TracJacks or the rugged module footprint of Series II.

### **Featured Products**



TracJack® **Furniture Bezels** 

Mutoa Mac-Pak

### Copper Workstation

Clarity® High Density Jacks Plates and Surface Mounts

NEW



High Density Jacks



High Density Jack Faceplates



Frames and Furniture Plates

TracJack® Faceplates, Frames and Surface Mounts



TracJacks



Stainless Steel TracJack Faceplates



Furniture Plates for TracJack

Series II® Modules and Faceplates



Series II Faceplates



Series II Modules



Surface Housings for Series II

A/V Connectivity



Series II Solutions



TracJack Solutions



TechChoice® Keystone Solutions

**Multimedia Workstations** 



Fib-or-Cop II



MUTOA Mac-Pak



Multimedia Outlet (MMO)

## CLARITY HIGH DENSITY JACKS

### Clarity 6A, 6 and 5E Options

Clarity® High Density Jacks incorporate patent pending mechanical and electrical advancements to provide greater performance headroom and an easier termination method. The easy to lace and crimp termination reduces time to install, while maintaining cable performance. Termination of all 8 conductors with one crimp is easy using the HDJHCT crimping tool or the free hand tool supplied in each carton. The HDJ jacks are available in Category 6a, 6 and 5e with Clarity technology that elevates channel performance. These jacks are rear loading, utilizing an innovative locking latch for quick, reliable mounting and removal.

### **Features**

- Supported by panel and workstation mounting options
- Support up to 48 ports in 1 rack unit (1RU panel)
- Quicker termination and installation time
- Quad Reactance<sup>™</sup> technology in Category 6a jacks for improved performance at higher frequencies
- ETL verified to TIA 568C.2 Category 6a and Category 6 component performance standards
- Center tuned to Clarity patch cords for optimal channel performance

### OR-HDJ6A, OR-HDJ6, OR-HDJ5E **High Density Jacks**







### **High Density Jacks**

PART NO.	DESCRIPTION
OR-HDJ6A	Clarity HDJ Category 6a jack, 8 position, T568A/B, fog white
OR-HDJ6	Clarity HDJ Category 6 jack, 8 position, T568A/B, fog white
OR-HDJ5E	Clarity HDJ Category 5e jack, 8 position, T568A/B, fog white

Notes: For other colors add one of the following suffixes: -00 black, -36 blue, -42 red, -43 orange, -44 yellow, -45 green, -88 white, -13 ivory, -27 violet, -78 gray.

### **OR-HDJHCT HDJ Handled Crimping Tool**

NEW



### **HDJ Handled Crimping Tool**

The HDJ termination process is simpler. The HDJ handled crimping tool works with the jack's easy to lace wiring cap, making the crimp process guick and consistently aligned. This presents an even greater time savings when terminating cable.

PART NO.	DESCRIPTION
OR-HDJHCT	HDJ handled crimping tool

### OR-HDJPCT **HDJ Supplied Crimping Tool**

NEW



OR-HDJPCT

### **HDJ Crimping Tool**

PART NO.	DESCRIPTION
OR-HDJPCT	Hand tool supplied in each full carton of HDJ jacks

**Li** legrand

### CLARITY HIGH DENSITY JACKS

### **Workstation Options**

The HDJ series jacks and HD fiber modules are supported by our most popular single gang faceplate sizes along with surface mount box and furniture plate mountings. In addition, an HDJTJ bezel can convert any of these jacks into a front loading TracJack® mount for inserting into the wide range of TracJack plates and boxes.

### OR-403HDJ Single Gang Plastic High Density Jack Faceplates





### Single Gang Plastic High Density Jack Faceplates

PART NO.	DESCRIPTION
OR-403HDJ12	Faceplate single gang, 2-port, fog white, rear loading with designation
OR-403HDJ13	Faceplate single gang, 3-port, fog white, rear loading with designation
OR-403HDJ14	Faceplate single gang, 4-port, fog white, rear loading with designation
OR-403HDJ16	Faceplate single gang, 6-port, fog white, rear loading with designation

Notes: Standard color for plastic HDJ plates is fog white. For white, add -88 to end of part number.

### OR-404HDJ, OR-421HDJ Surface Housing, Frames and Furniture Plates



OR-404HDJ4



OR-421HDJ-09

### Surface Housing, Frames and Furniture Plates

PART NO.	DESCRIPTION
OR-404HDJ4	Surface mount box, 4-port, for high density jacks, 4.75L x 3.6"W x 1.5"D
OR-421HDJ-09	Furniture adapter plate for high density jacks, fog white, (3) rear load openings
OR-421HDJ-00	Furniture adapter plate for high density jacks, black, (3) rear load openings

Notes: Plates, frames and surface mount housings are 94V-0 rated thermoplastic housing and UL 1863 listed.

Frames and Panels

PART NO.

Plastic Blanks for High Density Jack Faceplates, Boxes,

DESCRIPTION

### **OR-HDJB**

Plastic Blanks for High Density Jack Faceplates, Boxes, Frames and Panels

NEW



### **OR-HDJTJA** TracJack Adapter Bezel for High Density Jacks

### OR-HDJB20 High density blank, 20pk, fog white OR-HDJB20-00 High density blank, 20pk, black OR-HDJB20-88 High density blank, 20pk, white OR-HDJB20-13 High density blank, 20pk, ivory

OR-HDJTJA20

# OR-HDJTJA20 OR-HDJTJA20-88

### TracJack Adapter Bezel for High Density Jacks

### Clarity Unshielded Modules





TracJack® modules combine the ease and reliability of a front-loading individual jack with popular 110 termination and offer universal T568A/B wiring.

## OR-TJ6A Clarity 6A/10G Category 6A TracJacks



### Clarity 6A/10G Category 6A TracJacks

Clarity® 6A TracJacks offer the elevated performance of quad reactance to minimize internal crosstalk and reduce the injection of common mode noise, a significant source of alien crosstalk. These connectors work with Clarity 6A patch cords to provide a nearly transparent signal path for enhanced signal-to-noise (internal and alien) performance.

These front-loading jacks are icon-compatible and can be used in any TracJack workstation outlet. Meets TIA 568C.2 Category 6A component specifications.

PART NO.	DESCRIPTION
OR-TJ6A	Clarity 6A/10G, 180° exit, fog white

Notes: T568A/B wiring.

Clarity 6A jacks are available in these colors: -00=black, -36=blue, -42=red,

-43=orange, -44=yellow, -45=green, -68=Wiremold® gray, -88=white,

-99=Wiremold ivory. Add tailcode to end of part number.

# OR-TJ6, OR-TJ5E Clarity 6 and Clarity 5E Center Tuned, Enhanced Category 6 and 5e TracJacks









OR-TJ5E45


# Clarity 6 and Clarity 5E Center Tuned, Enhanced Category 6 and 5e TracJacks

Clarity TracJacks feature the improved performance of center tuned Category 6 or 5e connector technology. Enhanced IDC designs make it easier to terminate, while reducing the size of the jack. Clarity 6 and 5E TracJacks are available in flat or angled.

PART NO.	DESCRIPTION
OR-TJ600	Clarity 6 jack, 8-position, 180° exit, fog white
OR-TJ645	Clarity 6 jack, 8-position, 45° exit, fog white
OR-TJ5E00	Clarity 5e jack, 8-position, 180° exit, fog white
OR-TJ5E45	Clarity 5e jack, 8-position, 45° exit, fog white

Notes: T568A/B wiring. Icon compatible. See color chart below for available colors.

### **COLOR OPTIONS**



Notes: Clarity TJ5E00 and TJ600 jacks are available in all colors listed above. The Clarity TJ5E45 and TJ645 are not available in colors 22-27. WM indicates Wiremold color match. These color samples correspond with the tail codes inserted at the end of Legrand® part numbers (ex: OR-TJ600-45). Fog white is standard, requiring no tail code. Consult sales for availability and other colors.



### Additional TracJack Modules and Clarity Shielded Modules

### OR-63730003, OR-63700005 Additional TracJack Modules





OR-63730003

OR-63700005

### Additional TracJack Modules

PART NO.	DESCRIPTION
OR-63730003	Category 3 jack, 8-position, 180° exit, T568A/B wiring, icon compatible
OR-63700005*	RJ25 jack, 6-position, 180° exit, USOC wiring, icon compatible

Notes: Standard color for TracJack modules is fog white.

\*Indicates also available in -99 Wiremold® ivory and -88 white. Contact Legrand sales department for other colors.

### **Shielded Jacks**

Legrand® offers 2 jack options for workstation applications. In the TracJack® footprint, the TJS family is front loading, 110 terminated solution. For Keystone applications, TKS jacks provide a tool less self terminating, rear loading jack. Both are support above the standards shielded channel performance.

- Exceeds ISO 11801 2nd edition, including EN50173 2nd edition
- Exceeds TIA 568c.2 component specifications
- Easy to follow universal writing labels

### OR-TJS6A, OR-TJS6, OR-TJS5E Clarity Shielded, Category 6A, 6 and 5e TracJacks



OR-TJS600

### Clarity Shielded, Category 6A, 6 and 5e TracJacks

Legrand shielded TracJacks are available in Category 6A, 6, 5E and 110 terminated, tuned to Clarity® shielded patch cords for optimized performance that is measurable in the channel.

PART NO.	DESCRIPTION
OR-TJS6A	Clarity 6A, Category 6A shielded jack, 8-position, 180° exit
OR-TJS600	Clarity 6, Category 6 shielded jack, 8-position, 180° exit
OR-TJS5E00	Clarity 5E, Category 5e shielded jack, 8-position, 180° exit

Notes: T568A/B wiring.

### OR-TKS6A Shielded, Category 6A, Keystone Jack



### Shielded, Category 6A, Keystone Jack

Legrand shielded Keystone jacks, available in 6A, utilize a tool less self terminating design and are tuned to Clarity 6A shielded patch cords for optimized performance that is measurable in the channel.

PART NO.	DESCRIPTION
OR-TKS6A	Category 6A shielded self terminating jack, 8-position rear loading

Notes: See page XX for Keystone faceplates.

### **Faceplates**



Legrand® offers a full range of TracJack® faceplates in plastic or stainless steel, with a variety of port capacities to match your workstation applications. All TracJack plates offer recessed label fields and slotted screw holes to adjust alignment. They are ruggedly constructed from high impact thermo-plastic 94V-0 rated to ensure long life. Two to 12-port plastic wall plates now include the ability to rear-load TracJack modules.

### OR-403005

### Single Gang Plastic TracJack Faceplates











### Single Gang Plastic TracJack Faceplates

PART NO.	DESCRIPTION
OR-40300549	Holds (1) TracJack, 2.75" x 4.5"
OR-40300548	Holds (2) TracJacks, 2.75" x 4.5"
OR-40300547	Holds (3) TracJacks, 2.75" x 4.5"
OR-40300546	Holds (4) TracJacks, 2.75" x 4.5"
OR-40300545	Holds (6) TracJacks, 2.75" x 4.5"

Notes: Standard color for plastic TracJack faceplates is fog white. For ivory add -13, for white add -88 and for Wiremold® ivory add -99 to end of part number. For other colors, contact sales.

## **OR-403STJ**Single Gang Stainless Steel TracJack Faceplates









### Single Gang Stainless Steel TracJack Faceplates

PART NO.	DESCRIPTION
OR-403STJ11	Holds (1) TracJack, 2.75" x 4.5"
OR-403STJ12	Holds (2) TracJacks, 2.75" x 4.5"
OR-403STJ13	Holds (3) TracJacks, 2.75" x 4.5"
OR-403STJ14	Holds (4) TracJacks, 2.75" x 4.5"
OR-403STJ16	Holds (6) TracJacks, 2.75" x 4.5"

# OR-40300 Double Gang Plastic TracJack Faceplates

OR-403STJ16



OR-403STJ14





### Double Gang Plastic TracJack Faceplates

PART NO.	DESCRIPTION
OR-40300555	Holds (6) TracJacks, 4.5" x 4.5"
OR-40300554	Holds (8) TracJacks, 4.5" x 4.5"
OR-40300620	Holds (12) TracJacks, 4.5" x 4.5"

Notes: Standard color for TracJack plastic faceplates is fog white. For other available colors, contact sales.

### **La legrand**

### TRACJACK

### Faceplates and Plate Mountings



### OR-403STJ **Double Gang Stainless Steel TracJack Faceplates**





### Double Gang Stainless Steel TracJack Faceplates

PART NO.	DESCRIPTION
OR-403STJ28	Holds (8) TracJacks, 4.5" x 4.5"
OR-403STJ212	Holds (12) TracJacks, 4.5" x 4.5"

### TracJack Frames and Cover Plates

Legrand® offers TracJack® mountings in both the 106-Type duplex footprint or the Stylistics® rectangular (GFCI) footprint, with a variety of port capacities to match your workstation applications. These two footprints are common to Wiremold® and many other industry standard raceway, furniture, pedestals and floor boxes. Legrand also offers plastic cover plates with recessed label fields and slotted screw holes to adjust alignment. All parts are ruggedly constructed from high impact thermo-plastic 94V-0 rated to ensure long life.

### OR-408000 106-Type TracJack Frames









**106-Type TracJack Frames** 

PART NO.	DESCRIPTION
OR-40800017*	Holds (2) TracJacks
OR-40800018	Holds (3) TracJacks
OR-40800019*	Holds (4) TracJacks

Notes: Standard color is fog white.

### OR-40300 106-Type Plastic Cover Plates





OR-40300255

OR-40300256

### **106-Type Plastic Cover Plates**

PART NO.	DESCRIPTION
OR-40300255	Single gang cover, 2.75" x 4.5"
OR-40300256	Double gang cover, 4.5" x 4.5"

Notes: Standard color for 106-Type Cover Plate is fog white. For other colors, contact sales.

### OR-419000 **Stylistics TracJack Frames**





### **Stylistics TracJack Frames**

PART NO.	DESCRIPTION
OR-41900017*	Single gang cover, 2.75" x 4.5"
OR-41900018*	Double gang cover, 4.5" x 4.5"

Notes: Standard color is fog white.

\* Indicates also available in -99 Wiremold ivory

<sup>\*</sup> Indicates also available in -99 Wiremold ivory and -88 white.

### Plates and Undercover Wall Plate

### OR-403005

**Stylistics Plastic Cover Plates** 





OR-40300271

### OR-403STJ1WP

Single Gang Stainless Steel TracJack Faceplates with Phone Studs



### **Stylistics Plastic Cover Plates**

PART NO.	DESCRIPTION
OR-40300270	Single gang cover, 2.75" x 4.5"
OR-40300271	Double gang cover, 4.5" x 4.5"

Notes: Standard color for Stylistics® cover plates is fog white. Contact Legrand sales department for other colors

### Single Gang Stainless Steel TracJack Faceplates with Phone Studs

PART NO.	DESCRIPTION
OR-403STJ1WP	Holds (1) TracJack, 2.75" x 4.5"

Notes: Not compatible with 2554 series wall phones.

### **TracJack Surface Mount Boxes**

Legrand® TracJack® surface mount boxes are available to house from two to six TracJacks. Bases are easily installed with supplied screws or double-sided adhesive. Snap-on covers have recessed label fields. Boxes are ruggedly constructed from high impact thermo-plastic 94V-0 rated. Standard color is fog white. Compatible with Wiremold® 2700, 2800 and 2900 raceway series.

### OR-403005 **Surface Housings for TracJack**



### **Surface Housings for TracJack**

PART NO.	DESCRIPTION
OR-404TJ2	Holds (2) TracJacks, 2.59" x 2.27" x 1.20"
OR-404TJ4*	Holds (4) TracJacks, 4.80" x 3.6" x 1.16"
OR-404TJ2X2	Holds (4) TracJacks, jacks exit from both sides, 4.0" x 2.42" x 1.16"
OR-404TJ6**	Holds (6) TracJacks, 6.98" x 4.33" x 1.16"

Notes: \*Can mount directly to single gang recessed wall boxes. Includes one

\*\*Includes internal storage ring for fiber and two TracJack blanks. Can mount directly to single or double gang recessed wall boxes.

Contact Legrand sales department for other colors



### Furniture Bezels



### **Furniture Bezels**

Legrand® offers TracJack® plates for most furniture systems. Plates easily snap mount into furniture, requiring no special tools. Plates are ruggedly constructed from high impact thermo-plastic 94V-0 rated.

IMPORTANT: Measure furniture openings to determine the correct plate.

# OR-40300, OR-421000, OR-407000 Furniture Plates for TracJack













OR-40300633-00\*

OR-42100009

OR-42100054-00







OR-40700071

OR-40700072\*

OR-40700073\*

### **Furniture Plates for TracJack**

PART NO.	DESCRIPTION
OR-40300577	Holds (4) TracJacks, fits Herman Miller Beltline furniture openings 2.35" x 3.41" (+.015) for .125" thick material, fog white
OR-40300577-00	Black
OR-40300576	Holds (6) TracJacks, fits Herman Miller Beltline furniture openings 2.35" x 3.41" (+.015) for .125" thick material, fog white
OR-40300576-00	Black
OR-40300575	Holds (6) TracJacks, fits Herman Miller Baseline furniture openings 1.89" x 2.99" (+.015) for .063" thick material, fog white
OR-40300575-00	Black
OR-40300633*	Holds (4) TracJacks, two-piece base and cover, adjustable to fit a range of common furniture openings 2.67"–2.75" x 1.34"–1.41" for .065" thick material, fog white
OR-40300633-00*	Black
OR-42100009	Adapter plate, front-loads (3) TracJacks, fog white
OR-42100009-00	Black
OR-42100054	Adapter plate, rear-loads (3) TracJacks, fog white, 5pk
OR-42100054-00	Black, 5pk
OR-40700071	.125"D bezel mounts adapter plates above to 2.71" x 1.38" (+.035) opening, fog white
OR-40700071-00	Black
OR-40700072*	.625"D bezel mounts adapter plates above to 2.71" x 1.38" (+.035) opening, fog white
OR-40700072-00*	Black
OR-40700073*	1.0"D bezel mounts adapter plates above to 2.71" x 1.38" (+.035) opening, fog white
OR-40700073-00*	Black

Notes: \*Have recessed label fields.

### SERIES II

### Modules





Clarity® Series II® modules combine the improved performance of center tuned Category 6 or 5e connector technology with the ease and reliability of rugged, front-loading Series II modules with linear 110 termination.

### OR-S21,OR-S22

Clarity 6 and Clarity 5E Enhanced Category 6 and 5e Series II Modules





OR-S21600

OR-S22600





OR-S215E00

OR-S225E00

### Clarity 6 and Clarity 5E Enhanced Category 6 and 5e **Series II Modules**

PART NO.	DESCRIPTION
OR-S21600	Single enhanced Category 6 jack, 8-position, 180° exit, universal T568A/B wiring
OR-S22600	Dual enhanced Category 6 jack, 8-position, 180° exit, universal T568A/B wiring
OR-S215E00	Single enhanced Category 5e jack, 8-position, 180° exit, universal T568A/B wiring
OR-S225E00	Dual enhanced Category 5e jack, 8-position, 180° exit, universal T568A/B wiring

Notes: Clarity Series II modules are available in -99 Wiremold® ivory, -88 white and -00 black. Icon compatible.

### OR-S21RJ, OR-S22RJ Additional Series II Jack Modules







OR-S21RJ61

OR-S22RJ61

OR-S22RJ25-5E





OR-S21RJ25

OR-S22RJ25

### **Additional Series II Jack Modules**

PART NO.	DESCRIPTION
OR-S21RJ61	Single USOC RJ61 jack, 8-position, 180° exit
OR-S22RJ61	Dual USOC RJ61X jack, 8-position, 180° exit
OR-S22RJ25-5E	Single RJ25 USOC 6-position jack, single T568A/B Category 5e, 8-position jack, 180° exit
OR-S21RJ25	Single USOC RJ25 jack, 6-position, 180° exit
OR-S22RJ25	Dual USOC RJ25 jack, 6-position, 180° exit

Notes: See page 35 for fiber Series II modules.

### SERIES II

### Modules

# OR-40300 Additional Series II Modules OR-40300144 OR-40300164 OR-40300656

### Additional Series II Blanks and Connector Modules

PART NO.	DESCRIPTION
OR-40300144	Blank module, .5-unit
OR-40300164	Blank module, 1-unit
OR-40300191	Blank modules, 1-unit, 10pk
OR-40300023	Blank module, 1.5-units
OR-40300656	Series II angled bezel, accepts (2) flat TracJack modules, 1.5-units, 10pk

### **Series II Faceplates**

Legrand® offers single and double gang Series II® plastic faceplates with a variety of module capacities to match your workstation applications. Series II plates offer recessed label fields, slotted screw holes to adjust alignment and are ruggedly constructed from high impact thermo-plastic 94V-0 rated to ensure long life.

# OR-40300 Single Gang Plastic, Double Gang Plastic and Angled Series II Faceplates



# Single Gang Plastic, Double Gang Plastic and Angled Series II Faceplates

PART NO.	DESCRIPTION
OR-40300158	Single gang plastic, low profile, .5"D, fog white, 2.75" x 4.5"
OR-40300011	Single gang plastic, standard profile, .75"D, fog white, 2.75" x 4.5"
OR-40300159	Double gang plastic, standard profile, .75"D, fog white, 4.5" x 4.5"
OR-40300175	Double gang plastic, high profile, 1.65"D, fog white, 4.5" x 4.5"
OR-40300664	Angled, single gang faceplate holds (2) 1-unit modules, 2.5" x 4.5"

### **Series II Module Combinations**



Notes: Available in Wiremold® ivory.

### SERIES II

### Surface Mount Interface Boxes



Series II® surface mount boxes are available to house one to four 1-unit modules. Bases are easily installed with supplied screws or double-sided adhesive. Snap-on covers have recessed label fields. Series II surface mount boxes are ruggedly constructed from high impact thermo-plastic 94V-0 rated. These surface mount boxes work with 180° modules only. Compatible with Wiremold® 2700, 2800 and 2900 raceway series.

# OR-404S2 Surface Housings for Series II OR-404S21U OR-404S22U OR-404S21X1U OR-404S23U OR-404S22X2U OR-404S23X2X2U

### **Surface Housings for Series II**

PART NO.	DESCRIPTION
OR-404S21U	Holds (1) 1-unit Series II module, fog white, 2.27" x 2.59" x 1.20"
OR-404S22U	Holds (2) 1-unit Series II modules, fog white, includes (1) Series II blank, 3.60" x 4.80" x 1.16"
OR-404S21X1U	Holds (2) 1-unit Series II modules, fog white, includes (1) Series II blank, 4.00" x 2.42" x 1.16"
OR-404S23U	Holds (3) 1-unit Series II modules, internal fiber storage ring, fog white, 4.33" x 6.98" x 1.16"
OR-404S22X2U	Holds (4) 1-unit Series II modules, fog white, includes (2) Series II blanks, 4.00" x 4.71" x 1.16"

Notes: Do not accept 45° modules.

### **Series II Furniture Plates**

Legrand® offers a wide selection of Series II plates for the many furniture systems available today. Plates easily snap mount into furniture, requiring no special tools. Plates are ruggedly constructed from high impact thermo-plastic 94V-0 rated.

IMPORTANT: Measure furniture openings to determine the correct plate.



### **Surface Housings for Series II**

PART NO.	DESCRIPTION
OR-40300196	Holds (3) 1-unit Series II modules, fog white, fits Herman Miller Baseline furniture openings 1.89" x 2.99" (+.015) for .0625" thick material
OR-40300196-00	Black
OR-40300213	Holds (3) 1-unit Series II modules, fog white, fits Herman Miller Beltline furniture openings 2.35" x 3.41" (+.015) for .125" thick material
OR-40300167	Holds (1) 1-unit Series II modules, black, 2.7" x 1.375" ( +.03) for .090" thick material
OR-40300167-09	Fog white



# AUDIO I VIDEO CONNECTIVITY

#### Series II Solutions

The Ortronics® range of audio, video and data connectivity options offers you the flexibility, modularity and application density needed to support a wide variety of A/V equipment. Legrand modules are available in our Series II®, TracJack® and TechChoice® (Keystone) footprints. We also offer a wide selection of connector termination styles and module colors.

 $\label{thm:model} \mbox{IMPORTANT: Measure furniture openings to determine the correct plate.}$ 

#### OR-6090, OR-KSS2210 **Series II Solutions**



OR-60900372







OR-60900313







OR-60900225

OR-60900378

OR-60900235







OR-60900314

OR-60900315

OR-60900316







OR-60900373

OR-60900374

OR-60900381

OR-60900377







OR-60900382

OR-60900380



OR-60900017

OR-60900019

OR-60900020

#### Series II Solutions

The Series II footprint provides the broadest range of options for data and A/V connectivity. It's ideal for larger A/V connectors such as VGA and combination modules which have both audio and video together. Series II also supports TracJack and Keystone footprints through the use of an adapter bezel.

PART NO.	DESCRIPTION
OR-60900372	HDMI, female-to-female, 19-pin, 1-unit
OR-60900376	VGA 15-pin, female-to-female, 1-unit
OR-60900375	VGA 15-pin, female-to-screw term, 1-unit
OR-60900313	VGA 15-pin, female-to-crimp pins, 1-unit
OR-60900225	S-Video to 110, 1-unit
OR-60900378	S-Video with 3.5m-to-110, 1-unit
OR-60900379	S-Video with RCA red, white-to-110, 1-unit
OR-60900235	(3) RCA red, white, yellow-to-110, 1-unit
OR-60900314	(2) RCA (1) red (1) white, female-to-110, 1-unit
OR-60900315	(2) RCA (1) red (1) white, female-to-solder, 1-unit
OR-60900316	(3) RCA white, red, yellow female-to-female, 1-unit
OR-60900373	(3) RCA red, green, blue female-to-female, 1-unit
OR-60900374	(3) RCA red, green, blue-to-110, 1-unit
OR-60900273	3.5 mm, stereo jack female-to-female, 1-unit
OR-60900381	Speakon, 3-pin male-to-solder, 1.5-unit
OR-60900382	XLR, 4-pin female-to-screw term, 1.5-unit
OR-60900380	Binding post, red, black pair, 1-unit
OR-60900377	Serial 9-pin, female-to-female, 1-unit
OR-60900017	F Conn 75 ohm, female-to-female, 1-unit
OR-60900019	(2) BNC 75 ohm, female-to-female, 1-unit
OR-60900020	(2) F Conn 75 ohm, female-to-female, 1-unit
OR-60900073	F Conn 75 ohm, angled, female-to-female, 2-unit
OR-KSS2210	Series II bezel, 2-port, Keystone opening, 1-unit, 10pk

# AUDIO | VIDEO CONNECTIVITY

TracJack Solutions

#### OR-637000, OR-42100002 TracJack Solutions



OR-63700058



OR-63700085



OR-63700059



OR-63700060



OR-63700071



OR-63700084



OR-63700070



OR-63700047



OR-63700046



OR-63700025



OR-63700069



OR-63700023



OR-63700006



OR-63700087



OR-42100002

#### **TracJack Solutions**

TracJack® footprint is front loading and supports a number of A/V and data modules. It's ideal for combining A/V with our high performance Clarity® workstation products. The TracJack footprint can also be used with Series II® through the use of an adapter bezel.

•	
PART NO.	DESCRIPTION
OR-63700058*	RCA red female-to-female
OR-63700085	RCA blue, female-to-female
OR-63700059*	RCA white female-to-female
OR-63700060*	RCA yellow female-to-female
OR-63700071	RCA red to 110
OR-63700084	RCA blue to 110
OR-63700070	RCA white to 110
OR-63700047	RCA yellow to 110
OR-63700046	Pair of RCA to 110 (1) red, (1) black, 180° exit
OR-63700025	S-Video to 110
OR-63700069	3.5mm stereo jack
OR-63700023	BNC 75 ohm, female-to-female
OR-63700006	F Conn 75 ohm, female-to-female
OR-63700087	F Conn 75 ohm, recessed, female-to-female
OR-42100002	TracJack blank, 10pk

Notes: Standard color for TracJack modules is fog white. Also available in -99 Wiremold® ivory and -88 white. Contact Legrand sales department for other colors.

<sup>\*</sup>Only available in fog white.



# AUDIO | VIDEO CONNECTIVITY

#### TechChoice Keystone Solutions

#### **OR-KS TechChoice Keystone Solutions**







OR-KSSV



OR-KSSVIDC



OR-KSRCAR



OR-KSRCAG



OR-KSRCABL



OR-KSRCAY



OR-KSRCAW



OR-KSRCAB



OR-KS35ST



OR-KS35STST



OR-KS14ST



OR-KSUSBAA



OR-KSUSBAB



OR-KSBP



OR-KSBNC75



OR-KSBNC



OR-KSFCN



OR-KSFCNR-13



OR-KSB10

#### **TechChoice Keystone Solutions**

TechChoice® Keystone footprint is a rear loading style module that comes in a variety of A/V connector types as well as Category 5e and 6 data connectivity. It's ideal for creating a quality solution for A/V and data connectivity. The Keystone footprint can also be used with Series II® through the use of an adapter bezel (OR-40300656).

through the use of an adapter bezet (off-4000000).		
PART NO.	DESCRIPTION	
OR-KSHDMI	HDMI, female-to-female, 19-pin	
OR-KSSV	S-Video to 110	
OR-KSSVIDC	S-Video, female-to-female	
OR-KSRCAR	RCA red to 110	
OR-KSRCAG	RCA green to 110	
OR-KSRCABL	RCA blue to 110	
OR-KSRCAY	RCA yellow to 110	
OR-KSRCAW	RCA white to 110	
OR-KSRCAB	RCA black to 110	
OR-KS35ST	3.5mm, stereo jack, female-to-female	
OR-KS35STST	3.5mm, stereo jack, female-to-screw term	
OR-KS14ST	1/4" stereo jack, female-to-solder	
OR-KSUSBAA	USB 2.0 A-A, female-to-female	
OR-KSUSBAB	USB 2.0 A-B, female-to-female	
OR-KSBP	Binding post, set of (2)	
OR-KSBNC75	BNC 75 ohm, female-to-female, 75 ohm	
OR-KSBNC	BNC 50 ohm, female-to-female, 50 ohm	
OR-KSFCN	F Conn 75 ohm, female-to-female	
OR-KSFCNR	F Conn 75 ohm, recessed, female-to-female	
OR-KSB10	Blank, 10pk	

38

# MULTIMEDIA WORKSTATIONS

Fib-or-Cop workstation solutions from Legrand® service a broad scope of multimedia applications, supporting sound cabling practices in an attractive and user-friendly design.



#### Fib-or-Cop II

Fib-or-Cop II offers greater capacity, accommodating up to 12 fiber connections with protected exit from the bottom and six copper connections, either TracJack® or Series II®. This is a truly segregated design, which allows access to one media without impacting the other. Bottom-exiting connections can be further protected with an optional snap-on shroud.

PART NO.	DESCRIPTION
OR-62100041	Base and cover for (6) TracJacks, 5" x 8" x 1.19"
OR-62100040	Base and cover for (3) Series II modules, 5" x 8" x 1.19"
OR-62100037	Package of (5) bottom adapter plates for (4) TracJack modules
OR-62100038	Package of (5) protective bottom shrouds
OR-62100044	3-ST duplex (6-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-62100045	3-ST duplex (6-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-62100046	6-SC simplex (6-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-62100047	6-SC simplex (6-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-62100048	3-SC duplex (6-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-62100049	3-SC duplex (6-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-62100050	6-LC duplex (12-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-62100051	6-LC duplex (12-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-62100052	6-MT-RJ (12-fibers) feed-through multimode, beige adapters
OR-62100053	6-MT-RJ (12-fibers) single-mode, blue adapters

# MULTIMEDIA WORKSTATIONS

#### OR-JP66U, OR-JP5E6U Clarity 6 and Clarity 5E Jak-Paks



#### OR-60950301 MUTOA Mac-Pak



OR-60950301

#### OR-62100001 Multimedia Outlet (MMO)



OR-	41	2	00	0
MM0	Pai	nel	s	



OR-41200004

OR-41200010

OR-41200012

#### Clarity 6 and Clarity 5E Jak-Paks

The Jak-Pak is a compact, flexible, multi-user solution that can be structurally mounted or used in more temporary environments. Kits come supplied with Clarity 6 or Clarity 5E 6-port/110 modules.

PART NO.	DESCRIPTION
OR-JP66U	Clarity 6 Jak-Pak, 6-port multi-access outlet field termination kit, T568A/B
OR-JP5E6U	Clarity 5E Jak-Pak, 6-port multi-access outlet field termination kit, T568A/B

#### **MUTOA Mac-Pak**

The MUTOA Mac-Pak is a compact, flexible, multi-user solution that can be structurally mounted or used in more temporary environments. Kits come ready to accept flat Category 5e and 6 TracJack® modules and cables.

PART NO.	DESCRIPTION
OR-60950301	Accepts (8) TracJacks, black housing

#### Multimedia Outlet (MMO)

Multimedia Outlet (MMO) is a high capacity, field configurable workstation housing. The MMO comes with three blank panels with cable access knockouts. A wide range of MMO panels are available to support your specific applications. MMO mounts directly to any single or double gang recessed wall box or to any surface. Labeling is supplied.

PART NO.	DESCRIPTION
OR-62100001	Cover base and (3) blank panels, 6.75" x 6.75 x 1.68", fog white

#### **MMO Panels**

PART NO.	DESCRIPTION
OR-41200004	Accepts (2) 1-unit Series II® modules
OR-41200010*	Accepts (1) fiber adapter panel
OR-41200012	Accepts (2) OR-42100009 TracJack adapters
OR-42100009	Accepts (3) TracJacks

Notes: \*See fiber section.

# **ACCESSORIES**



# OR-403000, OR-709000 Surface Mount Outlet Boxes







OR-40300061

OR-40300185-13

OR-70900020



OR-40300186

#### **Surface Mount Outlet Boxes**

Ortronics® surface mount outlet boxes are compatible with all Ortronics single and double gang faceplates. These boxes provide a mounting surface for faceplates or can be attached to recessed boxes to provide greater cable storage capacity.

PART NO.	DESCRIPTION
OR-40300061*	Single-gang, low profile, fog white, 3" x 4.7" x 1.5"
OR-40300185*	Single-gang, fog white, 3" x 4.7" x 2"
OR-40300185-13*	Electrical ivory
OR-70900020	Adhesive-back single gang magnet
OR-40300186	Double-gang, fog white, 4.9" x 4.7" x 2"

Notes: \*Compatible with Wiremold® 2700, 2800 and 2900 raceway series.

#### OR-40300010 **Extension Plate**



OR-40300010

#### **Extension Plate**

Legrand extension plates provides an additional .9" of depth behind single gang faceplates for bend radius requirements or cable storage.

PART NO.	DESCRIPTION
OR-40300010	Single-gang, low profile, fog white, 3" x 4.7" x 1.5"

# LABELING AND DESIGNATION SOLUTIONS

### OR-70400411

**Work Outlet Station Designation** 



OR-70400411

#### **Work Outlet Station Designation**

Color-coded designation strips provide easy identification for workstations. Designation strips are supplied in 8.5" x 11" sheets of laser feed paper.

Supported by the LabelMo XL templates.

PART NO.	DESCRIPTION
OR-70400411	White
OR-70400411-22	Red
OR-70400411-24	Yellow
OR-70400411-26	Blue

Notes: (10) sheets per package, (96) labels per sheet.

#### LabelMo XL Labeling Templates

The LabelMo XL templates provide a new format for your labeling needs that increases flexibility and ease of use.

- Provided in an easy-to-use Excel format
- Uses our standard 8.5" x 11" label stock

PART NO.	DESCRIPTION
OR-70400202	Workstation, replacement designation label/cover kit, 10pk

# OR-70400219 Jack Designation Tabs



OR-70400219

# OR-403 Color-Coded Icons



Color-Coded Icons

#### **Jack Designation Tabs**

Legrand® jack designation tabs snap into Series II® modules and TracJacks® to identify each port and accommodate two one-port modules. Standard color is fog white.

PART NO.	DESCRIPTION
OR-70400219	Jack designation tabs, 12pk


#### **Color-Coded Icons**

Legrand color-coded designation tabs are for port identification on patch panels and most workstation products. The tabs are available in 606 standard colors with a voice or data icon or blank. 100pk.

OR-403 Manufacturer Number	XX Coloring 00=Black 22=Red 24=Yellow 26=Blue	23=Orange 25=Green 27=Purple	Marking 1=Voice 2=Data 5=Blank	00
	13=Electrical Ivory	'		


ORDERING EXAMPLE: To order a red voice tab, use the following part number OR-40322100. NOTE: For a complete set of voice and data tabs in all colors, use order number OR-40300174.

# COPPER PATCH PANELS

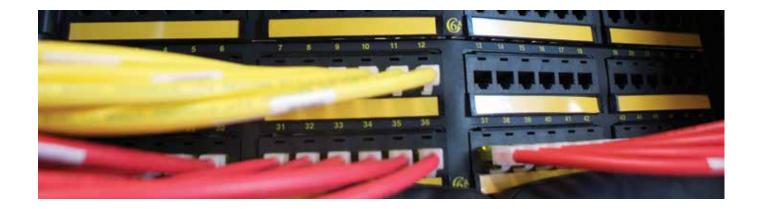

Legrand® continues to lead the industry in patch panel design by fully supporting all of the internal and alien requirements of Category 6A/10 gigabit ethernet in a traditional multi-port adapter panel format. This accomplishment builds on the first ETL independently verified patch panel to meet the Category 6 component specification. Equally important, Legrand panels excel in performance while supporting ease of use and preferred installation practices. So, whether it is 10 Gig, PoE, Category 6 or voice, 110 termination or lace and crimp, high density, standard density, angled or hinged, Legrand has a quality panel to serve your application.

# **Featured Products**



**Clarity High Density Jack Patch Panels** 

**Shielded Patch Panels** 

### Clarity® Patch Panels



45

Clarity 6A Flat Panels



46

Clarity 6 and Clarity 5E Flat Modular to 110 Patch Panels



Clarity 6 and Clarity 5E Modular to 110 Mini Patch Panels



Angled & Curved Clarity6 and Clarity5E Modular to 110 Patch Panels



Clarity High Density Jack Patch Panels



Clarity Rear Loaded Jack Panel Kits



50

Clarity 6 and Clarity 5E Panels with Hinged Cable Management

### **Special Application Patch Panels**



52

Category 5e and Category 6 RJ45 Feed-Through Patch Panels



52

Modular Quadframe 19" Telco Patch Panels

**Shielded Patch Panels** 



53

Category 6A Shielded Patch Panels

# CLARITY PATCH PANELS

Clarity 6A (6-Port Grouping)

#### OR-PHD6A, OR-PHA6A, OR-PHC6A Clarity 6A Patch Panels



OR-PHD6AU48



OR-PHA6AU24

#### Clarity 6A 6-Port Patch Panels

Clarity® 6A patch panels are available in the traditional multi-port panel format with 6-port modules and the added flexibility of flat or angled versions. Utilizing innovative methods for circuit isolation, the Clarity 6A multi-port patch panels support all alien and internal performance requirements of IEEE 802.3an (10GBase-T) and TIA Augmented Category 6 (6A) cabling specifications without requiring the use of individual jacks for your panel termination. Clarity 6A multi-port panels support traditional (linear 110) termination practices with mechanical accommodations for easy termination of the larger conductors of 10 Gig cables, providing a labor-saving alternative to the individual jack panel.

Clarity 6A angled patch panels utilize a unique recessed angle design to help direct cords with greater ease to vertical rack or cabinet management within a lower profile. This design provides an improved alternative for applications that don't offer rack space for horizontal management.

#### **Features**

- More transparent signal path with Clarity 6A cords
- Standard termination practice 110 tool
- IDC towers designed to accept larger 6A/10 Gig cable conductors
- Easy-to-follow universal wiring label is quick and user-friendly to eliminate confusion
- Panels include label fields and rear cable management
- Meets TIA 568C.2 Category 6A component specifications
- Backwards compatible to Category 6 and Category 5e

#### Clarity 6A/10G Flat Patch Panels

PART NO.	DESCRIPTION	
OR-PHD6AU24	24-port flat Clarity 6A patch panel, T568A/B, 1.75"x 19", 1 RU	
OR-PHD6AU48	48-port flat Clarity 6A patch panel, T568A/B, 3.5"x 19", 2 RU	

#### Clarity 6A/10G Angled Patch Panels

PART NO.	DESCRIPTION	
OR-PHA6AU24	24-port flat Clarity 6A patch panel, T568A/B, 1.75"x 19", 1 RU	
OR-PHA6AU48	48-port angled Clarity 6A patch panel, T568A/B, 3.5"x 19", 2 RU	

#### Clarity 6A/10G Curved Patch Panels

PART NO.	DESCRIPTION
OR-PHC6AU24	24-port curved Clarity 6A patch panel, T568A/B, 1.75"x 19", 1 RU
OR-PHC6AU48	48-port curved Clarity 6A patch panel, T568A/B, 3.5"x 19", 2 RU

# CLARITY PATCH PANELS

#### Clarity 6 and 5e (6 and 8-Port Grouping)

Clarity® patch panels combine the Legrand® commitment to ease and reliability with the ETL verified TIA-568C.2 Category 6 or Category 5e performance of center tuned connector technology. These 110 termination 19" panels are available in 6-port and 8-port module groupings, in 12, 24, 48, and 96-port sizes. Panels provide extensive designation abilities, icon compatibility and rear cable management.

- ETL verified to TIA component specifications to ensure component performance
- Center tuned to Clarity patch cords more transparent mated union and higher channel performance
- Universal wiring supports T568A and B installations with linear 110 termination
- IDC housing handles both Category 6 and Category 5e conductors
- Supplied rear cable management supports cabling best practices
- High density design maximizes rack utilization

#### OR-PHD6, OR-PHD5E

Clarity 6 and Clarity 5E Modular to 110 Patch Panels



OR-PHD66U24



OR-PSD66U24



OR-PHD68U24

# OR-PMP6, OR-PMP5E Clarity 6 and Clarity 5E Modular to 110 Mini Patch Panels





#### Clarity 6 and Clarity 5E Modular to 110 Patch Panels

#### High Density Patch Panels with 6-Port Modules

-		
CLARITY 6 PART NO.	CLARITY 5E PART NO.	DESCRIPTION
OR-PHD66U24	OR-PHD5E6U24	24-port, T568A/B, 1.75"H x 19"W, 1 RU
OR-PHD66U48	OR-PHD5E6U48	48-port, T568A/B, 3.5"H x 19"W, 2 RU
OR-PHD66U96	OR-PHD5E6U96	96-port, T568A/B, 7"H x 19"W, 4 RU

#### Standard Density Patch Panels with 6-Port Modules

OR-PSD66U12	OR-PSD5E6U12	12-port, T568A/B, 1.75"H x 19"W, 1 RU
OR-PSD66U24	OR-PSD5E6U24	24-port, T568A/B, 3.5"H x 19"W, 2 RU
OR-PSD66U48	OR-PSD5E6U48	48-port, T568A/B, 5.25"H x 19"W, 3 RU
OR-PSD66U96	OR-PSD5E6U96	96-port, T568A/B, 10.5"H x 19"W, 6 RU

#### High Density Patch Panels with 8-Port Modules

OR-PHD68U24	OR-PHD5E8U24	24-port, T568A/B, 1.75"H x 19"W, 1 RU
OR-PHD68U48	OR-PHD5E8U48	48-port, T568A/B, 3.5"H x 19"W, 2 RU
OR-PHD68U96	OR-PHD5E8U96	96-port, T568A/B, 7"H x 19"W, 4 RU

#### Clarity 6 and Clarity 5E Modular to 110 Mini Patch Panels

CLARITY 6 PART NO.	CLARITY 5E PART NO.	DESCRIPTION
OR-PMP612H	OR-PMP5E12H	12-port, T568A/B, hinged mounting
OR-PMP61289	OR-PMP5E1289	12-port, T568A/B, 89D mounting

## CLARITY PATCH PANELS

#### Angled and Curved Category 6 and 5E

Clarity® angled panels utilize a unique recessed angle design to help direct cords with greater ease to vertical rack or cabinet management within a lower profile. This design provides an improved alternative for applications that don't offer rack space for horizontal management. Rugged rear cable management is supplied to support best cabling practices.

Clarity curved patch panels offer yet another alternative for patch cord management. Built around the elevated performance of Clarity 6 and Clarity 5E, these high density patch panels feature a new look, utilizing a patented, recessed, curved design to help direct cords to vertical rack or cabinet management within a lower profile. This design provides another alternative for installations which have limited rack space for horizontal management.

- Lower mounted profile directs cords more easily to vertical management
- Deeper rear cable support bar addresses larger Category 6 cable designs
- ETL verified category performance
- Compatibility with standard 110 tool termination practices
- Time saving termination with easy lace multi-port adapters
- Rugged construction
- Label fields and icon compatibility
- Work especially well with the increased depth and enhancements of Mighty Mo® racks and cable management

#### OR-PHA6, OR-PHA5E

Angled Clarity 6 and Clarity 5E Modular to 110 Patch Panels



OR-PHA66U48

#### Angled Clarity 6 and Clarity 5E Modular to 110 Patch Panels

CLARITY 6 PART NO.	CLARITY 5E PART NO.	DESCRIPTION
OR-PHA66U24	OR-PHA5E6U24	24-port, T568A/B, 1.75"H x 19"W, 1 RU
OR-PHA66U48	OR-PHA5E6U48	48-port, T568A/B, 3.5"H x 19"W, 2 RU

# OR-PHC66U24, OR-PHC66U48 Clarity 6 and Clarity 5E Curved Patch Panels



OR-PHC5F6U24

#### **Clarity 6 Curved Patch Panels**

PART NO.	DESCRIPTION
OR-PHC66U24	24-port, T568A/B, 1.75" x 19", 1 RU
OR-PHC66U48	48-port, T568A/B, 3.5" x 19", 2 RU

47

**Li** legrand


## CLARITY HIGH DENSITY JACK PANELS

High Density Jack Panels

#### **High Density Jack Panels**

These unloaded panels provide up to 48-ports in a single rack unit, supporting the high destiny family with flat and angled panels. Panel choices include 24-port (1RU), 48-port (1RU), 48-port (2RU) and 72-port (2RU). All panels are supplied with front labeling bezels, rear cable management bars, straps and ties.

- Support up to 48-port in 1RU
- Ability to configure with choice performance categories and colors
- Compatible with copper jacks and fiber modules for mixed media and future upgrades
- Easier to access, remove and install into loaded parts
- Angled panels offer additional bend radius protection for patch cords as they route to vertical pathways
- Supplied rear management support and protect cable terminations
- Icon compatible or supplied 6 port front label fields snap into icon slots



#### OR-HDJ6A, OR-HDJ6, OR-HDJ5E, **High Density Jacks**







Notes: See page 25 for the HDJ contractor tool that works with the jack's easy to lace wiring cap, making each termination quick and consistent.

#### **High Density Jack Panels**

PART NO.	DESCRIPTION	
OR-PHAHJU24	24-port angled HDJ jack panel, unloaded 1.75"H x 19"W, 1 RU	
OR-PHAHJU48	48-port angled HDJ jack panel, unloaded 1.75"H x 19"W, 1 RU	
OR-PHAHJU72	72-port angled HDJ jack panel, unloaded 3.5"H x 19"W, 2 RU	
OR-PHDHJU24	24-port flat HDJ jack panel, unloaded 1.75"H x 19"W, 1 RU	
OR-PHDHJU48	48-port flat HDJ jack panel, unloaded 1.75"H x 19"W, 1 RU	
OR-PHDHJU72	72-port flat HDJ jack panel, unloaded 3.5"H x 19"W, 2 RU	

#### **High Density Jacks**

Clarity® High Density Jacks provide greater performance headroom and an easier termination method. The easy to lace and crimp termination reduces time to install, while maintaining cable performance. Termination of all 8 conductors with one crimp is easy, using the HDJCT crimping tool or free disposable hand tool supplied in each carton. These jacks are rear loading, utilizing a innovative locking latch for quick reliable mounting and removal.

- Center tuned to Clarity® patch cords for optimal channel performance
- Quicker termination and installation time

PART NO.	DESCRIPTION	
OR-HDJ6A	Clarity HDJ Category 6a jack, 8-position, T568A/B, fog white	
OR-HDJ6	Clarity HDJ Category 6 jack, 8-position, T568A/B, fog white	
OR-HDJ5E	Clarity HDJ Category 5e jack, 8-position, T568A/B, fog white	

Notes: For other colors add one of the following suffixes: -00 black, -36 blue, -42 red, -43 orange, -44 yellow, -45 green, -88 white, -13 ivory, -27 violet, -78 gray.

# PATCH PANELS

Clarity Patch Panel Kits

#### OR-PH, OR-PJ Clarity Rear-Load Jack Panel Kits



OR-PHAPJU48



#### **Clarity Rear-Load Jack Panel Kits**

Legrand® rear-loading individual jack panels utilize reduced-size Clarity<sup>®</sup> 6 and Clarity 5E panel jacks that can be terminated and snap-in from the back of the patch panel. A variety of panel configurations allow a wide choice of field configurable, easy to install horizontal cross connects. Panels are supplied without jacks. Jacks can be ordered individually or in full carton quantities of 24.

#### **Rear-Load Panels**

PART NO.	DESCRIPTION
OR-PHAPJU24	24-port, panel jack panel kit, angled, unloaded, 1 RU, 1.75"H x 19"W, HD
OR-PHAPJU48	48-port, panel jack panel kit, angled, unloaded, 2 RU, 3.5"H x 19"W, HD
OR-PHAPJU72	72-port, panel jack panel kit, angled, unloaded, 2 RU, 3.5"H x 19"W, HD
OR-PHDPJU24	24-port, panel jack panel kit, flat, unloaded, 1 RU, 1.75"H x 19"W, HD
OR-PHDPJU48	48-port, panel jack panel kit, flat, unloaded, 2 RU, 3.5"H x 19"W, HD
OR-PHDPJU72	72-port, panel jack panel kit, flat, unloaded, 2 RU, 3.5"H x 19"W, HD

#### Rear-Load Panel Jacks

PART NO.	DESCRIPTION		
OR-PJ6A-00	Panel jack, Clarity 6A, T568A/B, 8 pos, black, 180°		
OR-PJ6-00	Panel jack, Clarity 6, T568A/B, 8 pos, black, 180°		
OR-PJ5E-00	Panel jack, Clarity 5E, T568A/B, 8 pos, black, 180°		

Notes: Clarity panel jacks are available in these colors: -36 blue, -42 red, -43 orange, -44 yellow, -45 green.

Replace tail code at the end of part number.

# PATCH PANELS

Clarity Patch Panel Kits



# OR-PHD, OR-PSD Clarity 6 Patch Panels with Hinged Cable Management



OR-PHD66U24HM

#### Clarity 6 Patch Panels with Hinged Cable Management

Hinged Clarity® panels include cable management panels to assist in applications with limited rear access. Panels can be terminated in the hinged-down position while resting on management rings. Panels can also be mounted back-to-back on our 16.25"D Mighty Mo® racks.

#### Clarity High Density Hinged Panels with 6-Port Modules

PART NO.	DESCRIPTION	
OR-PHD66U24HM	24-port, T568A/B, 3.5"H, 2 RU	
OR-PHD66U48HM	48-port, T568A/B, 7"H, 4 RU	

Notes: 24-port high density panels have 1.75" cable management panels with 1.7" x 3.5" rings. All other hinged panels have 3.5" cable management panels with 3" x 4" rings.

#### Clarity Standard Density Hinged with 6-Port Modules

PART NO.	DESCRIPTION	
OR-PSD66U24HM	24-port, T568A/B, 7"H, 4 RU	
OR-PSD66U48HM	48-port, T568A/B, 8.75"H, 5 RU	

Notes: 24-port high density panels have 1.75" cable management panels with 1.7" x 3.5" rings. All other hinged panels have 3.5" cable management panels with 3" x 4" rings.

# PATCH PANELS

Patch Panel Kits

#### OR-4010452 **Patch Panel Kits**





OR-401045286

#### **Patch Panel Kits**

Legrand® 19"W panel kits provide the ability to field configure your own patch panels. Kits are available to support front-loading TracJack® or Series II® modules, providing panel options to support a wide range of applications. TracJacks and Series II modules are ordered separately.

#### Standard Density TracJack Patch Panel Kits

PART NO.	DESCRIPTION	
OR-401045289	(16) TracJack panel kit with shelf, 1.75"H, 4"D, 1 RU	
OR-401045290	[24] TracJack panel kit with shelf, 3.5"H, 5"D, 2 RU	
OR-401045291	(32) TracJack panel kit with shelf, 3.5"H, 5"D, 2 RU	
OR-401045292	(48) TracJack panel kit with shelf, 5.25"H, 6"D, 3 RU	

Notes: TracJacks not included, see page XX.

#### Standard Density Series II Patch Panel Kits

PART NO.	DESCRIPTION	
OR-401045283	[8] 1-unit Series II modules, panel kit with shelf, 1.75"H, 4"D, 1 RU	
OR-401045285	[16] 1-unit Series II modules, panel kit with shelf, 3.5"H, 5"D, 2 RU	
OR-401045286	[24] 1-unit Series II modules, panel kit with shelf, 5.25"H, 6"D, 3 RU	

Notes: Series II modules not included, see page XX.

**L**legrand

# SPECIAL APPLICATION PATCH PANELS

### OR-PHD5E, OR-PHA5E

Category 5e Telco Panel



OR-PHD5E2148

#### Category 5e Telco Panel

Legrand® Category 5e 25-pair panels provide a 50-pin connector interface (standard RJ21 wiring) between Category 5e 25-pair cable Gigabit Ethernet hubs requiring full 4-pair cabling. Panels provide front label fields. Use with 845E cable assemblies.

PART NO.	DESCRIPTION	
OR-PHD5E2124	24-port, flat panel, T568B, 1.75"H, 1 RU	
OR-PHD5E2148	48-port, flat panel, T568B, 3.5"H, 2 RU	
OR-PHA5E2124	24-port, angled panel, T568B, 1.75"H, 1 RU	
OR-PHA5E2148	48-port, angled panel, T568B, 3.5"H, 2 RU	

#### OR-PHD5E, OR-PHD6

Category 5e and Category 6 Feed-Through **Patch Panels** 



OR-PHD5EFF24





OR-PHD6FF24

#### Category 5e and Category 6 Feed-Through Patch Panels

Legrand Category 5e and Category 6 RJ45 feed-through panels provide interface between (2) RJ45 plugs.

PART NO.	DESCRIPTION	
OR-PHD5EFF24	24-port, RJ45, feed-through patch panel, Cat 5e, T568A/B, 19"x 1.75", 1 RU	
OR-PHD6FF24	24-port, RJ45, feed-through patch panel, Cat 6, T568A/B, 19"x 1.75", 1 RU	

#### OR-80800

Modular Quadframe 19" Telco Patch Panels



OR-808004920



#### Modular Quadframe 19" Telco Patch Panels

Legrand modular quadframe 19" telco panels provide RJ21 50-pin connectors wired to RJ11, 2-contact jacks. These panels are commonly used to support voice, alarm and low speed data applications. Available jack wiring: RJ11, RJ14, 8-position (4-5).

MALE TELCO PART NO.	FEMALE TELCO PART NO.	DESCRIPTION
OR-808004920	OR-808004921	24-port, (1) 50-pin telco, 6-position RJ11, pins 3 and 4, 3.5"H, 2 RU
OR-808004940	OR-808004941	48-port, (2) 50-pin telco, 6-position RJ11, pins 3 and 4, 5.25"H, 3 RU

# SPECIAL APPLICATION AND SHIELDED PATCH PANELS

#### OR-80800

High Density Modular 19" Telco Patch Panels



OR-808004345

#### High Density Modular 19" Telco Patch Panels

Legrand® 19"W high density modular telco panels provide RJ21 50-pin connectors wired to two-, four-, six-, or eight- contact 8-position jacks. These panels are commonly used to support voice, alarm and low speed data applications.

MALE TELCO PART NO.	FEMALE TELCO PART NO.	DESCRIPTION
OR-808004388	OR-808004389	24-port, (1) 50-pin telco, 8-position, pins 4 and 5, 1.75"H, 1 RU
OR-808004042	OR-808004041	48-port, (2) 50-pin telco, 8-position, pins 4 and 5, 3.5"H, 2 RU
OR-808004343	-	48-port, (8) 50-pin telco, 8-position, pins 3-6*, 3.5"H, 2 RU

Notes: \*T568B wired 8-position jacks.

#### OR-PHDPJS6A, OR-PHDPJS5E **Clarity Shielded Jack Panels**



OR-PHDPJS6A24

#### Clarity® Shielded Jack Panels

Legrand® shielded panels offer rear loading shielded jacks to support improved ease of termination and installation from the back of the panel.

PART NO.	DESCRIPTION
OR-PHDPJS6A24	24-port shielded, Category 6A, 1 RU, 19" x 1.75"
OR-PHDPJS5E24	24-port shielded, Category 5e, 1 RU, 19" x 1.75"

# SHIELDED PATCH PANELS

## **OR-PHDTKS, OR-PHATKS**

Category 6A Shielded Patch Panels with Rear Cable Management



# OR-PHDTKS, OR-PHATKS, OR-TKS Unloaded Shielded Patch Panels and Jacks





# Category 6A Shielded Patch Panels with Rear Cable Management

PART NO.	DESCRIPTION
OR-PHDTKS6A24	24-port, flat 1 RU patch panel with (24) TKS6A jacks
OR-PHDTKS6A48	48-port, flat 2 RU patch panel with (48) TKS6A jacks
OR-PHATKS6A24	24-port, angled 1 RU patch panel with (24) TKS6A jacks
OR-PHATKS6A48	48-port, angled 2 RU patch panel with (48) TKS6A jacks

#### **Unloaded Shielded Patch Panels**

PART NO.	DESCRIPTION
OR-PHDTKSU24	Unloaded 24-port, flat 1 RU patch panel for TKS jacks
OR-PHDTKSU48	Unloaded 48-port, flat 2 RU patch panel for TKS jacks
OR-PHATKSU24	Unloaded 24-port, angled 1 RU patch panel for TKS jacks
OR-PHATKSU48	Unloaded 48-port, angled 2 RU patch panel for TKS jacks
OR-TKS6A	Category 6A Shielded self-terminating Keystone iack

## LABELING AND DESIGNATION SOLUTIONS

#### OR-70400

6- and 8-Port Module Patch Panel Designation LabelMo XL Labeling Templates



#### 6- and 8-Port Module Patch Panel Designation

Color-coded designation strips can be used in 6- or 8-port patch panel module front bezels. Designation strip sheets are 8.5"W x 11"H. Support by the Label XL templates.

#### 6-Port Module Patch Panel Designation

PART NO.	DESCRIPTION
OR-70400408	White
OR-70400408-26	Blue

Notes: (10) sheets per package, (48) labels per sheet.

#### 8-Port Module Patch Panel Designation

PART NO.	DESCRIPTION
OR-70400409	White
OR-70400409-24	Yellow

Notes: (10) sheets per package, (24) labels per sheet.

#### 8-Port Module Thin Patch Panel Kit Designation

PART NO.	DESCRIPTION
OR-70400644	White

Notes: (10) sheets per package, (44) labels per sheet.

#### 6-Port Module Thin Designation Holder

OR-70400692 Bezel color for maximum density patch panels

Notes: (8) required 48-port per patch panel.


#### **OR-403 Color-Coded Icons**



Color-Coded Icons

#### **Color-Coded Icons**

Ortronics color-coded designation tabs are for port identification on patch panels and most workstation products. The tabs are available in 606 standard colors with a voice, data icon or blank. 100pk.



ORDERING EXAMPLE: To order a red voice tab, use the following part number OR-40322100. NOTE: For a complete set of voice and data tabs in all colors, use order number OR-40300174.

# SNAP PRE-TERMINATED COPPER HORIZONTAL CABLING SYSTEM



Quick and reliable data center installations are a SNAP $^{\text{TM}}$  with the latest innovation from Legrand $^{\circ}$ .

In today's workplace, where network downtime is costly and detrimental to any business or organization, bringing a new data center online must be completed as quickly as possible. Quick and easy installations that guarantee reliable performance are more critical than ever.

Clarity® SNAP Pre-Terminated Copper Cabling System offers the above-the-standards performance of Clarity connectivity in a custom terminated cable assembly system that's ready to plug and go. Its innovative modular design combines high performance and installer friendly features with the quick deployment and reliability of a factory terminated and tested cabling system.

# **Featured Products**



**SNAP Patch Panels** 

<u>60</u>

SNAP Workstation Modules

61

# SNAP PRE-TERMINATED COPPER CABLING SYSTEM



#### Clarity® SNAP™ Pre-Terminated Copper Cabling System Cabling System

The SNAP connection utilizes a bifurcated termination method, placing one mating half of the termination onto the horizontal cable and the other on the 8-position T568 jack interface. This approach reduces the size of the terminated cable ends, making it easier to pull and lace cables through racks, cabinets, cable management systems, and pathways. In addition, individual cable ends of bundled cables can be passed through one at a time, as compared to some alternative designs where the connections are bundled into modules and must be pulled through pathways and openings that way.

As a result, SNAP cable assemblies route faster, with less interference from connector ends within congested pathways. And, the robust cable ends are ruggedly designed to handle the physical challenges of any installation. When in position, these cable ends simply SNAP into the back of the panel or workstation outlet, completing the termination. It's a SNAP!

The Clarity SNAP system also offers the added assurance of the premium performance of Clarity connectivity. The SNAP bifurcated termination offers improved pair-to-pair isolation and improved pair balance through the connector, while barriers located on the sides of these terminations enhance alien noise performance. The result is improved channel immunity from internal and external noise, which ensures consistently high performance links and channels.

The benefit of this technology is a consistently high performance cabling system that is fast and simple to install and enables quick network deployment, increased reliability, and lower total cost of ownership. Both the electrical design of SNAP and the additional controls and in-process testing only available in a factory environment lead to improved consistency in channel performance, to improve the overall average results that you can expect from your installation.

#### The Clarity SNAP system offers port replication

Port replication enables a separate patch panel to act as the administrative cross connect for servers and switches. Factory assembled port replication cable sets and panels provide a quick and easy pretested option.

Port replication is an increasingly popular method of protecting modular jacks in both switches and servers. Repeated use of these modular jacks as an administrative connection to horizontal cabling can expose jack ports to damage. Port replication enables a separate patch panel to act as the administrative cross connect instead of using the switch or server ports directly, minimizing the risk of harm to your active equipment. Should the replicated ports become damaged over time, the replacement cost and network downtime are significantly less than the expense of replacing a switch or server port.

Clarity SNAP Port Replication (PR) from Legrand® raises the bar in performance and speed of installation by utilizing the SNAP system's innovative design to easily integrate factory terminated cables into a port replication application. SNAP PR cable assemblies use RJ45 terminations on the server/switch side and SNAP cable terminations on the patch panel side to enable the SNAP patch panel as the cross connect.

58

# SNAP CABLE ASSEMBLIES

#### Horizontal Cabling

Each Clarity® SNAP cable assembly includes an identification label, which includes part number, performance level, and serialized quality assurance number for future traceability.

#### **OR-PCH**

Multiple Cable Harnesses Matrix: CMP (plenum), CMR (riser), LSZH (low smoke zero halogen)

CHOOSE YOUR CABLE TYPE, NUMBER OF CABLES, COLOR, LENGTH AND LEG STYLE USING THE ORANGE SHADED CODE.

Notes: Contact sales for lead-times and minimums for other cable colors.





CHXP6B06XXXXX	OR-PCH2R6M06XXXXX

PCH	CABLE TYPE		# OF CABLES	COLOF	?	LENGTH (INCLUDES LEGS)			
	Cat6a Plenum	XP	6 in a						
	Cat6a Riser	XR	spiral-bound bundle	6B	Blue	06	XXX (feet)		
	Caté Plenum	2P		6M		00			
	Cat6 Riser	2R	6 in mesh						
	Cat6 LSZH 2Z		6 in a spiral-bound bundle	6B	Green	05	XX.X (meters) .0 (full meter) .5 (1/2 meters)		

END 1 LEGS		END 2 LEGS	
no stagger w/ protective sock	1	no stagger w/ protective sock	1
stagger left w/ protective sock	2	stagger left w/ protective sock	2
stagger right w/ protective sock	3	stagger right w/ protective sock	3
no stagger w/ pulling sock	4	no stagger w/ pulling sock	4
stagger left w/ pulling sock	5	stagger left w/ pulling sock	5
stagger right w/ pulling sock	6	stagger right w/ pulling sock	6

Example: → PCH

PCH

XΡ

6B

XXX

06

1


#### **OR-PCS**

Single Cable Assembly Matrix: CMP (plenum), CMR (riser), LSZH (low smoke zero halogen)

CHOOSE YOUR CABLE TYPE, COLOR, LENGTH AND LEG STYLE USING THE ORANGE SHADED CODE.

Notes: Contact sales for lead-times and minimums for other cable colors.



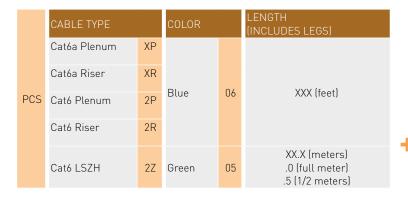

	CABLE NUMBER	LABEL
	No #	00
	#1	01
ŀ	#2	02
	#3	03
	#99	99
		01

Example: → PCS

XΡ

06

16

XXX

# SNAP CABLE ASSEMBLIES

#### Port-Replication

#### **OR-PRH**

**Multiple Cable Harnesses Matrix** 

CHOOSE YOUR CABLE TYPE, NUMBER OF CABLES, COLOR, LENGTH AND LEG STYLE USING THE ORANGE SHADED CODE.

Notes: Contact sales for other color requirements and lead times.



		CABLE TYPE		# OF CABLES		COLOF	?	LENGTH FEET, (INCLUDES LEGS)	RJ45 END LEGS		SNAP END LEGS		
	PRH	Cat6A Plenum Cat6A Riser	Cat6A Riser X		6 in a spiral-bound bundle	6B	Blue	06		no stagger w/ protective sock	1	no stagger w/ protective sock	1
		PRH	Caté Plenum Caté Riser	2P 2R	6 in mesh	6M				stagger left w/ protective sock	2	stagger left w/ protective sock	2
									XXX	stagger right w/ protective sock	3	stagger right w/ protective sock	3
									no stagger w/ pulling sock	4	no stagger w/ pulling sock	4	
									stagger left w/ pulling sock	5	stagger left w/ pulling sock	5	
									stagger right w/ pulling sock	6	stagger right w/ pulling sock	6	
Example: —	PCH		ΧP		6B		06	XXX		1		1	

#### **OR-PRS** Single Cable Assembly Matrix

CHOOSE YOUR CABLE TYPE, COLOR, LENGTH AND LEG STYLE USING THE ORANGE SHADED CODE.

Notes: Contact sales for other color requirements.



		CABLE TYPE CO				LENGTH FEET, (INCLUDES LEGS)	CABLE NUMBER LABEL		
		Cat6A Plenum	ΧP				No #	00	
		Cat6A Riser	XR	Blue	06		#1	01	
	PRS						#2	02	
		Cat6 Plenum	2P			XXX	#3	03	
		Cat6 Riser	2R				#99	99	
Example: —	PRS		2P		06	XXX		01	

59

## SNAP PATCH PANELS

Clarity® SNAP™ patch panels offer improved rear cable management with the addition of an adjustable depth rear management bar. The rear portion of these bars is also removable to provide more working room for the initial termination of panels. After cables are SNAP terminated, the rear bars are attached and adjusted to the depth that best matches the cable and rack selections.

SNAP panels are also supplied with SNAP-on positioning bend limiters. These plastic cable management aids assist with maintaining proper bend radius of all cables while minimizing the stress on any one cable. This is especially beneficial for cable bundles, as this allows the dissipation of any stress across the entire bundle instead of any one cable termination.

# OR-PPC, OR-PHD, OR-PJS SNAP Panels and Panel Jacks



OR-PPCF66U24



OR-PPCA66U48



OR-PHDSJU24



#### **SNAP Panels and Panel Jacks**

#### Flat Panels

FLAT 24-PORT PART NO.	FLAT 48-PORT PART NO.	DESCRIPTION
OR-PPCF610U24	OR-PPCF610U48	Clarity 10G flat panels with 6-port modules
OR-PPCF66U24	OR-PPCF66U48	Clarity 6 flat panels with 6-port modules

#### **Angled Panels**

ANGLED 24-PORT PART NO.	ANGLED 48-PORT PART NO.	DESCRIPTION
OR-PPCA610U24	OR-PPCA610U48	Clarity 10G angled panels with 6-port modules
OR-PPCA66U24	OR-PPCA66U48	Clarity 6 angled panels with 6-port modules

#### PJSN Jack Panels without Jacks

FLAT 24-PORT PART NO.	FLAT 48-PORT PART NO.	DESCRIPTION
OR-PHDSJU24	OR-PHASJU24	24-port, unloaded
OR-PHDSJU48	OR-PHASJU48	48-port, unloaded

#### Panel Jacks

PART NO.	DESCRIPTION
OR-PJSN6A-xx	Clarity 6A
OR-PJSN6-xx	Clarity 6

Notes: SNAP PJs available colors -00 black ,-36 blue, -42 red,- 43 orange, -44 yellow, -45 green, - 68 gray

60

# SNAP WORKSTATION MODULES

#### OR-TJSN6A, OR-TJSN6 **SNAP TracJack Workstation Modules**





#### **SNAP TracJack Workstation Modules**

PART NO.	DESCRIPTION
OR-TJSN6A-xx	Clarity 6A
OR-TJSN6-xx	Clarity 6

Notes: xx = 2 digit color code SNAP TJs available colors -09 fog white ,-36 blue, -42 red, -43 orange, -44 yellow, -45 green, -68 gray

#### OR-TJSNIC-53, OR-PJSNIC-53 **SNAP TracJack Workstation Modules**





#### **SNAP TracJack Workstation Modules**

SNAP™ inline coupler will allow multiple lengths of SNAP cable assemblies to be connected together in a horizontal channel or permanent link.

This product is targeted for use in the open office, flexible workplaces or environments where there is a predisposition that work station layouts will be frequently modified. Factory terminated cabling offers a time saving approach to initial installation and future MAC work.

Supported by PJ panel and TJ plate mounting options.

PART NO.	DESCRIPTION
OR-TJSNIC-53	SNAP inline coupler TracJack®, orange
OR-PJSNIC-53	SNAP inline coupler panel jack, orange



#### Installation Made EZ!

The Legrand® patent pending EZ Patch™ solution is a revolutionary way to dispense and manage patch cords, reducing installation time and waste. There are no bags to open, tie wraps to undo or straightening necessary; the cords dispense one after another, ready to install. With EZ Patch, staging areas are clean, neat and completely organized.

#### **Features and Benefits**


- Dispenses patch cords quickly and easily, reducing staging and installation time
- Significantly reduces the amount of trash typically generated from the opening of bagged patch cords, creating a greener, friendlier approach to patch cord packaging
- Provides a more organized staging area for patch cords, eliminating the errors and tangles from traditional staging
- 100% recyclable

EZ Patch uses an innovative clip to connect patch cords together, allowing cords to be distributed over an internal cardboard reel and fed through the front box opening. The corrugated cardboard box and internal dispensing reel are made from 100% recyclable materials and the clip is made from 25% regrind plastic. Each of these components is fully recyclable after use, making the EZ Patch solution a contributor towards LEED certification.

To learn more, visit **www.legrand.us/ezpatch**, or turn to **page 67** of this catalog.



# COPPER CORDS

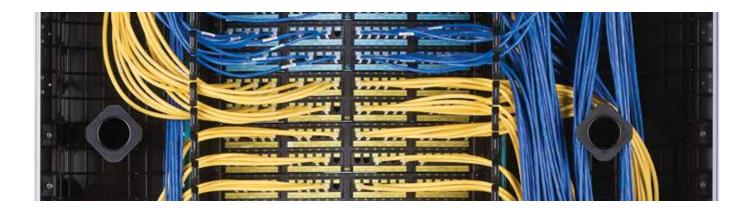

Clarity 6A/10G, Clarity 6 and Clarity 5E patch cords lead the broad family of Legrand® patch cords. Patch cords are now recognized as the most critical element of any high performance cabling system. Legrand developed and is continuously improving Paralign™ modular plug technology to ensure that Clarity® cords offer unsurpassed installed performance. The Clarity patch cord offering is complemented by an extensive line of voice/data grade cords and 25-pair cable assemblies − all built with the same attention to flexibility, efficiency and design.

# **Featured Products**



Clarity Shielded Patch Cords

69

Clarity IP Phone Patch Cords

69

63

### **Clarity Patch Cords**



Clarity 6A Patch Cords



Clarity 6 and 5E Modular Patch Cords

# **Clarity Shielded Patch Cords**



# **Clarity 110 Patch Cords**



Clarity UTP 110/110 Patch Cords



Clarity UTP 110/Modular 8-Position Patch Cords

### **Custom Assemblies**



Category 5E 25-Pair Cable Assemblies



25-Pair Cable Assemblies

# CLARITY PATCH CORDS

Clarity UTP Patch Cords

#### **Clarity UTP Patch Cords**

Clarity® patch cords utilize center tuned technology to elevate channel performance. Clarity 6A, 6 and 5E cords are ETL verified to Category 6 and 5e component standards. More importantly, center tuning these cords to Clarity jacks and panels provides significant elevation of channel performance that can be field measured.

- Center tuned to Clarity jacks and panels for a more transparent mated union
- Paralign™ 2 plug termination better controls plug performance
- Assembled with premium cordage, 100% factory tested for performance, reliability and long life
- Narrow Paralign plug profile supports use in high density panels and hubs
- Icon compatible provides additional TIA-606-A designation capabilities

#### OR-MC6A Clarity 6A Patch Cords



#### **Clarity 6A Patch Cords**

Clarity 6A patch cords combine Category 6A performance with the flexibility of stranded conductor cordage for increased flexibility and ease of cable management. MC6A patch cords combine with Clarity 6A jacks and panels to deliver reliable 10 Gig channel performance. Meets TIA 568C.2 category 6A component specifications.

Also available in EZ Patch $^{TM}$ . See page 67.

PART NO.	DESCRIPTION
OR-MC6A03-09	Modular cord, white, 3
OR-MC6A05-09	Modular cord, white, 5°.
OR-MC6A07-09	Modular cord, white, 7
OR-MC6A09-09	Modular cord, white, 9
OR-MC6A15-09	Modular cord, white, 15
OR-MC6A20-09	Modular cord, white, 20°
OR-MC6A25-09	Modular cord, white, 25'

Notes: To order other standard colors change suffix on MC cords: -04=yellow, -05=green, -06=blue, -08=gray, -09=white.

# CLARITY PATCH CORDS

Clarity UTP Patch Cords

#### OR-MC6, OR-MC5E Clarity Modular Patch Cords



OR-MC607-06

#### OR-SC

Clarity 6A and 6 Solid Conductor Modular Cable Assemblies



OR-SC6P07SB-06

#### **Clarity Modular Patch Cords**

Clarity® 6 and Clarity 5E modular patch cords are ETL verified to Category 6 and 5e component standards, while providing elevated field-measurable channel performance.

Also available in EZ Patch™. See page 67.

CLARITY 6 CATEGORY 6 UTP PART NO.	CLARITY 5E CATEGORY 5e PART NO.	DESCRIPTION
OR-MC603-06	OR-MC5E03-06	Four-pair 24 AWG stranded UTP, blue, PVC, length 3'
OR-MC605-06	OR-MC5E05-06	Four-pair 24 AWG stranded UTP, blue, PVC, length 5'
OR-MC607-06	OR-MC5E07-06	Four-pair 24 AWG stranded UTP, blue, PVC, length 7'
OR-MC609-06	OR-MC5E09-06	Four-pair 24 AWG stranded UTP, blue, PVC, length 9'
OR-MC615-06	OR-MC5E15-06	Four-pair 24 AWG stranded UTP, blue, PVC, length 15'
OR-MC620-06	OR-MC5E20-06	Four-pair 24 AWG stranded UTP, blue, PVC, length 20'
OR-MC625-06	OR-MC5E25-06	Four-pair 24 AWG stranded UTP, blue, PVC, length 25

Notes: To order other standard colors change suffix on MC cords: -02 = red, -04 = yellow, -05 = green, -06 = blue, -08 = gray, -09 = white, -00=black.

#### Clarity 6A and 6 Solid Conductor Modular Cable Assemblies

Parlign 2 plug terminations elevate these Category 6 and 6A assemblies to Clarity performance to serve application with extended distances or where a punch down termination is required on one end. Typical application includes modular consolidation points or Mutoa applications.

#### PART NO. FORMULA

OR-SC(X)	(XX)	(X)	(X)	(XX)
6R=Category 6 Riser	length in feet	D= double ended modular	A= T568A	-06 = blue
6P=Category Plenum	_ ``	8 pos. plug	wired	
6AR=Category 6A Riser	Example 10=10'	S= single ended modular	B= T568B	
6AP=Category 6A Plenum		8 pos. plug	wired	

Notes: To order other standard colors for PVC cables change suffix to: -04=yellow, -05=green, -06=blue, -08=gray, -09=white. Contact sales for other Plenum cable colors.

## 67

# EZ PATCH

#### Patch Cord Dispensing Solution

#### **Installation Made EZ!**

The Legrand® patent pending EZ Patch™ solution is a revolutionary way to dispense and manage patch cords, reducing installation time and waste. There are no bags to open, tie wraps to undo or straightening necessary; the cords dispense one after another, ready to install. With EZ Patch, staging areas are clean, neat and completely organized.

The EZ Patch solution contains our Clarity 6A, 6 or 5E patch cords in standard lengths and colors. All Clarity cords are factory tested to TIA/EIA 568C.2 component specifications for Category 6a, 6 and 5e.

#### OR-EZC6A EZ Patch Clarity 10G

#### **EZ Patch Clarity 10G**



Patch Cord Dispensing Solution

#### Clarity 6A

PART NO.	DESCRIPTION	CONTAINS PART NUMBER	QTY PER CARTON
OR-EZC6A03Q50-XX	EZ Patch Clarity 10G modular patch cord, 3'	OR-MC61003-XX	50
OR-EZC6A05Q50-XX	EZ Patch Clarity 10G modular patch cord, 5'	OR-MC61005-XX	50
OR-EZC6A07Q40-XX	EZ Patch Clarity 10G modular patch cord, 7'	OR-MC61007-XX	40
OR-EZC6A09Q30-XX	EZ Patch Clarity 10G modular patch cord, 9'	OR-MC61009-XX	30
OR-EZC6A15Q20-XX	EZ Patch Clarity 10G modular patch cord, 15	OR-MC610015-XX	20

Notes: To order standard colors, replace xx suffix: -06 = blue, -05 = green.

# OR-EZC6 EZ Patch Clarity 6

#### **EZ Patch Clarity 6**



Innovative Clip Design

#### Clarity 6

PART NO.	DESCRIPTION	CONTAINS PART NUMBER	QTY PER CARTON
OR-EZC603Q50-XX	EZ Patch Clarity 6 modular patch cord, 3'	OR-MC603-XX	50
OR-EZC605Q50-XX	EZ Patch Clarity 6 modular patch cord, 5'	OR-MC605-XX	50
OR-EZC607Q50-XX	EZ Patch Clarity 6 modular patch cord, 7'	OR-MC607-XX	50
OR-EZC609Q40-XX	EZ Patch Clarity 6 modular patch cord, 9'	OR-MC609-XX	40
OR-EZC610Q40-XX	EZ Patch Clarity 6 modular patch cord, 10'	OR-MC610-XX	40
OR-EZC615Q25-XX	EZ Patch Clarity 6 modular patch cord, 15'	OR-MC615-XX	25

Notes: To order standard colors, replace xx suffix: -09 = white, -08 = gray, -06 = blue, -05 = green, -04 = yellow, -02 = red.

# EZ PATCH

#### Patch Cord Dispensing Solution

# OR-EZC5E EZ Patch Clarity 5E

#### **EZ Patch Clarity 5E**



#### Clarity 5E

PART NO.	DESCRIPTION	CONTAINS PART NUMBER	QTY PER CARTON
OR-EZC5E03Q50-XX	EZ Patch Clarity 5E modular patch cord, 3'	OR-MC5E03-XX	50
OR-EZC5E05Q50-XX	EZ Patch Clarity 5E modular patch cord, 5'	OR-MC5E05-XX	50
OR-EZC5E07Q50-XX	EZ Patch Clarity 5E modular patch cord, 7'	OR-MC5E07-XX	50
OR-EZC5E09Q40-XX	EZ Patch Clarity 5E modular patch cord, 9'	OR-MC5E09-XX	40
OR-EZC5E10Q40-XX	EZ Patch Clarity 5E modular patch cord, 10'	OR-MC5E10-XX	40
OR-EZC5E15Q25-XX	EZ Patch Clarity 5E modular patch cord, 15'	OR-MC5E15-XX	25

Notes: To order standard colors, replace xx suffix: -09 = white, -08 = gray, -06 = blue, -05 = green, -04 = yellow.

# **CLARITY PATCH CORDS**

Clarity VoIP Patch Cords and Shielded Category 6A, 6 and 5e

#### OR-VC6

**Clarity VoIP Patch Cords** 



OR-VC607-09

#### OR-MCS6A, OR-MCS6, OR-MCS5E **Shielded Clarity Modular Patch Cords**



OR-MCS603-08

#### **Clarity VoIP Patch Cords**

Legrand® VoIP patch cords provide an extra low-profile Clarity plug at one end to address cable bend requirements when plugging into the bottom of an IP phone set. The other cord end offers the full protective attributes of the Paralign™ 2 plug.

PART NO.	DESCRIPTION
OR-VC603-09	Four-pair 24 AWG Category 6 stranded UTP, white, PVC, length 3'
OR-VC605-09	Four-pair 24 AWG Category 6 stranded UTP, white, PVC, length 5'
OR-VC607-09	Four-pair 24 AWG Category 6 stranded UTP, white PVC, length 7'
OR-VC609-09	Four-pair 24 AWG Category 6 stranded UTP, white, PVC, length 9'
OR-VC615-09	Four-pair 24 AWG Category 6 stranded UTP, white, PVC, length 15'

Notes: To order other standard colors change suffix on VC cords: -02=red, -03=orange, -04=yellow, -05=green, -06=blue, -08=gray, -09=white.

#### **Shielded Clarity Modular Patch Cords**

A shielded version of the Paralign 2 plug termination makes these Clarity shielded patch cords the high performance choice for an STP or FTP 100 ohm cabling system.

SHIELDED CLARITY 6A PART NO.	SHIELDED CLARITY 6 PART NO.	SHIELDED CLARITY 5E PART NO.	DESCRIPTION
OR-MCS6A03-08	OR-MCS603-08	OR-MCS5E03-08	Four-pair 24 AWG stranded FTP, gray, PVC, length 3'
OR-MCS6A05-08	OR-MCS605-08	OR-MCS5E05-08	Four-pair 24 AWG stranded FTP, gray, PVC, length 5
OR-MCS6A07-08	OR-MCS607-08	OR-MCS5E07-08	Four-pair 24 AWG stranded FTP, gray, PVC, length 7
OR-MCS6A09-08	OR-MCS609-08	OR-MCS5E09-08	Four-pair 24 AWG stranded FTP, gray, PVC, length 9'
OR-MCS6A15-08	OR-MCS615-08	OR-MCS5E15-08	Four-pair 24 AWG stranded FTP, gray, PVC, length 15
OR-MCS6A25-08	OR-MCS625-08	OR-MCS5E25-08	Four-pair 24 AWG stranded FTP, gray, PVC, length 25

Notes: Clarity 6A and 6 are also available in -02 red and -04 yellow.

# CLARITY 110 PATCH CORDS

Clarity® 110 patch cords are ETL verified to TIA-568-B Category 6 and 5e component standards. More importantly, Clarity 110 plugs utilize an internal signal feedback technique to control cross talk without compromising impedance. Clarity 110 to modular 8-position patch cords utilize both signal feedback and center tuning. This allows more transparent connector interfaces for significant elevation of channel performance that can be field measured.

- Verified to TIA component specifications to ensure component performance
- Internal signal feedback of the 110 plug design controls noise contributors
- Center tuned Paralign™ 2 modular plug design controls the plug for a transparent mated union
- Assembled with premium cordage for performance, reliability and long life
- Factory tested for performance to ensure consistent reliability

# **OR-110C6, OR-110C5E**Clarity UTP 110/110 Patch Cords



OR-110C607-06

#### Clarity UTP 110/110 Patch Cords

CLARITY 6 UTP PART NO.	CLARITY 5E UTP PART NO.	DESCRIPTION	
OR-110C603-06	OR-110C5E03-06	110/110 four-pair patch cord, blue, length 3'	
OR-110C605-06	OR-110C5E05-06	110/110 four-pair patch cord, blue, length 5'	
OR-110C607-06	OR-110C5E07-06	110/110 four-pair patch cord, blue, length 7'	
OR-110C609-06	OR-110C5E09-06	110/110 four-pair patch cord, blue, length 9'	
OR-110C615-06	OR-110C5E15-06	110/110 four-pair patch cord, blue, length 15'	

Notes: To order other standard colors, change suffix: -06 = blue, -05 = green, -09 = white.

# OR-MC18B6, OR-MC18B5E Clarity UTP 110/Modular 8-Position Patch Cords



#### Clarity UTP 110/Modular 8-Position Patch Cords

CLARITY 6 UTP PART NO.	CLARITY 5E UTP PART NO.	DESCRIPTION	
OR-MC18B603-06	OR-MC18B5E03-06	110 four-pair patch cord, T568B, blue, length 3'	
OR-MC18B605-06	OR-MC18B5E05-06	110 four-pair patch cord, T568B, blue, length 5'	
OR-MC18B607-06	OR-MC18B5E07-06	110 four-pair patch cord, T568B, blue, length 7'	
OR-MC18B609-06	OR-MC18B5E09-06	110 four-pair patch cord, T568B, blue, length 9'	
OR-MC18B615-06	OR-MC18B5E15-06	110 four-pair patch cord, T568B, blue, length 15'	

Notes: To order other standard colors, change suffix: -06 = blue, -05 = green, -09 = white.



# **CUSTOM ASSEMBLIES**

### OR-804025

25-Pair Cable Assemblies



OR-804025PC1GY

#### 25-Pair Cable Assemblies

Legrand® voice 25-pair cable assemblies are constructed from 24 AWG solid conductor UTP cables terminated with industry standard 50-pin telco connectors.

#### PART NO. FORMULA

OR-XXXX	XXXX	XXX	-X or -XXX
ASSEMBLY TYPE	TYPE OF CABLE ENDS	LENGTH IN FEET	TYPE OF CABLE
OR-804025 (Voice)	P, C, X	5, 10, 15, 25	1GY or 4

Example: OR-804025PC015-1GY,

Type of Cable Ends:  $P = Male 90^{\circ}$ ,  $C = Female 90^{\circ}$ , X = Blunt, not terminated

Type of Cable: 1GY = 24 AWG Gray PVC, 4 = 24 AWG Plenum

Notes: Consult sales for other custom requirements and for lead times and minimum orders.

# COPPER CONNECTIVITY

#### 72

# INDUSTRIAL SOLUTIONS



Bringing data cabling systems into your industrial space comes with a new set of challenges that must be addressed in order to ensure the reliability of your cabling and connectivity. Legrand® provides an offering of connectivity products designed to meet the environmental challenges of industrial, lab, and harsh environments as well as meeting standard data transmission requirements. The offering starts with IP67-rated Category 5e and Category 6 connectors, housings and patch cords. What is IP67? IP stands for Ingress Protection, the ability to withstand the influence of external environmental influences. The IP number is composed of 2 digits. The first digit refers to protection against solid objects (dust is an example). The larger this number is, the smaller the particle of matter has to be to penetrate the protection. A number 6 indicates "total protection against dust." The second digit describes the protection level against liquids. A number 7 indicates "protected against the effects of immersion between 15cm and 1 meter." An IP67 rating would surpass IP66 and is an optimum rating for a factory environment where exposure to dirt, dust, other particulate, splash and wash downs are likely.

#### **Featured Products**



Industrial Jacks

73

Industrial Plates and Surface Boxes

<u>/ 3</u>

Industrial Patch Cords

74

# COPPER CONNECTIVITY

# INDUSTRIAL JACKS, PLATES AND BOXES

#### Industrial Jacks, Plates, Boxes and Patch Cords

The Legrand® range of industrial grade connectivity meets IP67 while supplying the quality cabling performance you have long associated with Legrand. Industrial grade jacks, patch panels and patch cords are available in Category 5e and 6 performance grades. A supporting offering of industrial grade faceplates and surface boxes include gaskets, seals and sealing plugs to support IP67 level protection through the equipment outlet. Industrial faceplates are stainless steel with gaskets. Industrial boxes utilize UL 94V0 chemically resistant plastic bases with stainless steel cover plates.

#### OR-IPJ6, OR-IPJ5E **Industrial IP67 IDC Jacks**





OR-IPJ6

OR-IPJ5E

#### **Industrial IP67 IDC Jacks**

PART NO.	DESCRIPTION	
OR-IPJ6	Category 6 industrial jack, IP67, black with protective cover cap	
OR-IPJ5E	Category 5e industrial jack, IP67, black with protective cover cap	

#### OR-403IPSS11, OR-403IPSS12 Stainless Steel IP67 Industrial Faceplates





# OR-403IPSS11

#### **Stainless Steel IP67 Industrial Faceplates**

PART NO.	DESCRIPTION	
OR-403IPSS11	Industrial stainless steel plate, 1-port single gang plate, 2.75" x 4.5"	
OR-403IPSS12	Industrial stainless steel plate, 2-port single gang plate, 2.75" x 4.5"	

#### OR-404IP22, OR-404IP24 Industrial IP67 Surface Boxes with Stainless Steel Covers





OR-404IP22

OR-404IP24

#### Industrial IP67 Surface Boxes with Stainless Steel Covers

PART NO.	DESCRIPTION	
OR-404IP22	2-port industrial grade box, cover and watertight cable gaskets and plugs, 5" x 5"	
OR-404IP24	4-port industrial grade box, cover and watertight cable gaskets and plugs, 5" x 5"	



# INDUSTRIAL PATCH CORDS


# OR-IPC6, OR-IPC5E Industrial Grade IP67 Patch Cords



#### **Industrial Grade IP67 Patch Cords**

OR-IPC603-00 Category 6 industrial patch cord, 3', black OR-IPC605-00 Category 6 industrial patch cord, 5', black OR-IPC607-00 Category 6 industrial patch cord, 7', black OR-IPC6010-00 Category 6 industrial patch cord, 10', black OR-IPC6015-00 Category 6 industrial patch cord, 15', black OR-IPC6020-00 Category 6 industrial patch cord, 20', black OR-IPC6025-00 Category 6 industrial patch cord, 25', black OR-IPC5E03-00 Category 5e industrial patch cord, 3', black OR-IPC5E05-00 Category 5e industrial patch cord, 5', black OR-IPC5E07-00 Category 5e industrial patch cord, 7', black
OR-IPC607-00 Category 6 industrial patch cord, 7', black OR-IPC6010-00 Category 6 industrial patch cord, 10', black OR-IPC6015-00 Category 6 industrial patch cord, 15', black OR-IPC6020-00 Category 6 industrial patch cord, 20', black OR-IPC6025-00 Category 6 industrial patch cord, 25', black OR-IPC5E03-00 Category 5e industrial patch cord, 3', black OR-IPC5E05-00 Category 5e industrial patch cord, 5', black OR-IPC5E07-00 Category 5e industrial patch cord, 7', black
OR-IPC6010-00  Category 6 industrial patch cord, 10', black OR-IPC6015-00  Category 6 industrial patch cord, 15', black OR-IPC6020-00  Category 6 industrial patch cord, 20', black OR-IPC6025-00  Category 6 industrial patch cord, 25', black OR-IPC5E03-00  Category 5e industrial patch cord, 3', black OR-IPC5E05-00  Category 5e industrial patch cord, 5', black OR-IPC5E07-00  Category 5e industrial patch cord, 7', black
OR-IPC6015-00 Category 6 industrial patch cord, 15', black OR-IPC6020-00 Category 6 industrial patch cord, 20', black OR-IPC6025-00 Category 6 industrial patch cord, 25', black OR-IPC5E03-00 Category 5e industrial patch cord, 3', black OR-IPC5E05-00 Category 5e industrial patch cord, 5', black OR-IPC5E07-00 Category 5e industrial patch cord, 7', black
OR-IPC6020-00 Category 6 industrial patch cord, 20', black OR-IPC5E03-00 Category 5e industrial patch cord, 3', black OR-IPC5E05-00 Category 5e industrial patch cord, 5', black OR-IPC5E07-00 Category 5e industrial patch cord, 7', black
OR-IPC6025-00  Category 6 industrial patch cord, 25', black  OR-IPC5E03-00  Category 5e industrial patch cord, 3', black  OR-IPC5E05-00  Category 5e industrial patch cord, 5', black  OR-IPC5E07-00  Category 5e industrial patch cord, 7', black
OR-IPC5E03-00 Category 5e industrial patch cord, 3', black OR-IPC5E05-00 Category 5e industrial patch cord, 5', black OR-IPC5E07-00 Category 5e industrial patch cord, 7', black
OR-IPC5E05-00 Category 5e industrial patch cord, 5', black OR-IPC5E07-00 Category 5e industrial patch cord, 7', black
OR-IPC5E05-00 Category 5e industrial patch cord, 5', black OR-IPC5E07-00 Category 5e industrial patch cord, 7', black
OR-IPC5E07-00 Category 5e industrial patch cord, 7', black
3 7
OD IDOFF010 00
OR-IPC5E010-00 Category 5e industrial patch cord, 10', black
OR-IPC5E015-00 Category 5e industrial patch cord, 15', black
OR-IPC5E020-00 Category 5e industrial patch cord, 20', black
OR-IPC5E025-00 Category 5e industrial patch cord, 25', black

# 110 CROSS CONNECT SYSTEM

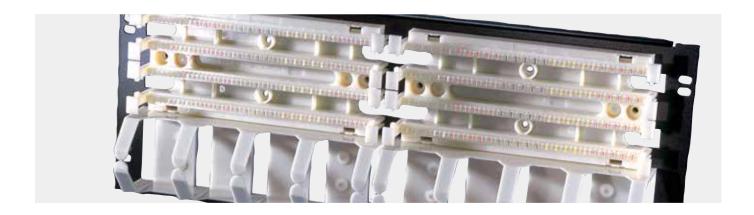

Clarity® 6 and Clarity 5E blocks further expand the high performance data opportunities for 110 blocks. Offering field terminated block kits to rack or backboard mounted cross connect assemblies, Legrand® has a 110 product to meet your application needs for performance, high density and quick termination. Legrand also offers a range of pre-wired 66 blocks to serve as a network demarcation point or for voice or low speed data applications.

## **Featured Products**



Rack Mount 110 **Block Panel Kits** 

110 Wall Mount **Backboard Channels** 

## Clarity 6 and Clarity 5E 110 Block Kits



Clarity 6 Category 6 110 Block Kits



Clarity 5E Category 5e 110 Block Kits

#### 110 Accessories



78
Designation
Labeling Kits



110 Jumper Troughs

#### 110 Panels



19" Wide Rack Mount 110 Panel Kits



110 Wall Mount Cross Connect Block Kits

#### **Pre-Wired 66 Blocks**



110 Wall Mount Backboards and Cable Management



110 Frames and Cable Management



Pre-Wired 66 Blocks

# COPPER CONNECTIVITY

# CLARITY 6 AND CLARITY 5E 110 BLOCK KITS

#### **Clarity UTP Patch Cords**

The Clarity® family of 110 blocks combines Category 6 and 5e performance with the ease and reliability of 110 termination and installer friendly features all within the traditional 110 block footprint. Clarity blocks are available in 50, 100 and 300-pair sizes, providing designation areas and rear cable entry. Clarity 6 blocks use a signal feedback technique internal to the C6110C4 connector to control crosstalk without compromising impedance. Clarity 6 and Clarity 5E block kits include base wiring block, 110C connecting blocks and label holders for designation.

#### **OR-110ABC6**

Clarity 6 Category 6 110 Block Kits



OR-110ABC6100 (with legs)



OR-110DBC6100 (without legs)



#### Clarity 6 Category 6 110 Block Kits

PART NO.	DESCRIPTION
OR-110ABC6050	48-pair (12–4-pair clips) 50-pair footprint, 1.8" x 10.72" x 3.25", with legs
OR-110ABC6100	96-pair (24–4-pair clips) 100-pair footprint, 3.59" x 10.72" x 3.25", with legs
OR-110ABC6300	288-pair (72–4-pair clips) 300-pair footprint, 10.79" x 10.72" x 3.25", with legs
OR-110DBC6050	48-pair (12–4-pair clips) 50-pair footprint, 1.8" x 8.5" x 1.59", without legs
OR-110DBC6100	96-pair (24–4-pair clips) 100-pair footprint, 3.59" x 8.5" x 1.59", without legs

#### OR-110ABC5E Clarity 5E Category 5e 110 Block Kits



OR-110ABC5E100 (with legs)



OR-30200 110 C Connecting Block Clips for Voice



#### Clarity 5E Category 5e 110 Block Kits

PART NO.	DESCRIPTION
OR-110ABC5E050	50-pair (10–4-pair and 2 5-pair clips), 1.8" x 10.72" x 3.25", with legs
OR-110ABC5E100	100-pair (20–4-pair and 4 5-pair clips), 3.59" x 10.72" x 3.25", with legs
OR-110ABC5E300	300-pair (60–4-pair and 12 5-pair clips), 10.79" x 10.72" x 3.25", with legs
OR-110DBC5E050	50-pair (10–4-pair and 2 5-pair clips), 1.8" x 8.5" x 1.59", without legs
OR-110DBC5E100	100-pair (20–4-pair and 4 5-pair clips), 3.59" x 8.5" x 1.59", without legs

#### 110 C Connecting Block Clips for Voice

PART NO.	DESCRIPTION	
OR-30200108	3-pair (110C3), 10pk	
OR-30200109	4-pair (110C4), 10pk	
OR-30200110	5-pair (110C5), 10pk	

# 110 ACCESSORIES

# **OR-70400**Designation Labeling Kits



OR-70400646 (for blocks with legs)





OR-70400680 (for blocks without legs)

OR-70400272

#### **Designation Labeling Kits**

PART NO.	DESCRIPTION
OR-70400646	For Clarity 110 blocks, end label caps, clear strips and paper inserts, for blocks with legs, 2pk
OR-70400680	For Clarity 110 blocks, short end caps, clear strips and paper inserts, for blocks without legs, 2pk
OR-70400272*	Clear strips and white paper, 2pk

Notes: \*Not compatible with Clarity 6 Blocks.

#### OR-30200 110 Jumper Troughs



#### 110 Jumper Troughs

PART NO.	DESCRIPTION
OR-30200139	8.5" x 2.69" x 2.69", without legs
OR-30200140	10.75" x 2.69" x 4.69", with legs

# 110 PANELS

Legrand® 110 Block Panels provide two 100-pair block kits and two jumper troughs (without legs) on a 19"W panel that is mountable to the Mighty Mo® rack system or to other EIA racks.

#### OR-3020032 19" Rack Mount 110 Panel Kits






# OR-30600

19" Rack Mount 110 Panel (Unloaded)





#### 19" Rack Mount 110 Panel Kits

PART NO.	DESCRIPTION	
OR-302003282	Clarity 6 192-pair Category 6 panel kit with troughs, (48) Category 6 110C4, 19" x 7"	
OR-302003251	Category 5e 200-pair panel kit with troughs, (40) 110C4 and (8) 110C5 clips, 19" x 7"	
OR-302003253	Category 5e 200-pair panel kit with troughs, (40) 110C5 clips, 19" x 7"	

#### 19" Rack Mount 110 Panel (Unloaded)

PART NO.	DESCRIPTION	
OR-30600167	Panel for (2) 100-pair blocks without legs, 19" x 3.5"	
OR-30600150	Panel for (2) 100-pair blocks and (2) troughs without legs, 19" x 7"	

EXPLANATION OF TERMINAL BLOCKS PRODUCT CODE			110 - PB2 - 300FT
	110 110 Family of Terminal Blocks		Blocks
	Р	A = Includes 110 Type Wiring Blocks with legs / P = Includes 110 Type Wiring Blocks on a back panel with horizontal troughs and bottom tray	
	В	A = 5-pair 110 Type Connecting Blocks / B = 4-pair 110 Type Connecting Blocks	
	2	Voice/Data / C6 = Category 6	
	300	Total quantity of pairs	
	FT Field terminated		

COPPER CONNECTIVITY

80

# **La legrand**®

# 110 WALL MOUNT CROSS CONNECT BLOCK KITS





Rivet - 12 per package

Holder/Insert, Designation





110 AW4-300 Wiring Block w/legs

110 DW4-100 Wiring Block





Rivet (12 per package)

110C-5 Connecting Block





110C-4 Connecting Block

#12 Exterior Lock Washer





#12-14X5/8 Phillips Head Screw

Grounding Bar





#10-32 Nut

#10-32x5/8 Phillips Head Screw



Jumper Trough

300-Pair Panel

900-Pair Panel

Bottom Tray

Legrand® wall mount 110 field term kits are available in 100-, 300- and 900-pair configurations. 300- and 900-pair kits can be ordered with metal back panels and horizontal wiring troughs.

#### Voice/Data Wall Mount Block Kits

PART NO.	TERMINAL BLOCKS PRODUCT CODE	KIT CONTENTS
OR-30203506	110-AB2-100FT	[20] 110C-4 connecting blocks, [4] 110C-5 connecting blocks, [1] 110 AW4-100 wiring block (with legs), [1] holder/insert, designation
OR-30200116	110-AA2-100FT	[20] 110C-5 connecting block, (1) 110 AW4-100 wiring block (with legs), (1) holder/insert, designation
OR-30203519	110-AB2-300FT	(60) 110C-4 connecting blocks, (12) 110C-5 connecting blocks, (1) 110 AW4-300 wiring block (with legs), (3) holder/insert, designation
OR-30200095	110-AA2-300FT	(60) 110C-5 connecting blocks, (1) 110 AW4-300 wiring block (with legs), (3) holder/insert, designation
OR-30203461	110-PA2-300FT	(1) instruction sheet, (1) 300-pair panel, (1) bottom tray, (3) jumper troughs, (2) #10-32 x 5/8" phillips head screws, (2) #10-32 nuts, (1) grounding bar, (2) #12-14 x 5/8" phillips head screws, (2) #12 ext. lock washers, (60) 110C-5 connecting blocks, (3) 110 DW4-100 wiring blocks, (3) holder/insert, designation, (2) rivets, 12pk
OR-30200020	110-PB2-300FT	(1) instruction sheet, (1) 300-pair panel, (1) bottom tray, (3) jumper troughs, (2) #10-32 x 5/8" phillips head screws, (2) #10-32 nuts, (1) grounding bar, (2) #12-14 x 5/8" phillips head screws, (2) #12 ext. lock washers, (60) 110C-4 connecting blocks, (12) 110C-5 connecting blocks, (3) 110 DW4-100 wiring blocks, (3) holder/insert, designation, (2) rivets, 12pk
OR-30200024	110-PA2-900FT	(1) instruction sheet, (1) 900-pair panel, (1) bottom tray, (9) jumper troughs, (2) #10-32 x 5/8" phillips head screws, (2) #10-32 nuts, (1) grounding bar, (2) #12-14 X 5/8" phillips head screws, (2) #12 ext. lock washers, (180) 110C-5 connecting blocks, (9) 110 DW4-100 wiring blocks, (9) holder/insert, designation, (6) rivets, 12pk
OR-30200026	110-PB2-900FT	(1) instruction sheet, (1) 900-pair panel, (1) bottom tray, (9) jumper troughs, (2) #10-32 x 5/8" phillips head screws, (2) #10-32 nuts, (1) grounding bar, (2) #12-14X5/8 phillips head screw, (2) #12 ext. lock washers, (180) 110C-4 connecting block, (36) 110C-5 connecting blocks, (9) 110 DW4-100 wiring blocks, (9) holder/insert, designation, (6) rivet, 12pk

#### Clarity 6 110 Wall Mount Cross Connect Block Kits

PART NO./ TERMINAL BLOCKS PRODUCT CODE	KIT CONTENTS	
OR-110PBC6300	(1) instruction sheet, (1) 300-pair panel, (1) bottom tray, (3) jumper troughs, (2) #10-32 x 5/8" phillips head screws, (2) #10-32 nuts, (1) grounding bar, (2) #12-14 X 5/8" phillips head screw, (2) #12 ext. lock washers, (72) 110C-4 connecting block, (3) DW4-100 connecting blocks, (3) holder/insert, designation, (2) rivet, 12pk	
OR-110PBC6900	(1) instruction sheet, (1) 900-pair panel, (1) bottom tray, (3) jumper troughs, (2) #10-32 x 5/8" phillips head screws, (2) #10-32 nuts, (1) grounding bar, (2) #12-14 x 5/8" phillips head screw, (2) #12 ext. lock washers, (216) 110C-4 connecting block, (9) DW4-100 connecting blocks, (9) holder/insert, designation, (6) rivet, 12pk	

# PRE-WIRED 66 BLOCKS

110 Wall Mount Backboards and Cable Management

#### OR-806003246, OR-30200132

110 Wall Mount Backboard Channels



#### 110 Wall Mount Backboard Channels

Legrand® 110 backboard channels are wall mount kits, complete with hardware to mount 100-pair 110 blocks without legs and jumper troughs without legs.
Channels provide protected paths for terminated cables. Kits include bottom cable trough and grounding bar.

PART NO.	DESCRIPTION
OR-806003246	300-pair backboard, 8.5" x 24.75" x 8.13"
OR-30200132	900-pair backboard, 8.5" x 62.63" x 8.13"

#### OR-80600319

110 Wall Mount Backboard Channels



OR-806003194

#### 110 Wall Mount Backboard Channels

Legrand single or dual channel vertical channels wall mount between 110 wall mount backboards to provide a managed path for patch cords or cross connect wire. The dual channel provides an added ability to separate cable types in vertical management.

#### Single Channel

	PART NO.	DESCRIPTION
	OR-806003194	300-pair backboard size, 8.5" x 23.88" x 8.13"
	OR-806003196	900-pair backboard size, 8.5" x 61.75" x 8.13"
<b>Dual Channel</b>		
	OR-806003197	300-pair backboard size, 8.5" x 23.88" x 8.13"

#### OR-60400020 110 Wall Mount Horizontal Cable

110 Wall Mount Horizontal Cable Management Bracket



#### 110 Wall Mount Horizontal Cable Management Bracket

Legrand horizontal cable management brackets wall mount between 110 wiring blocks to organize, support and provide for future changes to horizontal runs of cable.

PART NO.	DESCRIPTION
OR-60400020	10.75" x 6.5" x 4.5"

# COPPER CONNECTIVITY

## PRE-WIRED 66 BLOCKS

110 Frames and Cable Management

#### OR-MM67110D

Mighty Mo 6 110D Distribution Frame






#### Mighty Mo 6 110D Distribution Frame

Mighty Mo® 6 110D distribution frame provides total vertical cable management to route cable more effectively in a 110 cross connect. Use with OR-30600166 to mount 300-pair 110 blocks with legs. Front and rear mounting supports up to 9000 pairs. Includes cable management straps in 6.5"D vertical channels. Black.

PART NO.	DESCRIPTION
OR-MM67110D	39" x 86" x 16.5"

#### OR-30600166

900-Pair Rack Mount Panel with Cable Troughs



OR-30600166

#### 900-Pair Rack Mount Panel with Cable Troughs

Accepts three 300-pair 110 blocks with legs.

PART NO.	DESCRIPTION
OR-30600166	34.25" x 14.54"

#### OR-MM6VML70

Mighty Mo 6 Vertical Cable Management Cage with Latches



# Mighty Mo 6 Vertical Cable Management Cage with Latches

Patented design promotes efficient routing of patch cords between racks. Hinged latches allow easy access during moves, adds and changes. 6"W cage creates a 2.5" gap between racks for front-to-back routing of equipment cables and patch cords.

PART NO.	DESCRIPTION
OR-MM6VML704	With latches, 4" x 6" x 7"
OR-MM6VML706	With latches, 6" x 6" x 7"

Notes: Includes all hardware necessary to mount cage on face of (2) Mighty Mo 6 racks, single rack or end of row. Patent No. 6,365,834.

# PRE-WIRED 66 BLOCKS



#### OR-8050 **Pre-Wired 66 Blocks**



OR-805003202




#### **Pre-Wired 66 Blocks**

Legrand® pre-wired 66 blocks can be used to provide network interface connections between voice and data equipment and the public telco network as well as modular wiring connections for key telephone systems.

PART NO.	DESCRIPTION
OR-805003202	T1 network interface block, 66M150 66 block 8-port, RJ48X, on 89D, 16-pair, 10" x 2.84" x 2.71"
OR-8050F157B	Modular 66 connecting block with (2) 25-pair female telcos on 89D, 50-pair, 10" x 2.84" x 2.71"
OR-8050F66M150	Modular 66M150 connecting block with (1) 25-pair female telco on left side on 89D, 25-pair, 10" x 2.84" x 2.71"
OR-8050M66M150	Modular 66 connecting block on 89D with [1] 25-pair male telco on left side, 25-pair, 10" x 2.84" x 2.71"

## 

# PRE-WIRED 66 BLOCKS

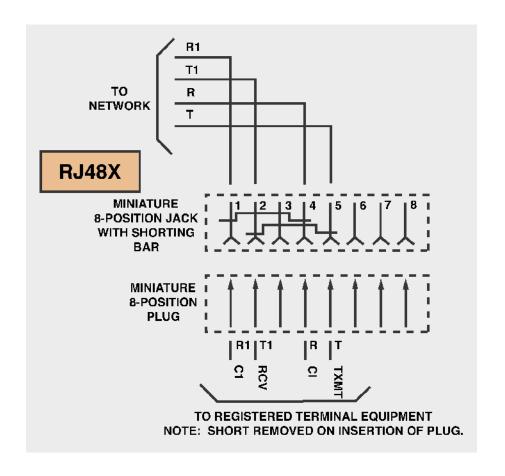

# PHYSICAL SUPPORT



Complete cable management maximizes your network's performance. It may be a small portion of your overall network investment, but the proper infrastructure layout can yield enormous returns. The right cable management system can efficiently protect and extend the life of your network. Legrand® advanced cable management systems provide strength, support, and flexibility for system design and future expansion. No other system makes it easier to install your network with standards compliant bend radius, cable routing and strain relief, ensuring optimal network performance.

# **Featured Products**




Mighty Mo® 20 Cable Management **Systems** 

**Mighty Mo Cabinets** 

Mighty Mo **Fiber Raceway** 

### Mighty Mo® Cabinets







Wall Mount Cabinets

#### Mighty Mo 20 Cable Management Systems







Cable Management Racks

Rack Accessories

Mighty Mo Overhead Cable Pathway and Equipment Racks

#### **Standard EIA Racking Systems**







4-Post Racks and Accessories

2-Post Racks and Accessories

Wall Mount Racks and Brackets

#### Horizontal Cable Management, Shelves and Accessories







Standard Horizontal Cable Managers

**Equipment Shelves** 

Tool Less Snap-in Filler Panels

#### **Bonding and Grounding**









Telecommunications Main Ground Bars and Kits

Compression Lugs and Taps, Accessories

Mechanical Compression Tools

#### Runway, Mighty Mo Fiber Raceway



Tubular Runway



Mighty Mo Fiber Raceway



Raceway Hardware and Tooling




# {COMING SOON!}

# Mighty Mo® LX Cabinet

- Most efficient airflow technology available in any cabinet
- Advanced security solutions that comply with financial, medical and retail regulations
- Industry leading internal and external cable management solutions for the most demanding applications
- Wide selection of standard sizes available globally
- Highly aesthetic in black or white with other colors available
- UL, and OSHPD listed (pending)
- RoHS and ASCE-7 compliant



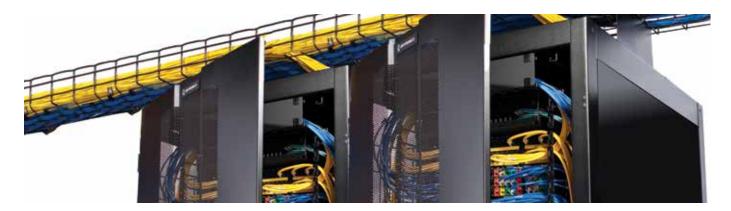

#### **Enhanced Cable Management with Efficient Airflow**

A solid foundation is critical for superior network performance in high density applications. A poorly designed physical support system can have a devastating effect on the performance of the network. Legrand® engineers have strategically designed Mighty Mo® cabinets from the ground up to protect network integrity. Cable management is not just an add-on accessory, it is the basis for our design.

Legrand's full line of free standing cabinets specifically addresses the cable management needs of today's high performance networks by:

- Purposefully repositioning the caster support brackets out of the cable pathway
- Providing proper cable pathways that allow cables to minimize bends and turns, reducing the number of failure points
- Effectively managing entry and exit points from within the cabinet frame
- Offering advanced features such as bend limiting clips that snap on the rack unit spaced fingers where needed to protect fiber jumpers

The Mighty Mo cabinet is also ideal for maintaining cold-aisle/hot-aisle airflow, whether your network equipment is front-to-back, bottom or side venting. Mighty Mo cabinet airflow baffles provide separation of hot and cold aisles and redirect airflow from side vented equipment so it matches the front to back airflow of servers.

#### **Features**

- Heavy duty construction: Heavy-duty 14 ga. construction offers improved durability over conventional 16 ga. cabinets. Mighty Mo doors are especially designed to eliminate the irritating flex found in less well built cabinets.
- Cable management: Mighty Mo vertical and horizontal managers provide improved management for both servers and high density switches. Available bend limiters provide standards compliant protection for fiber and 10G copper patch cords.
- Passive thermal management: Mighty Mo baffles redirect the airflow of side vented equipment from side to side and front to rear, ensuring the proper flow of air from cold aisle to hot aisle.
- Thermal protection: A wide selection of top panels, fans and doors are available to ensure adequate ventilation is provided to keep equipment at the optimal operating conditions.

- Security: Doors include locking handles to prevent unauthorized access and tampering. Side panels also come equipped with locks.
- Mobility: Levelers come standard with frames.
   Swivel casters are optional for added mobility.
- 180° door swing with self contained hinges:
   Self-contained hinges used on our surface mount
   doors have no removable pins that can be lost.
   These hinges eliminate aisle blockage when loading
   or performing maintenance on equipment without
   removing the door.
- Fully configurable: Mighty Mo cabinets are built to your configuration and arrive fully assembled with all components installed and accessories included, reducing equipment deployment time and overall costs. Consult your local representative to configure a cabinet to your unique requirements.

#### **Pre-Configured Cabinets**

Legrand® has assembled some of the most popular cabinet sizes and accessories together into easy to order part numbers.

#### **OR-MMC4 Pre-Configured Server Cabinets**



Mighty Mo Server Cabinet

#### **Pre-Configured Server Cabinets**

- Frame configured with cable opening at bottom rear
- Frame levelers
- Two pairs of RU labeled mounting rails with 3/8" square holes
- Full profile mesh front door
- Split flat mesh rear door
- Two "L" shaped finger managers on rear rails
- Vertical PDU mount and lacing bar
- Divider or side panels as stated below
- Solid top panel in front
- Cable entry top panel in rear
- Rack unit cage nuts #12-24 thread (50pk)
- Two packages of 50 panel mounting screws #12-24 (total of 100)
- Additional adhesive rack unit labels (mounted inside of rear set of rails)
- Black powder coat pain

PART NO. DIVIDER VERSION	PART NO. SIDE PANELS VERSION	DESCRIPTION Server Cabinet Sizes (Depth includes doors)
OR-MMC422440-00005	OR-MMC422440-00006	42 RU x 24"W x 42"D
OR-MMC422446-00002	OR-MMC422446-00003	42 RU x 24"W x 48"D
OR-MMC472440-00003	OR-MMC472440-00004	47 RU x 24"W x 42"D
OR-MMC472446-00001	OR-MMC472446-00002	47 RU x 24"W x 48"D
OR-MMC423240-0000G	OR-MMC423240-0000H	42 RU x 32"W x 42"D
OR-MMC423246-00007	OR-MMC423246-00008	42 RU x 32"W x 48"D
OR-MMC473240-00003	OR-MMC473240-00004	47 RU x 32"W x 42"D
OR-MMC473246-00001	OR-MMC473246-00002	47 RU x 32"W x 48"D

Notes: "Divider" versions have a right side divider panel and ganging hardware (for within row). "Side Panels" versions have a set of end panels (for stand alone or to create ends of row).


#### **Pre-Configured Cabinets**

#### OR-MMC42 Pre-Configured Network Cabinets



Mighty Mo Network Cabinet

#### OR-MMC42, OR-MMC47 Pre-Configured Cabinets for the Nexus 7010



\*Right side removed to show interior of cabinet

#### **Pre-Configured Network Cabinets**

- Frame configured with cable opening at bottom front
- Frame levelers
- Two pairs of RU labeled mounting rails with #12-24 tapped holes
- Full profile Plexiglas® front door
- Full flat solid rear door
- Two "L" shaped finger managers on front rails
- Right and left locking side panels
- Fan top panel in front
- Cable entry top panel in rear
- Panel mounting screws #12-24, 50pk
- Black powder coat paint

PART NO.	DESCRIPTION
OR-MMC422434-00004	42 RU x 24"W x 36"D
OR-MMC423234-0000A	42 RU x 32"W x 36"D

#### Pre-Configured Cabinets for the Nexus 7010

Mighty Mo<sup>®</sup> cabinets are designed around industry leading cable management systems that provide above the standard performance and capabilities for handling and supporting Cisco Nexus 7010 Data Center Switches.

- Frame configured with cable opening at bottom front
- Frame levelers
- Two pairs of RU labeled mounting rails with #12-24 tapped holes
- Full profile perforated front door and split flat mesh rear door
- Two "L" shaped finger managers on front rails with 12 bend limiters
- Mighty Mo Cabinet Air Dam Kits for the Nexus 7010
- Right and left locking side panels
- Cable entry top panel on front and rear with brush quards on front
- Panel mounting screws #12-24, 50pk
- Black powder coat paint


PART NO.	DESCRIPTION
OR-MMC423240-0001J	42 RU x 32"W x 42"D, black
OR-MMC423246-00016	42 RU x 32"W x 48"D, black
OR-MMC473240-0000L	47 RU x 32"W x 42"D, black
OR-MMC473246-0000H	47 RU x 32"W x 48"D, black

90

**Pre-Configured Cabinets** 


#### OR-MMC4

Pre-Configured Cabinets for the Nexus 7009



#### OR-MMC4

Pre-Configured Cabinets for the Nexus 7018



#### **Pre-Configured Cabinets for the Nexus 7009**

- Static capacity to support up to three fully configured Cisco Nexus 7009 data center switches
- Space that meets Cisco's clearance requirements for the front, side and rear of the Nexus 7009 switch
- Full height modular baffling systems to maintain strict hot aisle/cold aisle air separation
- Baffling systems are scalable: operate with a single 7009 chassis and add additional 7009 chassis at a later date
- Blanking panels and other internal accessories to eliminate hot air recirculation inside the cabinet
- Cable management that addresses the density requirements of up to three fully configured Nexus 7009 switches chassis (336 port density for each chassis)
- Mighty Mo<sup>®</sup> cabinets are the only solution on the market today with patented bend limiter clips to provide the proper bend radius for fiber optic cables

PART NO.	DESCRIPTION
OR-MMC424846-00002	Mighty Mo cabinet, 42U x 48"W x 46"D for Cisco 7009 with dual side car kit, up to (2) switches, black
OR-MMC474846-00002	Mighty Mo cabinet, 47U x 48"W x 46"D for Cisco 7009 with dual side car kit, up to [3] switches, black

# The Mighty Mo Cabinet for the Cisco Nexus 7018 (stand-alone version)

- Static capacity to fully support a configured Cisco Nexus 7018 data center switch
- Space that meets Cisco's clearance requirements for the front, side and rear of the Nexus 7018 switch
- Full height baffling system to maintain strict hot aisle/cold aisle air separation
- Blanking panels and other internal accessories to eliminate hot air recirculation inside the cabinet
- Cable management that addresses the density requirements of a fully configured Nexus 7018 switch chassis (768 port density)
- Mighty Mo cabinets are the only solution on the market today with patented bend limiter clips to provide the proper bend radius for fiber cables

PART NO.	DESCRIPTION
OR-MMC424846-00001	Mighty Mo cabinet, 42U x 48"W x 46"D for Cisco 7018 with dual side car kit, black
OR-MMC474846-00001	Mighty Mo cabinet, 47U x 48"W x 46"D for Cisco 7018 with dual side car kit, black


Notes: Includes the 32" wide cabinet with mounting rails, front and rear doors, (2) side extensions, (2) side panels, (1) pieces roof, (2) vertical "U" shaped cable managers, and all of the internal baffles.



#### **Pre-Configured Cabinets**

#### **OR-MMC4**

Pre-Configured Cabinets for the Nexus 7018




#### For Creating a Stand-Alone Nexus 7018 Cabinet From an Existing 32"W Mighty Mo Cabinet

PART NO.	DESCRIPTION
OR-MMC421646-SC001	Mighty Mo $^{\circ}$ dual-side cart kit, 42U x 16"W x 46"D for Cisco 7018, black
OR-MMC471646-SC001	Mighty Mo dual-side cart kit, $47U \times 16$ W $\times 46$ D for Cisco 7018, black

Notes: Includes (2) side extensions, (2) vertical "U" shaped cable managers, all of the internal baffles and mounting hardware.

#### **OR-MMC4**

**Pre-Configured Cabinets for the Nexus 7018** 



#### For Creating a Nexus 7018 Cabinet From (2) 32"W Mighty Mo Cabinets at the End of a Row

PART NO.	DESCRIPTION
OR-MMC420846-SC001	Mighty Mo single-side car kit, 42U x 8"W x 46"D for Cisco 7018, black
OR-MMC470846-SC001	Mighty Mo single-side car kit, 47U x 8"W x 46"D for Cisco 7018, black


Notes: Includes (1) side extension, (1) vertical "U" shaped cable manager, all of the internal baffles and mounting hardware.

**Pre-Configured Cabinets** 

#### **OR-MMC**

☐ legrand®

**Pre-Configured Cabinets for the Nexus 7018** 



#### For Creating a Nexus 7018 Cabinet in the Center Cabinet of (3) 32"W Mighty Mo Cabinets

PART NO.	DESCRIPTION
OR-MMCAB427018	Mighty Mo® in row baffle kit, 42U x 46"D for Cisco 7018, black
OR-MMCAB477018	Mighty Mo in row baffle kit, 47U x 46"D for Cisco 7018, black

Notes: Includes all of the internal baffles and mounting hardware.

#### **Cabinet Accessories**

# **OR-MMC**Vertical PDU Mount and Lacing Bars



# OR-MMC4 Vertical Cable Trays



#### **Vertical PDU Mount and Lacing Bars**

Vertical PDU mount and lacing bars can be used to mount PDUs or to manage distribution cables routing from patch panels and equipment out of the cabinet.

PART NO.	DESCRIPTION
OR-MMC24VPMLS	Vertical PDU mount and lacing bar single for 24U frames
OR-MMC42VPMLS	Vertical PDU mount and lacing bar single for 42U frames
OR-MMC47VPMLS	Vertical PDU mount and lacing bar single for 47U frames
OR-MMC24VPMLD	Vertical PDU mount and lacing bar double for 24U frames
OR-MMC42VPMLD	Vertical PDU mount and lacing bar double for 42U frames
OR-MMC47VPMLD	Vertical PDU mount and lacing bar double for 47U frames

#### **Vertical Cable Trays**

Vertical cable trays consist of a pre-cut section of 2" x 6" Cablofil® tray and mounting hardware designed to mount inside the cabinet and manage distribution cables routing from the patch panels and equipment out of the cabinet. It mounts to the strut inside the cabinet and can be adjusted front to back.

PART NO.	DESCRIPTION
OR-MMC420206VCT	Vertical cable tray 2"W x 6"D for 42U frames
OR-MMC470206VCT	Vertical cable tray 2"W x 6"D for 47U frames

#### Horizontal Cable Capacities for Vertical Cable Tray

PART NO.			VERTICAL CABLE TRAY CAPACITY		
			CAT 5E	CAT 6	CAT 6A
	DESCRIPTION	USABLE AREA (SQUARE INCH)	1.125" O.D.	1.25" O.D.	1.625" O.D.
OR-MMC420206VCT	Vertical cable tray 2"W x 6"D for 42U frames	14	240	168	96
OR-MMC470206VCT	Vertical cable tray 2"W x 6"D for 47U frames	14	240	168	96

#### Cabinet Accessories



#### **Vertical Managers**

Mighty Mo® cabinet vertical managers protect patch cords, cable, and equipment ports from damage by maintaining proper bend radius requirements, reducing tension on plugs and jacks and protecting network equipment ports.

#### What's your shape?

The **"L" shape** 1.5" version fits in single or ganged 24"W and 32"W cabinets (with or without interbay divider panels).

The "U" shape 12" version fits in ganged 32"W cabinets and can be used with baffles to create cold aisle/hot aisle airflow from side venting equipment.

PART NO.	DESCRIPTION
OR-MMC2402VMFL	Vertical manager fingers "L" shape 1.5"W for 24U frames
OR-MMC4202VMFL	Vertical manager fingers "L" shape 1.5"W for 42U frames
OR-MMC4702VMFL	Vertical manager fingers "L" shape 1.5"W for 47U frames
OR-MMC4212VMFU	Vertical manager fingers "U" shape 12"W for 42U frames
OR-MMC4712VMFU	Vertical manager fingers "U" shape 12"W for 47U frames

#### Cable Fill Capacities for Vertical Managers

				RECOM	MENDED CABLE F	ILL 40%
		USABLE AREA 24"W CABINET	USABLE AREA 32"W CABINET	CAT 5E	CAT 6	CAT 6A
PART NO.	DESCRIPTION	(SQUARE INCH)	(SQUARE INCH)	0.215" O.D.	0.230" O.D.	0.290" O.D.
OR-MMC2402VMFL	Vertical manager fingers "L" shape 1.5"W for 24U frames	24	-	288	240	168
OR-MMC4202VMFL	Vertical manager fingers "L" shape 1.5"W for 42U frames	24	-	288	240	168
OR-MMC4202VMFL	Vertical manager fingers "L" shape 1.5"W for 42U frames	-	56	672	560	392
OR-MMC4702VMFL	Vertical manager fingers "L" shape 1.5"W for 47U frames	24	-	288	240	168
OR-MMC4702VMFL	Vertical manager fingers "L" shape 1.5"W for 47U frames	-	56	672	560	392
OR-MMC4212VMFU	Vertical manager fingers "U" shape 12"W for 42U frames	-	90	1080	900	630
OR-MMC4712VMFU	Vertical manager fingers "U" shape 12"W for 47U frames	-	90	1080	900	630

Notes: Usable area is calculated using managers on both sides of the cabinet. The "U" shape vertical extends between two cabinets but the capacity is calculated for the two sides of a single cabinet.



Cabinet Accessories

# **OR-MMCCTMB**Cable Tray Mounting Brackets



# OR-MMC

Cable Troughs



#### **Cable Tray Mounting Brackets**

Cable tray mounting brackets mount to the top of the cabinet and utilize the Cablofil® FAS method to attach cable tray without additional hardware. Cable tray mounting brackets can be used alone or with the cable troughs. The mounting brackets are designed to maintain an even height when using Mighty Mo® racks and cabinets together. The 42U cabinet frame will line up with the 7' rack and the 47U cabinet frame will line up with the 8' rack.

#### Cable Tray Mounting Brackets for 42U Frames

PART NO.	DESCRIPTION
OR-MMCCTMB06-B	Comes with Cablofil FAS style attachment for 6"W tray, black
OR-MMCCTMB12-B	Comes with Cablofil FAS style attachment for 12"W tray, black
OR-MMCCTMB18-B	Comes with Cablofil FAS style attachment for 18"W tray, black

Notes: Replace 'B' with 'G' for cool gray.

#### Cable Tray Mounting Brackets for 47U Frames

PART NO.	DESCRIPTION
OR-MMCCTMB4706-B	Comes with Cablofil FAS style attachment for 6"W tray, black
OR-MMCCTMB4712-B	Comes with Cablofil FAS style attachment for 12"W tray, black
OR-MMCCTMB4718-B	Comes with Cablofil FAS style attachment for 18"W tray, black

Notes: Replace 'B' with 'G' for cool gray.

#### Cable Troughs

Cable troughs mount on top of the cabinet frame and provide integrated overhead routing for cable. They are sized and pre-punched to interface with 6", 12" and 18" Cablofil cable tray directly, or can be used with the cable tray mounting bracket.

#### Cable Tray Mounting Brackets for 42U Frames

PART NO.	DESCRIPTION
OR-MMC2406CTCE-B	Center exit, 6"W for 24"W frames, black
OR-MMC2412CTCE-B	Center exit, 12"W for 24"W frames, black
OR-MMC2418CTCE-B	Center exit, 18"W for 24"W frames, black
OR-MMC3206CTCE-B	Center exit, 6"W for 32"W frames, black
OR-MMC3212CTCE-B	Center exit, 12"W for 32"W frames, black
OR-MMC3218CTCE-B	Center exit, 18"W for 32"W frames, black

Notes: Replace 'B' with 'G' for cool gray.

# HYSICAL SUPPORT

#### 97

# MIGHTY MO CABINETS

Cabinet Accessories

# **OR-MMC**Cable Trough Panel Brackets



# OR-MMCCRM Cable Runway Mounting Brackets



#### **Cable Trough Panel Brackets**

Cable trough panel brackets mount to the underside of the cable trough and provide 3RU of 19"W mounting space.

PART NO.	DESCRIPTION
OR-MMC243UCTPB-B	3U for use with 24"W cabinets, black
OR-MMC323UCTPB-B	3U for use with 32"W cabinets, black

Notes: Replace 'B' with 'G' for cool gray.

#### **Cable Runway Mounting Brackets**

Cable runway mounting brackets mount to the top of the cabinet and provide a surface for attaching 6", 12", 18" or 24"W runway. The mounting brackets are designed to maintain an even height when using Mighty Mo® racks and cabinets together. The 42U frame will line up with the 7'racks and the 47U frame will line up with the 8'racks.

#### Cable Runway Mounting Brackets for 42U Frames

PART NO.	DESCRIPTION
OR-MMCCRMB06-B	For 6"W runway, black
OR-MMCCRMB12-B	For 12"W runway, black
OR-MMCCRMB18-B	For 18"W runway, black
OR-MMCCRMB24-B	For 24"W runway, black

Notes: Replace 'B' with 'G' for cool gray.

#### Cable Runway Mounting Brackets for 47U Frames

PART NO.	DESCRIPTION
OR-MMCCRMB4706-B	For 6"W runway, black
OR-MMCCTMB4712-B	For 12"W runway, black
OR-MMCCTMB4718-B	For 18"W runway, black
OR-MMCCTMB4724-B	For 24"W runway, black

Notes: Replace 'B' with 'G' for cool gray.



#### **Cabinet Accessories**

#### **Hardware**



OR-MMCMBK



OR-RU-1224CN



# **OR-MMC**Levelers/Isolation



OR-MMCLVL-IP

#### Hardware

The Legrand® line of cabinet hardware provides the products needed to complete your installation. Rack Unit Cage Nuts enable easy and quick installation of three cage nuts simultaneously.

PART NO.	DESCRIPTION
OR-60400533	Panel mounting screw, #12-24 x .625"L, 50pk, black
OR-PS-M6X1-50	Panel mounting screw, M6X1 x .625"L, 50pk, clear
OR-RU-1224CN	Rack unit cage nuts, #12-24 thread, 50pk, clear
OR-RU-M6X1CN	Rack unit cage nuts, M6X1 thread, 50pk, clear
OR-PS-1224CN	Single hole cage nuts, #12-24 thread, 50pk, clear
OR-PS-M6X1CN	Single hole cage nuts, M6X1 thread, 50pk, clear
OR-MMCCNTOOL	Cage nut installation tool
OR-MMCMBK	Multi-bay hardware kit, (6) each 1/4-20 bolts and nuts
OR-MMCUN-1420-10	Unistrut hardware kit, (10) each 1/4-20 bolts and unistrut nuts
OR-MMCRULBL-60-A	Adhesive rack unit label, (60) RU length
OR-MM6BLC	Mighty Mo bend limiting clip, 3.25"L, snaps onto fingers

#### Levelers/Isolation

Levelers come standard with the cabinet frame; however, additional parts may be ordered. Isolation bushings are used to isolate the anchoring hardware from the frame of the cabinet.

PART NO.	DESCRIPTION
OR-MMCLVL-IP	Levelers, 1/2-13 thread with isolation pads, quantity: 4
OR-MMCISOB-38	Isolation bushing for 3/8" hardware, quantity: 4
OR-MMCISOB-50	Isolation bushing for 1/2" hardware, quantity: 4

#### Cabinet Accessories

# OR-MMC Shelves and Drawers



# **OR-MMCFP**Filler Panels



#### **Shelves and Drawers**

Legrand® offers a full range of sturdy equipment shelves and drawers to protect and support valuable equipment. Mounting hardware is included. Black.

PART NO.	DESCRIPTION
OR-MMCCSS1-1912	Cantilevered shelf, 1U, solid, steel, 19"W x 12"D
OR-MMCCSS2-1915	Cantilevered shelf, 2U, solid, steel, 19"W x 15"D
OR-MMCCSS3-1915	Cantilevered shelf, 3U, solid, steel, 19"W x 15"D
OR-MMCCSV1-1912	Cantilevered shelf, 1U, vented, steel, 19"W x 12"D $$
OR-MMCCSV2-1915	Cantilevered shelf, 2U, vented, steel, 19"W x 15"D
OR-MMCCSV3-1915	Cantilevered shelf, 3U, vented, steel, 19"W x 15"D
OR-MMCFSV-1926	19"W x 26"D, 4-point rack mount vented fixed shelf
OR-MMCSSVL-1924	Sliding shelf, 19" EIA, 24"D vented, 4-point, 100 lbs. load rated
OR-MMCSSVM-1924	Sliding shelf, 19" EIA, 24"D vented, 4-point, 150 lbs. load rated
OR-MMCSSVH-1930	Sliding shelf, 19" EIA, 30"D vented, 4-point, 300 lbs. load rated
OR-MMCDR2-1915	Drawer, 2U, 19"W x 15"D
OR-MMCDR4-1915	Drawer, 4U, 19"W x 15"D

#### Filler Panels

Improve network performance with improved separation of the hot and cold aisle utilizing filler panels to control airflow.

PART NO.	DESCRIPTION
OR-MMCFPS-1-B	1 RU, #12-24 hardware
OR-MMCFPS-2-B	2 RU, #12-24 hardware
OR-MMCFPS-3-B	3 RU, #12-24 hardware
OR-MMCFPS-4-B	4 RU, #12-24 hardware
OR-MMCFPS-5-B	5 RU, #12-24 hardware
OR-MMCFPS-6-B	6 RU, #12-24 hardware
OR-MMCFPT-1-B	1 RU, tool less for square management holes
OR-MMCFPT-2-B	2 RU, tool less for square management holes
OR-MMCFPT-3-B	3 RU, tool less for square management holes
OR-MMCFPT-4-B	4 RU, tool less for square management holes
OR-MMCFPT-8-B	8 RU, tool less for square management holes

# PHYSICAL SUPPORT

## MIGHTY MO CABINETS

**Cabinet Accessories** 

# OR-MMCFANP19-4-2 Fan Panels



OR-MMCFANP19-4-2

# OR-MMCAB, OR-MMC4 Airflow Baffles



OR-MMCAB421612

# OR-MMCFAN-6, OR-MMCFAN-6-2 Fans



#### **Fan Panels**

Use the 19" rack mount fan panel to eliminate hot spots.

PART NO.	DESCRIPTION
OR-MMCFANP19-4-2	19", (2) 4" 110 CFM each, 120V, 24" cord

#### **Airflow Baffles**

Airflow baffles ensure the proper flow of air from cold aisle to hot aisle, even with side ventilated equipment. Air dam kits prevent hot air from recirculating and mixing with the cool air when used with equipment that breathes front to rear.

PART NO.	DESCRIPTION
OR-MMCAB421612	For 32"W 42 RU frame when mounting rails are set at 16-1/4" front to rear and "U" shape vertical is installed
OR-MMCAB423012	For 32"W 42 RU frame when mounting rails are set at 30" front to rear and "U" shape vertical is installed
OR-MMCAB471612	For 32"W 47 RU frame when mounting rails are set at 16-1/4" front to rear and "U" shape vertical is installed
OR-MMCAB473012	For 32"W 47 RU frame when mounting rails are set at 30" front to rear and "U" shape vertical is installed
OR-MMCAB421632SA	For 32"W 42 RU frame when mounting rails are set at 16-1/4" front to rear and side panels are installed
OR-MMCAB471632SA	For 32"W 47 RU frame when mounting rails are set at 16-1/4" front to rear and side panels are installed
OR-MMC4232ADK	Air dam kit, for 32"W 42RU frame
OR-MMC4732ADK	Air dam kit, for 32"W 47RU frame

#### **Fans**

Replacement fans for the fan top plate. Fans include the cord, finger guard and mounting hardware.

PART NO.	DESCRIPTION
OR-MMCFAN-6	Replacement fan for top panels, 6" diameter, 120V, 235 CFM, 24" cord, black
OR-MMCFAN-6-2	Replacement fan for top panels, 6" diameter, 208V, 235 CFM, 24" cord, black

#### Cabinet Accessories

#### OR-MMCPB Basic PDU



#### **Basic PDU**

Increased processing speeds require additional power distributed to each cabinet. Managing the power while minimizing the interference with the rack equipment and airflow is critical. The Legrand® range includes 120V and 208V basic power distribution in 15A, 20A and 30A sizes. Hardware is included to mount to vertical PDU mounting bar.

PART NO.	DESCRIPTION
OR-MMCPB11510-01	Basic 17.5" horizontal PDU, 120V 15A, (10) NEMA 5-15 outlets, 5-15P input plug with 10' cord
OR-MMCPB11518-01	Basic 29.5" vertical PDU, 120V 15A, [18] NEMA 5-15 outlets, 5-15P input plug with 10' cord
OR-MMCPB11524-01	Basic 66.5" vertical PDU, 120V 15A, [24] NEMA 5-15 outlets, 5-15P input plug with 10' cord
OR-MMCPB12010-01	Basic 17.5" horizontal PDU, 120V 20A, (10) NEMA 5-20 outlets, L5-20P input plug with 10' cord
OR-MMCPB12018-01	Basic 29.5" vertical PDU, 120V 20A, [18] NEMA 5-20 outlets, L5-20P input plug with 10' cord
OR-MMCPB12024-01	Basic 66.5" vertical PDU, 120V 20A, [24] NEMA 5-20 outlets, L5-20P input plug with 10' cord
OR-MMCPB13016-01	Basic 29.5" vertical PDU, 120V 30A, [16] NEMA 5-20 outlets, L5-30P input plug with 10' cord
OR-MMCPB13024-01	Basic 66.5" vertical PDU, 120V 30A, [24] NEMA 5-20 outlets, L5-30P input plug with 10' cord
OR-MMCPB22012-01	Basic 17.5" horizontal PDU, 208V 20A, [12] IEC C13 outlets, L6-20P input plug with 10' cord
OR-MMCPB22018-01	Basic 29.5" vertical PDU, 208V 20A, (18) IEC C13 outlets, L6-20P input plug with 10' cord
OR-MMCPB22024-01	Basic 66.5" vertical PDU, 208V 20A, [24] IEC C13 outlets, L6-20P input plug with 10' cord
OR-MMCPB23016-01	Basic 29.5" vertical PDU, 208V 30A, (16) IEC C13 outlets, L6-30P input plug with 10' cord
OR-MMCPB23024-01	Basic 66.5" vertical PDU, 208V 30A, [24] IEC C13 outlets, L6-30P input plug with 10' cord
OR-MMCPB23024-02	Basic 66.5" vertical PDU, 208V 30A, (20) IEC (4) IEC C19 outlets, L6-30P input plug with 10' cord



#### **Cabinet Accessories**

#### OR-MMCPM Metered PDU



#### **Metered PDU**

Increased processing speeds require additional power distributed to each cabinet. Monitoring and managing the power while minimizing the interference with the rack equipment and airflow is critical. Legrand® options include 120V and 208V metered power distribution in 20A and 30A sizes. Hardware is included to mount to vertical PDU mounting bar.


PART NO.	DESCRIPTION
OR-MMCPM12010-01	Metered 17.5" horizontal PDU, 120V 20A, (10) NEMA 5-20 outlets, L5-20P input plug with 10' cord
OR-MMCPM12018-01	Metered 29.5" vertical PDU, 120V 20A, (18) NEMA 5-20 outlets, L5-20P input plug with 10' cord
OR-MMCPM12024-01	Metered 66.5" vertical PDU, 120V 20A, (24) NEMA 5-20 outlets, L5-20P input plug with 10' cord
OR-MMCPM13016-01	Metered 29.5" vertical PDU, 120V 30A, (16) NEMA 5-20 outlets, L5-30P input plug with 10' cord
OR-MMCPM13024-01	Metered 66.5" vertical PDU, 120V 30A, (24) NEMA 5-20 outlets, L5-30P input plug with 10' cord
OR-MMCPM22012-01	Metered 17.5" horizontal PDU, 208V 20A, (12) IEC C13 outlets, L6-20P input plug with 10' cord
OR-MMCPM22018-01	Metered 29.5" vertical PDU, 208V 20A, (18) IEC C13 outlets, L6-20P input plug with 10' cord
OR-MMCPM22024-01	Metered 66.5" vertical PDU, 208V 20A, (24) IEC C13 outlets, L6-20P input plug with 10' cord
OR-MMCPM23016-01	Metered 29.5" vertical PDU, 208V 30A, (16) IEC C13 outlets, L6-30P input plug with 10' cord
OR-MMCPM23024-01	Metered 66.5" vertical PDU, 208V 30A, (24) IEC C13 outlets, L6-30P input plug with 10' cord
OR-MMCPM23024-02	Metered 66.5" vertical PDU, 208V 30A, (20) IEC (4) IEC C19 outlets, L6-30P input plug with 10' cord

# 103

# MIGHTY MO CABINETS

#### Cabinet Accessories

# OR-BCG Air Guard Brush Cable Grommets

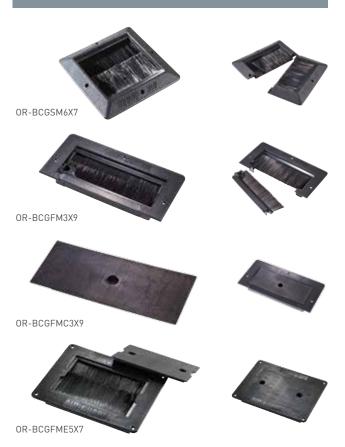

#### Air Guard® Brush Cable Grommets

#### **Features**

- Provides an exceptional seal around cables for an effective and economical solution towards eliminating bypass air through cable cutouts
- Provides an energy savings benefit by reducing cool air loss while improving the static pressure to cool data center equipment
- Helps prevent network equipment from overheating
- Seals cable openings with an overlapping brush and/or EPDM gaskets to help prevent under-floor contamination
- Floor tiles can be removed without disconnecting equipment
- Flame retardant ABS polycarbonate material provides a finished look

PART NO.	DESCRIPTION
OR-BCGSM6X7*	Surface mount two piece assembly designed to retrofit around existing cables without the need to disconnect cables. Covers any shape or size up to 10" x 10".
OR-BCGFM3X9	Flush mount two piece assembly designed for new installations in data centers to maximize energy efficiency. Designed with a removable back brush that allows for great versatility when floor tiles need to be removed.
OR-BCGFMC3X9	Cover fits over the flush mount brush cable grommet to provide a solid surface for increased durability and safety when cables are not going through the floor.
OR-BCGFME5X7	Flush mount Extreme is a heavy duty unit with a two stage, integrated sealing system, EPDM gasket material (UL94 HF-1 rated) and standard Air Guard brush technology, to provide the most effective air seal. A heavy duty, integrated safety cover comes as a standard component. OSHA job-site statutes require open holes in floor panels to be covered. The cover may remain in place until cabling systems are installed and may be saved for future use.

Notes: \*The OR-BCGSM6X7 can mount to any standard Mighty Mo® Cabinet cable entry top panel to provide a layer of protection from dust and debris.

One two piece grommet will cover both openings in a cable entry top panel.



#### Wall Mount Cabinets



Mighty Mo® Wall Mount Cabinets Utilize Advanced Cable Management to Help Secure, Support and Organize Your **Network Where Floor Space is Limited** 

Providing capacity for both active and passive equipment, the cabinets feature one-rack unit finger style vertical managers to ensure proper cable management for maximum network performance. An optional rear horizontal mount bracket kit is designed to provide 2 additional fixed rack units on the rear wall for mounting fiber, equipment or power distribution units. In addition, the cabinet center section swings out from the wall to provide easy access to the equipment.

The front lockable wing turn latch allows you to secure the front door without having to lock the cabinet. This feature allows for easy access into the front of the cabinet when you are in a secure environment.

The Mighty Mo wall mount cabinets are also an ideal choice for mounting in an open office environment. The cabinet's heavy duty construction minimizes sagging under heavy loads and the optional 50 CFM fan is 50% quieter than most other leading cabinets.

#### **Features and Benefits**

- Cable management to support and organize cables, ensuring proper cable management for minimum distortion and maximum network performance
- Choice of solid or Plexiglas® door
- The cabinet can be mounted to open left or right
- Locking center section swings out to provide easy access to the equipment
- Front and center sections are keyed alike
- Includes one pair of fully adjustable #12-24 EIA mounting rails
- Brush cable entry plates standard on top rear
- Cable knockout plates standard on bottom rear
- 3" hole with cap standard on top and bottom rear
- Vented sides for passive cooling of active equipment
- Optional 50 CFM cooling fans are available to further protect active equipment
- Heavy duty 14 ga (.075") steel construction

#### 105

# MIGHTY MO CABINETS

Wall Mount Cabinets

#### OR-MMW Wall Mount Cabinets



OR-MMW122420P-B

#### **Wall Mount Cabinets**

PART NO.	DESCRIPTION	WEIGHT CAPACITY
OR-MMW122420S-B	12U x 24"W x 20"D, solid door, height is 23.50", black	150 lbs.
OR-MMW122420P-B	12U x 24"W x 20"D, Plexiglas® door, height is 23.50", black	150 lbs.
OR-MMW192420S-B	19U x 24"W x 20"D, solid door, height is 35.75", black	200 lbs.
OR-MMW192420P-B	19U x 24"W x 20"D, Plexiglas® door, height is 35.75", black	200 lbs.
OR-MMW262420S-B	26U x 24"W x 20"D, solid door, height is 48.00", black	300 lbs.
OR-MMW262420P-B	26U x 24"W x 20"D, Plexiglas® door, height is 48.00", black	300 lbs.
OR-MMW122426S-B	12U x 24"W x 26"D, solid door, height is 23.50", black	150 lbs.
OR-MMW122426P-B	12U x 24"W x 26"D, Plexiglas® door, height is 23.50", black	150 lbs.
OR-MMW192426S-B	19U x 24"W x 26"D, solid door, height is 35.75", black	200 lbs.
OR-MMW192426P-B	19U x 24"W x 26"D, Plexiglas® door, height is 35.75", black	200 lbs.
OR-MMW262426S-B	26U x 24"W x 26"D, solid door, height is 48.00", black	300 lbs.
OR-MMW262426P-B	26U x 24"W x 26"D, Plexiglas® door, height is 48.00", black	300 lbs.

#### **Wall Mount Cabinet Accessories**

PART NO.	DESCRIPTION
OR-MMCFAN-4-50	Fan kit, 4", 50 CFM
OR-MMWHMBM12-B	Rear horizontal mount bracket kit
OR-MMWBPK	Brush plate kit
OR-MMW12M12-B	12U mounting rail, #12-24, 1-pair
OR-MMW19M12-B	19U mounting rail, #12-24, 1-pair
OR-MMW26M12-B	26U mounting rail, #12-24, 1-pair





#### The Mighty Mo GX Cabinet Series is Made in the USA

The Mighty Mo® GX cabinet is fully modular and configurable to suit the needs of your specific installation. Each cabinet can be assembled with as few or as many accessories as needed to properly support your servers, switches and patch panels. The cabinets are designed to stand alone or easily gang together, as your network demands increase.

#### **Features and Benefits**

- Select models available for next day shipment
- Custom configured to meet equipment and space storage requirements
- Select accessories can be pre-installed, reducing installation time and packaging waste
- Configurations utilize a single part number and price to simplify ordering
- Available in 24U, 42U, 45U and 48U heights
- Available in 24" (match 24"W floor tiles), 29.5"W and 31.5"W
- Available in 36"D, 42"D and 48"D
- EIA mounting rails are available in 0.375" square hole or #12-24 tapped styles
- 3,000 lbs. static load capacity
- UL and cUL listed, UL 60950-1 2nd Edition, NWIN
- Fully configurable: Mighty Mo GX cabinets are available in 29 different frame sizes and two colors (black or white). Built to your configuration, a single part number represents your cabinet design for simplified ordering and receiving. It arrives fully assembled for immediate, on-site installation.

- Unistrut frame design: The unistrut design offers infinite mounting rail adjustments, enabling the installation of vertical accessories anywhere along the struts.
- Cable management: Mighty Mo GX advanced cable management products provide improved management for both servers and high density switches. Available bend limiters provide standards compliant protection for fiber optic and 10G copper patch cords.
- Passive thermal management: Mighty Mo GX baffles redirect the airflow of side vented equipment from the front to rear, ensuring the proper flow of air from cold aisle to hot aisle. Mighty Mo GX cabinets offer airflow baffles for single cabinet configurations, in between ganged cabinets and end of row cabinets.
- Access management: Mighty Mo GX cabinet doors utilize 180° hinges to eliminate aisle blockage when loading or performing maintenance on equipment, without removing the door. All doors include locking handles to prevent unauthorized access and tampering. Side panels also come equipped with locks.
- Bonding and grounding: Per the standard, every cabinet is bonded according to UL 60950-1 2nd Edition and offers a double-lug connection point at the front and rear of every frame.

#### 107

# MIGHTY MO GX CABINETS

#### **Pre-Configured Cabinets**

# OR-GXC422442-A1-B Pre-Configured Server Cabinets



# OR-GXC422942-A1-B Pre-Configured Network Cabinets



#### **Pre-Configured Server Cabinets**

- 42U frame with levelers and casters
- Two pairs of RU labeled equipment mounting rails with 0.375" square holes
- Mounting rail spacing at 30"
- Full width front mesh door
- Split mesh rear door
- Solid top panel with (2) 4" diameter gland grommets
- Double-wide PDU-mount lacing bar
- Side panels, both sides
- Rack unit cage nuts, #12-24 thread, 50pk
- Panel screws, #12-24, 50pk
- Color is black

PART NO.	DESCRIPTION
OR-GXC422442-A1-B	Server, cabinet assembly 42U (80.45"H), 24"W, 42"D, black

#### **Pre-Configured Network Cabinets**

- 42U frame with levelers and casters
- Two pairs of RU labeled equipment mounting rails with #12-24 tapped holes
- Mounting rail spacing at 16.25"
- Full width front mesh door
- Split mesh rear door
- Solid top panel with (2) 4" diameter gland grommets
- Double-wide PDU-mount lacing bar
- Side panels, both sides
- Panel screws, #12-24, 50pk
- Color is black

PART NO.	DESCRIPTION
OR-GXC422942-A1-B	Network, cabinet assembly 42U (80.45"H), 29.5"W, 42"D, black

OR-GXC422942-A1-B

### 24"W Cabinets



Ideal for server applications, the 24"W Mighty Mo® GX enclosure allows users to align with floor tiles, to stay "on grid" even when side panels are deployed. Speed of deployment was a primary consideration in design; the cabinets can be ganged by a single person without removing the doors. The cabinet provides maximum versatility with a static weight load capacity of 3,000 lbs., cable entry from the top or bottom and infinite rail adjustment. All cabinets are electrically bonded and UL and cUL listed, UL2416 2nd Edition, NWIN.

These cabinets are configured-to-order, ensuring you get only what you need for your application. The structural components of the cabinet are available in black or white, while the accessories are available in black.

### Configured-to-Order

#### **Dimensions**

- 24U (47.25"H) x 24"W x (36"D, 42"D)
- 42U (78.75"H) x 24"W x (36"D, 42"D, 48"D)
- 45U (84.00"H) x 24"W x (36"D, 42"D, 48"D)
- 48U (89.25"H) x 24"W x (36"D, 42"D, 48"D)

### Weight Load Capacity

- 3,000 lbs. static
- 2,250 lbs. on casters

### Agency Approvals

UL2416

#### Compliant With

- RoHS
- EIA

### Colors

Black or white

## Frames For 24"W Cabinets



### Frames for 24"W Cabinets

24U	42U	45U	48U	DESCRIPTION
OR-GXC242436-B	OR-GXC422436-B	OR-GXC452436-B	OR-GXC482436-B	36"D frame with leveling feet
OR-GXC242442-B	OR-GXC422442-B	OR-GXC452442-B	OR-GXC482442-B	42"D frame with leveling feet
-	OR-GXC422448-B	OR-GXC452448-B	OR-GXC482448-B	48"D frame with leveling feet

Notes: For white cabinets, please contact your sales representative.

# MIGHTY MO GX CABINETS 24"W Cabinets

# Enclosure Options For 24"W Cabinets

### **Enclosure Options**

	24U	42U	45U	48U	DESCRIPTION
EIA	OR-GXC2424M38-B	OR-GXC4224M38-B	OR-GXC4524M38-B	OR-GXC4824M38-B	0.375" square hole, 14 ga., black, includes 2 rails
Mounting Rails	OR-GXC2424M12-B	OR-GXC4224M12-B	OR-GXC4524M12-B	OR-GXC4824M12-B	#12-24 tapped, 12 ga., black, includes 2 rails
	OR-GXC2424DFM-B	OR-GXC4224DFM-B	OR-GXC4524DFM-B	OR-GXC4824DFM-B	Full width, mesh, 180° swing
Doors, Full Width	OR-GXC2424DFP-B	OR-GXC4224DFP-B	OR-GXC4524DFP-B	OR-GXC4824DFP-B	Full width, Plexiglas®, 180° swing
r die Width	OR-GXC2424DFS-B	OR-GXC4224DFS-B	OR-GXC4524DFS-B	OR-GXC4824DFS-B	Full width, solid, 180° swing
	OR-GXC2424DSM-B	OR-GXC4224DSM-B	OR-GXC4524DSM-B	OR-GXC4824DSM-B	Split, mesh, 180° swing
Doors, Split	OR-GXC2424DSS-B	OR-GXC4224DSS-B	OR-GXC4524DSS-B	OR-GXC4824DSS-B	Split, solid, 180° swing
	-	OR-GXC4248SPSL-B	OR-GXC4548SPSL-B	OR-GXC4848SPSL-B	48"D, solid, locking, covers 1 side of frame
Side Panels	OR-GXC2442SPSL-B	OR-GXC4242SPSL-B	OR-GXC4542SPSL-B	OR-GXC4842SPSL-B	42"D, solid, locking, covers 1 side of frame
	OR-GXC2436SPSL-B	OR-GXC4236SPSL-B	OR-GXC4536SPSL-B	OR-GXC4836SPSL-B	36"D, solid, locking, covers 1 side of frame
	-	OR-GXC2448TPS-B	OR-GXC2448TPS-B	OR-GXC2448TPS-B	48"D, solid, (2) 4" dia. grommets
	OR-GXC2442TPS-B	OR-GXC2442TPS-B	OR-GXC2442TPS-B	OR-GXC2442TPS-B	42"D, solid, (2) 4" dia. grommets
	OR-GXC2436TPS-B	OR-GXC2436TPS-B	OR-GXC2436TPS-B	OR-GXC2436TPS-B	36"D, solid, (2) 4" dia. grommets
	-	OR-GXC2448TPV-B	OR-GXC2448TPV-B	OR-GXC2448TPV-B	48"D, vented or fan, (2) 4" dia. grommets
	OR-GXC2442TPV-B	OR-GXC2442TPV-B	OR-GXC2442TPV-B	OR-GXC2442TPV-B	42"D, vented or fan, (2) 4" dia. grommets
	OR-GXC2436TPV-B	OR-GXC2436TPV-B	OR-GXC2436TPV-B	OR-GXC2436TPV-B	36"D, vented or fan, (2) 4" dia. grommets
Top Panels	-	OR-GXC2448TPC-B	OR-GXC2448TPC-B	OR-GXC2448TPC-B	48"D, cabling H-panel
	OR-GXC2442TPC-B	OR-GXC2442TPC-B	OR-GXC2442TPC-B	OR-GXC2442TPC-B	42"D, cabling H-panel
	OR-GXC2436TPC-B	OR-GXC2436TPC-B	OR-GXC2436TPC-B	OR-GXC2436TPC-B	36"D, cabling H-panel
	OR-GXC2448TPC4-B	OR-GXC2448TPC4-B	OR-GXC2448TPC4-B	OR-GXC2448TPC4-B	48"D, solid (2) 4" dia. grommets
	OR-GXC2442TPC4-B	OR-GXC2442TPC4-B	OR-GXC2442TPC4-B	OR-GXC2442TPC4-B	42"D, solid (2) 4" dia. grommets
	OR-GXC2436TPC4-B	OR-GXC2436TPC4-B	OR-GXC2436TPC4-B	OR-GXC2436TPC4-B	36"D, solid (2) 4" dia. grommets
Top Fans/ Brush	OR-MMCFAN-6	OR-MMCFAN-6	OR-MMCFAN-6	OR-MMCFAN-6	6" fan for top panel, 120V, 235 CFM, 24" cord, 1 fan
	OR-GXCTPBK	OR-GXCTPBK	OR-GXCTPBK	OR-GXCTPBK	Brush kit for cabling H-panel, covers both openings
Casters	OR-GXCCSTR-4	OR-GXCCSTR-4	OR-GXCCSTR-4	OR-GXCCSTR-4	Casters, set of 4

☐ legrand®



24"W Cabinets

# Recommended Accessories For 24"W Cabinets

### **Recommended Accessories**

	24U	42U	45U	48U	DESCRIPTION
	-	OR-GXC42VFK	OR-GXC45VFK	OR-GXC48VFK	Vertical finger kit , covers 1 rail
Cable Management	OR-MM6BLC	OR-MM6BLC	OR-MM6BLC	OR-MM6BLC	Bend limiting clip, 3.25" for vertical finger kits, qty 12
Management	OR-GXC24VPMLD	OR-GXC42VPMLD	OR-GXC45VPMLD	OR-GXC48VPMLD	Cable lacing/PDU mount, double-wide
	-	OR-GXC4206VWT-B	OR-GXC4506VWT-B	OR-GXC4806VWT-B	Vertical wire trellis, 6"W
Grommets	OR-70300083	OR-70300083	OR-70300083	OR-70300083	Cable grommet, 4" dia.
Blanking Panels	OR-BFPT-1RU-10	OR-BFPT-1RU-10	OR-BFPT-1RU-10	OR-BFPT-1RU-10	Blanking panel, plastic, tool less, 1U, 10pk
Shelves	OR-MMCFSV-1926	OR-MMCFSV-1926	OR-MMCFSV-1926	OR-MMCFSV-1926	Fixed – 19"EIA x 26"D, 4-point mount, 200 lbs capacity
Hardware	OR-PS-1224CN	OR-PS-1224CN	OR-PS-1224CN	OR-PS-1224CN	Single hole cage nuts, #12-24 thread, 50pk, clear
	OR-60400533	OR-60400533	OR-60400533	OR-60400533	Panel mounting screws, #12-24 x.625", 50pk, black

Notes: All accessories are black unless noted.

### 29.5"W Cabinets



The Mighty Mo® GX 29.5"W was developed to accommodate ever increasing cable densities while maintaining proper airflow patterns. Predictable air inlet temperature to side-breathing switches is ensured by installing an airflow baffle. Efficiency is gained by properly channeling the airflow to help solve the problem of over-temperature alarms. If the equipment has a front-to-rear airflow pattern, bypass airflow is eliminated by installing an air dam kit on the face of the cabinet. Side patching kits allow for mounting patch panels outside of the vertical rack unit space. Each kit contains (2) 1U 19" EIA mounting locations between the vertical mounting rail and the outside of the cabinet, allowing deployment of up to four additional patch panels per cabinet. A wide cable management offering facilitates proper routing of cabling to maintain the integrity of the network. The Mighty Mo GX will meet your most demanding network applications and is UL and cUL listed, UL2416 2nd Edition, NWIN.

### Configured-to-Order

#### **Dimensions**

- 42U (78.75"H) x 29.5"W x (36"D, 42"D, 48"D)
- 45U (84.00"H) x 29.5"W x (36"D, 42"D, 48"D)
- 48U (89.25"H) x 29.5"W x (36"D, 42"D, 48"D)

### Weight Load Capacity

- 3,000 lbs. static
- 2,250 lbs. on casters

### Agency Approvals

**UL2416** 

### Compliant With

- RoHS
- EIA

#### Colors

Black or white

### Frames For 29.5"W Cabinets



#### Frames for 29.5"W Cabinets

42U	45U	48U	DESCRIPTION
OR-GXC422936-B	OR-GXC452936-B	OR-GXC482936-B	36"D frame with leveling feet
OR-GXC422942-B	OR-GXC452942-B	OR-GXC482942-B	42"D frame with leveling feet
OR-GXC422948-B	OR-GXC452948-B	OR-GXC482948-B	48"D frame with leveling feet

Notes: For white cabinets, please contact your sales representative.



29.5"W Cabinets

# Enclosure Options For 29.5"W Cabinets

### **Enclosure Options**

	42U	45U	48U	DESCRIPTION
EIA	OR-GXC4229M38-B	OR-GXC4529M38-B	OR-GXC4829M38-B	.375" square hole, 14 ga., black, includes (2) rails
Mounting Rails	OR-GXC4229M12-B	OR-GXC4529M12-B	OR-GXC4829M12-B	#12-24 tapped, 12 ga., black, includes (2) rails
	OR-GXC4229DFM-B	OR-GXC4529DFM-B	OR-GXC4829DFM-B	Full width, mesh, 180° swing
Doors, Full Width	OR-GXC4229DFP-B	OR-GXC4529DFP-B	OR-GXC4829DFP-B	Full width, Plexiglas®, 180° swing
, att matil	OR-GXC4229DFS-B	OR-GXC4529DFS-B	OR-GXC4829DFS-B	Full width, solid, 180° swing
0.10	OR-GXC4229DSM-B	OR-GXC4529DSM-B	OR-GXC4829DSM-B	Split, mesh, 180° swing
Doors, Split	OR-GXC4229DSS-B	OR-GXC4529DSS-B	OR-GXC4829DSS-B	Split, solid, 180° swing
	OR-GXC4248SPSL-B	OR-GXC4548SPSL-B	OR-GXC4848SPSL-B	48"D, solid, locking, covers 1 side of frame
Side Panels	OR-GXC4242SPSL-B	OR-GXC4542SPSL-B	OR-GXC4842SPSL-B	42"D, solid, locking, covers 1 side of frame
	OR-GXC4236SPSL-B	OR-GXC4536SPSL-B	OR-GXC4836SPSL-B	36"D, solid, locking, covers 1 side of frame
	OR-GXC2948TPS-B	OR-GXC2948TPS-B	OR-GXC2948TPS-B	48"D, solid, includes (2) 4" dia. grommets
	OR-GXC2942TPS-B	OR-GXC2942TPS-B	OR-GXC2942TPS-B	42"D, solid, includes (2) 4" dia. grommets
	OR-GXC2936TPS-B	OR-GXC2936TPS-B	OR-GXC2936TPS-B	36"D, solid, includes (2) 4" dia. grommets
	OR-GXC2948TPV-B	OR-GXC2948TPV-B	OR-GXC2948TPV-B	48"D, vented or fan, includes (2) 4" dia. grommets
	OR-GXC2942TPV-B	OR-GXC2942TPV-B	OR-GXC2942TPV-B	42"D, vented or fan, includes (2) 4" dia. grommets
Tan Danala	OR-GXC2936TPV-B	OR-GXC2936TPV-B	OR-GXC2936TPV-B	36"D, vented or fan, includes (2) 4" dia. grommets
Top Panels	OR-GXC2948TPC-B	OR-GXC2948TPC-B	OR-GXC2948TPC-B	48"D, cabling H-panel
	OR-GXC2942TPC-B	OR-GXC2942TPC-B	OR-GXC2942TPC-B	42"D, cabling H-panel
	OR-GXC2936TPC-B	OR-GXC2936TPC-B	OR-GXC2936TPC-B	36"D, cabling H-panel
	OR-GXC2948TPC4-B	OR-GXC2948TPC4-B	OR-GXC2948TPC4-B	48"D, solid (2) 4" dia. grommets
	OR-GXC2942TPC4-B	OR-GXC2942TPC4-B	OR-GXC2942TPC4-B	42"D, solid (2) 4" dia. grommets
	OR-GXC2936TPC4-B	OR-GXC2936TPC4-B	OR-GXC2936TPC4-B	36"D, solid (2) 4" dia. grommets
Top Fans/	OR-MMCFAN-6	OR-MMCFAN-6	OR-MMCFAN-6	6" fan for top panel, 120V, 235 CFM, 24" cord, (1) fan
Brush	OR-GXCTPBK	OR-GXCTPBK	OR-GXCTPBK	Brush kit for cabling H-panel, covers both openings
Casters	OR-GXCCSTR-4	OR-GXCCSTR-4	OR-GXCCSTR-4	Casters, set of 4

29.5"W Cabinets

☐ legrand®

### **Recommended Accessories** For 29.5"W Cabinets

### **Recommended Accessories**

	42U	45U	48U	DESCRIPTION
	OR-GXC42VFK	OR-GXC45VFK	OR-GXC48VFK	Vertical finger kit, covers 1 rail
	OR-MM6BLC	OR-MM6BLC	OR-MM6BLC	Bend limiting clip, 3.25" for vertical finger kits, qty 12
Cable	OR-GXC42VPMLD	OR-GXC45VPMLD	OR-GXC48VPMLD	Cable lacing/PDU mount, double-wide
Management	OR-GXC4206VWT-B	OR-GXC4506VWT-B	OR-GXC4806VWT-B	Vertical wire trellis, 6"W
	OR-GXC29WMK-5	OR-GXC29WMK-5	OR-GXC29WMK-5	Wire manager kit, mounts between (2) 29.5 $\!\!\!^{\circ}\text{W}$ frames, kit of 5
Grommets	OR-70300083	OR-70300083	OR-70300083	Cable reserved /" die
Grommets	UR-70300083	UR-70300083	UR-70300083	Cable grommet, 4" dia.
	OR-GXC4229ADK-B	OR-GXC4529ADK-B	OR-GXC4829ADK-B	Air dam kit, 29.5" W cabinets
Airflow	OR-GXCAB421629	OR-GXCAB451629	OR-GXCAB481629	Angled airflow baffles, 16.25"D, mounts between (2) 29.5"W frames
Management	OR-GXCAB423029	OR-GXCAB453029	OR-GXCAB483029	Angled airflow baffles, 30"D, mounts between (2) 29.5"W frames
	OR-GXC4229SPB-B	OR-GXC4529SPB-B	OR-GXC4829SPB-B	Side patching baffle – covers one side of cabinet
D				
Blanking Panels	OR-BFPT-1RU-10	OR-BFPT-1RU-10	OR-BFPT-1RU-10	Blanking panel, plastic, tool less, 1U, 10pk
Shelves	OR-MMCFSV-1926	OR-MMCFSV-1926	OR-MMCFSV-1926	Fixed shelf – 19"EIA x 26"D, 4-point mount, 200 lbs. capacity
				200 tab. dapabity
Hardware	OR-PS-1224CN	OR-PS-1224CN	OR-PS-1224CN	Single hole cage nuts, #12-24 thread, 50pk, clear
rialuwale	OR-60400533	OR-60400533	OR-60400533	Panel mounting screws, #12-24 x .625", 50pk, black

Notes: Air dam kit and side patching baffle are available in white, all other accessories are black.

# PHYSICAL SUPPORT

### MIGHTY MO GX CABINETS

### 31.5"W Cabinets



The 31.5"W Mighty Mo® GX has all the features and benefits of the 29.5"W cabinet while providing more width for cable intensive applications. The extra width allows for larger cable bundles to be managed to the sides of the cabinet and not impede airflow. Multiple top panels are also available, providing flexibility for cable entry and egress. The Mighty Mo GX is UL and cUL listed, UL 2416 2nd Edition, NWIN. These cabinets are configured-to-order, ensuring you get only what you need for your application.

### Configured-to-Order

**Dimensions** 

- 42U (78.75"H) x 31.5"W x (36"D, 42"D, 48"D)
- 45U (84.00"H) x 31.5"W x (36"D, 42"D, 48"D)
- 48U (89.25"H) x 31.5"W x (36"D, 42"D, 48"D)

Weight Load Capacity

- 3,000 lbs. static
- 2,250 lbs. on casters

### Agency Approvals

**UL2416** 

Compliant With

- RoHS
- EIA

### Colors

Black or white

## Frames For 31.5"W Cabinets



### Frames for 31.5"W Cabinets

42U	45U	48U	DESCRIPTION
OR-GXC423136-B	OR-GXC453136-B	OR-GXC483136-B	36"D frame with leveling feet
OR-GXC423142-B	OR-GXC453142-B	OR-GXC483142-B	42" D frame with leveling feet
OR-GXC423148-B	OR-GXC453148-B	OR-GXC483148-B	48"D frame with leveling feet

Notes: For white cabinets, please contact your sales representative.

31.5"W Cabinets

# Enclosure Options For 31.5"W Cabinets

### **Enclosure Options**

Lilotosaro opti	Enclosure options					
	42U	45U	48U	DESCRIPTION		
EIA	OR-GXC4231M38-B	OR-GXC4531M38-B	OR-GXC4831M38-B	.375" square hole, 14 ga., black, includes (2) rails		
Mounting Rails	OR-GXC4231M12-B	OR-GXC4531M12-B	OR-GXC4831M12-B	#12-24 tapped, 12 ga., black, includes (2) rails		
D	OR-GXC4231DFM-B	OR-GXC4531DFM-B	OR-GXC4831DFM-B	Full width, mesh, 180° swing		
Doors, Full Width	OR-GXC4231DFP-B	OR-GXC4531DFP-B	OR-GXC4831DFP-B	Full width, Plexiglas®, 180° swing		
	OR-GXC4231DFS-B	OR-GXC4531DFS-B	OR-GXC4831DFS-B	Full width, solid, 180° swing		
	OR-GXC4231DSM-B	OR-GXC4531DSM-B	OR-GXC4831DSM-B	Split, mesh, 180° swing		
Doors, Split	OR-GXC4231DSS-B	OR-GXC4531DSS-B	OR-GXC4831DSS-B	Split, solid, 180° swing		
	OR-GXC4248SPSL-B	OR-GXC4548SPSL-B	OR-GXC4848SPSL-B	48"D, solid, locking, covers 1 side of frame		
Side Panels	OR-GXC4242SPSL-B	OR-GXC4542SPSL-B	OR-GXC4842SPSL-B	42"D, solid, locking, covers 1 side of frame		
	OR-GXC4236SPSL-B	OR-GXC4536SPSL-B	OR-GXC4836SPSL-B	36"D, solid, locking, covers 1 side of frame		
	OR-GXC3148TPS-B	OR-GXC3148TPS-B	OR-GXC3148TPS-B	48"D, solid, includes (2) 4" dia. grommets		
	OR-GXC3142TPS-B	OR-GXC3142TPS-B	OR-GXC3142TPS-B	42"D, solid, includes (2) 4" dia. grommets		
	OR-GXC3136TPS-B	OR-GXC3136TPS-B	OR-GXC3136TPS-B	36"D, solid, includes (2) 4" dia. grommets		
	OR-GXC3148TPV-B	OR-GXC3148TPV-B	OR-GXC3148TPV-B	48"D, vented or fan, includes (2) 4" dia. grommets		
	OR-GXC3142TPV-B	OR-GXC3142TPV-B	OR-GXC3142TPV-B	42"D, vented or fan, includes (2) 4" dia. grommets		
Top Panels	OR-GXC3136TPV-B	OR-GXC3136TPV-B	OR-GXC3136TPV-B	36"D, vented or fan, includes (2) 4" dia. grommets		
Top I allets	OR-GXC3148TPC-B	OR-GXC3148TPC-B	OR-GXC3148TPC-B	48"D, cabling H-panel		
	OR-GXC3142TPC-B	OR-GXC3142TPC-B	OR-GXC3142TPC-B	42"D, cabling H-panel		
	OR-GXC3136TPC-B	OR-GXC3136TPC-B	OR-GXC3136TPC-B	36"D, cabling H-panel		
	OR-GXC3148TPC4-B	OR-GXC3148TPC4-B	OR-GXC3148TPC4-B	48"D, solid (2) 4" dia. grommets		
	OR-GXC3142TPC4-B	OR-GXC3142TPC4-B	OR-GXC3142TPC4-B	42"D, solid (2) 4" dia. grommets		
	OR-GXC3136TPC4-B	OR-GXC3136TPC4-B	OR-GXC3136TPC4-B	36"D, solid (2) 4" dia. grommets		
T	OR-MMCFAN-6	OR-MMCFAN-6	OR-MMCFAN-6	6" fan for top panel, 120V, 235 CFM, 24" cord, (1) fan		
Top Fans/ Brush	OR-GXCTPBK	OR-GXCTPBK	OR-GXCTPBK			
	UK-UKUIPBK	OK-UNCIPBN	OK-OVCIARV	Brush kit for cabling H-panel, covers both openings		
Casters	OR-GXCCSTR-4	OR-GXCCSTR-4	OR-GXCCSTR-4	Casters, set of 4		

31.5"W Cabinets

# Recommended Accessories For 31.5"W Cabinets

### **Recommended Accessories**

	42U	45U	48U	DESCRIPTION
	OR-GXC42VFK	OR-GXC45VFK	OR-GXC48VFK	Vertical finger kit, covers 1 rail
	OR-MM6BLC	OR-MM6BLC	OR-MM6BLC	Bend limiting clip, 3.25" for vertical finger kits, qty 12
Cable	OR-GXC42VPMLD	OR-GXC45VPMLD	OR-GXC48VPMLD	Cable lacing/PDU mount, double-wide
Management	OR-GXC4206VWT-B	OR-GXC4506VWT-B	OR-GXC4806VWT-B	Vertical wire trellis, 6"W
	OR-GXC31WMK-5	OR-GXC31WMK-5	OR-GXC31WMK-5	Wire manager kit, mounts between (2) 31.5 $\!\!^{\circ}\text{W}$ frames, kit of 5
Grommets	OR-70300083	OR-70300083	OR-70300083	Cable grommet, 4" dia.
Grommets	UK-70300063	UK-70300063	UK-70300063	Cable grofflifier, 4 dia.
	OR-GXC4231ADK-B	OR-GXC4531ADK-B	OR-GXC4831ADK-B	Air dam kit, 31.5" W cabinets
Airflow	OR-GXCAB421631	OR-GXCAB451631	OR-GXCAB481631	Angled airflow baffles, 16.25"D, mounts between (2) 31.5"W frames
Management	OR-GXCAB423031	OR-GXCAB453031	OR-GXCAB483031	Angled airflow baffles, 30°D, mounts between (2) 31.5°W frames
	OR-GXC4231SPB-B	OR-GXC4531SPB-B	OR-GXC4831SPB-B	Side patching baffle – covers one side of cabinet
Disabias				
Blanking Panels	OR-BFPT-1RU-10	OR-BFPT-1RU-10	OR-BFPT-1RU-10	Blanking panel, plastic, tool less, 1U, 10pk
Shelves	OR-MMCFSV-1926	OR-MMCFSV-1926	OR-MMCFSV-1926	Fixed shelf – 19"EIA x 26"D, 4-point mount, 200 lbs. capacity
Hardware	OR-PS-1224CN	OR-PS-1224CN	OR-PS-1224CN	Single hole cage nuts, #12-24 thread, 50pk, clear
naruware	OR-60400533	OR-60400533	OR-60400533	Panel mounting screws, #12-24 x .625", 50pk, black

 $Notes: Air dam \ kit \ and \ side \ patching \ baffle \ are \ available \ in \ white, \ all \ other \ accessories \ are \ black.$ 

# PHYSICAL SUPPORT

# MIGHTY MO GX CABINETS

### Cabinet Accessories

# **OR-GXC**Vertical Finger Kits





OR-MM6BLC

### **Vertical Finger Kits**

Provide support and maintain the proper bend radius for patch cords and cable at each rack unit. Also protects equipment ports from damage by minimizing tension on the cords. Vertical finger kits mount directly to the vertical mounting rails. Each kit covers 1 rail. Bend limiting clips provide bend limitation for fiber optic jumpers.

PART NO.	DESCRIPTION
OR-GXC42VFK	For 42U cabinets
OR-GXC45VFK	For 45U cabinets
OR-GXC48VFK	For 48U cabinets
OR-MM6BLC	Mighty Mo bend limiting clip, 3.25"L, snaps onto fingers, qty 12

# OR-GXC Vertical Wire Trellis



Vertical Wire Trellis

#### **Vertical Wire Trellis**

Flat wire form has vertical and horizontal wire cross hatch pattern. The horizontal wires are set at every 1 rack unit to provide a flexible lacing backdrop. The trellis is 6" wide to accommodate several cable bundles at one time.

PART NO.	DESCRIPTION
OR-GXC4206VWT-B	For 42U cabinets
OR-GXC4506VWT-B	For 45U cabinets
OR-GXC4806VWT-B	For 48U cabinets

### OR-GXC Wire Manager Kit



OR-GXC29WMK-5

### Wire Manager Kit

Set of (5) 2" tall wire forms connect cable management fingers between cabinets to simulate a wire management 'cage' within the open space between two ganged cabinets. Wire managers mount to vertical mounting rails between adjoining cabinets. As many wire forms as desired can be installed between cabinets.

PART NO.	DESCRIPTION
OR-GXC29WMK-5	For 29.5"W cabinets
OR-GXC31WMK-5	For 31.5"W cabinets

Cabinet Accessories

## OR-MMCCTMB PDU Mount/Lacing Bars





PDU Mount/Lacing Bars

### OR-MM6HMF, OR-604 Horizontal Cable Managers



OR-MM6HMF2RU

# OR-MMCCTMB Cable Tray Mounting Brackets



### **PDU Mount / Lacing Bars**

Available in single and double widths. Button mount allows for tool less mounting of vertical PDUs. The tear-drop shaped slots allow hook and loop fasteners to be dropped over the bar and tightened instead of trying to feed the fasteners through from the back.

PART NO.	DESCRIPTION
OR-MMCCTMB06-B	Comes with Cablofil® FAS style attachment for 6"W tray, black
OR-MMCCTMB12-B	Comes with Cablofil FAS style attachment for 12"W tray, black
OR-MMCCTMB18-B	Comes with Cablofil FAS style attachment for 18"W tray, black

### **Horizontal Cable Managers**

Horizontal cable managers organize cables and maximize system performance.

PART NO.	DESCRIPTION
OR-MM6HMF1RU	Includes fingers, cover, 1 RU
OR-MM6HMF2RU	Includes fingers, cover, 2 RU
OR-60400131	Includes 5 steel rings, 3.5"D, 1 RU
OR-60400057	Includes 5 steel rings, 4"D, 2 RU

### **Cable Tray Mounting Brackets**

Cable tray mounting brackets mount to the top of the cabinet and use the Cablofil FAS method to attach cable tray without any additional hardware. They can be used alone or in conjunction with cable troughs.

PART NO.	DESCRIPTION
OR-MMCCTMB06-B	Comes with Cablofil FAS style attachment for 6"W tray, black
OR-MMCCTMB12-B	Comes with Cablofil FAS style attachment for 12"W tray, black
OR-MMCCTMB18-B	Comes with Cablofil FAS style attachment for 18"W tray, black

Notes: Available in black or white

### Cabinet Accessories

# OR-MMCCRMB Cable Runway Brackets



# OR-MMC, OR-GXC Cable Troughs



### **Cable Runway Brackets**

Cable runway brackets mount to the top of the cabinet, providing a surface to attach 6", 12" or 18" wide runway.

PART NO.	DESCRIPTION
OR-MMCCRMB06-B	For 6"W runway, black
OR-MMCCRMB12-B	For 12"W runway, black
OR-MMCCRMB18-B	For 18"W runway, black

Notes: Available in black or white.

### **Cable Troughs**

Cable troughs provide low profile cable routing that mounts to the top of the cabinet. They can be used alone or in conjunction with Cablofil® cable tray. Available in 6", 12" and 18" widths.

### 24"W Cabinets

PART NO.	DESCRIPTION
OR-MMC2406CTCE-B	6"W trough
OR-MMC2412CTCE-B	12"W trough
OR-MMC2418CTCE-B	18"W trough

#### 29.5"W Cabinets

OR-GXC2906CTCE-B	6"W trough
OR-GXC2912CTCE-B	12"W trough
OR-GXC2918CTCE-B	18"W trough

### 31.5"W Cabinets

OR-GXC3106CTCE-B	6"W trough
OR-GXC3112CTCE-B	12"W trough
OR-GXC3118CTCE-B	18"W trough


Notes: Available in black or white.

### Cabinet Accessories and Hardware

### **OR-MMC Shelves and Drawers**







OR-MMCFSV-1926

OR-MMCCSS1-1912

OR-MMCCSV1-1912





OR-MMCSSVL-1924

OR-MMCDR2-1915

### **Shelves and Drawers**

Legrand® offers a full range of sturdy equipment shelves and drawers to protect and support valuable equipment.

- Mounting hardware is included
- Color is black

### Fixed Shelf - 4-point rack-mount

PART NO.	DESCRIPTION
OR-MMCFSV-1926	19"EIA x 26"D, 4-point mount

#### Cantilevered Fixed Shelves - Solid

PART NO.	DESCRIPTION
OR-MMCCSS1-1912	1U, solid steel, 19" x 12"D
OR-MMCCSS2-1915	2U, solid steel, 19" x 15"D
OR-MMCCSS3-1915	3U, solid steel, 19" x 15"D

#### Cantilevered Fixed Shelves - Vented

PART NO.	DESCRIPTION
OR-MMCCSV1-1912	1U, vented steel, 19" x 12"D
OR-MMCCSV2-1915	2U, vented steel, 19" x 15"D
OR-MMCCSV3-1915	3U, vented steel, 19" x 15"D

### **Sliding Shelves**

PART NO.	DESCRIPTION
OR-MMCSSVL-1924	19" EIA, 24"D vented, 100 lbs. capacity
OR-MMCSSVM-1924	19" EIA, 24"D vented, 150 lbs. capacity
OR-MMCSSVH-1930	19" EIA, 30"D solid, 300 lbs. capacity

#### **Drawers**

PART NO.	DESCRIPTION
OR-MMCDR2-1915	2U, 19" EIA x 15"D
OR-MMCDR4-1915	4U, 19" EIA x 15"D

### Hardware



OR-RU-1224CN



#### Hardware

PART NO.	DESCRIPTION
OR-RU-1224CN	Rack unit cage nuts, #12-24 thread, 50pk, clear
OR-PS-1224CN	Single hole cage nuts, #12-24 thread, 50pk, clear
OR-PS-M6X1CN	Single hole cage nuts, M6X1 thread, 50pk, clear
OR-MMCCNTOOL	Cage nut installation tool
OR-60400533	Panel mounting screws, #12-24 x .625", 50pk, black
OR-PS-M6X1-50	Panel mounting screws, #12-24 x .625", 50pk, clear
OR-MMCUN-1420-10	Unistrut hardware kit, 10 each 1/4 20 bolts and unistrut nuts – GX cabinets
OR-MMCRULBL-60-A	Adhesive rack unit label, 60 RU length

120

### DATACAB WALL MOUNT CABINETS

#### Wall Mount Cabinets and Accessories

DataCab<sup>™</sup> wall mount cabinets are perfect for both active equipment and passive zone cabling. The thin line front door construction offers more room in the center section to provide easy access to the equipment. The heavy duty construction of the cabinet minimizes sagging under heavy loads.

The hinge side placement of the rear section mounting holes provides additional support when the center section is open for terminations.

The sides of the cabinet are vented for passive cooling of the active equipment, and the optional 50 CFM fan is 50% quieter than the fans of most other leading cabinets.

#### **Features**

- Choice of solid or Plexiglas® door
- Locking center section swings out to provide easy access
- Door and center section are keyed alike
- Includes one pair of fully adjustable #12-24 EIA mounting rails
- Heavy duty welded steel construction
- Vented sides for passive cooling of active equipment
- Optional 50 CFM cooling fans are available to further protect active equipment

### OR-DCW DataCab Wall Mount Cabinets



OR-DCW122424P-B

### DataCab Wall Mount Cabinets

The DataCab wall mount cabinet comes standard with four removable cable knockout panels on the rear section. Each section contains one knock-out that can be 1-3/8" or 2" diameter and two knockouts that can be 7/8" or 1-1/8" diameter.

PART NO.	DESCRIPTION	WEIGHT CAPACITY
OR-DCW122424S-B	12U x 24"W x 24"D, solid door, 23.50"H, black	125 lbs.
OR-DCW122424P-B	12U x 24"W x 24"D, Plexiglas® door, 23.50"H, black	125 lbs.
OR-DCW192424S-B	19U x 24"W x 24"D, solid door, 35.75"H, black	150 lbs.
OR-DCW192424P-B	19U x 24"W x 24"D, Plexiglas® door, 35.75"H, black	150 lbs.
OR-DCW262424S-B	26U x 24"W x 24"D, solid door, 48"H, black	175 lbs.
OR-DCW262424P-B	26U x 24"W x 24"D, Plexiglas® door, 48"H, black	175 lbs.

### **DataCab Accessories**

PART NO.	DESCRIPTION
OR-MMCFAN-4-50	Fan kit, 4", 50 CFM with finger guard and 2' power cord
OR-MMWBPK	Brush plate kit
OR-DCW12M12-B	12U mounting rail, #12-24, one-pair
OR-DCW19M12-B	19U mounting rail, #12-24, one-pair
OR-DCW26M12-B	26U mounting rail, #12-24, one-pair

### NEW

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM



The Mighty Mo® 20 rack system is a comprehensive solution that meets the needs of networks requiring greater flexibility, optimum efficiency and superior design. With over 120 new innovative products, the Mighty Mo 20 is designed for any size LAN, SAN or Data Center, any Copper or Fiber media and any Network Equipment.

A well designed physical support infrastructure maximizes network performance by minimizing signal loss caused by improper cable support, guarantees the flexibility necessary for future technology and growth and increases cooling efficiency through proper airflow management.

#### **Features**

- 26 different sizes in black or white
- Channel and 4-Post versions up to 9 feet
- 2" deeper fingers for higher density networks
- Bend limiting clips provide 180° protection
- Mounting brackets for both Cablofil® tray and runway
- Available 6" tall brackets improve cable transition
- Deeper vertical managers with up to 40% more room
- Channel rack depths up to 30" for improved capacity
- Improved hex pattern on all channel racks
- Larger vertical managers reduce cable obstruction

# HYSICAI SIIPPORT

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Cable Management Racks

### OR-MM20 Mighty Mo 20 Channel Racks





### Mighty Mo® 20 Channel Racks

Mighty Mo 20 channel racks are designed to provide greater flexibility and optimum efficiency to any size network. The top trough with built-in waterfall provides bend radius control and efficient patch cable routing. Honeycomb side rails on all depth channel racks provide the ultimate in distribution cable management. On 16-1/4" and deeper channel racks, honeycomb side rails and airflow baffles combine to create a patented system that manages intake and exhaust air from side vented equipment.

PART NO.	DESCRIPTION
OR-MM20706-X	6.5"D channel, 7'H, 45 RU, tapped #12-24
OR-MM20710-X	10.5"D channel, 7'H, 45 RU, tapped #12-24
OR-MM20716-X	16.25"D channel, 7'H, 45 RU, tapped #12-24
OR-MM20724-X	24"D channel, 7'H, 45 RU, tapped #12-24
OR-MM20730-X	30"D channel, 7'H, 45 RU, tapped #12-24
OR-MM20810-X	10.5"D channel, 8'H, 51 RU, tapped #12-24
OR-MM20816-X	16.25"D channel, 8'H, 51 RU, tapped #12-24
OR-MM20824-X	24"D channel, 8'H, 51 RU, tapped #12-24
OR-MM20830-X	30"D channel, 8'H, 51 RU, tapped #12-24
OR-MM20916-X	16.25"D channel, 9'H, 58 RU, tapped #12-24
OR-MM20924-X	24"D channel, 9'H, 58 RU, tapped #12-24
OR-MM20930-X	30"D channel, 9'H, 58 RU, tapped #12-24

Notes: Replace the "X" tail code with "B" for black or "W" for white.

Static capacity 2,000 lbs. Assembly required.

Patent numbers 8,130,494 and 8,256,181.

**L**legrand

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

### Cable Management Racks

## OR-MM20ADJ Mighty Mo 20 Adjustable 4-Post Racks

NEW



### Mighty Mo® 20 Adjustable 4-Post Racks

Mighty Mo 20 4-post racks provide greater flexibility and optimum efficiency in any data center. The adjustable rack allows all 4 mounting rails to be adjusted even after the rack has been fastened to the floor. Front and rear waterfalls allow for equipment patching and server patching. All styles of Mighty Mo 20 vertical managers can be mounted front or rear and airflow baffles can be mounted to manage the airflow of side breathing equipment.

	<b>9</b>
PART NO.	DESCRIPTION
OR-MM20736ADJ12-X	36"D adjustable, 7'H 45 RU, tapped #12-24
OR-MM20736ADJ38-X	36"D adjustable, 7'H, 45 RU, punched 3/8" square
OR-MM20742ADJ12-X	42"D adjustable, 7'H, 45 RU, tapped #12-24
OR-MM20742ADJ38-X	42"D adjustable, 7'H, 45 RU, punched 3/8" square
OR-MM20836ADJ12-X	36"D adjustable, 8'H, 51 RU, tapped #12-24
OR-MM20836ADJ38-X	36"D adjustable, 8'H, 51 RU, punched 3/8" square
OR-MM20842ADJ12-X	42"D adjustable, 8'H, 51 RU, tapped #12-24
OR-MM20842ADJ38-X OR-MM20842ADJ12-X	42"D adjustable, 8'H, 51 RU, punched 3/8" square

Notes: Replace the "X" tail code with "B" for black or "W" for white. Static capacity 2,000 lbs. Assembly required.
Patent numbers 8,130,494 and 8,256,181.

# OR-MM20FXD Mighty Mo 20 Fixed 4-Post Rack

NEV



### Mighty Mo 20 Fixed 4-Post Racks

Mighty Mo 20 4-post racks provide greater flexibility and optimum efficiency in any data center. The fixed racks provide an economical mounting platform for switches and servers. Front and rear waterfalls allow for equipment patching and server patching. All styles of Mighty Mo 20 vertical managers can be mounted front or rear and airflow baffles can be mounted to manage the airflow of side breathing equipment.

PART NO.	DESCRIPTION
OR-MM20730FXD12-X	30"D fixed, 7'H, 45 RU, tapped #12-24
OR-MM20730FXD38-X	30"D fixed, 7'H, 45 RU, punched 3/8" square
OR-MM20830FXD12-X	30"D fixed, 8'H, 51 RU, tapped #12-24
OR-MM20830FXD38-X	30"D fixed, 8' H, 51 RU, punched 3/8" square
OR-MM20930FXD12-X	30"D fixed, 9'H, 58 RU, tapped #12-24
OR-MM20930FXD38-X	30"D fixed, 9'H, 58 RU, punched 3/8" square

Notes: Replace the "X" tail code with "B" for black or "W" for white. Static capacity 2,000 lbs. Assembly required.
Patent numbers 8,130,494 and 8,256,181.

PHYSICAL SUPPORT

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Cable Management Racks and Vertical Managers



### Mighty Mo® 20 4-Post Rack Baffle Rails

Baffle rails allow 16-1/4", 24" and 30" deep airflow baffles to be mounted to the side of the adjustable 4-post rack, even when the mounting rails are set to a deeper dimension. The fixed version allows 16-1/4" and 24" baffles to be mounted to the 30" deep racks.

PART NO.	DESCRIPTION
OR-MM207FXDABR-X	For 7' MM20 4-post fixed racks
OR-MM207ADJABR-X	For 7' MM20 4-post adjustable racks
OR-MM208FXDABR-X	For 8' MM20 4-post fixed racks
OR-MM208ADJABR-X	For 8' MM20 4-post adjustable racks
OR-MM209FXDABR-X	For 9' MM20 4-post fixed racks

Notes: Replace the "X" tail code with "B" for black or "W" for white.

Mighty Mo 20 Vertical Manager with Door

### OR-MM20VMD Mighty Mo 20 Vertical Manager with Door





The wire frame and rack unit finger design promotes efficient routing of patch cords between racks. Dual hinged slam latch doors allow easy access during moves. adds and changes. Supplied with four cable management spools to provide slack storage for fiber jumpers and twelve bend limiting clips to protect fiber entering the vertical manager.

PART NO.	DESCRIPTION
OR-MM20VMD706-X	6.5"W x 10.25"D for 7' MM20 racks
OR-MM20VMD710-X	10.5"W x 15"D for 7' MM20 racks
OR-MM20VMD712-X	12.25"W x 15"D for 7' MM20 racks
OR-MM20VMD716-X	16.25"W x 15"D for 7' MM20 racks
OR-MM20VMD806-X	6.5"W x 10.25"D for 8' MM20 racks
OR-MM20VMD810-X	10.5"W x 15"D for 8' MM20 racks
OR-MM20VMD812-X	12.25"W x 15"D for 8' MM20 racks
OR-MM20VMD816-X	16.25"W x 15"D for 8' MM20 racks
OR-MM20VMD906-X	6.5"W x 10.25"D for 9' MM20 racks
OR-MM20VMD910-X	10.5"W x 15"D for 9' MM20 racks
OR-MM20VMD912-X	12.25"W x 15"D for 9' MM20 racks

Notes: Replace the "X" tail code with "B" for black or "W" for white. Patent numbers 6,946,605 and 7,026,553.

OR-MM20VMD710-B

**L**legrand

#### NEW

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Vertical Managers







# OR-MM20VML Mighty Mo 20 Vertical Manager with Latches





NEW

OR-MM20VML704-B

### Mighty Mo® 20 Vertical Manager with Cover

The wire frame and rack unit finger design promotes efficient routing of patch cords between racks. Dual hinged snap-on covers allow easy access during moves, adds and changes. A 6" wide cage is supplied with four cable management spools and 12 bend-limiting clips.

PART NO.	DESCRIPTION
OR-MM20VMS704-X	3.75"W x 8.62"D for 7' MM20 racks
OR-MM20VMS706-X	6"W x 8.62"D for 7' MM20 racks
OR-MM20VMS710-X	10"W x 13.62"D for 7' MM20 racks
OR-MM20VMS804-X	3.75"W x 8.62"D for 8' MM20 racks
OR-MM20VMS806-X	6"W x 8.62"D for 8' MM20 racks
OR-MM20VMS810-X	10"W x 13.62"D for 8' MM20 racks
OR-MM20VMS904-X	3.75"W x 8.62"D for 9' MM20 racks
OR-MM20VMS906-X	6"W x 8.62"D for 9' MM20 racks
OR-MM20VMS910-X	10"W x 13.62"D for 9' MM20 racks

Notes: Replace the "X" tail code with "B" for black or "W" for white. Patent numbers 6,946,605 and 7,026,553.

### Mighty Mo 20 Vertical Manager with Latches

Wire frame and hinged latches allow easy access during moves, adds and changes. An efficient and economical choice for small to mid-size networks.

PART NO.	DESCRIPTION
OR-MM20VML704-X	4"W x 6.12"D for 7' MM20 racks
OR-MM20VML706-X	6'W x 6.12"D for 7' MM20 racks
OR-MM20VML804-X	4"W x 6.12"D for 8' MM20 racks
OR-MM20VML806-X	6'W x 6.12"D for 8' MM20 racks

Notes: Replace the "X" tail code with "B" for black or "W" for white. Patent number 6,365,834.

# OR-MM20VMDSK Mighty Mo 20 Vertical Manager Stabilizing Kit

NEW

### Mighty Mo 20 Vertical Manager Stabilizing Kit

Stabilizing kits are used to reinforce the mounting of 10" and wider VMD and VMS vertical managers mounted at the end of a row.

PART NO.	DESCRIPTION
OR-MM20VMDSK	(4) stabilizer brackets and hardware

# 127

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Rack Accessories

OR-MM20VCT70206-B



### Mighty Mo® 20 Vertical Cable Tray

Vertical cable trays consist of a pre-cut section of Cablofil® cable tray and mounting hardware designed to mount on the rack and manage distribution cables routing from the patch panel and equipment out of the rack. It mounts to the strut on the rack and can be adjusted front to back.

PART NO.	DESCRIPTION
OR-MM20VCT70206-X	2"W x 6"D for 7' MM20 4-post racks
OR-MM20VCT70212-X	2"W x 12"D for 7' MM20 4-post racks
OR-MM20VCT80206-X	2"W x 6"D for 8' MM20 4-post racks
OR-MM20VCT80212-X	2"W x 12"D for 8' MM20 4-post racks

Notes: Replace the "X" tail code with "B" for black or "W" for white.

# OR-MM20ABL Mighty Mo 20 Lightweight Airflow Baffles

NEW



OR-MM20ABL71612-B

### Mighty Mo 20 Lightweight Airflow Baffles

Mighty Mo 20 airflow baffles mount between racks, direct intake and exhaust air on side flow network equipment from cold aisle to hot aisle. The patented angle design utilizes less space, reduces back pressure and provides better overall performance than square duct style systems.

PART NO.	DESCRIPTION
OR-MM20ABL71612-X	For MM20716 rack and MM20VMD712 vertical manager
OR-MM20ABL71616-X	For MM20716 rack and MM20VMD716 vertical manager
OR-MM20ABL72412-X	For MM20724 rack and MM20VMD712 vertical manager
OR-MM20ABL72416-X	For MM20724 rack and MM20VMD716 vertical manager
OR-MM20ABL73012-X	For MM20730 rack and MM20VMD712 vertical manager
OR-MM20ABL73016-X	For MM20730 rack and MM20VMD716 vertical manager
OR-MM20ABL81612-X	For MM20816 rack and MM20VMD812 vertical manager
OR-MM20ABL81616-X	For MM20816 rack and MM20VMD816 vertical manager
OR-MM20ABL82412-X	For MM20824 rack and MM20VMD812 vertical manager
OR-MM20ABL82416-X	For MM20824 rack and MM20VMD816 vertical manager

Notes: Replace the "X" tail code with "B" for black or "W" for white. Patent numbers 8,130,494 and 8,256,181.

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

#### Rack Accessories

### OR-MM20ABL Mighty Mo 20 Lightweight Airflow Baffles



OR-MM20ABL71612-B

### Mighty Mo® 20 Lightweight Airflow Baffles (cont)

PART NO.	DESCRIPTION
OR-MM20ABL83012-X	For MM20830 rack and MM20VMD812 vertical manager
OR-MM20ABL83016-X	For MM20830 rack and MM20VMD816 vertical manager
OR-MM20ABL91612-X	For MM20916 rack and MM20VMD912 vertical manager
OR-MM20ABL91616-X	For MM20916 rack and MM20VMD916 vertical manager
OR-MM20ABL92412-X	For MM20924 rack and MM20VMD912 vertical manager
OR-MM20ABL92416-X	For MM20924 rack and MM20VMD916 vertical manager
OR-MM20ABL93012-X	For MM20930 rack and MM20VMD912 vertical manager

Notes: Replace the "X" tail code with "B" for black or "W" for white. Patent numbers 8,130,494 and 8,256,181.

### OR-MM20UCT2X2-X Mighty Mo 20 Universal Cable Troughs

NEW



OR-MM20VCT70206-B

### Mighty Mo 20 Universal Cable Troughs

Universal cable troughs snap into the hex pattern on the Mighty Mo 20 channel racks and are used to create a front to rear or vertical trough on the inside or outside of the channel. They can be mounted in a row to create a continuous trough or rotated at 30° increments to support cables through directional changes. Up to 3 HiLOC™ harnesses can be toollessly mounted into each trough. The 2" x 2" size is equipped with slots to allow it to be joined to Mighty Mo Fiber Raceway.

PART NO.	DESCRIPTION
OR-MM20UCT2X2-X	2" x 2" x 5.25" trough with hex mounting for MM20 channel racks, 6pk


## Д.

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Rack Accessories

# OR-MM20HMZ Mighty Mo 20 Zero-U Horizontal Managers

NEW



### Mighty Mo® 20 Zero-U Horizontal Managers

Zero rack unit horizontal managers slide into the slots in the Mighty Mo 20 fingers and provide support for fiber and copper cables exiting horizontal equipment modules. They toollessly lock into place with the 19" version mounting between 2 vertical managers in front of the equipment. Internal versions are sized to fit inside the vertical managers and provide a continuous horizontal path across the front of the racks and managers.

PART NO.	DESCRIPTION
OR-MM20HMZRU19-X	For front of rack between two VMD or VMS style managers
OR-MM20HMZRU06-X	For MM20 6"W VMD and VMS style managers
OR-MM20HMZRU10-X	For MM20 10"W VMD and VMS style managers
OR-MM20HMZRU12-X	For MM20 12"W VMD style managers
OR-MM20HMZRU16-X	For MM20 16"W VMD style managers

Notes: Replace the "X" tail code with "B" for black or "W" for white.

# OR-MM20BLC-X Mighty Mo 20 Bend Limiting Clips

NEW



### Mighty Mo 20 Bend Limiting Clips

Bend limiting clips snap on to any finger on the vertical management cage to provide bend limitation for fiber jumpers entering and exiting the cage. The half oval design provides 180° protection for fiber jumpers.

PART NO.	DESCRIPTION
OR-MM20BLC-X	6.25"L for VMD or VMS style managers, 12pk

Notes: Replace the "X" tail code with "B" for black or "W" for white.

# OR-MM20CMS Mighty Mo 20 Cable Management Spools





### Mighty Mo 20 Cable Management Spools

Cable management spools effectively manage excess fiber cable slack, providing flexibility and the proper bend radius for cables. They mount at rack unit intervals on the front of the 6" wide vertical manager or on the front and rear of the 10" and wider vertical managers with fingers.

PART NO.	DESCRIPTION
OR-MM20CMS10-X	11"L for 10", 12" and 16"W VMD or VMS style managers, 4pk
OR-MM20CMS6-X	6"L for 6"W VMD or VMS style managers, 4pk

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

#### Rack Accessories

# OR-MM20CMR Mighty Mo 20 Cable Management Rings

NEV



### Mighty Mo® 20 Cable Management Rings

These black plastic rings flex at the end for easy insertion or removal of cross connect cables. The 3/8" 1/4 turn connector mounts on the front and back of the Mighty Mo racks. It can also be installed into 3/8" square accessory holes on the sides of the Mighty Mo racks or into any open 3/8" square EIA mounting hole.

PART NO.	DESCRIPTION
OR-MM20CMR3-X	1.75" x 3" ring mounts in 3/8" square holes, 14pk
OR-MM20CMR6-X	1.75" x 6" ring mounts in 3/8" square holes, 15pk

Notes: Replace the "X" tail code with "B" for black or "W" for white.

# OR-MM20WFE-X Mighty Mo 20 Waterfall Extension

NFW



### Mighty Mo 20 Waterfall Extension

Increases the height of the front flange of the Mighty Mo waterfall by 2.25" when additional cable capacity is required.

PART NO.	DESCRI	PTION
OR-MM20WFE	E-X 19.12"W	x 4.5"H fits any MM20 waterfall

Notes: Replace the "X" tail code with "B" for black or "W" for white.

# OR-MM20ESB Mighty Mo 20 Equipment Support Brackets

NEW



### Mighty Mo 20 Equipment Support Brackets

The 6" equipment support brackets can be cantilever mounted at the rear of any Mighty Mo rack and used to support equipment mounted to the front rails. Deeper equipment support brackets are sized to the 16-1/4" to 30" channel racks and 4-point mount with the equipment's mounting ears to provide zero unit support from front-to-back.

PART NO.	DESCRIPTION
OR-MM20ESB06-X	Set of brackets 6"D for rear support on all MM20 racks
OR-MM20ESB16-X	Set of brackets for MM20 16-1/4"D channel racks
OR-MM20ESB24-X	Set of brackets for MM20 24"D channel racks
OR-MM20ESB30-X	Set of brackets for MM20 30"D channel racks

# HYSICAL of

NEW

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Rack Accessories





# OR-MM20CRB Mighty Mo 20 Cable Runway Mounting Brackets





### Mighty Mo® 20 Cable Troughs

Cable troughs support fiber cables at the bottom of Mighty Mo racks. The kit includes an extension that bridges the space between racks and creates a continuous trough at the bottom of the row.

PART NO.	DESCRIPTION
OR-MM20CT4RU-X	8"D x 4"H, requires 4 bottom RU of MM20 racks
OR-MM20CT4RUK-X	8"D x 4"H requires 4 bottom RU of MM20 racks, with extension

Notes: Replace the "X" tail code with "B" for black or "W" for white.

### Mighty Mo 20 Cable Runway Mounting Brackets

Cable troughs support fiber cables at the bottom of Mighty Mo racks. The kit includes an extension that bridges the space between racks and creates a continuous trough at the bottom of the row.

PART NO.	DESCRIPTION
OR-MM20CRB06-X	2"H for MM20 6-1/2" channel racks, supports runway up to 18"W
OR-MM20CRB10-X	2"H for MM20 10-1/2" channel racks, supports runway up to 18"W
OR-MM20CRB16-X	2"H for MM20 16-1/4" channel racks, supports runway up to 18"W
OR-MM20CRB1624-X	2"H for MM20 16-1/4" channel racks, supports runway up to 24"W
OR-MM20CRB24-X	2"H for MM20 24" channel racks, supports runway up to 24"W
OR-MM20CRB30-X	2"H for MM20 30" channel racks, supports runway up to 24"W
OR-MM20CRB4PU-X	2"H for the side of MM20 4-post racks, supports runway up to 24"W
OR-MM20CRB4PRU-X	2"H for the rear of MM20 4-post racks, supports runway up to 18"W
OR-MM20CRB6H06-X	6"H for MM20 6-1/6" channel racks, supports runway up to 18"W
OR-MM20CRB6H10-X	6"H for MM20 10-1/6" channel racks, supports runway up to 18"W
OR-MM20CRB6H16-X	6"H for MM20 16-1/4" channel racks, supports runway up to 18"W
OR-MM20CRB6H1624-X	6"H for MM20 16-1/4" channel racks, supports runway up to 24"W
OR-MM20CRB6H24-X	6"H for MM20 24" channel racks, supports runway up to 24"W
OR-MM20CRB6H30-X	6"H for MM20 30" channel racks, supports runway up to 24"W

**L**legrand

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Rack Accessories

**OR-MM20CRB** Mighty Mo 20 Cable Runway Mounting Brackets

NEW

### **OR-MM20CTB** Mighty Mo 20 Cable Tray Mounting Brackets



### Mighty Mo® 20 Cable Runway Mounting Brackets (cont)

PART NO.	DESCRIPTION
OR-MM20CRB6H4PU-X	6"H for the side of MM20 4-post racks, supports runway up to 24"W
OR-MM20CRB6H4PRU-X	6"H for the rear of MM20 4-post racks, supports runway up to 18"W

Notes: Replace the "X" tail code with "B" for black or "W" for white.

### Mighty Mo 20 Cable Tray Mounting Brackets

Mounts to the top side of the Mighty Mo rack channels or frames, providing mounting for runway (ladder rack) to run parallel with the row of racks. Standard brackets position the bottom of the runway at 2" above the rack height and 6" high brackets position the bottom of the runway at 6" above the rack height.

PART NO.	DESCRIPTION
OR-MM20CTB06-X	2"H for MM20 6-1/2" channel racks, supports wire tray up to 18"W
OR-MM20CTB10-X	2"H for MM20 10-1/2" channel racks, supports wire tray up to 18"W
OR-MM20CTB16-X	2"H for MM20 16-1/4" channel racks, supports wire tray up to 18"W
OR-MM20CTB1624-X	2"H for MM20 16-1/4" channel racks, supports wire tray up to 24"W
OR-MM20CTB24-X	2"H for MM20 24" channel racks, supports wire tray up to 24"W
OR-MM20CTB30-X	2"H for MM20 30" channel racks, supports wire tray up to 24"W
OR-MM20CTB4PU-X	2"H for the side of MM20 4-post racks, supports wire tray up to 24"W
OR-MM20CTB4PRU-X	2"H for the rear of MM20 4-post racks, supports wire tray up to 18"W
OR-MM20CTB6H06-X	6"H for MM20 6-1/6" channel racks, supports wire tray up to 18"W
OR-MM20CTB6H10-X	6"H for MM20 10-1/6" channel racks, supports wire tray up to 18"W
OR-MM20CTB6H16-X	6"H for MM20 16-1/4" channel racks, supports wire tray up to 18"W
OR-MM20CTB6H1624-X	6"H for MM20 16-1/4" channel racks, supports wire tray up to 24"W
OR-MM20CTB6H24-X	6"H for MM20 24" channel racks, supports wire tray up to 24"W
OR-MM20CTB6H30-X	6"H for MM20 30" channel racks, supports wire tray up to $24"W$
OR-MM20CTB6H4PU-X	6"H for the side of MM20 4-post racks, supports wire tray up to 24"W
OR-MM20CTB6H4PRU-X	6"H for the rear of MM20 4-post racks, supports wire tray up to 24"W

# HYSICAI SUPPOR

### .

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Rack Accessories

# OR-MM20BDC Mighty Mo 20 Base Dust Covers

NEW



### Mighty Mo® 20 Base Dust Covers

Prevents dust and debris from accumulating in the rack base. Scored for bending to clear cables from floor up to channel.

	PART NO.	DESCRIPTION
ı	OR-MM20BDC06-X	For 6-1/2"D MM20 channel racks
	OR-MM20BDC10-X	For 10-1/2"D MM20 channel racks
	OR-MM20BDC16-X	For 16-1/4"D MM20 channel racks
	OR-MM20BDC24-X	For 24"D MM20 channel racks
I	OR-MM20BDC30-X	For 30"D MM20 channel racks

Notes: Replace the "X" tail code with "B" for black or "W" for white.

# OR-MM20EP Mighty Mo 20 End Panels

NEW



### Mighty Mo 20 End Panels

The 4.4" wide end panel is used to finish the end of a row of Mighty Mo racks when a 6" wide vertical manager is mounted at the end of the row. It mounts directly to the rack behind the manager, providing a stable mounting surface for the manager and concealing cables in the rack frame.

PART NO.	DESCRIPTION
OR-MM20EP706-X	For MM20706 channel rack behind a MM20VMD706 manager
OR-MM20EP710-X	For MM20710 channel rack behind a MM20VMD706 manager
OR-MM20EP716-X	For MM20716 channel rack behind a MM20VMD706 manager
OR-MM20EP724-X	For MM20724 channel rack behind a MM20VMD706 manager
OR-MM20EP730-X	For MM20730 channel and MM20730FXD 4-post racks behind a MM20VMD706 manager
OR-MM20EP736-X	For MM20736ADJ 4-post racks behind a MM20VMD706 manager
OR-MM20EP742-X	For MM20742ADJ 4-post racks behind a MM20VMD706 manager
OR-MM20EP810-X	For MM20810 channel rack behind a MM20VMD806 manager
OR-MM20EP816-X	For MM20816 channel rack behind a MM20VMD806 manager
OR-MM20EP824-X	For MM20824 channel rack behind a MM20VMD806 manager
OR-MM20EP830-X	For MM20830 channel and MM20830FXD 4-post racks behind a MM20VMD806 manager
OR-MM20EP836-X	For MM20836ADJ 4-post racks behind a MM20VMD806 manager

### **La legrand**®

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Rack Accessories

# OR-MM20EP Mighty Mo 20 End Panels

NEW

### Mighty Mo® 20 End Panels (cont)

PART NO.	DESCRIPTION
OR-MM20EP842-X	For MM20842ADJ 4-post racks behind a MM20VMD806 manager
OR-MM20EP916-X	For MM20916 channel rack behind a MM20VMD906 manager
OR-MM20EP924-X	For MM20924 channel rack behind a MM20VMD906 manager
OR-MM20EP930-X	For MM20930 channel and MM20930FXD 4-post racks behind a MM20VMD906 manager

Notes: Replace the "X" tail code with "B" for black or "W" for white.

# OR-MM20EPN Mighty Mo 20 Narrow End Panels

NEW



### Mighty Mo 20 Narrow End Panels

The 2.25" wide end panel is used to finish the end of a row of Mighty Mo racks when a 10" or wider vertical manager is mounted at the end of the row. It mounts directly behind the manager concealing cables in the rack frame. The narrow end panel requires the use of an end panel support bracket to stabilize the rear of the end panel.

PART NO.	DESCRIPTION
OR-MM20EPN706-X	For MM20706 channel rack behind a MM20VMD710 or wider manager
OR-MM20EPN710-X	For MM20710 channel rack behind a MM20VMD710 or wider manager
OR-MM20EPN716-X	For MM20716 channel rack behind a MM20VMD710 or wider manager
OR-MM20EPN724-X	For MM20724 channel rack behind a MM20VMD710 or wider manager
OR-MM20EPN730-X	For MM20730 channel and MM20730FXD 4-post racks behind a MM20VMD710 or wider manager
OR-MM20EPN736-X	For MM20736ADJ 4-post racks behind a MM20VMD710 or wider manager
OR-MM20EPN742-X	For MM20742ADJ 4-post racks behind a MM20VMD710 or wider manager
OR-MM20EPN810-X	For MM20810 channel rack behind a MM20VMD810 or wider manager
OR-MM20EPN816-X	For MM20816 channel rack behind a MM20VMD810 or wider manager
OR-MM20EPN824-X	For MM20824 channel rack behind a MM20VMD810 or wider manager
OR-MM20EPN830-X	For MM20830 channel and MM20830FXD 4-post racks behind a MM20VMD810 or wider manager
OR-MM20EPN836-X	For MM20836ADJ 4-post racks behind a MM20VMD810 or wider manager

Notes: Replace the "X" tail code with "B" for black or "W" for white.

134

# PHYSICAL SUPPORT

### MIGHTY MO 20 CABLE MANAGEMENT SYSTEM

Rack Accessories

### **OR-MM20EPN** Mighty Mo 20 Narrow End Panels

### Mighty Mo® 20 Narrow End Panels (cont)

PART NO.	DESCRIPTION
OR-MM20EPN842-X	For MM20842ADJ 4-Post racks behind a MM20VMD810 or wider manager
OR-MM20EPN916-X	For MM20916 channel rack behind a MM20VMD910 or wider manager
OR-MM20EPN924-X	For MM20924 channel rack behind a MM20VMD910 or wider manager
OR-MM20EPN930-X	For MM20930 channel and MM20930FXD 4-post racks behind a MM20VMD910 or wider manager

Notes: Replace the "X" tail code with "B" for black or "W" for white.

### **OR-MM20EPS** Mighty Mo 20 End Panel Support Brackets

NEW



Notes: Replace the "X" tail code with "B" for black or "W" for white.

### Mighty Mo 20 End Panel Support Brackets

The end panel support brackets mount from the rack to the narrow end panels to stabilize the rear of the end panel.

PART NO.	DESCRIPTION
OR-MM20EPS16-X	For bracing MM20 narrow end panels behind 16"W VMD managers
OR-MM20EPS-X	For bracing MM20 narrow end panels behind 10"W or 12"W VMD managers

### **OR-MM20VMD** Mighty Mo 20 VMD Finger Covers

NEW




### Mighty Mo 20 VMD Finger Covers

The finger cover is used to finish the end of a row of Mighty Mo racks by covering up the side of the vertical manager. Finger covers mount to the fingers on the VMD or VMS vertical managers and when used with an end panel, completely cover the end of the row.

PART NO.	DESCRIPTION
OR-MM20VMD7FC-X	For 7' MM20VMD managers
OR-MM20VMD8FC-X	For 8' MM20VMD managers
OR-MM20VMD9FC-X	For 9' MM20VMD managers

### MIGHTY MO CABLE MANAGEMENT

Mighty Mo Overhead Cable Pathway and Equipment Racks

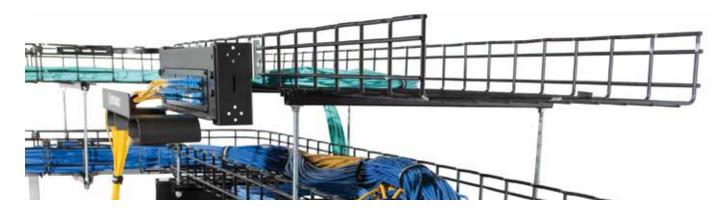

Mighty Mo® overhead cable pathway racks provide cable management and an innovative mounting method for 19" rack mount copper and fiber panels and cabinets. The pathway racks allow horizontal connectivity to be supported by the overhead pathway, freeing up valuable rack or cabinet space below.

### OR-604010 Mighty Mo Overhead Cable Pathway Rack



OR-60401001

# OR-60401111 Mighty Mo Overhead 4-Post Equipment Rack



### Mighty Mo Overhead Cable Pathway Rack

The Mighty Mo overhead cable pathway racks come with everything needed to mount the bracket to the side of the runway with 1-1/2" stringers or any Cablofil® cable tray 2" or deeper. Black.

PA	RT NO.	DESCRIPTION
OF	R-60401001	2 RU, 23.6"W x 7.4"H x 9"D, 90 lbs. capacity
OF	R-60401015	5 RU, 23.6"W x 12.6"H x 9"D, 90 lbs. capacity
OF	R-60401089	8 RU, 23.6"W x 18.1"H x 9"D, 90 lbs. capacity

Notes: Patent numbers 7,601,922 and 8,106,311.

### Mighty Mo Overhead 4-Post Equipment Rack

The Mighty Mo overhead 4-post rack can be mounted over a row of cabinets or racks. It mounts from threaded rods or can be hung from runway or tray (rods and hardware sold separately). Depth adjusts from 20" to 30".

PART NO.	DESCRIPTION
OR-60401111	6 RU, 23.7"W x 12.2"H x 37.5D, 200 lbs. capacity

#### 4-Post Racks and Accessories



### Adjustable Dual Equipment Racks

The patented adjustable dual equipment rack provides an affordable, innovative solution for housing network equipment. Unlike cabinets, its open design allows for expansion, so it is ready to adapt to future needs. The design also expands installation opportunities by enabling cross-connects, facilitating cable management, and eliminating heat build-up. Available with three adjustable depths, the rack provides a solid foundation for mounting hubs, routers, and other heavy equipment. Black.

#### **Features**

- Self-supporting and self-squaring base
- Assembles quickly and easily
- Top angles and patented reinforced base are standard
- Depth adjusts in 1/2" increments
- Mounting holes are roll threaded for 12-24 hardware
- Allows excellent cable management opportunities
- Mounts 19" equipment and includes cross-recessed black panel mounting screws


- 5/8", 5/8", 1/2" universal mounting hole pattern
- Equipped with standard 1/2" junctioning holes for securing multiple-rack lineups
- Constructed of 6061-T6 structural grade aluminum
- Meets EIA-310 standards
- Listed to the UL 1863 Standard for Communication Circuit Accessories

### OR-19-84. OR-19-96 Adjustable Dual Equipment Racks



### **Adjustable Dual Equipment Racks**

PART NO.	DESCRIPTION	
OR-19-84-T4SDA1520	84"H x 20.19"W x 15"-20"D, 45 RU (1.75"), load rating: 1,000 lbs.	
OR-19-84-T4SDA2132	84"H x 20.19"W x 21"-32"D, 45 RU (1.75"), load rating: 1,000 lbs.	
OR-19-96-T4SDA2132	96"H x 20.19"W x 21"-32"D, 51 RU (1.75"), load rating: 1,000 lbs.	



Equipment rack options self-support bases are 3-1/2" x 6" extruded aluminum angles mounted at the bottom of all standard equipment racks.

A. 1520 = 15"-20" 2132 = 21"-32"

B. 1520 = 24.14"-29.14" C. 1520 = 26"-31"

2132 = 30.14"-41.14" 2132 = 32"-43"

4-Post Racks and Accessories



### M6 Adjustable Dual Equipment Rack

#### **Features**

OR-19-84-SSDA2132

- Self-squares to assemble quickly and easily
- Depth adjusts in 1/2" increments
- Open ventilation reduces the need for fans
- 5/8", 5/8", 1/2" square hole mounting pattern
- Notched markers beside hole pattern facilitate counting of rack spaces
- Base mounts to rack with the angles facing inward or outward; mount inward to use minimal floor space
- Universal "L" shaped uprights allow for mounting of sliding server rails
- Steel construction allows 1000 lbs. load rating
- Equipped with 1/2" junctioning holes for securing multiple-rack lineups
- Mounting hardware not included
- Black finish

### OR-19-84-SSDA2132 M6 Adjustable Dual Equipment Rack





### M6 Adjustable Dual Equipment Rack

PART NO.	DESCRIPTION
OR-19-84-SSDA2132	84"H x 20.19"W x 21"-32"D, load rating: 1,000 lbs.

Notes: Depth does not include top angle. For full depth, add 3".

4-Post Racks and Accessories



### **Adjustable Equipment Shelves**

#### **Features**

- Mounts to all adjustable dual racks
- #12-24 cage nuts and screws included
- Adjust in the same 1/2" increments as the rack
- Shelves do not include a front or back 90° bend
- Easy to add and remove deep equipment
- Mounted to all four uprights for maximum stability
- Black finish

### OR-ESV-19-FDR Adjustable Equipment Shelves



### **Vented Equipment Shelf**

PART NO.	DESCRIPTION
OR-ESV-19-FDR1520	3.34"H x 17.50"W x 1520"D, center load rating: 125 lbs., distributed load rating: 300 lbs.
OR-ESV-19-FDR2126	3.34"H x 17.50"W x 21- 26"D, center load rating: 125 lbs., distributed load rating: 300 lbs.
OR-ESV-19-FDR2732	3.34"H x 17.50"W x 27- 32"D, center load rating: 125 lbs., distributed load rating: 300 lbs.

Notes: Load rating determined at .25" deflection.

### **Equipment Shelf**

PART NO.	DESCRIPTION
OR-ES-19-FDR1520	3.34"H x 17.50"W x 15- 20"D, center load rating: 125 lbs., distributed load rating: 300 lbs.
OR-ES-19-FDR2126	3.34"H x 17.50"W x 21– 26"D, center load rating: 125 lbs., distributed load rating: 300 lbs.
OR-ES-19-FDR2732	3.34"H x 17.50"W x 27– 32"D, center load rating: 125 lbs., distributed load rating: 300 lbs.

Notes: Load rating determined at .25" deflection.


### 4-Post Racks and Accessories

### **Adjustable Equipment Shelves**

#### **Features**

- Mounts to all adjustable dual racks
- Heavy-duty for high load bearing capacity
- Bottom brackets adjust to rack depth
- Easy to add and remove deep equipment

# **OR-ES-19-SDR**Adjustable Equipment Shelves



OR-ESV-19-SDR2126F

- Fully usable surface area to accommodate servers
- Air flow slots ensure equipment is kept cool
- #12-24 cage nuts and screws hardware included
- Steel construction with
- Black finish

#### **Fixed Dual Shelves**

PART NO.	DESCRIPTION
OR-ES-19-SDR1520F	1.94"H x 19"W x 20.5"D, center load rating: 125 lbs., distributed load rating: 300 lbs.
OR-ES-19-SDR2126F	1.94"H x 19"W x 26.5"D, center load rating: 125 lbs., distributed load rating: 300 lbs.
OR-ES-19-SDR2732F	1.94"H x 19"W x 32.5"D, center load rating: 125 lbs., distributed load rating: 300 lbs.

Notes: Load rating determined at .25" deflection.

### Vented Equipment Shelf

PART NO.	DESCRIPTION
OR-ESV-19-SDR1520F	1.94"H x 19"W x 20.5"D, center load rating: 125 lbs., distributed load rating: 300 lbs.
OR-ESV-19-SDR2126F	1.94"H x 19"W x 26.5"D, center load rating: 125 lbs., distributed load rating: 300 lbs.
OR-ESV-19-SDR2732F	1.94"H x 19"W x 32.5"D, center load rating: 125 lbs., distributed load rating: 300 lbs.

Notes: Load rating determined at .25" deflection.

# PHYSICAI SIIPPOR

### OR-M6DRSAK M6 Adapter Bracket



### STANDARD EIA FLOOR AND WALL MOUNT RACKING SYSTEMS

4-Post Racks and Accessories

### Adjustable Pull-Out Equipment Shelves

#### **Features**

- Shelves glide forward and backward for equipment access
- Auto-lock function responds when fully extended
- Brackets secure the shelf to the rack when returned to its standard operating position
- All shelves are vented
- Adjust in 1/2" increments
- M6DRSAK required when mounting on M6 rack
- Black finish

# OR-ESV-19-FST Adjustable Pull-Out Equipment Shelves



### Adjustable Pull-Out Equipment Shelves

PART NO.	DESCRIPTION
OR-ESV-19-FST1520	4.13"H x 17.5"W x 20.17"D, load rating extended: 275 lbs.
OR-ESV-19-FST2126	4.13"H x 17.5"W x 26.17"D, load rating extended: 275 lbs.
OR-ESV-19-FST2732	4.13"H x 17.5"W x 32.17"D, load rating extended: 275 lbs.

Notes: Load rating determined by .5" deflection at end of extended shelf.

### M6 Adapter Bracket

The M6 adapter bracket allows the adjustable pull-out equipment shelves to mount easily to M6 adjustable dual equipment racks. The adapter bracket attaches to the pull-out shelf mounting bracket to allow #12-24 mounting within M6 square holes.

#### **Features**

- Converts adjustable pull-out equipment shelf mounting on M6 adjustable dual racks
- Durable black finish
- Four adapter brackets

- Mounting hardware included
- 12-gauge steel construction
- Meets EIA-310 standards

### M6 Adapter Bracket

PART NO.	DESCRIPTION
OR-M6DRSAK	3.5"H x 1" W x 3.19"D

Notes: Depth includes full depth (including bracket M6 latch hook).

### 4-Post Racks and Accessories

### Adjustable Dual Rack Dust Cover

#### **Features**

- Fully shields the self-support base opening to keep dust from accumulating
- Mounts on all adjustable dual racks
- Provides a clean installation

- Three-piece cover easily assembles without the use of tools
- Constructed of 16-gauge steel
- Black finish

# **OR-DC**Adjustable Dual Rack Dust Cover



### Adjustable Dual Rack Dust Cover

PART NO.	DESCRIPTION
OR-DC1520-19	19.38 "W x 15"-20"D, 10 lbs.
OR-DC2126-19	19.38"W x 21"-26"D, 12 lbs.
OR-DC2732-19	19.38"W x 27"-32"D, 15 lbs.

### Adjustable Dual Rack Runway Kit

#### **Features**

- Mounts runway to adjustable dual equipment rack
- Brackets create a strong bond between the rack and the runway for solid overhead cable support

 Includes two top angle brackets and two side brackets for parallel or perpendicular mounting

# OR-RRJC-S Adjustable Dual Rack Runway Kit



### Adjustable Dual Rack Runway Kit

PART NO.	DESCRIPTION
OR-RRJC-S	Adjustable dual rack runway bracket kit, 1 lb.

Notes: Clear zinc plated.

#### 2-Post Racks and Accessories

### **Standard Equipment Racks**

The Legrand® computer-guided manufacturing process assures that each rack meets exact dimensions, guaranteeing a self-squaring assembly. Made of top quality 6061-T6 structural grade aluminum, Legrand equipment racks provide strength and stability for years. Racks ship unassembled for efficient delivery and storage.


#### **Features**

- Self-squaring and self-supporting
- Tapped uprights so no nuts are required for assembly
- Top angles, patented self-support base are standard
- Assembly hardware included
- Mounting holes are roll formed for work hardened thread system
- Includes 12-24 cross-recessed black panel mounting screws
- Constructed of 6061-T6 structural-grade aluminum
- 3" x 1-1/4" channel uprights

### **Specifications**

- 5/8", 5/8", 1/2" universal mounting hole pattern
- Equipped with 1/2" junctioning holes for securing multiple-rack lineups
- Meets EIA-310 standards
- Listed to the UL 1863 Standard for Communication Circuit Accessories

### OR-19, OR-23 Standard Equipment Racks



### **Standard Equipment Racks**

### 19" Rack - 3" Channel

PART NO.	DESCRIPTION
OR-19-72-T2SD	72"H x 20.19"W x 15"D, 38 RU, channel width: 3", load rating: 750 lbs.
OR-19-84-T2SD	84"H x 20.19"W x 15"D, 45 RU, channel width: 3", load rating: 750 lbs.
OR-19-96-T2SD	96"H x 20.19"W x 15"D, 51 RU, channel width: 3", load rating: 750 lbs.

Notes: Aluminum finish. Add "B" to part number for black finish.

#### 19" Rack - 6" Channel

PART NO.	DESCRIPTION
OR-19-84-6T2SDB	84"H x 20.19"W x 18"D, 45 RU, channel width: 6", load rating: 750 lbs.

Notes: Black finish.

#### 23" Rack - 3" Channel

PART NO.	DESCRIPTION
OR-23-72-T2SD	72"H x 24.19"W x 15.00"D, 38 RU, channel width: 3", load rating: 750 lbs.
OR-23-84-T2SD	84"H x 24.19"W x 15"D, 45 RU, channel width: 3", load rating: 750 lbs.
OR-23-96-T2SD	96"H x 24.19"W x 15"D, 51 RU, channel width: 3", load rating: 750 lbs.

Notes: Aluminum finish. Add "B" to part number for black finish.

### 23" Rack - 6" Channel

PART NO.	DESCRIPTION
OR-23-84-6T2SDB	84"H x 24.19"W x 18"D, 45 RU, channel width: 6", load rating: 750 lbs.

Notes: Black finish.

#### 2-Post Racks and Accessories

## OR-IPK Equipment Rack Isolation Pad Kit



#### **Equipment Rack Isolation Pad Kit**

Isolates equipment racks from concrete floors for effective bonding and grounding.

PART NO.	DESCRIPTION
OR-IPK	Isolation pad kit for standard equipment racks

# OR-SVMS, OR-DVMS Standard Vertical Cable Management Cage with Cover



OR-SVMS706



#### Standard Vertical Cable Management Cage with Cover

Mounts to the side of a standard EIA rack. The fingers are spaced to line up with rack units, promoting efficient routing of patch cords to patch panels and equipment from the vertical manager. Dual snap on hinged covers allow easy access during moves, add, and changes. Available in single-sided and double-sided versions.

#### Single-sided

PART NO.	DESCRIPTION
OR-SVMS704	3.75"W x 6.58"D x 7"H
OR-SVMS706	6"W x 6.58"D x 7'H
OR-SVMS804	3.75"W x 6.58"D x 8"H
OR-SVMS806	6"W x 6.58"D x 8'H

#### Double-sided

PART NO.	DESCRIPTION
OR-DVMS704	3.75"W x 13.17"D x 7"H
OR-DVMS706	6.00"W x 13.17"D x 7'H
OR-DVMS804	3.75"W x 13.17"D x 8'H
OR-DVMS806	6.00"W x 13.17"D x 8'H

Notes: Includes all hardware necessary to mount to the side of a standard EIA rack.

## 2-Post Racks and Accessories

#### **Vertical Organizers**

Patented vertical organizers save time and money during moves, adds, and changes to patch panels. Rings in the front organize patch cords with ease. A rear, U-shaped channel is formed either between equipment racks or at the end of a lineup to provide a pathway for delivering horizontal cables to patch panels. The 6"W is used between fully loaded racks; the 3" width is used with a single rack, at the end of a lineup or between partially loaded racks. Black.

STANDARD EIA FLOOR AND WALL MOUNT RACKING SYSTEMS

#### **Features**

- Rings are spaced 9" apart, center ring is spaced 13" apart from others
- 3" organizers (2.63"W x 4.13"D) accommodate 130 Cat 5e patch cords at 40% fill
- 6" organizers (5.63"W x 4.13"D) accommodate 276 Cat 5e patch cords at 40% fill
- Shipped in two sections for easy on-site assembly
- Sturdy steel construction
- Mounting hardware included: 6 of each: 3/8" hex nuts, 3/8 bolts, 3/8 lock washers, 3/8" flat washers
- Fits all EIA-310 compliant equipment racks

# OR-VO-84, OR-VO-96 Standard Equipment Racks OR-VO-84-T6FTE

#### **Standard Equipment Racks**

PART NO.	DESCRIPTION
OR-V0-84-T3E	Solid, channel width: 3", 80"H x 3"W x 5.31"D
OR-VO-84-T6E	Solid, channel width: 6", 80"H x 6"W x 5.31"D
OR-VO-84-T3FTE	Feed-through holes, channel width: 3", 80"H x 3"W x 5.31"D
OR-VO-84-T6FTE	Feed-through holes, channel width: 6", 80"H x 6"W x 5.31"D



#### 2-Post Racks and Accessories

#### **Vertical Organizers**

Vertical control brackets attach to equipment racks to provide secure backside cable containment; Legrand recommends using four brackets on an 84" rack.

#### **Features**

- Use with 6" vertical organizers for double-sided management
- Sold individually

- Includes 12-24 mounting hardware
- Constructed of steel

## OR-VCB-93 Vertical Control Brackets





OR-VCB-93-6L OR-VCB-93-6H

#### **Vertical Control Brackets**

#### Single-sided

PART NO.	DESCRIPTION
OR-VCB-93-6L	Cable capacity: 216, 1"H x 8.56"W x .06"D
OR-VCB-93-6U	Cable capacity: 216, 1"H x 7.28"W x 2.73"D
OR-VCB-93-6H	Cable capacity: 432, 1"H x 8.56"W x 6"D
OR-VCB-93-6UH	Cable capacity: 432, 1"H x 7.28"W x 3.69"D

Notes: Black finish. Cable capacities are based on Cat 5e cable and a 40% fill.

#### **Cable Rings**

#### **Features**

- Mount to any equipment rack, including Swing-EZs, for versatile vertical jumper management
- Channel cables from the floor or ceiling to patch panels
- CR-93S-1B and CR-93S-3B rings fit within the width of a rack; they are designed for smaller, single-rack installations or where the width of the rack cannot be exceeded
- Larger capacity CR-93S-2B and CR-93S-4B rings mount between adjacent racks and equal the combined width of the rack channels; they are designed for multiple rack installations
- Slotted mounting holes for easy installation; able to mount beneath pre-installed equipment
- Includes #12-24 mounting hardware
- Constructed of 12-gauge steel
- Sold individually

#### OR-CR-93S Cable Rings









#### Cable Rings

PART NO.	DESCRIPTION
OR-CR-93S-1B	Inside ring dimensions: .91"W x 2.50"D, 2 RU, cable capacity: 27
OR-CR-93S-2B	Inside ring dimensions: 2.19"W x 2.50"D, 2 RU, cable capacity: 65
OR-CR-93S-3B	Inside ring dimensions: .91"W x 4.75"D, 2 RU, cable capacity: 51
OR-CR-93S-4B	Inside ring dimensions: 2.19"W x 4.75"D, 2 RU, cable capacity: 124

Notes: Black finish. Cable capacity based on Cat 5e cable.

# HYSICAI SIIPPORT

#### 147

## STANDARD EIA FLOOR AND WALL MOUNT RACKING SYSTEMS

#### 2-Post Racks and Accessories

## OR-CB-93 Cable Brackets



#### OR-RRJC-T Runway Bracket Kit



OR-RRJC-T

#### OR-JP Junction Plate



#### **Cable Brackets**

Constructed of steel, they attach to any equipment rack to secure cable. Used for routing vertically. Includes #12-24 mounting hardware.

PART NO.	DESCRIPTION
OR-CB-93-6B	.75"H x .71"W x 6"D
OR-CB-93-7B	.75"H x .71"W x 7"D
OR-CB-93-8B	.75"H x .71"W x 8"D

Notes: Black finish.

#### **Runway Bracket Kit**

Mount runway to equipment racks using the runway bracket kit. J-Bolts secure the brackets to the top angles of racks and create a solid connection between the rack and runway. The kit is easy to install and includes all required hardware.

PART NO.	DESCRIPTION
OR-RRJC-T	Runway bracket kit

Notes: Clear zinc plated.

#### **Junction Plate**

Used for junctioning cable runway and equipment racks. Runway can be junctioned parallel or perpendicular to rack. Hardware included.

#### For racks with 3" uprights

PART NO.	DESCRIPTION
OR-JP0606B	$7.5^{\circ}\text{L} \times 4^{\circ}\text{W} \times .25^{\circ}\text{D},$ for use with runway up to $6^{\circ}\text{W}$
OR-JP0612B	12.5"L x 4"W x.25"D, for use with runway from 6" $-12$ "W
OR-JP1218B	$18.5^{\circ}$ L x 4. $^{\circ}$ W x.25 $^{\circ}$ D, for use with runway from 12 $^{\circ}$ -18 $^{\circ}$ W
OR-JP1824B	24.5"L x 4"W x. $25$ "D, for use with runway from $18$ " $-24$ "W

Notes: Black finish.

#### For racks with 6" uprights

PART NO.	DESCRIPTION
OR-JP0606-6TB	$7.5^{\circ}\text{L} \times 7^{\circ}\text{W} \times .25^{\circ}\text{D},$ for use with runway up to $6^{\circ}\text{W}$
OR-JP0612-6TB	12.5"L x 7"W x.25"D, for use with runway from 6"–12"W
OR-JP1218-6TB	$18.5^{\circ}$ L x $7^{\circ}$ W x. $25^{\circ}$ D, for use with runway from $12^{\circ}$ – $18^{\circ}$ W
OR-JP1824-6TB	24.5" x 7"W x.25"D, for use with runway from 18"-24"W

Notes: Black finish.

#### 2-Post Racks and Accessories

## OR-DC Dust Cover



#### OR-DC-19B

#### **Dust Cover**

Fully shields the self-support base opening to keep dust from accumulating, and provides a clean installation. Cover easily assembles without the use of tools and is constructed of 16-gauge steel.

#### For racks with 3" uprights

PART NO.	DESCRIPTION
OR-DC-19B	.75"H x 19.88"W x 5.3"D
OR-DC-23B	.75"H x 23.88"W x 5.3"D

Notes: Black finish.

#### For racks with 6" uprights

PART NO.	DESCRIPTION
OR-DC6-19B	.75"H x 19.88"W x 5.3"D
OR-DC6-23B	.75"H x 23.88"W x 5.3"D

Notes: Black finish.

#### OR-GR Guard Rail



#### **Guard Rail**

Constructed from sturdy steel, this guard rail protects equipment from accidents. One guard tail per order, and includes all mounting hardware.

PART NO.	DESCRIPTION
OR-GR-19B	2.88"H x 19.81"W x 4.5"D
OR-GR-23B	2.88"H x 23.81"W x 4.5"D

Notes: Black finish.

#### Wall Mount Racks and Brackets

#### Swing-EZ Wall Racks

The patented Swing-EZ wall rack arrives ready to square and keyholes mount in minutes. Reinforcement plates stabilize the frame to allow maximum load bearing capacity. Hub and LAN applications are easily accommodated without door deflection. Latch pins or bolts secure the door to the frame and remove to swing open smoothly from the left or right.

#### **Features**

- Opens to allow easy access to terminations without disturbing terminations
- Both latch pins and bolts are included
- Hook and loop straps feed into slots for backside cable management
- Side panels fold flat for shipping, then unfold for easy on-site assembly
- 5/8", 5/8", 1/2" universal mounting hole pattern

- Mounting holes threaded for
- #12-24 hardware
- Includes cross-recessed #12-24 black panel mounting screws
- Made of steel
- Meets EIA-310 standards
- Listed to the UL 1863 Standard for Communications Circuit Accessories

## Swing-EZ Wall Racks



#### **Swing-EZ Wall Racks**

PART NO.	DESCRIPTION
OR-19-21-T8DB	21"H x $19.75$ "W x $8$ "D, $11$ RU $(1.75$ "), load rating: $75$ lbs.
OR-19-35-T8DB	35"H x $19.75$ "W x $8$ "D, $19$ RU $(1.75$ "), load rating: $75$ lbs.
OR-19-21-T12DB	21"H x 19.75"W x 12"D, 11 RU (1.75"), load rating: 75 lbs
OR-19-35-T12DB	35"H x 19.75"W x 12"D, 19 RU (1.75"), load rating: 75 lbs.
OR-19-48-T12DB	48"H x 19.75"W x 12"D, 26 RU (1.75"), load rating: 75 lbs.
OR-19-21-T18DB	21"H x 19.75"W x 18"D, 11 RU (1.75"), load rating: 75 lbs.
OR-19-35-T18DB	35"H x 19.75"W x 18"D, 19 RU (1.75"), load rating: 75 lbs
OR-19-48-T18DB	48"H x 19.75"W x 18"D, 26 RU (1.75"), load rating: 75 lbs.
OR-19-21-T25DB	21"H x 19.75"W x 25"D, 11 RU (1.75"), load rating: 75 lbs.
OR-19-35-T25DB	$35$ "H x $19.75$ "W x $25$ "D, $19$ RU $\{1.75$ " $\}9$ , load rating: $75$ lbs.
OR-19-48-T25DB	48"H x 19.75"W x 25"D, 26 RU (1.75"), load rating: 75 lbs.

Notes: Black finish. Load rating based on using swing feature. Load increases when fixed.

Wall Mount Racks and Brackets

#### OR-HFM-19-2

Cable Management Products for Swing-EZs



#### Cable Management Products for Swing-EZs

Legrand® cable management panels provide organized patch cables horizontally and vertically on Swing-EZ wall mount racks. Black.

PART NO.	DESCRIPTION
OR-HFM-19-2	Front rings: vertical 1.75"W x 3.75"D, front rings: horizontal 1.75"H x 1.75"D, back rings: horizontal 2.5"H x 1.62"D, 2 RU (1.75")

#### **Heavy Duty Swing-EZ Wall Racks**

Patented heavy duty Swing-EZ wall racks are designed to mount heavier networking equipment in tight closets. A 12-gauge steel reinforcement pan attached to the bottom of the rack provides added strength. The pan works in conjunction with the stabilization plates and the self-squaring feature, allowing sturdy, dependable 150 lbs. equipment loads. The 25" depth allows plenty of room to open and close fully loaded with patch panels, hubs and routers.

#### **Features**

- 150 lbs. load rating accommodates hubs and routers
- Swings open to the left or right for access to terminations
- Hook and loop straps included for backside cable management
- Self-squaring assembly
- Mounting holes threaded for #12-24 hardware

- Includes cross-recessed black panel mounting screws
- 5/8", 5/8", 1/2" universal mounting hole pattern
- Meets EIA-310 standards
- Made of steel
- Both latch pins and bolts included for easy rear access
- Listed to the UL 1863 standard for
- Communications Circuit Accessories

## **OR-19**Heavy Duty Swing-EZ Wall Racks



#### Heavy Duty Swing-EZ Wall Racks

PART NO.	DESCRIPTION
OR-19-21-T25DHYDTB	24.25"H x 19.75" W x 25"D, 11 RU, load rating: 150 lbs.
OR-19-35-T25DHYDTB	38.25"H x 19.75" W x 25"D, 19 RU, load rating: 150 lbs.

Notes: Black finish.

#### Wall Mount Racks and Brackets

Legrand® wall mount racks and hinged wall mount brackets are designed for applications where space is critical. Their wall mount design increases closet wiring capacity while allowing rear access to patch panels and equipment.

#### OR-6040454 Wall Mount Racks



OR-604045400

#### **Wall Mount Racks**

Legrand Wall Mounted Racks offer the flexibility of an 18" (457 mm) deep wall mounted unit for mounting telecommunications and data equipment. They are available in three heights, with front swing gates and 19" #12-24 threaded EIA pattern. Black.

PART NO.	DESCRIPTION
OR-604045400	26"H x 20.25"W x 18"D, 12 RU, load rating: 75 lbs.
OR-604045450	38"H x 20.25"W x 18"D, 18 RU, load rating: 100 lbs.
OR-604045451	50"H x 20.25"W x 18"D, 25 RU, load rating: 125 lbs.

Notes: Fully assembled, supplied with 10 self-adhesive saddles and (12) 6" hook and loop straps.

#### **OR-WMRF** Wall Mount Racks Fixed



#### Wall Mount Racks Fixed

Legrand Fixed Wall Mount Racks offer the flexibility of either a 12" or 18" deep wall mounted unit for mounting 19" telecommunications and data equipment. They are available in three heights with #12-24 threaded EIA rails. Black.

PART NO.	DESCRIPTION
OR-WMRF-8-12	17.75"H X 19.78"W X 12"D, 8RU, load rating: 200 lbs.
OR-WMRF-15-12	30"H X 19.78"W X 12"D, 15RU, load rating: 200 lbs.
OR-WMRF-30-12	56.25"H X 19.78"W X 12"D, 30 RU, load rating: 175 lbs.
OR-WMRF-8-18	17.75"H X 19.78"W X 18"D, 8 RU, load rating: 150 lbs.
OR-WMRF-15-18	30"H X 19.78"W X 18"D, 15 RU, load rating: 150 lbs.
OR-WMRF-30-18	56.25"H X 19.78"W X 18"D, 30 RU, load rating: 125 lbs.

Notes: Assembly required. Supplied with Fifty #12-24 mounting screws.



Wall Mount Racks and Brackets

#### OR-604004 Hinged Wall Mount Brackets



OR-604004396



011 00 100 100



OR-604004645

## OR-WMBV Vertical Wall Mount Brackets



#### **Hinged Wall Mount Brackets**

Legrand® hinged wall mount brackets meet smaller system requirements and allow easy access to the rear of the panels. Holes in back allow for rear cable feed through. These brackets are available in four heights, with 19" #12-24 threaded EIA pattern. Fully assembled. Black.

PART NO.	DESCRIPTION
OR-604004396	3.5"H x 19"W x 6"D, 2 RU
OR-604004301	5.25"H x 19"W x 6"D, 3 RU
OR-604004068	7"H x 19"W x 6"D, 4 RU
OR-604004645	10.5"H x 19"W x 6"D, 6 RU

#### Vertical Wall Mount Brackets

Legrand Vertical Wall Mount Brackets provide the ability to mount up to 4 rack units of equipment vertically on a wall. The innovative design also allows the brackets to be mounted to a 19" rack, under a work surface or even under Cablofil tray with optional hardware. The 3/8" square holes and installed #12-24 RU nuts allow patch panels, switches or even servers to be mounted to the brackets. Black

PART NO.	DESCRIPTION
OR-WMBV2U	20.25"W x 4.58"D x 6"H, 2 RU, load rating: 200 lbs.
OR-WMBV3U	20.25"W x 6.35"D x 6"H, 3 RU, load rating: 200 lbs.
OR-WMBV4U	20.25"W x 8.10"D x 6"H, 4 RU, load rating: 200 lbs.

Notes: Supplied with Four #12-24 screws per rack unit and Ten  $6^{\prime\prime}$  hook and loop fasteners.

152

## Cable Management Panels

Mighty Mo® cable management panels are optimized to organize patch cords vertically and horizontally on Mighty Mo racks. They will also mount on any standard 19" rack. The finger design encourages defined and traceable routing of individual patch cords.

## OR-MM6HM

Mighty Mo Horizontal Management Panels





OR-MM6HMF2RU





OR-MM6HM61RU





OR-MM6HM81RU



#### Mighty Mo Horizontal Management Panels

PART NO.	DESCRIPTION
OR-MM6HMF1RU	Multiple fingers, cover, 1RU (1.75" x 19"), black
OR-MM6HMF2RU	Multiple fingers, cover, 2 RU (3.5" x 19"), black
OR-MM6HMF4RU	Multiple fingers, cover, 4 RU (7.0" x 19"), black
OR-MM6HM61RU	6-port finger spacing, cover, 1 RU (1.75" x 19"), black
OR-MM6HM62RU	6-port finger spacing, cover, 2 RU (3.5" x 19"), black
OR-MM6HM81RU	8-port finger spacing, cover, 1 RU (1.75" x 19"), black
OR-MM6HM82RU	8-port finger spacing, 2 RU (3.5" x 19"), black
OR-MM6HM6D2RU	6-port finger spacing, double-sided, covers, 2 RU (3.5" x 19"), black



#### Cable Management Panels

Legrand® standard horizontal cable managers are available in 1RU and 2RU sizes. Fingers begin 3/4" from the face of rack to provide bend limitation for cables, protecting cables, equipment and network performance. Included hinged cover mounts with six heavy duty clips allow them to be opened one handed without becoming "unhinged". Manufactured from UL94V-0 rated plastic.

#### **OR-SHMC**

Singe-Sided Standard Horizontal Cable Managers



OR-SHMC-1RU



### OR-DHMC

Double-Sided Standard Horizontal Cable Managers




OR-DHMC1RU



## OR-PHMC

Plugs, Standard Horizontal Cable Managers



#### Single-Sided Standard Horizontal Cable Managers

PART NO.	DESCRIPTION
OR-SHMC1RU	Horizontal cable manager, single-sided, 19" mounting x 1 RU, black
OR-SHMC2RU	Horizontal cable manager, single-sided, 19" mounting x 2 RU, black

Notes: Add "W" to the end of the part number for a white finish. Includes #12-24 mounting hardware.

#### **Double-Sided Standard Horizontal Cable Managers**

PART NO.	DESCRIPTION
OR-DHMC1RU	Horizontal cable manager, double-sided, 19" mounting x 1RU, black
OR-DHMC2RU	Horizontal cable manager, double-sided, 19" mounting x 2RU, black

Notes: Add "W" to the end of the part number for a white finish. Includes #12-24 mounting hardware.

#### Plugs, Standard Horizontal Cable Managers

PART NO.	DESCRIPTION
OR-PHMC1RU	Plugs eliminate airflow through the 1RU standard horizontal cable manager, 4pk
OR-PHMC2RU	Plugs eliminate airflow through the 2RU standard horizontal cable manager, 4pk

Notes: Material is UL94V-0 rated, white thermoplastic.

154

#### Cable Management Panels

Complete cable management maximizes system performance. Legrand® has the largest selection of horizontal cable managers in the industry. This wide array of panel styles will meet all cable management requirements.

#### OR-6040, OR-8080 Cable Management Panels



OR-60400131



OR-60400057



OR-808004759



OR-808004867



OR-808004818



OR-808044855



OR-808045590

#### **Cable Management Panels**

Legrand cable management panels provide organized movement of patch cables horizontally and vertically on 19" EIA distribution racks. Black.

PART NO.	DESCRIPTION
OR-60400131	(5) horizontal distribution rings, 1.7"H x 3.5"D, 1 RU
OR-60400057	(5) horizontal distribution rings, 3"H x 4"D, 2 rack units
OR-808004759	(5) horizontal plastic distribution rings, 1.7"H x 2.70"D, 1 RU
OR-808004867	(5) horizontal plastic distribution rings, 3.95"H x 2.4"D, 2 RU
OR-808004818	(5) horizontal plastic distribution rings, 3.95"H x 4.8"D, 2 RU
OR-808044855	(4) horizontal, four vertical distribution rings, 2"H x 4"D, 24 routing clips, .10"W x 2.63"D, 2 RU
OR-808045590	(5) horizontal polycarbonate plastic distribution rings, 1.7"H x 6"D, 1 RU
OR-808045768	(5) horizontal polycarbonate plastic distribution rings, 1.7"H x 3"D, 1 RU

Notes: Includes #12-24 mounting hardware.

Cable Management Panels

OR-60400, OR-8080
Feed-Through Cable Management Panels



OR-60400129



OR-808044916



OR-60400426



OR-808044915

#### Feed-Through Cable Management Panels

Legrand® feed-through cable management panels provide organized management of patch cables horizontally, vertically, and from front to back on 19" EIA distribution racks. Black.

PART NO.	DESCRIPTION
OR-60400129	(5) horizontal distribution rings, 1.7"H x 3.5"D, (4) 1" x 2" cutouts, 1 RU
OR-808044916	(5) horizontal distribution rings, 3"H x 2"D, (4) 1.5" x 2" cutouts, 2 RU
OR-60400426	(5) horizontal distribution rings, 3"H x 4"D, (4) 2.75" x 2.75" cutouts, 2 RU
OR-808044915	(4) horizontal, distribution rings, 2"H x 4"D, 24 routing clips, .10"W x 2.63"D, (3) 1.5" x 2" cutouts, 2 RU

Notes: Includes #12-24 mounting hardware.

#### Cable Management Panels

Complete cable management maximizes system performance. Legrand® has the largest selection of horizontal cable managers in the industry. This wide array of panel styles will meet all cable management requirements.

#### OR-60400 **Bend Limiting Cable Management Panels**







#### OR-8080 Finger Duct Cable Management Panels



OR-808000010



OR-808044508



OR-808045030

#### **Bend Limiting Cable Management Panels**

Legrand® bend limiting cable management panels have curved falls that protect against cable crimping and also maintain proper bend radius. The panels are ideal at the top of standard 19" EIA racks. Black.

PART NO.	DESCRIPTION
OR-60400189	1.7"H x 3.5"D rings with waterfall, 1 RU
OR-60400099	3.5"H x 3.5"D rings with waterfall, 2 RU
OR-60400114	3.5"H x 6"D rings with waterfall, 2 RU
OR-60400098	7"H x 4.5"D rings with waterfall, 4 RU
OR-60400054	7"H x 7"D rings with waterfall, 4 RU

Notes: Includes #12-24 mounting hardware.

#### **Finger Duct Cable Management Panels**

Legrand closed cover finger duct cable management panels provide organized movement for horizontal and vertical routing of patch cables on 19" EIA distribution racks. Black.

PART NO.	DESCRIPTION
OR-808000010	1.5"H x 1.5"D duct, 1 RU
OR-808044508	3"H x 1.5"D duct, 2 RU
OR-808044549	3"H x 3"D duct, 2 RU
OR-808045030	Front and rear ducts, 3"H x 3"D front duct, 2"H x 4"D rear duct, 2 RU

Notes: Includes #12-24 mounting hardware.



#### Cable Management Panels

#### **Interbay Organizers**

Ideal for bulk routing patch cords between bays and within bays to eliminate congestion, interbay organizers are larger in capacity than patch cord organizers. Express routes make it easy to trace and maintain circuits.

#### **Features**

- FCM-19-1XL and FCM-19-2XL should be mounted at the top, center or bottom of equipment racks
- FCMs with side rings help manage wall rack installations
- Rounded ring edges protect cables
- Constructed of 16-gauge steel
- Welded cable rings also constructed of steel for maximum support

## OR-FCM-19 Interbay Organizers



OR-FCM-19-1XL





#### **Interbay Organizers**

PART NO.	DESCRIPTION
OR-FCM-19-1XL	Inside ring: 1.5"H x 3.5"D, dimensions: 1.75"H x 20.19"W x 4.75"D,
OR-FCM-19-2XL	Inside ring: 3"H x 3.5"D, dimensions: 3.50"H x 20.19"W x 4.94"D, cable capacity: 126, 4 lbs.
OR-FCM-19-2L	Inside ring dimensions: vertical 1.75"W x 3.75"D, horizontal 1.75"H x 3.75"D, 2 RU (1.75")
OR-FCM-19-4XL	Inside ring: 6.5"H x 3.5"D, dimensions: 7"H x 20.19"W x 4"D, cable capacity: 273, 7 lbs.

Notes: Black finish.

## **OR-FTBP**Interbay Organizers



#### **Interbay Organizers**

Legrand Feed-Through Brush Panels allow cables to be routed from the front of the rack to the rear. The built in brush allows passage of cables while blocking airflow. Black.

PART NO.	DESCRIPTION
OR-FTBP-1RU	1.75"H x19"W x 2.92"D, 1 RU
OR-FTBP-2RU	3.5"H x 19"W x 2.92"D, 2 RU

Notes: Includes #12-24 mounting hardware.

158

#### 159

## HORIZONTAL CABLE MANAGEMENT, SHELVES AND ACCESSORIES

Equipment Shelves for Mighty Mo Racks

## OR-604 Double Equipment Shelves



## OR-604045681 4-Point Equipment Shelf



OR-604045681

## OR-60400538 Mighty Mo Server Rack Equipment Shelf



OR-60400538

#### **Double Equipment Shelves**

Legrand® double equipment shelf supports miscellaneous equipment, test gear, etc. The double shelves work with Mighty Mo racks with 6.5" deep channels. Shelf widths are available in 17", 18.75" and 21.37". Black.

PART NO.	DESCRIPTION
OR-60400355	19" x 5.25" x 24", 150 lbs. capacity
OR-60400517	23" x 5.25" x 24", 150 lbs. capacity
OR-60400655	19" x 5.25" x 24", 150 lbs. capacity

Notes: Shelf is slotted to accept the monitor strap kit OR-70700126. Includes #12-24 mounting hardware.

#### 4-Point Equipment Shelf

Legrand 4-point equipment shelf supports miscellaneous equipment or test gear. The one unit shelf works with Mighty Mo racks with all depth channels and Mighty Mo cabinets 24" and deeper. Shelf is 17.25" wide. Black.

PART NO.	DESCRIPTION
OR-604045681	19" x 1.72" x 20", 100 lbs capacity

Notes: Shelf is slotted to accept the Ortronics monitor strap kit OR-70700126. Includes #12-24 mounting hardware.

#### Mighty Mo Server Rack Equipment Shelf

The Mighty Mo server rack equipment shelf has a fixed front flange with an infinitely adjustable rear flange that allows for secure four point mounting as deep as 30". Shelf width is 17.25". Black.

PART NO.	DESCRIPTION
OR-60400538	19" x 1.7" x 30", 200 lbs capacity

Notes: Shelf is slotted to accept the Ortronics monitor strap kit OR-70700126. Includes #12-24 mounting hardware.

#### **Equipment Shelves**

Legrand® offers a full range of sturdy equipment shelves to support valuable equipment. From vented equipment shelves to the folding keyboard shelf, there is a shelf to fit every need.

#### OR-60400 Equipment Shelves



#### **Equipment Shelves**

Legrand equipment shelf supports miscellaneous equipment or test gear. Can be mounted on standard 19" EIA racks. Inside shelf width is 17". Black.

PART NO.	DESCRIPTION
OR-60400404	19" x 5. 25" x 10.13", 75 lbs. capacity
OR-60400006	19" x 5.25" x 12.13", 75 lbs. capacity
OR-60400405	19" x 5.25" x 15.13", 75 lbs. capacity

Notes: #12-24 mounting hardware included with all shelves.

## OR-ESV-19, OR-ESV-23 Equipment Shelves





OR-ESV-19-3B

#### **Equipment Shelves**

Equipment shelves mount to 19" or 23" equipment racks. Heavy -duty 16-gauge steel accommodates heavy equipment. Patented shelves can be mounted upside down. Shelves are vented to allow air flow beneath mounted equipment. Black.

#### **Solid Version**

PART NO.	DESCRIPTION
OR-ES-19-3B	3.5"H x 17.38"W x 15.5"D, 2 RU, load rating: 150 lbs.
OR-ES-19-4B	3.5"H x 17.38"W x 21.75"D, 2 RU, load rating: 150 lbs.
OR-ES-23-3B	3.5"H x 21.38"W x 15.5"D, 2 RU, load rating: 150 lbs.
OR-ES-23-4B	3.5"H x 21.38"W x 21.75"D, 2 RU, load rating: 150 lbs.

Notes: #12-24 mounting hardware included with all shelves.

#### **Vented Version**

PART NO.	DESCRIPTION
OR-ESV-19-3B	3.5"H x 17.38"W x 15.50"D, 2 RU, load rating: 150 lbs.
OR-ESV-19-4B	3.5"H x 17.38"W x 21.75"D, 2 RU, load rating: 150 lbs.
OR-ESV-23-3B	3.5"H x 21.38"W x 15.5"D, 2 RU, load rating: 150 lbs.
OR-ESV-23-4B	3.5"H x 21.38"W x 21.75"D, 2 RU, load rating: 150 lbs.

Notes: #12-24 mounting hardware included with all shelves.

OR-604044938

## HORIZONTAL CABLE MANAGEMENT, SHELVES AND ACCESSORIES

**Equipment Shelves** 

#### OR-604045388 4 Point Vented Equipment Shelf



#### OR-60404 **Vented Equipment Shelves**





#### 4-Point Vented Equipment Shelf

This 4-point vented shelf can be used with the Mighty Mo® racks in all three channel depths. Shelf width is 17.5". Black.

#### Vented Equipment Shelf for Mighty Mo Racks

PART NO.	DESCRIPTION
OR-604045388	19" x 5.75" x 20", 150 lbs. capacity

#### **Vented Equipment Shelves**

Legrand® vented equipment shelves keep active equipment cool. Can be mounted on standard 19" EIA racks. Shelf width is 17.5". Black.

#### **Cantilevered Vented Equipment Shelves**

PART NO.	DESCRIPTION
OR-604045388	19" x 5.75" x 20", 150 lbs. capacity
OR-604045081	19" x 5.75" x 24", 85 lbs. capacity

#### Standard Vented Equipment Shelf

PART NO.	DESCRIPTION
OR-604045401	19" x 4" x 16", 50 lbs. capacity

#### Vented Equipment Shelf, Fixed

PART NO.	DESCRIPTION
OR-604044486	19" x 4" x 18", 35 lbs. capacity

#### Vented Equipment Shelf, Fixed

PART NO.	DESCRIPTION
OR-604044938	19" x 4" x 18", 35 lbs. capacity

#### **Equipment Shelves**

#### Front-Mount Equipment Shelf

#### **Features**

- Cantilever shelf mounts in several positions
- 1/2"deep tray can be inverted to create a flat surface for deep equipment
- Mounts to 3" or 6" channel

- Choose between standard or vented version
- Mounting hardware included
- Made of 16-gauge steel

#### OR-ES, OR-ESV Front-Mount Equipment Shelf



#### Front-Mount Equipment Shelf

#### **Solid Version**

PART NO.	DESCRIPTION
OR-ES-19-FMB	5.25"H x 17.25"W x 14"D, 3 RU, load rating: 50 lbs.
OR-ES-23-FMB	5.25"H x 21.25"W x 14.00"D, 3 RU, load rating: 50 lbs.

Notes: Black finish.

#### **Vented Version**

OR-ESV-19-FMB	5.25"H x 17.25"W x 14.00"D, 3 RU, load rating: 50 lbs.
OR-ESV-23-FMB	5.25"H x 21.25"W x 14.00"D, 3 RU, load rating: 50 lbs.

Notes: Black finish.

#### **Multi-Configuration Equipment Shelf**

#### **Features**

- Mounts in at least 14 different ways
- Mounts on 3" or 6" channel equipment racks
- Brackets invert to meet mounting space requirements

- Shelf can be inverted to create a 3/4" deep tray
- Mount two units back-to-back to form a double-sided shelf
- Mounting hardware included
- Made of 16-gauge steel

# OR-ES-19-MCSB Multi-Configuration Equipment Shelf



#### **Multi-Configuration Equipment Shelf**

PART NO.	DESCRIPTION
OR-ES-19-MCSB	5.25"H x 17.5"W x 12"D, 3 RU, load rating: 50 lbs.

Notes: Black finish.

#### **Multi-Configuration Equipment Shelf Mounting Options**



Shelf back to Strack center



Shelf front flush to rack front



Shelf front 1-1/2" beyond rack front



Two units form a 24 double-sided shelf



Brackets can be inverted to meet mounting space requirements



Brackets can be inverted to meet mounting space requirements



Shelf can be inverted to make a 3/4" deep tray

162

#### 163

## HORIZONTAL CABLE MANAGEMENT, SHELVES AND ACCESSORIES

**Equipment Shelves** 

## OR-6040055 Folding Keyboard Shelf



### OR-60400606 Rear Support Brackets



## OR-60400575 Mouse Tray with Pad



#### Folding Keyboard Shelf

This shelf has a keyboard tray which folds up and locks in place. The tray holds all full standard keyboards up to 19" wide. Black.

PART NO.	DESCRIPTION
OR-60400550	19"W rack mount, 1 RU
OR-60400551	23"W rack mount, 1 RU

#### **Rear Support Brackets**

Rear support brackets allow the folding keyboard shelf to support any standard computer monitor up to 35 lbs. The brackets adjust from 6.25" to 17". Black.

PART NO.	DESCRIPTION
OR-60400606	For folding keyboard shelf

#### **Mouse Tray with Pad**

The mouse tray slides underneath the keyboard tray when not in use. Black.

PART NO.	DESCRIPTION
OR-60400575	For folding keyboard shelf

Notes: Mounting hardware included.

**Equipment Shelves** 

#### OR-KTR-19-DR Keyboard Tray



#### OR-KTF-19-DR Fold-Up Keyboard Tray





### OR-604044927 Wall Mount Shelf



#### **Keyboard Tray**

Fits all standard keyboards and mounts to 19" equipment racks. Mouse tray slides beneath the keyboard tray when not in use. Mouse tray can be mounted on left or right side.

PART NO.	DESCRIPTION
OR-KTR-19-DR	4.47"H x 20.38"W x 12"D, load rating: 25 lbs.

Notes: Black finish. Mounting hardware included.

#### Fold-Up Keyboard Tray

Fits all standard keyboards and mounts to 19" equipment racks. Mouse tray slides beneath the keyboard tray when not in use. Keyboard tray folds upward against uprights when not in use. Mouse tray can be mounted on left or right side.

PART NO.	DESCRIPTION
OR-KTF-19-DR	3.5"H x 20.38"W x 7.13"D, load rating: 25 lbs.

Notes: Black finish. Mouse pad tray adds  $7.28^{\circ}$  to the direction extended. Mounting hardware included.

#### Wall Mount Shelf


Legrand® wall mount shelf is designed for smaller systems applications, or where space is limited and a free standing rack cannot be used. Black.

PART NO.	DESCRIPTION
OR-604044927	20"W x 4.875"H x 18"D, 120 lbs. capacity

Notes: Shelf has six keyholes in the rear for mounting. Mounting hardware not included.

Rack and Cabinet Accessories

# OR-BFPT-1RU-10, OR-BFPT-2RU-10 Tool Less Snap-in Filler Panels

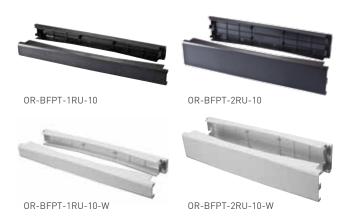

#### Tool Less Snap-in Filler Panels

Legrand® tool less snap-in filler panels are used to fill open rack units in racks and cabinets where separation of cold air and hot air is required. They are designed to work with active equipment and flat, angled or curved patch panels.

The tool less snap-in filler panels unique patent pending design allows them to snap into 19" EIA/ECA-310-E compliant tapped or square hole mounting rails. Because no field modification is required to fit a tapped hole, the panel can be remounted in a square hole in the future eliminating the need to stock two different types of panels. Available in black and white.

PART NO.	DESCRIPTION
OR-BFPT-1RU-10	19"W x 1.75"H, 1 RU, 10pk, black
OR-BFPT-2RU-10	19"W x 3.5"H, 2 RU, 10pk, black
OR-BFPT-1RU-10-W	19"W x 1.75"H, 1 RU, 10pk, white
OR-BFPT-2RU-10-W	19"W x 3.5"H, 2 RU, 10pk, white

## OR-4010, OR-BFPA, OR-BFPC Blank Filler Panels



#### **Blank Filler Panels**

Legrand blank filler panels fill in open spaces on all standard 19" EIA racks and cabinets. They are composed of black powder coated aluminum and have a blue silkscreened logo. Includes #12-24 mounting hardware. Black.

#### Flat Blank Filler Panels

PART NO.	DESCRIPTION
OR-401004788	19"W x 1.75"H, 1 RU
OR-401004789	19"W x 3.5"H, 2 RU
OR-401004790	19"W x 5.25"H, 3 RU
OR-401004791	19"W x 7"H, 4 RU
OR-401045773	19"W x 38.5"H, 22 RU

#### **Angled Blank Filler Panels**

PART NO.	DESCRIPTION
OR-BFPA-1RU	19"W x 1.75"H, 1 RU
OR-BFPA-2RU	19"W x 3.5"H, 2 RU

#### **Curved Blank Filler Panels**

PART NO.	DESCRIPTION
OR-BFPC-1RU	19"W x 1.75"H, 1 RU

165

Rack and Cabinet Accessories

OR-6040451 Rack Adapter Kit



OR-604045108

OR-60400383 19" Equipment Support Bracket



OR-60400383

OR-50900051, OR-50900052 19" Equipment Power Strips



#### Rack Adapter Kit

Legrand® rack adapter kits allow 19" equipment to be used on 23" EIA racks. Includes #12-24 mounting hardware. Black.

PART NO.	DESCRIPTION
OR-604045108	19"-23"W, 1.75"H, 1 rack unit
OR-604045109	19"-23"W, 3.5"H, 2 rack units
OR-604045110	19"-23"W, 5.25"H, 3 rack units
OR-604045111	19"-23"W, 7.0"H, 4 rack units
OR-604045112	19"-23"W, 8.75"H, 5 rack units

#### 19" Equipment Support Bracket

Mounts on the rear of any 19" rack to support the weight of heavy equipment. The bracket is especially effective on the Mighty Mo® racks where the channel depth is 6.5" or deeper. Includes #12-24 mounting hardware. Black.

PART NO.	DESCRIPTION
OR-60400383	19"W x 1.75"H x 1"D

#### 19" Equipment Power Strips


The 8 outlet 20A rack mount power strips are available with or without a switch, and with a standard 3 prong or twist-lock plug design. All four power strips come with 15' of cord. Includes #12-24 mounting hardware. Black.

PART NO.	DESCRIPTION
OR-50900051	19"W, 8 outlet, 20A, circuit breaker, switch
OR-50900051-TL	19"W, 8 outlet, 20A, circuit breaker, switch, twist-lock plug
OR-50900052	19"W, 8 outlet, 20A, circuit breaker
OR-50900052-TL	19"W, 8 outlet, 20A, circuit breaker, twist-lock plug

Rack and Cabinet Accessories

## OR-60400

Power Strip for Mighty Mo Racks and Free Standing Cabinets



#### Power Strip for Mighty Mo Racks and Free Standing Cabinets

The 16-position power strip mounts vertically on the back of the Mighty Mo® racks and on the inside frame of the Mighty Mo cabinets. Includes mounting hardware.

PART NO.	DESCRIPTION
OR-60400381	Vertical, 49", 16 outlet, 15A, circuit breaker, switch, 15' cord
OR-60400681	Vertical, 49", 16 outlet, 20A, circuit breaker, switch, 15' cord

## OR-60400013 Wire Distribution Spool



OR-60400013

## OR-CMBFRORU Cable Management Support Bar, Zero RU



## OR-60400046 Cable Management Support Bar



#### Wire Distribution Spool

This spool has a #12-24 stud molded in place and can be threaded into the EIA holes on any Legrand® rack. Use it to mount cable management panels, patch panels or screw it in anywhere additional cable management is desired. Black.

PART NO.	DESCRIPTION
OR-60400013	#12-24 stud

#### Cable Management Support Bar, Zero RU

Provides strain relief at the front or rear of a standard 19" patch panel that does not include rear management panels. The support bar is mounted with patch panel mounting screws to the front or with the supplied additional nuts to the rear. Black.

PART NO.	DESCRIPTION
OR-CMBFRORU	19"W x 4"D

#### Cable Management Support Bar

Provides strain relief at the rear of a standard 19" rack for horizontal wiring cables that are terminated to modular patch panels that do not include this type of cable management. Support bar is mounted with thumbscrews to the rear upright channels of a rack. Black.

PART NO.	DESCRIPTION
OR-60400046	U-Type, 1.5"D, 19"W



Rack and Cabinet Accessories

## OR-Z4-RR-WC Earthquake Bracing Kit



## OR-60400 Panel Mounting Screws



OR-60400005

#### OR-PS Cage Nuts



#### OR-RU-1224CN Cage Nuts



OR-RU-1224CN

#### **Earthquake Bracing Kit**

Earthquake bracing kits secure installations against excessive damage from earthquakes, or simply add another measure of stability in areas not zoned. The kit is easy to install: Drill a 5/8" clearance hole in the top angle of your rack; attach brackets to both ends of a 5/8"-11" threaded rod (ordered separately); then brace the assembly to a beam, column or load-bearing wall.

PART NO.	DESCRIPTION
OR-Z4-RR-WC	Kit contains: (4) brackets – 5/8" hole, (2) 1/2"-13 hex nuts, (2) 1/2"-13 x 1 bolt, (2) 1/2" split lock washer

Notes: Use threaded rods on page 187.

#### **Panel Mounting Screws**

Legrand® mounting screws replace lost or damaged screws for patch panels and cable management panels. These combination head screws with #12-24 threads have a pilot point for easy starting. Black.

PART NO.	DESCRIPTION
OR-60400005	#12-24 x .625", 4pk
OR-60400533	#12-24 x .625", 50pk

#### **Cage Nuts**

Cage nuts adapt to holes that meet specific server threads. Available in #10-32, #12-24, and M6 metric applications. Fits all EIA rack uprights with square holes. Cage nuts are treated with spring grip nut retainer for heavy-duty performance. Zinc plated.

PART NO.	DESCRIPTION
OR-PS-1032CN	.50"H x .50"W x .38"D, thread size: #10-32, 50pk
OR-PS-1224CN	.50"H x .50"W x .38"D, thread size: #12-24, 50pk
OR-PS-M6X1CN	.50"H x .50"W x .38"D, thread size: M6 (metric), 50pk

#### **Cage Nuts**

Legrand rack unit cage nuts provide steel nuts in all three positions of a 1-3/4" rack unit with the installation of a single multiple nut.

PART NO.	DESCRIPTION
OR-RU-1224CN	Thread size: #12-24, 50pk

Rack and Cabinet Accessories

# OR-JH-93, OR-CA-93, OR-WA-93 Hardware



#### Hardware

Legrand® offers a selection of hardware to support the specific needs of each installation. Order hardware with equipment racks and accessories to readily complete installations.

PART NO.	DESCRIPTION
OR-JH-93	Junction hardware; (6) 3/8"x 3/4" bolts with nuts and washers
OR-CA-93	Concrete floor anchors; [2] 3/8" x 3" bolts, with nuts and washers
OR-WA-93	Wooden floor anchors; (2) 3/8" x 2" bolts, with washers

#### **Cable Management Straps**

Legrand cable management straps and accessories provide an organized solution for the management of patch and horizontal distribution cables.

#### OR-70800205 Saddles



#### Saddles

Self-adhesive saddles will attach to any smooth dry surface and are designed to accept the hook and loop straps shown below. Black.

PART NO.	DESCRIPTION
OR-70800205	Two-way, self-adhesive base, for cable management straps up to 1.25" maximum width, 10pk

## OR-707000 Color-Coded Cable Management Straps



#### **Color-Coded Cable Management Straps**

Color-coded cable management straps provide an organized solution for the management of patch and horizontal distribution cables. The 3/4"W straps have a hook and loop type closure to secure and administer cables without damaging the construction of the copper or fiber cable.

PART NO.	DESCRIPTION
OR-70700080	6"L x .75"W, grip range: .625" to 1.625" diameter, 10pk
OR-70700079	12"L x .75"W, grip range: 1.25" to 3.25" diameter, 10pk

Notes: To order colored straps, specify color by putting color code at end of part number Color Code: -00=Black, -22=Red, -23=Orange, -24=Yellow, -25=Green, -26=Blue (Example: To order a 6" red OR-70700080 strap: OR-70700080-22).

Rack and Cabinet Accessories

## **OR-7070014**Plenum-Rated Cable Management Straps



## OR-70700 D-Ring Cable Management Straps



## OR-60400199 Bend Limiting Strain Relief Bar



#### **Plenum-Rated Cable Management Straps**

Legrand® plenum cable management straps provide an organized solution for the management of cables in plenum rated air handling spaces. These 1/2" wide hook and loop type straps are reusable, easy to install and will not damage high performance cabling. Sold in 20 count rolls that are neat, convenient and quick to use. Cranberry.

PART NO.	DESCRIPTION
OR-70700143	8"L x .5"W, grip range: .75"-1.75" diameter
OR-70700144	12"L x .5"W, grip range: .75"-3" diameter

#### **D-Ring Cable Management Straps**

D-ring cable management straps provide an organized solution for the management of horizontal distribution cables. The 3/4" wide straps have a hook and loop type closure to secure and administer cables without damaging the construction of the copper or fiber cable. Sold in packages of ten. Black.

PART NO.	DESCRIPTION
OR-70700107-00	12"L, grip range: 1.5" to 2.5" diameter
OR-70700084-00	18" L, grip range: 2" to 4" diameter

#### **Bend Limiting Strain Relief Bar**

Bend limiting strain relief bar has curved falls that prevent distribution cable from crimping and maintain proper bend radius. The panel mounts to the rear of standard 19" EIA racks. Route cable ties through the 1/4" holes in the bar to hold cables in place.

PART NO.	DESCRIPTION
OR-60400199	19" x 1" x 2.5", fills 1 RU

# PHYSICAL SUPPORT

## BONDING AND GROUNDING

#### Bonding Bars and Kits

## OR-GB4X12, OR-GB4X20 Primary Bonding Busbars and Kits













OR-GB4X20TMGBKIT

#### **Primary Bonding Busbars and Kits**

Manufactured of 1/4" thick electrolytic tough pitch 110 alloy copper bar. Includes 1-1/2" insulators and 1" offset stainless steel mounting brackets. Includes one 1/2 oz. tube of antioxidant joint compound. Meets BICSI and ANSI/TIA-607 standards.

#### Kits include:

- (1) Copper bonding bar with brackets and insulators
- (6) #6 compression lugs
- (3) #2 compression lugs
- (1) 2/0 compression lug
- (1) 4/0 compression lug
- (12) 1/4"  $-20 \times 3/4$ " SS hex head cap screw
- (12) 1/4"-20 SS lock washer
- (12) 1/4"-20 SS hex nut
- (6) 3/8"-16 x 1" SS hex head cap screw
- (6) 3/8"-16 SS lock washer
- (6) 3/8"-16 SS hex nut

#### **Primary Bonding Busbars**

PART NO.	DESCRIPTION
OR-GB4X12TMGB	Bar size: 12"W x 4"H, 12-5/16" hole sets, 6-7/16" hole sets
OR-GB4X20TMGB	Bar size: 20"W x 4"H, 24-5/16" hole sets, 6-7/16" hole sets

#### **Primary Bonding Busbars and Kits**

PART NO.	DESCRIPTION
OR-GB4X12TMGBKIT	Bar size: 12"W x 4"H, 12-5/16" hole sets, 6-7/16" hole sets
OR-GB4X20TMGBKIT	Bar size: 20"W x 4"H, 24-5/16" hole sets, 6-7/16" hole sets

## BONDING AND GROUNDING

#### Bonding Bars and Kits

## OR-GB2X10, OR-GB2X12 Secondary Bonding Busbars and Kits









#### **Secondary Bonding Busbars and Kits**

Manufactured of 1/4" thick electrolytic tough pitch 110 alloy copper bar. Includes 1-1/2" insulators and 1" offset stainless steel mounting brackets. Includes one 1/2 oz. tube of antioxidant joint compound. Meets BICSI and ANSI/TIA-607 standards.

#### Kits include:

- (1) Copper bonding bar with brackets and insulators
- (6) #6 compression lugs
- (3) #2 compression lugs
- (1) 2/0 compression lug
- (1) 4/0 compression lug
- (12) 1/4"-20 x 3/4" SS hex head cap screw
- (12) 1/4"-20 SS lock washer
- (12) 1/4"-20 SS hex nut
- (6) 3/8"-16 x 1" SS hex head cap screw
- (6) 3/8"-16 SS lock washer
- (6) 3/8"-16 SS hex nut

#### **Secondary Bonding Busbars**

PART NO.	DESCRIPTION
OR-GB2X10TGB	Bar size: 10"W x 2"H, 4-5/16" hole sets, 3-7/16" hole sets
OR-GB2X12TGB	Bar size: 12"W x 2"H, 6-5/16" hole sets, 3-7/16" hole sets

#### Secondary Bonding Busbar Kit

PART NO.	DESCRIPTION
OR-GB2X12TGBKIT	Bar size: 12"W x 2"H, 6-5/16" hole sets, 3-7/16" hole sets

## OR-GB4X12J, OR-GB4X20J Standard Bonding Busbar



#### Standard Bonding Busbar

PART NO.	DESCRIPTION
OR-GB4X12J	Bar size: 12"W x 4"H, 27 holes
OR-GB4X20J	Bar size: 20"W x 4"H, 51 holes

# PHYSICAL SUPPORT

## BONDING AND GROUNDING | RUNWAY AND ACCESSORIES

Ground Bars and Kits


## OR-GBWMBKIT Wall Mounting Bracket Kit



#### **Wall Mounting Bracket Kit**

PART NO.	DESCRIPTION
OR-GBWMBKIT	Set of (2) brackets with insulators and hardware to mount to a ground bar

## OR-GBWMBKIT Vertical Rack Bonding Busbars and Kits

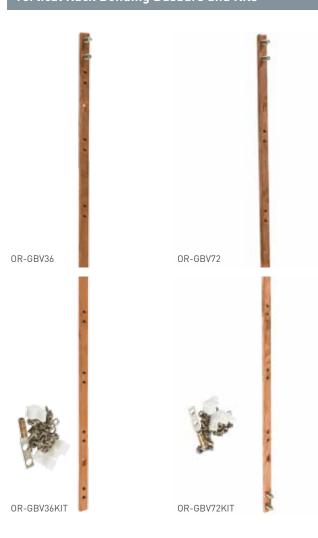

#### **Vertical Rack Bonding Busbars and Kits**

Manufactured of 1/4" thick electrolytic tough pitch 110 copper alloy bar. Accommodates one hole lugs or two hole lugs (5/8" on center). 36" bar has 2 PEM studs at one end and the 72" bar has 2 PEM studs at both ends for bonding conductor connection.

#### Kits include:

- (1) 1/4" thick electrolytic tough pitch 110 copper alloy bar
- (8) 1/4" x 1/2" stainless steel hex head cap screw
- (3) White delrin insulators
- (4) 5/16" stainless steel lock washer
- (8) 1/4" stainless steel lock washer
- (3) #12-24 x 5/8" hex washer head screw
- (4) 5/16" stainless steel hex nut
- (1) Two-hole long barrel compression lug

PART NO.	DESCRIPTION
OR-GBV36	5/8" x 36" vertical bar
OR-GBV72	5/8" x 72" vertical bar
OR-GBV36KIT	5/8" x 36" vertical bar kit
OR-GBV72KIT	5/8" x 72" vertical bar kit

Bonding Busbars and Kits, Compression Lugs and Taps

## OR-GBH19KIT Horizontal Rack Bonding Busbar Kit



# OR-CL2LB Two Hole Long Barrel Compression Lugs



#### Horizontal Rack Bonding Busbar Kit

#### Kits include:

- (1) 1/4" thick electrolytic tough pitch 110 copper alloy bar
- (1) 3" bar splice plate with 2 slotted holes
- (2) White delrin insulators
- (2) 12-24 x 5/8" hex washer head screw
- (2) #12-24 x 3/4" copper flashed brass screw
- (2) #12 copper flat washer
- (8) #6-32 x 1/4" copper flashed brass screw
- (8) #6 ring terminal
- (1) #6 long barrel compression lug, 3/4" o.c. for 1/4" hardware
- (2) 1/4"-20 x 3/4" stainless steel cap screw
- (2) 1/4" stainless steel lock washer
- (2) 1/4"-20 stainless steel nut

PART NO.	DESCRIPTION
OR-GBH19KIT	1" X 19.25" horizontal rack bonding busbar kit

#### Two Hole Long Barrel Compression Lugs

Manufactured from electroplated tinned copper. Long barrels maximize number of crimps and are color coded. Inspection port assures full conductor insertion. 10pk.

PART NO.	CABLE SIZE	O.C. DIMENSION BETWEEN HOLES	SCREW SIZE	COLOR CODE
OR-CL2LB6A	6	.625"	1/4"	Blue
OR-CL2LB6B	6	.75"	3/8"	Blue
OR-CL2LB6C	6	1"	3/8"	Blue
OR-CL2LB2A	2	.625"	1/4"	Brown
OR-CL2LB2C	2	1"	3/8"	Brown
OR-CL2LB10C	1/0	1"	3/8"	Pink
OR-CL2LB20C	2/0	1"	3/8"	Black
OR-CL2LB30C	3/0	1"	3/8"	Orange
OR-CL2LB40C	4/0	1"	3/8"	Purple

Compression Lugs and Taps, Accessories

### **OR-CTHD** C-Type Compression Taps







OR-CTHD4666

OR-CTHD4446

OR-CTHD2248





OR-CTHD2222

OR-CTHD220

### **OR-MCT8 Mechanical Compression Tools**



OR-MCT840



OR-MCT810

## **OR-GJ8KIT Insulated Bonding Jumper Kit**



#### **C-Type Compression Taps**

Connects two copper conductors together with a hydraulic crimp tool. 10pk.

PART NO.	CONDUCTOR RUN	CONDUCTOR TAP
OR-CTHD4666	#4 Stranded #6 Solid	#6 Stranded #6 Solid
OR-CTHD4446	#4 Stranded #6 Solid	#4 Stranded #4 Solid
OR-CTHD2248	#2 Stranded #2 Solid	#4 Stranded #8 Solid
OR-CTHD2222	#2 Stranded #2 Solid	#2 Stranded #2 Solid
OR-CTHD220	2/0 Stranded 1/0 Solid	#2 Stranded #8 Solid

#### **Mechanical Compression Tools**

PART NO.	DESCRIPTION	
OR-MCT840	Dieless adjustable compression tool with steel handle. Works with copper conductor sizes #8 through 250MCM and aluminum conductors #8 through 4/0. For use with compression lugs and compression taps.	
OR-MCT810	Terminates copper compression connectors in wire sizes #8 through 1/0. Dies included.	

#### **Insulated Bonding Jumper Kit**

PART NO.	DESCRIPTION
OR-GJ8KIT	Bonding jumper assembly kit, #6 AWG x 7 strand green THW insulation, 8"L

Compression Lugs and Taps, Accessories

## **OR-COTL**Copper Offset Terminal Lugs







COTL1014 OR-CO

Copper Offset Terminal Lugs

PART NO.	DESCRIPTION
OR-COTL1014	Wire range: max 10-strand, min 14-strand, bolt hole size: #8, ampere rating: 25
OR-COTL614	Wire range: max 6-strand, min 14-strand, bolt hole size: #8, ampere rating: 50
OR-COTL28	Wire range: max 2-strand, min 8-strand, bolt hole size: 1/4", ampere rating: 70

#### OR-60400010 Bonding Kit for Racks



OR-60400010

#### **Bonding Kit for Racks**

This kit provides a reliable systems bond for the distribution rack. One bonding kit is recommended for each rack.

PART NO.	DESCRIPTION
OR-60400010	Single conductor ground lug for 6 AWG to 14 AWG conductors

## OR-GL2014 Two Hole Ground Lug



OR-GL2014

#### Two Hole Ground Lug

Allows bonding of racks and cabinets utilizing the standard EIA/TIA hole pattern. Manufactured of electro-tin plated aluminum and allows attachment of copper or aluminum conductor sizes from 14AWG to 2/0. Meets BICSI and ANSI/TIA-607 recommendations for two hole mounting. Includes two 3/8" x 1" hex socket head set screws.

PART NO.	DESCRIPTION
OR-GL2014	Bolt hole size: 1/4", O.C. spacing 5/8"

OR-PCU56

#### Accessories

# **OR-PCU** Pipe Clamps OR-PCU575 OR-PCU152

OR-PCU354

#### Pipe Clamps

Manufactured from electroplated tinned bronze. Conductor range: #6 through 250 MCM PEM stud ensures a flush mounting surface. 5pk.

PART NO.	DESCRIPTION
OR-PCU575	Nominal pipe size range: .5"75", pipe outside diameter: .375"-1"
OR-PCU1125	Nominal pipe size range: 1"-1.25", pipe outside diameter: .75"-1.7"
OR-PCU152	Nominal pipe size range: 1.5"-2", pipe outside diameter: 1"-2.4"
OR-PCU253	Nominal pipe size range: 2.5"-3", pipe outside diameter: 2.25"-3.5"
OR-PCU354	Nominal pipe size range: 3.5" – 4", pipe outside diameter: 3.2" –4.5"
OR-PCU56	Nominal pipe size range: 5"-6", pipe outside diameter: 5.63"-6.63"

#### **Antioxidant Joint Compound**

OR-PCU253

Oxide inhibiting joint compound used to improve electrical conductivity and enhance the integrity of the connection.

#### OR-AJCA **Aluminum Antioxidant**



#### **Aluminum Antioxidant**

Synthetic base with suspended zinc particles. Material is gray in color. Recommended for aluminum to aluminum, aluminum to copper and aluminum conduit threads.

PART NO.	DESCRIPTION
OR-AJCA	.5 oz., 12pk
OR-AJCA8	8 oz.

#### **OR-AJCC** Copper Antioxidant



#### **Copper Antioxidant**

Synthetic base compound with suspended copper particles. Material is copper in color. Recommended for copper to copper connections, copper threads and all ground applications.

PART NO.	DESCRIPTION
OR-AJCC	.5 oz., 12pk
OR-AJCC8	8 oz.



## RUNWAY AND ACCESSORIES

#### Tubular Runway and Accessories

#### **Tubular Runway**

Flexibility is the key to cable management. Legrand® Cable Runway is designed to adapt to each twist and turn cables must make. Made of lightweight rectangular steel tubing, the runway reduces floor loading and is easy to install and maintain. Steel meets stringent specifications for yield and tensile strength, assuring a strong, light weight product that easily supports and delivers overhead cable.

#### **Features**

- Tubular cross slats welded to the top of stringers
- Cross slats feature rounded edges for cable protection
- Runway widths available from 6" to 24"
- Two standard lengths: 5'-11" or 9' 8 1/2"

#### **Specifications**

- Stringers made of 3/8" x 1-1/2" high tensile tubular steel
- Cross slats are 1" x 1/2" tubular steel
- Rust-resistant dove gray, or black finish
- UL listed

## OR-TR6, OR-TR10 Tubular Runway



OR-TR10-12B

#### **Tubular Runway**

PART NO.	DESCRIPTION
OR-TR6-6B	Dimensions: 6."W x 5'-11"L, load rating: 115 lbs.
OR-TR6-12B	Dimensions: 12" W x 5'-11" L, load rating: 115 lbs.
OR-TR6-18B	Dimensions: 18" W x 5'-11" L, load rating: 115 lbs.
OR-TR6-24B	Dimensions: 24" W x 5'-11" L, load rating: 115 lbs.
OR-TR10-6B	Dimensions: 6" W x 9' 8.5" L, load rating: 115 lbs.
OR-TR10-12B	Dimensions: 12" W x 9' 8.5" L, load rating: 115 lbs.
OR-TR10-18B	Dimensions: 18" W x 9' 8.5" L, load rating: 115 lbs.
OR-TR10-24B	Dimensions: 24" W x 9' 8.5" L, load rating: 115 lbs.

Notes: Replace "B" (black), with "D" for dove gray.

#### OR-TRHR Horizontal Radius Runway



#### **Horizontal Radius Runway**

Horizontal radius runway allows cables to be routed around horizontal corners. The horizontal radius runway features stringers made of 1-.5" x .375" steel tubes; cross slats are 1" x .5" x .125" steel tubes. UL listed.

#### TR Style

PART NO.	DESCRIPTION
OR-TRHR-12B	12"W x 18.03"IR x 29.66"OR*
OR-TRHR-18B	18"W x 18.03"IR x 35.66"OR*

Notes: \*IR= inside radius; OR= outside radius. Replace "B" (black), with "D" for dove gray.

# PHYSICAL SUPPORT

## RUNWAY AND ACCESSORIES

#### Tubular Runway and Accessories

#### **Universal Style Tubular Runway**

#### **Features**

- Tubular cross slats are welded between stringers
- Cross slats feature rounded edges for cable protection
- Runway widths available from 6" to 24"
- Standard length is 9'-11"

#### Specifications

- Stringers made of .375" x 1.5" high tensile tubular steel
- Cross slats are 1" x .5" tubular steel
- Available in rust-resistant, powder coated black finish only
- UL listed

## OR-URT10 Universal Style Tubular Runway



#### **Universal Style Tubular Runway**

PART NO.	DESCRIPTION
OR-URT10-6B	Dimensions: 6"W xX 9'-11"L, black
OR-URT10-12B	Dimensions: 12"W x 9'-11"L, black
OR-URT10-18B	Dimensions: 18"W x 9'-11"L, black
OR-URT10-24B	Dimensions: 24"W x 9'-11"L, black

#### Telco Style Tubular Runway

#### **Features**

- Tubular cross slats are welded between stringers
- Cross slats feature rounded edges for cable protection
- Runway widths available from 6" to 24"
- Standard length is 9' x 8.5"

#### **Specifications**

- Stringers made of .375" x 11.5" high tensile tubular steel
- Cross slats are 1" x .5" tubular steel
- Rust-resistant dove gray or black finish
- UL listed

## **OR-TRT10**Telco Style Tubular Runway



#### Telco Style Tubular Runway

PART NO.	DESCRIPTION
OR-TRT10-6B	Dimensions: 6"W x 9' 8.5"L, load rating: 115 lbs.
OR-TRT10-12B	Dimensions: 12"W x 9' 8.5"L, load rating: 115 lbs.
OR-TRT10-18B	Dimensions: 18"W x 9' 8.5"L, load rating: 115 lbs.
OR-TRT10-24B	Dimensions: 24"W x 9' 8.5"L, load rating: 115 lbs.

Notes: Replace "B" (black), with "D" for dove gray.

## RUNWAY AND ACCESSORIES

Tubular Runway and Accessories

## **OR-TRTC**Curved Runway



## OR-TRT Horizontal Radius Runway



#### **Curved Runway**

Radius curved runway permits smooth vertical to horizontal transitions. Stringers are 1-.5"  $\times$  .375" steel tubes; cross slats are 1"  $\times$  .5"  $\times$  .125" steel tubes. UL listed.

#### **Outside Curved Runway**

PART NO.	DESCRIPTION
OR-TRTC-6B	11.5"H x 6"W x 11.5"D
OR-TRTC-12B	11.5"H x 12"W x 11.5"D
OR-TRTC-18B	11.5"H x 18"W x 11.5"D
OR-TRTC-24B	11.5"H x 24"W x 11.5"D

#### **Inside Curved Runway**

PART NO.	DESCRIPTION
OR-TRTCI-6B	11.5"H x 6"W x 11.5"D
OR-TRTCI-12B	11.5"H x 12"W x 11.5"D
OR-TRTCI-18B	11.5"H x 18"W x 11.5"D
OR-TRTCI-24B	11.5"H x 24"W x 11.5"D

Notes: Replace "B" (black), with "D" for dove gray.

#### **Horizontal Radius Runway**

Horizontal radius runway allows cables to be routed around horizontal corners. The horizontal radius runway features stringers made of 1-.5" x .375" steel tubes; cross slats are 1" x .5" x .125" steel tubes. UL listed.

#### **TRT Style**

PART NO.	DESCRIPTION
OR-TRTHR-12B	12"W x 18.03"IR x 29.66"OR*
OR-TRTHR-18B	18"W x 18.03"IR x 35.66"OR*

Notes: \*IR= inside radius; OR= outside radius. Replace "B" (black), with "D" for dove gray.

# Tubul

## RUNWAY AND ACCESSORIES

Tubular Runway and Accessories

#### OR-P4135 End Closing Tubes



#### OR-RECBK End Closing Kit



#### OR-WRTRT-12B Runway Wall to Rack Kit



#### **End Closing Tubes**

End closing tubes are used when junctioning runway sections of different widths, or closing the stringers of a single piece of runway. They are used together with corner, edge or straight clamps. Made of .375" x 1-.5" tubular steel.

PART NO.	DESCRIPTION
OR-P413511H-TB	1.5"H x 5.75"W x .38"D, use with 6"
OR-P413512H-TB	1.5"H x 11.75"W x .38"D, use with 12"
OR-P413530H-TB	1.5"H x 17.75"W x .38"D, use with 18"
OR-P413531H-TB	1.5"H x 23.75"W x .38"D, use with 24"

Notes: Replace "B" (black), with "D" for dove gray.

#### **End Closing Kit**

The end closing kit includes one end closing tube and two corner clamps for closing the stringers of a single piece of runway.

PART NO.	DESCRIPTION
OR-RECBK-6B	For use with 6" runway
OR-RECBK-12B	For use with 12" runway
OR-RECBK-18B	For use with 18" runway
OR-RECBK-24B	For use with 24" runway

Notes: Replace "B" (black), with "D" for dove gray.

#### Runway Wall to Rack Kit

The runway wall to rack kit provides support for cable between the rack and the wall.

#### Kits include:

- (1) 12" wide 4'-5.5" long tubular runway with channels
- (1) 12" wide wall angle assembly
- (1) Runway bracket kit
- (1) Set of end caps

PART NO.	DESCRIPTION
OR-WRTRT-12B	Kit of (1) 4'-5.5" long runway

Notes: Replace "B" (black), with "D" for dove gray.



## RUNWAY AND ACCESSORIES

Tubular Runway and Accessories

## OR-GS-8 Ground Strap



## OR-P820 Straight and Corner Clamp Assemblies



## OR-P820127HA Adjustable Angle Splice Kit



#### **Ground Strap**

Ground straps provide grounding between spliced runway. Simply pre-drill runway to accept the strap, and connect to runway sections using compression lugs. All compression lugs and .5"-20". Constructed of flexible tinned copper flat braid.

#### Kits include:

- (1) 8" ground strap
- (2) Compression lugs
- (2) Toothed lock washers
- (2) Hex nuts

PART NO.	DESCRIPTION
OR-GS-8	11.5"H x 6"W x 11.5"D

Notes: Lug hole-to-lug hole length is 8". Runway clearance hole for .5"-20" is needed to mount ground strap.

#### Straight and Corner Clamp Assemblies

Clamps are used to junction runway sections together in a variety of configurations. Whether sections are extended in-line or junctioned perpendicularly or are transitioned from horizontal to vertical, clamps provide a solid connection to assure the runway layout will provide the necessary support for your cabling.

#### **Straight Clamp**

PART NO.	DESCRIPTION
OR-P820127H	Straight clamp kit, (2) straight clamps
OR-P820367H	Straight clamp kit, for different stringer widths, (2) clamps with filler

#### Corner Clamp

PART NO.	DESCRIPTION
OR-P820147H	Corner clamp kit, (2) corner clamps

Notes: Clear zinc plated. Add "B" to the end of part number for black finish.

#### Adjustable Angle Splice Kit

Adjustable angle splices junction runway sections from separate horizontal planes for smooth vertical transitions.

#### Straight Clamp

PART NO.	DESCRIPTION
OR-P820127HA	(2) adjustable angles

Notes: Clear zinc plated. Add "B" to the end of part number for black finish.

## RUNWAY AND ACCESSORIES **Tubular Runway and Accessories**

#### OR-P820287H, OR-P820327H **Edge Clamp Assemblies**



#### OR-CF, OR-CFTRC **Edge Clamp Assemblies**



# OR-P401750H-1B, OR-P820827HB



Cable Runway Feet

#### **Edge Clamp Assemblies**

Edge clamps junction runway of the same width where horizontal-to-vertical and horizontal-to-horizontal transitions are needed.

#### 45° Edge Clamp

PART NO.	DESCRIPTION
OR-P820287H	45° edge clamp kit, (2) edge clamps

#### 90° Edge Clamp

PART NO.	DESCRIPTION
OR-P820327H	90° edge clamp kit, (2) edge clamps

Notes: Clear zinc plated. Add "B" to the end of part number for black finish.

#### **Edge Clamp Assemblies**

Cable fence is available in 6" or 12" and provides added cable capacity for TR or TRT runway. One set includes 10 pieces that attach to runway as needed. Legrand® recommends placing cable fence to every other cross-member to support large cable piles.

#### For use with TR runway

PART NO.	DESCRIPTION
OR-CF-6B	6"H x 2.63"W x .19"D
OR-CF-12B	12"H x 2.63"W x .19"D

#### For use with any 1-.5" runway

-	<del>-</del>
PART NO.	DESCRIPTION
OR-CFTRC-6B	6"H x .75"W x 1.15"D
OR-CFTRC-12B	12"H x .75"W x 1.15"D

Notes: Replace "B" (black), with "D" for dove gray.

#### Cable Runway Feet

Cable runway feet anchor runway to the wall or floor. Feet are attached to runway with clamps. Made of 3/8" x 1-.5", steel bar. One foot included.

PART NO.	DESCRIPTION
OR-P401750H-1B	6"H x 2"W x 1.5"D
OR-P820827HB	Kit of [2] 6"H cable runway feet and [2] straight clamps

Notes: Replace "B" (black), with "D" for dove gray.

## RUNWAY AND ACCESSORIES

Tubular Runway and Accessories

## OR-P139 Shelf Brackets



#### OR-P820527HB Cable Bracket



# OR-TRP Transition Pans



#### **Shelf Brackets**

Shelf brackets attach to the wall and extend up to 24" for heavy duty runway support. Runway is secured to the bracket with J-bolts (included). Made of 3/16" x 1", steel bar. Hardware is zinc plated and dichromated.

PART NO.	DESCRIPTION
OR-P139240HB	A: 6.44", B: 6.44", runway width: 6"
OR-P139340HB	A: 12.44", B: 12.44", runway width: 12"
OR-P139540HB	A: 18.44", B: 18.44", runway width: 18"
OR-P139740HB	A: 24.44", B: 24.44", runway width: 24"

Notes: Replace "B" (black), with "D" for dove gray.

#### Cable Bracket

Steel cable bracket offers a separate channel for power cables that must not contact primary cables. Mounting hardware included. Mounts on 1-1/2" and 2" stringers.

PART NO.	DESCRIPTION
OR-P820527HB	4.5"H x 5"D, 1.30 lbs.

Notes: Replace "B" (black), with "D" for dove gray.

#### **Transition Pans**

Assure the proper bend radius for cables delivered from overhead runway to equipment racks with our transition pan. Each pan clamps to runway cross members or runway stringers (TRP8-S). Truss head screws with protective covers assure cables aren't damaged. Provides 1.25" radius.

PART NO.	DESCRIPTION
OR-TRP5-CM	2"H x 5"W x 4.13"D
OR-TRP8-CM	2"H x 8"W x 4.13"D
OR-TRP11-CM	2"H x 11"W x 4.13"D
OR-TRP17-CM	2"H x 17"W x 4.13"D
OR-TRP8-S	2"H x 7.5"W x 4.63"D

Notes: Black finish. CM = pan mounts on runway cross member; S = pan mounts on runway stringer.

## RUNWAY AND ACCESSORIES

#### Tubular Runway and Accessories

## OR-P128 Wall Angle Assemblies



# OR-RCBK-6 Runway Ceiling Kit



OR-RCBK-6

## OR-REK Runway Elevation Kit



OR-REK-2-3

#### Wall Angle Assemblies

Wall angle assemblies attach to the wall and provide a shelf or edge on which runway can be anchored using J-bolts. Anchoring can be either parallel or perpendicular to the wall. Includes 2" x 2" x .25" steel angle, (2) J-bolts, (2) 1/4"-20" hex nuts, and (2) 1/4" lock washers. Hardware is zinc plated and dichromated.

PART NO.	DESCRIPTION
OR-P128040HB	For runway width: 6"
OR-P128240HB	For runway width: 12"
OR-P128440HB	For runway width: 18"
OR-P128640HB	For runway width: 24"

Notes: Replace "B" (black), with "D" for dove gray.

#### **Runway Ceiling Kit**

#### Kits include:

- (1) Ceiling hanger bracket
- (1) Closed clip
- (1) 5/8"-11" x 6' threaded rod
- (4) 5/8"-11" hex nuts

PART NO.	DESCRIPTION
OR-RCBK-6	The runway ceiling kit is used to suspend cable runway from the ceiling.

#### **Runway Elevation Kit**

Used to provide additional space between the tops of racks or cabinets and the runway. Can be mounted to the runway junction plates, Mighty Mo® runway support brackets or to the rear flange of a Mighty Mo rack. Can also be mounted to the Mighty Mo cabinets simply by drilling two holes into the cabinet's removable top plates. Black.

PART NO.	DESCRIPTION
OR-REK-2-3	2", 2.5" or 3"
OR-REK-4-6	4", 5" or 6"

**L**legrand

## RUNWAY AND ACCESSORIES

Tubular Runway and Accessories

OR-P4, OR-P8
Ceiling Hanger Brackets



OR-P400298HB

#### **Ceiling Hanger Brackets**

When ceiling support is required, ceiling hanger brackets are used with 5/8"-11" threaded rods and open or closed clips to suspend runway overhead.

PART NO.	DESCRIPTION
OR-P400298HB	[1] Bracket
OR-P820667HB	(1) Bracket; (2) nuts
OR-P820677HB	(1) Bracket; (2) nuts; (1) plate*

Notes: \*Plate color matches bracket. Replace "B" (black), with "D" for dove gray.

## OR-2-E1-25C-A Protective Rubber End Caps



OR-2-E1-25C-A

#### **Protective Rubber End Caps**

Protective end caps conceal sharp runway edges that may harm the installation or injure those administering the installation. Sold in pairs.

PART NO.	DESCRIPTION
OR-2-E1-25C-A	For 1-1/2" stringers

Notes: Black rubber.

#### OR-RHB Runway Hanger Brackets



OR-RHB-12B

#### **Runway Hanger Brackets**

Use runway hanger brackets to suspend runway using a 5/8"-11" threaded rod. A 12" cable path forms above the runway. Mounts without the threaded rod interfering with the cable path. Mounting hardware included.

PART NO.	DESCRIPTION
OR-RHB-06B	12"H x 6.38"W x 2"D, runway width: 6"
OR-RHB-12B	12"H x 12.38"W x 2"D, runway width: 12"

Notes: Replace "B" (black), with "D" for dove gray.

## OR-P4, OR-P8 Open Clips



OR-P406395H

#### Open Clips

Use open clips with 1-1/2" stringers to secure runway to threaded rods when suspending runway from the ceiling. Also use when stacking runway. Use with 5/8"-11" threaded rod. Made of 3/16" x 1-1/2" steel bar. UL classified.

PART NO.	DESCRIPTION
OR-P406395H	(1) clip
OR-P820547H	Two sides – (2) clips; (4) nuts

Notes: Clear zinc plated.

# PHYSICAL SUPPORT

## RUNWAY AND ACCESSORIES

Tubular Runway and Accessories

## OR-P4, OR-P8 Closed Clips



#### OR-P982078H Vertical Wall Bracket



OR-P982078HB

## OR-P987 Threaded Rods



## OR-2-E1-75 Threaded Rod Coupler



#### **Closed Clips**

Use closed clips with 1-1/2" stringers to secure runway to threaded rods when suspending runway from the ceiling. Also use when stacking runway. Use with 5/8"-11" threaded rod. Made of 1/4" x 1-1/2" steel bar. UL classified.

PART NO.	DESCRIPTION
OR-P406395H	(1) clip
OR-P820547H	Two sides – (2) clips; (4) nuts

Notes: Clear zinc plated.

#### Vertical Wall Bracket

Made of 1/8" x 2" steel, vertical wall brackets fasten runway to the wall and provide a secure route for cables to channel vertically. Use 7/16" mounting hardware (not included). One bracket included.

PART NO.	DESCRIPTION
OR-P982078HB	1.5"H x 2"W x 2.53"D

Notes: Replace "B" (black), with "D" for dove gray.

#### **Threaded Rods**

Threaded rods are available in a variety of lengths to support runway sections suspended from the ceiling. Includes two 5/8"-11" hex nuts and two 5/8" flat washers.

PART NO.	DESCRIPTION
OR-P987650H	Length of rod 5'
OR-P987649H	Length of rod 6'
OR-P987645H	Length of rod 10'

Notes: Zinc plated and dichromated.

#### **Threaded Rod Coupler**

Extend threaded rod length with spliced coupling. Yellow zinc dichromate finish. Constructed of steel.

PART NO.	DESCRIPTION
OR-2-E1-75	Join two 5/8" threaded rods together, kit contents: (1) 5/8" coupler, (2) 5/8" x 11" hex nut

## RUNWAY AND ACCESSORIES

Tubular Runway and Accessories

## OR-2-E2-TRPC Protective Sleeve



OR-2-E2-TRPC

#### OR-P98752 J-Bolt Assemblies



OR-P987527H

#### **Protective Sleeve**

Slitted protective sleeves cover threaded rods to protect cables from damage. Field cut to desired size.

PART NO.	DESCRIPTION
OR-2-E2-TRPC	10' PVC protective sleeve for 5/8"-11" threaded rod

#### J-Bolt Assemblies

Each J-bolt assembly includes one 1/4"-20" or 5/16"-18" hex nut and one 1/4" or 5/16" lock washer. UL classified.

PART NO.	DESCRIPTION
OR-P987529H	A" 1.75, B" .250, C" .50, D" .75", thread size: 1/4"-20"
OR-P987528H	A" 3.25, B" .438, C" .75, D" 1.5", thread size: 1/4"-20"
OR-P987527H	A" 2.25, B" .438, C" .75, D" 1", thread size: 1/4"-20"
OR-P987526H	A" 3.75, B" .313, C" .75, D" 1.25", thread size: 5/16"-18"
OR-P987525H	A" 3.25, B" .313, C" .75, D" .75", thread size: 5/16"-18"
OR-P987524H	A" 3.25, B" .438, C" .75, D" 1.5", thread size: 5/16"-18"
OR-P987523H	A" 2.25, B" .438, C" .75, D" 1", thread size: 5/16"-18"

Notes: Clear zinc plated.

# PHYSICAL SUPPORT

## MIGHTY MO FIBER RACEWAY





#### Properly Route and Protect Your Fiber Cabling with Mighty Mo® Fiber Raceway

With today's network needs increasing exponentially, fiber optic cables are becoming mission critical components of any data center, SAN or large enterprise network and must be properly routed and protected to maximize network uptime. Proper cable management is a fundamental best practice for network infrastructure. Installing a separate fiber optic cabling pathway protects the integrity of the fiber by maintaining a proper bend radius, ensuring maximum performance from your network.

Mighty Mo Fiber Raceway provides a dedicated path for critical network cabling and is flexible enough to use in telecommunications exchanges, data centers, universities, hospitals or anywhere fiber optic cabling is present. It is a unique overhead system that routes and protects fiber optic cords between termination equipment, patch panels and fiber optic splicing cabinets or frames. Fiber Raceway is simple to configure and install above equipment racks, underneath runway or tray. It provides an easily accessible solution to any situation.

#### **Features**

Mighty Mo Fiber Raceway is made of Noryl®, a plastic with outstanding strength, stiffness, electrical insulating properties and low water absorption. Mighty Mo Fiber Raceway won't sag or flex under heavy cable loads, protecting the cables from damage.

- UL 2024A certified for riser-rated telecommunications applications
- Fire retardant to UL94V-0 rating
- Halogen free, therefore it will not emit toxic or corrosive gases in a fire
- RoHS compliant, providing a solution that is suitable for installations worldwide
- Available in yellow
- Orange and black can be special ordered

# PHYSICAL SUPPORT

## MIGHTY MO FIBER RACEWAY


#### Straight Duct

Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

## OR-MMFSD Solid Duct



### OR-MMFSL Slotted Duct



#### **Solid Duct**

Solid duct is available with and without covers in 5 sizes. The unique design of the hinged cover allows it to remain in an open position while fiber is installed in the raceway. All sizes are 6' 6-3/4" long and are slotted at each end for snapping to each other or to fittings with a slotted joiner.

PART NO.	DESCRIPTION
OR-MMFSD2X2-Y	2" x 2", yellow
OR-MMFSD4X2-Y	4" x 2", yellow
OR-MMFSD4X4-Y	4" x 4", yellow
OR-MMFSD8X4-Y	8" x 4", yellow
OR-MMFSD12X4-Y	12" x 4", yellow
OR-MMFSDC2X2-Y	2" x 2", with cover, yellow
OR-MMFSDC4X2-Y	4" x 2", with cover, yellow
OR-MMFSDC4X4-Y	4" x 4", with cover, yellow
OR-MMFSDC8X4-Y	8" x 4", with cover, yellow
OR-MMFSDC12X4-Y	12" x 4", with cover, yellow
OR-MMFSDHC2X2-Y	2" x 2", with hinged cover, yellow
OR-MMFSDHC4X2-Y	4" x 2", with hinged cover, yellow
OR-MMFSDHC4X4-Y	4" x 4", with hinged cover, yellow
OR-MMFSDHC8X4-Y	8" x 4", with hinged cover, yellow

#### **Slotted Duct**

Slotted duct (side exit) is available with and without covers in 3 sizes. The unique design of the hinged cover allows it to remain in an open position while fiber is installed in the duct. All sizes are 6' 6-3/4" long and are slotted at each end for snapping together or to fittings with a slotted joiner. Side exit slots run down both sides and are spaced approximately every 6" apart. Radius guides can be snapped into the side exit slots to provide protection for fiber optic cables exiting the duct.

PART NO.	DESCRIPTION
OR-MMFSL2X2-Y	2" x 2", yellow
OR-MMFSL4X2-Y	4" x 2", yellow
OR-MMFSL4X4-Y	4" x 4", yellow
OR-MMFSLC2X2-Y	2" x 2", with cover, yellow
OR-MMFSLC4X2-Y	4" x 2", with cover, yellow
OR-MMFSLC4X4-Y	4" x 4", with cover, yellow
OR-MMFSLHC2X2-Y	2" x 2", with hinged cover, yellow
OR-MMFSLHC4X2-Y	4" x 2", with hinged cover, yellow
OR-MMFSLHC4X4-Y	4" x 4", with hinged cover, yellow

190

#### Straight Duct

Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

#### OR-MMFSJ Joiners





## OR-MMFVE Vertical Elbows







OR-MMFVE30D4X4-Y

OR-MMFVEC30D4X4-Y

OR-MMFVER30D4X4-Y







OR-MMFVE30U4X4-Y

OR-MMFVEC30U4X4-Y

OR-MMFVER30U4X4-Y



OR-MMFVE45D4X4-Y

#### **Joiners**

Joiners are used to connect the straight duct and components together. Simply snap the joiner into the slots at the end of each part to be joined. For straight duct that has been cut to length new slots will need to be made with the proper slotting tool. "Slotless" joiners are available in sizes from 4" x 4" upwards that will join the fittings to the duct with or without joining slots.

PART NO.	DESCRIPTION
OR-MMFJ2X2-Y	Requires assembly slots for 2" x 2" duct, yellow
OR-MMFJ4X2-Y	Requires assembly slots for 4" x 2" duct, yellow
OR-MMFJ4X4-Y	Requires assembly slots for 4" x 4" duct, yellow
OR-MMFJ8X4-Y	Requires assembly slots for 8" x 4" duct, yellow
OR-MMFJ12X4-Y	Requires assembly slots for 12" x 4" duct, yellow
OR-MMFJSL4X4-Y	Slotless for 4" x 4" duct, yellow
OR-MMFJSL8X4-Y	Slotless for 8" x 4" duct, yellow
OR-MMFJSL12X4-Y	Slotless for 12" x 4" duct, yellow

#### Vertical Elbows

Vertical elbows are used to connect horizontal routes at different heights or to allow the fiber path to be raised or lowered to avoid obstacles. They are available with or without covers. The retrofit versions come with split covers that are used where there is existing fiber.

covers that are used where there is existing liber.	
PART NO.	DESCRIPTION
OR-MMFVE30D2X2-Y	30° down, 2" x 2", yellow
OR-MMFVE30D4X4-Y	30° down, 4" x 4", yellow
OR-MMFVE30D8X4-Y	30° down, 8" x 4", yellow
OR-MMFVEC30D2X2-Y	30° down, 2" x 2", with cover, yellow
OR-MMFVEC30D4X4-Y	30° down, 4" x 4", with cover, yellow
OR-MMFVEC30D8X4-Y	30° down, 8" x 4", with cover, yellow
OR-MMFVER30D4X4-Y	30° down, 4" x 4", retrofit, yellow
OR-MMFVER30D8X4-Y	30° down, 8" x 4", retrofit, yellow
OR-MMFVE30U4X4-Y	30° up, 4" x 4", yellow
OR-MMFVE30U8X4-Y	30° up, 8" x 4", yellow
OR-MMFVEC30U4X4-Y	30° up, 4" x 4", with cover, yellow
OR-MMFVEC30U8X4-Y	30° up, 8" x 4", with cover, yellow
OR-MMFVER30U4X4-Y	30° up, 4" x 4", retrofit, yellow
OR-MMFVER30U8X4-Y	30° up, 8" x 4", retrofit, yellow
OR-MMFVE45D2X2-Y	45° down, 2" x 2", yellow
OR-MMFVE45D4X4-Y	45° down, 4" x 4", yellow
OR-MMFVE45D8X4-Y	45° down, 8" x 4", yellow
OR-MMFVE45D12X4-Y	45° down, 12" x 4", yellow



### Fiber Raceway Fittings

Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

#### OR-MMFVE Vertical Elbows









OR-MMFVER45D4X4-Y OR-MMFVE45U4X4-Y







OR-MMFVEC45U4X4-Y

OR-MMFVER45U4X4-Y

OR-MMFVE90D4X4-Y







OR-MMFVEC90D4X4-Y

OR-MMFVE90U4X4-Y

#### Vertical Elbows (cont)

PART NO.	DESCRIPTION
OR-MMFVEC45D2X2-Y	45° down, 2" x 2", with cover, yellow
OR-MMFVEC45D4X4-Y	45° down, 4" x 4", with cover, yellow
OR-MMFVEC45D8X4-Y	45° down, 8" x 4", with cover, yellow
OR-MMFVEC45D12X4-Y	45° down, 12" x 4", with cover, yellow
OR-MMFVER45D4X4-Y	45° down, 4" x 4", retrofit, yellow
OR-MMFVER45D8X4-Y	45° down, 8" x 4", retrofit, yellow
OR-MMFVE45U2X2-Y	45° up, 2" x 2", yellow
OR-MMFVE45U4X4-Y	45° up, 4" x 4", yellow
OR-MMFVE45U8X4-Y	45° up, 8" x 4", yellow
OR-MMFVE45U12X4-Y	45° up, 12" x 4", yellow
OR-MMFVEC45U2X2-Y	45° up, 2" x 2", with cover, yellow
OR-MMFVEC45U4X4-Y	45° up, 4" x 4", with cover, yellow
OR-MMFVEC45U8X4-Y	45° up, 8″ x 4″, with cover, yellow
OR-MMFVEC45U12X4-Y	45° up, 12" x 4", with cover, yellow
OR-MMFVER45U2X2-Y	45° up, 2" x 2", retrofit, yellow
OR-MMFVER45U4X4-Y	45° up, 4" x 4", retrofit, yellow
OR-MMFVER45U8X4-Y	45° up, 8" x 4", retrofit, yellow
OR-MMFVE90D2X2-Y	90° down, 2" x 2", yellow
OR-MMFVE90D4X2-Y	90° down, 4" x 2", yellow
OR-MMFVE90D4X4-Y	90° down, 4" x 4", yellow
OR-MMFVE90D8X4-Y	90° down, 8" x 4", yellow
OR-MMFVE90D12X4-Y	90° down, 12" x 4", yellow
OR-MMFVEC90D2X2-Y	90° down, 2" x 2", with cover, yellow
OR-MMFVEC90D4X2-Y	90° down, 4" x 2", with cover, yellow
OR-MMFVEC90D4X4-Y	90° down, 4" x 4", with cover, yellow
OR-MMFVEC90D8X4-Y	90° down, 8" x 4", with cover, yellow
OR-MMFVEC90D12X4-Y	90° down, 12" x 4", with cover, yellow
OR-MMFVER90D2X2-Y	90° down, 2" x 2", retrofit, yellow
OR-MMFVER90D4X2-Y	90° down, 4" x 2", retrofit, yellow
OR-MMFVER90D4X4-Y	90° down, 4" x 4", retrofit, yellow
OR-MMFVER90D8X4-Y	90° down, 8" x 4", retrofit, yellow
OR-MMFVE90U2X2-Y	90° up, 2″ x 2″, yellow
OR-MMFVE90U4X2-Y	90° up, 4" x 2", yellow
OR-MMFVE90U4X4-Y	90° up, 4" x 4", yellow
OR-MMFVE90U8X4-Y	90° up, 8″ x 4″, yellow
OR-MMFVE90U12X4-Y	90° up, 12" x 4", yellow

### Fiber Raceway Fittings

Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

## OR-MMFVE Vertical Elbows







#### Vertical Elbows (cont)

PART NO.	DESCRIPTION
OR-MMFVEC90U2X2-Y	90° up, 2" x 2", with cover, yellow
OR-MMFVEC90U4X2-Y	90° up, 4" x 2", with cover, yellow
OR-MMFVEC90U4X4-Y	90° up, 4" x 4", with cover, yellow
OR-MMFVEC90U8X4-Y	90° up, 8" x 4", with cover, yellow
OR-MMFVEC90U12X4-Y	90° up, 12" x 4", with cover, yellow
OR-MMFVER90U2X2-Y	90° up, 2" x 2", retrofit, yellow
OR-MMFVER90U4X2-Y	90° up, 4" x 2", retrofit, yellow
OR-MMFVER90U4X4-Y	90° up, 4" x 4", retrofit, yellow
OR-MMFVER90U8X4-Y	90° up, 8" x 4", retrofit, yellow
OR-MMFVEE90UD4X4-Y	90° up/down, 4" x 4", enclosed, yellow
OR-MMFVEE90UD8X4-Y	90° up/down, 8" x 4", enclosed, yellow

## OR-MMFHE Horizontal Elbows







OR-MMFHE304X4-Y

OR-MMFHEC304X4-Y

OR-MMFHE454X4-Y







OR-MMFHEC454X4-Y

OR-MMFHE904X4-Y

#### **Horizontal Elbows**

Horizontal elbows are used to change the direction of horizontal routes. They are available with and without covers.

PART NO.	DESCRIPTION
OR-MMFHE302X2-Y	30°, 2" x 2", yellow
OR-MMFHE304X4-Y	30°, 4" x 4", yellow
OR-MMFHE308X4-Y	30°, 8" x 4", yellow
OR-MMFHEC302X2-Y	30°, 2" x 2", with cover, yellow
OR-MMFHEC304X4-Y	30°, 4" x 4", with cover, yellow
OR-MMFHEC308X4-Y	30°, 8" x 4", with cover, yellow
OR-MMFHE452X2-Y	45°, 2" x 2", yellow
OR-MMFHE454X4-Y	45°, 4" x 4", yellow
OR-MMFHE458X4-Y	45°, 8" x 4", yellow
OR-MMFHE4512X4-Y	45°, 12" x 4", yellow
OR-MMFHEC452X2-Y	45°, 2" x 2", with cover, yellow
OR-MMFHEC454X4-Y	45°, 4" x 4", with cover, yellow
OR-MMFHEC458X4-Y	45°, 8" x 4", with cover, yellow
OR-MMFHEC4512X4-Y	45°, 12" x 4", with cover, yellow
OR-MMFHE902X2-Y	90°, 2"x 2", yellow
OR-MMFHE904X2-Y	90°, 4" x 2", yellow
OR-MMFHE904X4-Y	90°, 4" x 4", yellow
OR-MMFHE908X4-Y	90°, 8" x 4", yellow
OR-MMFHE9012X4-Y	90°, 12" x 4", yellow



#### Fiber Raceway Fittings

OR-MMFHE
Horizontal Elbows




OR-MMFHEC904X4-Y

## **OR-MMFHT**Horizontal Tees







OR-MMFHT4X4-Y

OR-MMFHTC4X4-Y

OR-MMFHTC8T4-Y

#### Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

#### Horizontal Elbows (cont)

PART NO.	DESCRIPTION
OR-MMFHEC902X2-Y	90°, 2" x 2", with cover, yellow
OR-MMFHEC904X2-Y	90°, 4" x 2", with cover, yellow
OR-MMFHEC904X4-Y	90°, 4" x 4", with cover, yellow
OR-MMFHEC908X4-Y	90°, 8" x 4", with cover, yellow
OR-MMFHEC9012X4-Y	90°, 12" x 4", with cover, yellow

#### **Horizontal Tees**

Horizontal tees are used to branch off the main route or provide a method of breaking into horizontal duct. Standard tees branch off at the same size as the through duct. Transition tees branch off to a smaller duct. They are available with and without covers.

PART NO.	DESCRIPTION
OR-MMFHT2X2-Y	2" x 2", yellow
OR-MMFHT4X2-Y	4" x 2", yellow
OR-MMFHT4X4-Y	4" x 4", yellow
OR-MMFHT8X4-Y	8" x 4", yellow
OR-MMFHT12X4-Y	12" x 4", yellow
OR-MMFHTC2X2-Y	2" x 2", with cover, yellow
OR-MMFHTC4X2-Y	4" x 2", with cover, yellow
OR-MMFHTC4X4-Y	4" x 4", with cover, yellow
OR-MMFHTC8X4-Y	8" x 4", with cover, yellow
OR-MMFHTC12X4-Y	12" x 4", with cover, yellow
OR-MMFHTC4T8-Y	Transition, 4" to 8", with cover, yellow
OR-MMFHTC8T4-Y	Transition, 8" to 4", with cover, yellow
OR-MMFHTC12T4-Y	Transition, 12" to 4", with cover, yellow
OR-MMFHTC12T8-Y	Transition, 12" to 8", with cover, yellow

# PHYSICAL SUPPORT

#### 195

## MIGHTY MO FIBER RACEWAY

#### Fiber Raceway Fittings

Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

#### **OR-MMFVT Vertical Tees**







OR-MMFVT2X2T2-Y

OR-MMFVT4X4T4-Y

OR-MMFVT12X4T8-Y







OR-MMFVTC2X2T2-Y

OR-MMFVTC4X4T4-Y

OR-MMFVTC12X4T8-Y





OR-MMFVTR4X4T4-Y

#### **OR-MMFVHC Horizontal Crosses**







OR-MMFHC4X4-Y

OR-MMFHCC4X4-Y

OR-MMFHC8X4T4-Y

#### **Vertical Tees**

Vertical tees are used to drop cables vertically from horizontal routes into frames or cabinets. They are available with and without covers. Vertical tees in 8" x 4" and 12" x 4" can be used to transition to smaller duct and retrofit tees can be installed where cables are already in place.

PART NO.	DESCRIPTION
OR-MMFVT2X2T2-Y	2" x 2" to 2" x 2", yellow
OR-MMFVT4X2T4-Y	4" x 2" to 4" x 2", yellow
OR-MMFVT4X4T4-Y	4" x 4" to 4" x 4", yellow
OR-MMFVT8X4T4-Y	8" x 4" to 4" x 4", yellow
OR-MMFVT12X4T8-Y	12" x 4" to 8" x 4", yellow
OR-MMFVTC2X2T2-Y	2" x 2" to 2" x 2", with cover, yellow
OR-MMFVTC4X2T4-Y	4" x 2" to 4" x 2", with cover, yellow
OR-MMFVTC4X4T4-Y	4" x 4" to 4" x 4", with cover, yellow
OR-MMFVTC8X4T4-Y	8" x 4" to 4" x 4", with cover, yellow
OR-MMFVTC8X4T8-Y	8" x 4" to 8" x 4", with cover, yellow
OR-MMFVTC12X4T8-Y	12" x 4" to 8" x 4", with cover, yellow
OR-MMFVTR2X2T2-Y	2" x 2" to 2" x 2", retrofit, yellow
OR-MMFVTR4X4T4-Y	4" x 4" to 4" x 4", retrofit, yellow
OR-MMFVTR8X4T4-Y	8" x 4" to 4" x 4", retrofit, yellow

#### **Horizontal Crosses**

Horizontal crosses can be used to provide a cross intersection in straight duct. Transition crosses join duct of different sizes. They are available with and without covers.

PART NO.	DESCRIPTION
OR-MMFHC2X2-Y	2" x 2", yellow
OR-MMFHC4X2-Y	4" x 2", yellow
OR-MMFHC4X4-Y	4" x 4", yellow
OR-MMFHC8X4-Y	8" x 4", yellow
OR-MMFHC12X4-Y	12" x 4", yellow
OR-MMFHCC2X2-Y	2" x 2", with cover, yellow
OR-MMFHCC4X2-Y	4" x 2", with cover, yellow
OR-MMFHCC4X4-Y	4" x 4", with cover, yellow
OR-MMFHCC8X4-Y	8" x 4", with cover, yellow
OR-MMFHCC12X4-Y	12" x 4", with cover, yellow
OR-MMFHC8X4T4-Y	Transition, 8" x 4" to 4" x 4", yellow
OR-MMFHC8X4T12-Y	Transition, 8" x 4" to 12" x 4", yellow
OR-MMFHC12X4T4-Y	Transition, 12" x 4" to 4" x 4", yellow

#### Fiber Raceway Fittings

Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

## **OR-MMFVHC**Horizontal Crosses



OR-MMFHC12X4T4-Y

#### OR-MMFFSL Fiber Storage Loops





OR-MMFHT4X4-Y

OR-MMFHTC4X4-Y

#### **Horizontal Crosses (cont)**

PART NO.	DESCRIPTION
OR-MMFHCC8X4T4-Y	Transition, 8" x 4" to 4" x 4", with cover, yellow
OR-MMFHCC8X4T12-Y	Transition, 8" x 4" to 12" x 4", with cover, yellow
OR-MMFHCC12X4T4-Y	Transition, 12" x 4" to 4" x 4", with cover, yellow

#### **Fiber Storage Loops**

Fiber storage loops are used to safely store excess fiber length and can be placed in any horizontal route. They are available in inline or offset versions.

PART NO.	DESCRIPTION
OR-MMFFSLIN2X2-Y	2" x 2", inline, yellow
OR-MMFFSLIN4X2-Y	4" x 2", inline, yellow
OR-MMFFSLIN4X4-Y	4" x 4", inline, yellow
OR-MMFFSLIN8X4-Y	8" x 4", inline, yellow
OR-MMFFSLIN12X4-Y	12" x 4", inline, yellow
OR-MMFFSLOF2X2-Y	2" x 2", offset, yellow
OR-MMFFSLOF4X2-Y	4" x 2", offset, yellow
OR-MMFFSLOF4X4-Y	4" x 4", offset, yellow
OR-MMFFSLOF8X4-Y	8" x 4", offset, yellow
OR-MMFFSLOF12X4-Y	12" x 4", offset, yellow

## OR-MMFEC End Caps







OR-MMFEC2X220KO-Y

#### **End Caps**

End caps are used to close off the end of a horizontal or vertical route of duct. Some are solid, others have knockouts, cutouts or outlets for attaching flexible tubing.

PART NO.	DESCRIPTION
OR-MMFECS4X2-Y	4" x 2", blank, yellow
OR-MMFECS4X4-Y	4" x 4", blank, yellow
OR-MMFECS8X4-Y	8" x 4", blank, yellow
OR-MMFECSL4X4-Y	4" x 4", blank, slotless duct, yellow
OR-MMFECSL8X4-Y	8" x 4", blank, slotless duct, yellow
OR-MMFECSL12X4-Y	12" x 4", blank, slotless duct, yellow
OR-MMFEC2X220KO-Y	2" x 2", (2) 20mm diameter knockouts, yellow
OR-MMFEC2X238KO-Y	2"x 2", 38mm diameter knockout, yellow

#### Fiber Raceway Fittings

Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

#### **OR-MMFEC End Caps**







OR-MMFEC2X238CO-Y

OR-MMFEC2X244TO-Y

OR-MMFEC4X432KO-Y



OR-MMFEC4X488TO-Y

#### **OR-MMF** Reducers







OR-MMF4X4R2X2-Y

OR-MMFC4X4R2X2-Y



OR-MMFC4X4R4X2-Y

OR-MMFR8X4R4X4-Y

OR-MMFLC8X4R4X4-Y

### OR-MMFR, OR-MMF **Drop Components**





OR-MMF0T4-Y

#### End Caps (cont)

Vertical tees are used to drop cables vertically from horizontal routes into frames or cabinets. They are available with and without covers. Vertical tees in 8" x 4" and 12" x 4" can be used to transition to smaller duct and retrofit tees can be installed where cables are already in place.

PART NO.	DESCRIPTION
OR-MMFEC2X238CO-Y	2" x 2", 32mm diameter cutout, yellow
OR-MMFEC2X244TO-Y	2" x 2", 44mm tube outlet, yellow
OR-MMFEC4X432KO-Y	4" x 4", (2) 32mm diameter knockouts, yellow
OR-MMFEC4X446KO-Y	4" x 4", (2) 46mm diameter knockouts, yellow
OR-MMFEC4X4ESB-Y	4" x 4", end support bracket, yellow
OR-MMFEC4X488TO-Y	4" x 4", 88mm tube outlet, yellow
OR-MMFEC8X488TO-Y	4" x 4", (2) 88mm tube outlets, yellow

#### Reducers

Reducers allow different size ducts to be joined together. They are available with or without covers.

,	
PART NO.	DESCRIPTION
OR-MMF4X2R2X2-Y	4" x 2" to 2" x 2", yellow
OR-MMF4X4R2X2-Y	4" x 4" to 2" x 2", yellow
OR-MMFC4X2R2X2-Y	4" x 2" to 2" x 2", with cover, yellow
OR-MMFC4X4R2X2-Y	4" x 4" to 2" x 2", with cover, yellow
OR-MMF4X4R4X2-Y	4" x 4" to 4" x 2", yellow
OR-MMF12X4R8X4-Y	12" x 4" to 8" x 4", yellow
OR-MMFC4X4R4X2-Y	4" x 4" to 4" x 2", with cover, yellow
OR-MMFC12X4R8X4-Y	12" x 4" to 8" x 4", with cover, yellow
OR-MMFR8X4R4X4-Y	8" x 4" to 4" x 4", right hand, yellow
OR-MMFRC8X4R4X4-Y	8" x 4" to 4" x 4", with cover, right hand, yellow
OR-MMFL8X4R4X4-Y	$8" \times 4"$ to $4" \times 4"$ , left hand, yellow
OR-MMFLC8X4R4X4-Y	8" x 4" to 4" x 4", with cover, left hand, yellow

#### **Drop Components**

Radius guides provide protection for fiber optic cables exiting slotted duct. Outlet trumpets provide bend limitation for fiber optic cables exiting the side or end of the duct.

PART NO.	DESCRIPTION
OR-MMFRG10-Y	Radius guide, package of 10, yellow
OR-MMFOT2-Y	Outlet trumpet, 2", yellow
OR-MMFOT4-Y	Outlet trumpet, 4", yellow
OR-MMFOT8-Y	Outlet trumpet, 8", yellow
OR-MMF0T12-Y	Outlet trumpet, 12", yellow

#### Side Drop-Offs and Tubing

Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

## **OR-MMFSDK**Side Drop-Off Kits







OR-MMFSDK50DCT-Y

OR-MMFSDK4X4-Y

#### Side Drop-Off Kits

Side drop-off kits provide different methods of allowing fiber optic cables to enter or leave the duct. Both kits for the flexible tubing include a ramp up, drop-off and spreader. The 2" x 2" kit includes a ramp up, outlet trumpet, joiner and down elbow. The 4" x 4" kit includes an outlet trumpet, joiner and down elbow. The 4" x 2" kit includes a ramp up, outlet trumpet and joiner. A down angle or 4" x 2" duct can be attached to the 4" x 2" kit to create a low profile cross ducting solution.

PART NO.	DESCRIPTION
OR-MMFSDK50DCT-Y	50mm diameter flexible tube, yellow
OR-MMFSDK50SCT-Y	50mm square flexible tube, yellow
OR-MMFSDK2X2-Y	2" x 2" duct, yellow
OR-MMFSDK4X4-Y	4" x 4" duct, yellow
OR-MMFSDK4X2-Y	4" x 2" duct, yellow

## OR-MMHCDO High Capacity Side Drop-Offs and Kits



#### High Capacity Side Drop-Offs and Kits

High capacity side drop-offs and kits provide different methods of allowing fiber optic cables to enter or leave the duct. Individual drop-offs include the combined outlet and  $90^{\circ}$  elbow and cover. In addition to the outlet the  $4" \times 4"$  kit also includes one single 88 mm tube end cap and one 2m long flexible tube. The  $8" \times 4"$  kit includes the outlet, one dual 88 mm tube outlet and two 2m long flexible tubes.

PART NO.	DESCRIPTION
OR-MMFHCD04X4-Y	90°, 4"x 4", yellow
OR-MMFHCDOK4X4-Y	/ 90°, 4"x 4", kit, yellow
OR-MMFHCD08X4-Y	90°, 8"x 4", yellow
OR-MMFHCDOK8X4-Y	′ 90°, 8"x 4", kit, yellow

## OR-MMFCT Flexible Tubing



#### Flexible Tubing

Tubing is used for feeding entering or exiting fibers from the duct into equipment racks and cabinets. They are ribbed to allow flexibility if drops cannot be positioned exactly over or under equipment. Some are available with removable covers or split for ease of cable installation.

PART NO.	DESCRIPTION
OR-MMFCT50D1M-Y	50mm diameter, 1m, yellow
OR-MMFCT50D1M-B	50mm diameter, 1m, black
OR-MMFCT50D2M-Y	50mm diameter, 2m, yellow
OR-MMFCT50D2M-B	50mm diameter, 2m, black

#### Adapter Kits and Wall Mounting Kits

Notes: Replace "Y" (yellow), with "B" (black), or "O" (orange).

#### **OR-MMFCT** Flexible Tubing





OR-MMFCT50S350-Y

OR-MMFCTF751M-Y

#### Flexible Tubing (cont)

PART NO.	DESCRIPTION
OR-MMFCT50S350-Y	50mm square, 350mm long, yellow
OR-MMFCT50S350-B	50mm square, 350mm long, black
OR-MMFCTOC50S350-Y	50mm square, 350mm long, open, with cover, yellow
OR-MMFCTF751M-Y	75mm inside diameter, 88mm outside diameter, 1m, yellow
OR-MMFCTF752M-Y	75mm inside diameter, 88mm outside diameter, 2m, yellow

### **OR-MMFAK Adapter Kits**







OR-MMFAK4X4ADC4-Y

OR-MMFAKL4X4ADC6-Y

OR-MMFAKL8X4PAN6-Y

### **Adapter Kits**

Adapter kits are used to connect parts from other brands to the Fiber Raceway duct.

PART NO.	DESCRIPTION
OR-MMFAK4X4ADC4-Y	4" x 4" to ADC 4"
OR-MMFAKL8X4ADC6-Y	8" x 4" to ADC 6", left hand, yellow
OR-MMFAKR8X4ADC6-Y	8" x 4" to ADC 6", right hand, yellow
OR-MMFAK12X4ADC6-Y	12" x 4" to ADC 12"
OR-MMFAKR4X4ADC6-Y	4" x 4" to ADC 6", right hand, yellow
OR-MMFAKL4X4ADC6-Y	4" x 4" to ADC 6", left hand, yellow
OR-MMFAKR8X4PAN6-Y	8" x 4" to Panduit 6", right hand, yellow
OR-MMFAKL8X4PAN6-Y	8" x 4" to Panduit 6", left hand, yellow

#### **OR-MMFMMK** Wall Mounting Kits





#### **Wall Mounting Kits**

Adapter kits are used to connect parts from other brands to the Fiber Raceway duct.

PART NO.	DESCRIPTION
OR-MMFMMK4	For 4" duct, right angle bracket, duct mounting bracket, base bracket and hardware
OR-MMFMMK8	For 8" duct, right angle bracket, duct mounting bracket, base bracket and hardware
OR-MMFMMKEX4	For 4" duct, right angle bracket, straight bracket and hardware*
OR-MMFMMKEX8	For 8" duct, right angle bracket and hardware*

Notes: \*Duct mounting brackets purchased separately.

#### Mounting Hardware

#### OR-MMFSUSK Suspension Kits



#### **Suspension Kits**

Suspension kits are used to suspend raceway from existing metal work.

PART NO.	DESCRIPTION
OR-MMFSUSK1212	12" duct mounting bracket, (2) straight brackets, (2) 36" long 12mm threaded rods and hardware
OR-MMFSUSK5812	12" duct mounting bracket, (2) straight brackets, (2) 36" long 5/8" threaded rods and hardware
OR-MMFSUSKNR12	12" duct mounting bracket, (2) straight brackets and hardware (no threaded rod)
OR-MMFSUSK128	8" duct mounting bracket, straight bracket, (2) 15" long 12mm threaded rods and hardware
OR-MMFSUSK168	8" duct mounting bracket, straight bracket, (2) 15" long 16mm threaded rods and hardware
OR-MMFSUSK124	4" duct mounting bracket, straight bracket, (2) 15" long 12mm threaded rods and hardware
OR-MMFSUSK164	4" duct mounting bracket, straight bracket, (2) 15" long 16mm threaded rods and hardware

# OR-MMFRMK Raised Mounting Kits



#### **Raised Mounting Kits**

Raised mounting kits are used for supporting the raceway above cabinets or metal work.

PART NO.	DESCRIPTION
OR-MMFRMK2	For 2" duct, mounting plate, 15" long threaded rod and hardware
OR-MMFRMK4	For 4" duct, duct management bracket, 15" long threaded rod, protective sleeve and hardware
OR-MMFRMK8	For 8" duct, duct management bracket, 15" long threaded rod, protective sleeve and hardware
OR-MMFRMK12	For 12" duct, duct management bracket, 15" long threaded rod, protective sleeve and hardware

Mounting Hardware and Raceway Tooling

#### **OR-MMFRFPMK, OR-MMFCFMBKT Underfloor Mounting Kits**





#### **Underfloor Mounting Kits**

Underfloor mounting kits are used to support the raceway from raised floor pedestals or from the concrete floor.

PART NO.	DESCRIPTION
OR-MMFRFPMK	For raised floor pedestal, bracket, U-bolt and hardware*
OR-MMFCFMBKT	For concrete floor, bracket only, requires raised mounting kit

Notes: \*Duct mounting brackets purchased separately.

#### **OR-MMFRUNBK, OR-MMFU Runway Mounting Kits**





**Runway Mounting Kits** 

Runway mounting kits are used to support the raceway from runway with 1-1/2" high side rails.

PART NO.	DESCRIPTION
OR-MMFRUNBK4812	For 4", 8" and 12" duct mounting brackets
OR-MMFRUNBK2	For 2" duct mounting brackets
OR-MMFU158MB4812	For 4", 8" and 12" raised mounting brackets

### **OR-MMFDMB Duct Mounting Brackets**



#### **Duct Mounting Brackets**

Duct mounting brackets are used with mounting angle brackets and other kits that can accept multiple sizes of duct. They contain one bracket and attaching hardware.

PART NO.	DESCRIPTION
OR-MMFDMB2	For 2" duct
OR-MMFDMB4	For 4" duct
OR-MMFDMB8	For 8" duct
OR-MMFDMB12	For 12" duct

#### **OR-MMFST Slotting Tools**



#### **Slotting Tools**

Slotting tools are used to produce slots in the end of a cut length of duct required when using slotted joiners.

PART NO.	DESCRIPTION
OR-MMFST2	For 2" duct
OR-MMFST48	For 4" & 8" duct
OR-MMFSTS4X2	For 4" x 2" duct, side

#### Raceway Tooling

#### **OR-MMFSTFO** Slotting Tool - Foot Operated



## Slotting Tool - Foot Operated

The foot operated duct slotting tool allows installers to improve efficiency with it's no fuss operation and ergonomic design. This method safely and easily slots ducting, improving the efficiency of installations.

- Ducting can be easily aligned and positioned on slotting jig
- Fast and easy to use slotting mechanism which slots in seconds
- Compact unit only weighs 18 lbs. easy to transport
- Steady and robust platform
- Ergonomically designed, no stress or heavy manual operation required
- Repeatedly produces accurate slots

PART NO.	DESCRIPTION
OR-MMFSTF0	Foot operated, 4" x 2" and larger duct

#### OR-MMFCOT35, OR-MMFCOT6 **Raceway Cut-Out Tools**



#### Raceway Cut-Out Tools

Cut-out tools are used to cut notches in the side of the duct to accommodate drop-outs. They are supplied with a fiber spreader to protect previously installed fibers when using the tools.

PART NO.	DESCRIPTION
OR-MMFCOT35	For 3.5" cut-outs
OR-MMFCOT6	For 6" cut-outs

#### **OR-MMFMBOX4812** Miter Box



OR-MMFMB0X4812

#### Miter Box

The miter box provides a means of producing an accurate and straight cut on ducting. This is essential for correct alignment of the slotting tools and joiners.

PART NO.	DESCRIPTION
OR-MMFMB0X4812	For 4", 8" and 12" duct


# FIBER OPTIC SOLUTIONS

## FIBER OPTIC SOLUTIONS



Ideal for data center, SAN or enterprise LAN applications, Legrand® fiber optic solutions support common, convenient approaches to fiber optic cabling. Infinium™ series modular optical cassettes provide a system that is simple to design, quick to install, highly reliable and error-proof. For a conventional field-installation as well as factory terminated pigtails for a splicing approach, we offer no-epoxy/no-polish and quick-cure anaerobic field-installable connectors. For all your installations, fiber solutions guarantee quality and performance.

## **Featured Products**



Cable Assemblies



Ultra High Density System



High Density System



Standard Density System



Infinium Pre-Terminated Multi-Fiber Cable Assemblies



HiLOC™ Harness



Infinium™ Factory Terminated Patch Cords



Cleaning Tools



Prepolished Connectors



Anaerobic Connectors



Series II Modules and Faceplates



TracJack Modules and Faceplates



Fib-or-Cop II

## ENCLOSURE SYSTEMS OVERVIEW

As you consider your fiber port density requirements, Legrand® gives you a wide range of great choices with Legrand fiber optic rack mount enclosures. Whether you are matching the port density of a Cisco 7018 switch and need 96 LCs in one rack unit, or you simply need to max out fiber count at 144 LCs in a rack unit, Legrand has the right solution for the job. Along with this greater density, you can expect the usual benefits of the Legrand line like simpler installation, easier administration and higher performance. And as you evolve to parallel optics solutions, Legrand helps you maximize your investment by allowing you to simply swap out components while utilizing the same enclosure. Another way Legrand saves you money with flexible, efficient design.

#### **Three Port Densities**

#### **Ultra High Density**

ENCLOSURE PART NO.	LC DENSITY	12F MPO DENSITY	24F MPO DENSITY	CASSETTE	ADAPTER MODULE
OR-UC01UA-P	144	576	1152	Ultra High	
OR-UC02UA-P	288	1152	2304	Density Series (M6)	OR-UHDFP Series
OR-UC04UA-P	576	2304	4608		

#### **High Density**

ENCLOSURE PART NO.	LC DENSITY	12F MPO DENSITY	24F MPO DENSITY	CASSETTE	ADAPTER MODULE
OR-FC01U-M	96	288	576		
OR-FC02U-M	192	576	1152	High Density Series (M4)	OR-HDFP Series
OR-FC03U-M	288	864	1728		
OR-FC04U-M	384	1152	2304		

#### **Standard Density**

ENCLOSURE PART NO.	LC DENSITY	12F MP0 DENSITY	24F MPO DENSITY	CASSETTE	ADAPTER MODULE
OR-FC01U-P	72	288	576		
OR-FC02U-P	144	576	1152	Standard Density Series (M2)	OR-OFP Series
OR-FC03U-P	216	864	1728		
OR-FC04U-P	288	1152	2304		



## CASSETTE AND ADAPTER PANEL OVERVIEW

Pre-terminated fiber cassettes combine state-of-the-art [OM4+] optical ribbon cabling, industry-leading MTP® termination, advanced LC polishing and innovative hardware to create a cost-effective solution that provides a simple, quick and high-performing cassette-based fiber optic structured cabling system. Cassettes are available in three density ranges to meet a variety of applications, including standard-density, high-density and ultra high-density.

The Legrand® UHDFP series adapter modules are used with the UC Series modular enclosure with MPO adapters only. The OFP and HDFP series adapter panels are used with our popular FC Series modular fiber cabinets, offering great flexibility in structured cabling design. Front-removable adapter panels are available with LC, SC, and MPO adapters and feature options ideal for both single-mode and multimode applications. They are held securely in place with plunger/grommet fasteners.



Ultra High Density Systems



High Density Systems



Standard Density Systems

#### Cassettes and Adapters with Matched Enclosures

PART NO.	DESCRIPTION
Ultra High Density Systems	<ul> <li>Ultra high density systems utilize the M6 ultra high density cassettes and UHDFP adapter modules.</li> </ul>
High Density Systems	<ul> <li>High density systems use the M4 high density cassettes and HDFP adapter panels.</li> </ul>
Standard Density Systems	<ul> <li>Standard density systems utilize the M2 standard density cassettes and OFP-series adapter panels.</li> </ul>

Notes: Legrand standard is Connectivity Method A as defined by TIA-568.

## ULTRA HIGH DENSITY SYSTEMS

#### Enclosures

Very high density applications like Storage Area Networks, equipment consolidation and virtualization have added more ports, more connectors and more cables to the rack than ever before. Legrand® UHD was created to meet the demands of organizing that many fiber cables in smaller and smaller spaces. We were up for the challenge. As you work to become more efficient with the existing space you have available, count on the Legrand UHD system to effectively support your highest density requirements.

The Legrand Ultra High Density system consists of the enclosure – 1U, 2U or 4U – the MTP®-to-LC cassette and MPO pass through adapter. As you move from 1 Gig and 10 Gig to 40 Gig and beyond, the UHD system allows you to simply swap out the MTP-to-LC cassette for the MPO adapter panel.

UHD gives you the ability to manage 144 LC fibers in 1 rack unit and 576 LCs in a 4U enclosure. Once you go to 12-fiber MPOs, you can increase those numbers to 576 in 1U, and 2304 in 4U. That should not only help you be more efficient with your rack space now, it will also extend the life of the physical infrastructure well into the future.

#### OR-UC **Ultra High Density Systems**



OR-LICOTUA-P



OR-UC01UA-A

#### **Ultra High Density Rack Mount Fiber Enclosures**

PART NO.	DESCRIPTION
OR-UC01UA-P	<ul> <li>Holds (12) MPO adapter modules or ultra high density cassettes</li> <li>Manages (144) LC ports or 576-fibers using 12-fiber MPOs</li> <li>One hand front or rear-loading modules and cassettes</li> <li>Industry-leading cable management front and rear</li> </ul>
OR-UC1UA-A	<ul> <li>Holds (12) MPO adapter modules or ultra high density cassettes</li> <li>Manages (144) LC ports or 576-fibers using 12-fiber MPOs</li> <li>One hand front or rear-loading modules and cassettes</li> <li>Industry-leading cable management front and rear</li> </ul>
OR-UC02UA-P	<ul> <li>Holds (24) MPO adapter modules or ultra high density cassettes</li> <li>Manages (288) LC ports or 1152-fibers using 12-fiber MPOs</li> <li>One hand front or rear-loading modules and cassettes</li> <li>Industry-leading cable management front and rear</li> </ul>
OR-UC04UA-P	<ul> <li>Holds (48) MPO adapter modules or ultra high density cassettes</li> <li>Manages (576) LC ports or 2304-fibers using 12-fiber MPOs</li> <li>One hand front or rear-loading modules and cassettes</li> <li>Industry-leading cable management front and rear</li> </ul>

# FIBER OPTIC SOLUTIONS

## ULTRA HIGH DENSITY SYSTEMS

Ultra High Density Infinium™ Cassettes and Adapter Modules

# **OR-M6**Ultra High Density MTP-to-LC Cassettes





# **OR-UHDFP**Ultra High Density Adapter Modules



OR-UHDFP-MPA48LA



#### **UHD MTP®-to-LC Cassettes**

PART NO.	DESCRIPTION
OR-M6LCQ12-50E	<ul> <li>12-fiber (6-port) laser-optimized multimode fiber</li> <li>Effective Modal Bandwidth (EMB) of 4900 MHz-km @ 850 (OM4+)</li> <li>Premium performance cassette/mated pair insertion loss: 0.5dB maximum</li> <li>Cassette loads from front or rear of enclosure</li> <li>Cassette and adapter module fit (4) across and (3) high</li> <li>[12] modules per 1 RU</li> </ul>
OR-M6LCQ12-09	<ul> <li>12-fiber (6-port) single-mode fiber</li> <li>Cassette/mated pair maximum insertion loss: 1.05dB</li> <li>Cassette loads from front or rear of enclosure</li> <li>Cassette and adapter module fit (4) across and (3) high</li> <li>[12] modules per 1 RU</li> </ul>

### **Ultra High Density Adapter Modules**

PART NO.	DESCRIPTION
OR-UHDFP-MPA48LA	<ul><li>(4) aqua MPO pass-through adapters</li><li>Type A standard (key up-to-key down)</li></ul>
OR-UHDFP-MPA48CA	<ul><li>[4] green MPO pass-through adapters</li><li>Type A standard (key up-to-key down)</li></ul>

## HIGH DENSITY SYSTEMS

#### Enclosures

In today's data centers and SAN environments, space is often at a premium, making density more critical than ever. High Density (HD) solutions offer the same advanced performance and reliability that you've come to expect from Legrand® standard density products in a footprint designed for space-constrained installations. Using a comprehensive HD solution of high density rack-mount fiber cabinets with either adapter panels or pre-terminated cassettes provides a complete fiber cross connect patching solution for applications where greater density is required.

## **OR-FC**HD FC Series Rack-Mount Fiber Enclosures



OR-FC01U-M







#### **HD FC Series Rack-Mount Fiber Enclosures**

High density rack-mount fiber enclosures come complete with internal fiber management hardware and bend limiting clips for superior fiber management. These enclosures are compatible with all Mighty Mo® equipment racks and cabinets. They accept high density cassettes and HDFP adapter panels. They are optimally designed for 48-fiber splice trays.

PART NO.	DESCRIPTION
OR-FC01U-M	<ul> <li>HD 1U rack mount FC series fiber enclosure</li> <li>Holds (4) high density HDFP series adapter panels or high density cassettes</li> <li>Holds (2) 12-fiber or 48-fiber splice trays</li> <li>Front locking door</li> <li>Fiber tray slides to the front or the rear</li> <li>LC capacity: 96-fibers</li> <li>1.75"H, 1 RU, 15.65 lbs/7.10kg</li> <li>Includes internal management clips</li> </ul>
OR-FC02U-M	<ul> <li>HD 2U rack mount FC series fiber enclosure</li> <li>Holds (8) high density HDFP series adapter panels or high density cassettes</li> <li>Holds (4) 12-fiber or 48-fiber splice trays</li> <li>Front locking door</li> <li>Fiber tray slides to the front or the rear</li> <li>LC capacity: 192-fibers</li> <li>3.5"H, 2 RU, 16.75 lbs/7.62g</li> <li>Includes bend limiting clips and internal management clips</li> </ul>
OR-FC03U-M	<ul> <li>HD 3U rack mount FC series fiber enclosure</li> <li>Holds (12) high density HDFP series adapter panels or high density cassettes</li> <li>Holds (7) 12-fiber or 48-fiber splice trays*</li> <li>Front locking door</li> <li>Fiber tray slides to the front or the rear</li> <li>LC capacity: 288-fibers</li> <li>5.25"H, 3 RU, 18.5 lbs/8.4kg</li> <li>Includes bend limiting clips and internal management clips</li> </ul>
OR-FC04U-M	<ul> <li>HD 4U rack mount FC series fiber enclosure</li> <li>Holds (16) high density HDFP series adapter panels or high density cassettes</li> <li>Holds (10) 12-fiber or 48-fiber splice trays*</li> <li>Front locking door</li> <li>Fiber tray slides to the front or the rear</li> <li>LC capacity: 384-fibers</li> <li>7"H, 4 RU, 20.65 lbs/9.36kg</li> <li>Includes bend limiting clips and internal management clips</li> </ul>

Notes: Fiber enclosures come in black.

<sup>\*</sup>Splice tray capacity exceeds the fiber port capacity of the enclosures.

## HIGH DENSITY SYSTEMS

High Density Infinium™ MTP®-to-LC Cassettes

## OR-M4LCQ24 High Density Cassettes







#### **High Density Cassettes**

High density modular fiber optic pre-terminated cassettes combine the plug-and-play functionality of our standard cassette with the high density footprint accommodating 96-fibers in one rack unit.

The high density cassette fully supports the latest networking standards through 10 Gb/s and beyond. It is available in two performance levels for laser optimized multimode 50-micron fiber.

- Premium performance cassette insertion loss: 0.50dB maximum
- Standard performance cassette insertion loss: 0.75dB maximum
- 1.05dB total insertion loss for single-mode system
- Insertion loss value for each port printed on adhesive data label

PART NO.	DESCRIPTION
OR-M4LCQ24-50EA3A1	LC quad, 24-fiber, 50-micron LOMF*, (2) MTP(M), 0.5dB, single-unit
OR-M4LCQ24-50E	LC quad, 24-fiber, 50-micron LOMF*, (2) MTP(M), 0.75dB, single-unit
OR-M4LCQ24-09	LC quad, 24-fiber, single-mode, (2) MTP(M), 1.05dB, single-unit
OR-M4LCQ24-62	LC quad, 24-fiber, 62.5-micron multimode, (2) MTP(M), standard performance, single-unit

Notes: \*Effective modal bandwidth 4900 MHz-km @ 850nm (OM4+).

## HIGH DENSITY SYSTEMS

Transition Cassettes and HDFP Adapter Panels

## **OR-M4MA**Transition Cassettes



# **OR-HDFP**High Density Adapter Panels



OR-HDFP-LCQ24AC

OR-HDFP-LCQ24MB

#### **Transition Cassettes**

As switch and transceiver manufacturers evolve to higher speeds, harnesses and cassettes utilizing all of the installed fibers are required. Configurations that fall outside current TIA polarity standards are considered here. The most common transition configurations are shown here. Contact your Legrand® representative to discuss your proposed switch solution, and how Infinium™ connectivity and physical support infrastructure products will support your applications for years to come.

PART NO.	DESCRIPTION
OR-M4MAE24-50EB3K1	1x24-fiber MTP(M) in rear and 3x8-fiber MTP(M) in front, 50/125 LOMF*, 0.7dB max cassette insertion loss
OR-M4MAE24-50EA3K1	2x12-fiber MTP(M) in rear and 3x8-fiber MTP(M) in front, 50/125 LOMF*, 0.7dB max cassette insertion loss
OR-M4MAE48-50EB3K1	2x24-fiber MTP(M) in rear and 6x8-fiber MTP(M) in front, 50/125 LOMF*, 0.7dB max cassette insertion loss
OR-M4MAE48-50EA3K1	4x12-fiber MTP(M) in rear and 6x8-fiber MTP(M) in front, 50/125 LOMF*, 0.7dB max cassette insertion loss

Notes: \*Effective modal bandwidth 4900 MHz-km at 850nm (0M4+). Other MTP polarity options available. For additional MTP polarity options, please contact your sales representative. For MTP-MTP modules, MTP connectors on front and rear are pinned (male). Other gender options are available. MPO adapters are type A (key up to key down). Type B adapters are available. For cassettes with MPO front panel adapters, 24-fiber MPO adapters are red, Type B adapters are gray. MPO single-mode adapters are green, 50-micron MPO adapters are aqua and 62.5-micron MPO adapters are black. Other color options are available.

#### **High Density Adapter Panels**

PART NO.	DESCRIPTION
OR-HDFP-MPA72LA	HD, 6-MPO adapter panel, feed-through, multimode, aqua adapters, Type A*
OR-HDFP-MPA72CA	HD, 6-MPO adapter panel, feed-through, single-mode, green adapters, Type A*
OR-HDFP-MPA72MA	HD, 6-MPO adapter panel, feed-through, multimode, beige adapters, Type A*
OR-HDFP-LCQ24LC	HD, 6-LC quad (24-fiber) adapter panel, multimode, aqua adapters, ceramic alignment sleeves
OR-HDFP-LCQ24AC	HD, 6-LC quad (24-fiber) adapter panel, single-mode, blue adapters, ceramic alignment sleeves
OR-HDFP-LCQ24MB	HD, 6-LC quad (24-fiber) adapter panel, multimode, beige adapters, phosphor-bronze alignment sleeves
OR-HDFP-BLANK	HD, blank panel, black

Notes: \*Type A MPO adapters are key up/key down.

OR-HDFP-LCQ24LC



#### Rack Mount Fiber Enclosures Patching

#### **OR-FC** FC Series Fiber Enclosures









#### **FC Series Fiber Patch Enclosures**

Each fiber enclosure offers complete flexibility in terms of cable entry and exit, access to terminations from front and rear, and accommodates the unique needs of optical fiber bend radius limitation through enhanced patch cord management devices and novel internal fiber management components. These enclosures are compatible with standard cassettes and OFP adapter panels.

PART NO.	DESCRIPTION	
OR-FC01U-P	<ul> <li>Holds (3) adapter panels or cassettes</li> <li>Front locking door</li> <li>Fiber tray slides forward and backward</li> <li>ST, SC, FC capacity: 36-fibers</li> <li>MT-RJ, LC: 36-fibers</li> <li>LC quad: 72-fibers</li> <li>1.75"H, 1 RU, 15.65 lbs/7.1 kg</li> <li>Includes internal management clips</li> </ul>	
OR-FC02U-P	<ul> <li>Holds (6) adapter panels or cassettes</li> <li>Front locking door</li> <li>Fiber tray slides forward and backward</li> <li>ST, SC, FC capacity: 72-fibers</li> <li>MT-RJ, LC: 72-fibers</li> <li>LC quad: 144-fibers</li> <li>3.5"H, 2 RU, 16.75 lbs/7.62 kg</li> <li>Includes bend limiting clips and internal management clips</li> </ul>	
OR-FC03U-P	<ul> <li>Holds (9) adapter panels or cassettes</li> <li>Front locking door</li> <li>Fiber tray slides forward and backward</li> <li>ST, SC, FC capacity: 108-fibers</li> <li>MT-RJ, LC: 108-fibers</li> <li>LC quad: 216-fibers</li> <li>5.25"H, 3 RU, 18.5 lbs/8.4 kg</li> <li>Includes bend limiting clips and internal management clips</li> </ul>	
OR-FC04U-P	<ul> <li>Holds (12) adapter panels or cassettes</li> <li>Front locking door</li> <li>Fiber tray slides forward and backward</li> <li>ST, SC, FC capacity: 144-fibers</li> <li>MT-RJ, LC: 144-fibers</li> <li>LC quad: 288-fibers</li> <li>7"H, 4 RU, 20.65 lbs/9.36 kg</li> <li>Includes bend limiting clips and internal management clips</li> </ul>	

Notes: Fiber enclosures come in black.

Rack Mount Fiber Enclosures Patching and Splicing

## **OR-FC**FC Series Fiber Patch and Splice Enclosures









#### FC Series Fiber Patch and Splice Cabinets

Each fiber enclosure offers complete flexibility allowing the ability to patch and splice in the same enclosure. Each enclosure has optimized cable entry and exit points, allows access to terminations from front and rear, and accommodates the unique needs of optical fiber bend radius limitation through enhanced patch cord management devices and novel internal fiber management components. These enclosures are compatible with standard cassettes and OFP adapter panels.

PART NO.	DESCRIPTION
OR-FC01U-C	<ul> <li>Holds (2) 12-fiber splice trays</li> <li>Holds (3) adapter panels or cassette</li> <li>Front locking door</li> <li>ST, SC, FC capacity: 36-fibers</li> <li>MT-RJ, LC: 36-fibers</li> <li>LC quad: 72-fibers</li> <li>1.75"H, 1 RU, 15.65 lbs/7.1 kg</li> <li>Includes internal management clips</li> </ul>
OR-FC02U-C	<ul> <li>Holds (6) 12-fiber splice trays</li> <li>Front locking door</li> <li>Holds (6) adapter panels or cassette</li> <li>ST, SC, FC capacity: 72-fibers</li> <li>MT-RJ, LC: 72-fibers</li> <li>LC quad: 144-fibers</li> <li>3.5"H, 2 RU, 16.75 lbs/7.62 kg</li> <li>Includes bend limiting clips and internal management clips</li> </ul>
OR-FC03U-C	<ul> <li>Holds (11) 12-fiber splice trays</li> <li>Front locking door</li> <li>Holds (9) adapter panels or cassette</li> <li>ST, SC, FC capacity: 108-fibers</li> <li>MT-RJ, LC: 108-fibers</li> <li>LC quad: 216-fibers</li> <li>5.25"H, 3 RU, 18.5 lbs/8.4 kg</li> <li>Includes bend limiting clips internal management clips</li> </ul>
OR-FC04U-C	<ul> <li>Holds (16) 12-fiber splice trays</li> <li>Front locking door</li> <li>Holds (12) adapter panels or cassette</li> <li>ST, SC, FC capacity: 144-fibers</li> <li>MT-RJ, LC: 144-fibers</li> <li>LC quad: 288-fibers</li> <li>7"H, 4 RU, 20.65 lbs/9.36 kg</li> <li>Includes bend limiting clips and internal management clips</li> </ul>

Notes: Fiber enclosures come in black. Splice trays sold separately. See page 232.

Rack Mount Fiber Enclosures Splicing

## **OR-FC**Fiber Splice Enclosures









#### **Fiber Splice Enclosures**

Legrand® splice enclosures provide interconnect or cross connect facilities between horizontal and backbone inside plant (ISP) or outside plant (OSP) cables. Each fiber enclosure offers high density splicing with internal fiber management accessories, has optimized cable entry and exit points, allows access to terminations from front and rear, and accommodates the unique needs of optical fiber bend radius limitation with novel internal fiber management components. Includes internal fiber management clips.

PART NO.	DESCRIPTION
OR-FC01U-S	<ul> <li>Holds (4) 12-fiber or 48-fiber splice trays</li> <li>Front locking door</li> <li>1.75"H, 1 RU, 15.65 lbs/7.10 kg</li> </ul>
OR-FC02U-S	<ul> <li>Holds (12) 12-fiber or 48-fiber splice trays</li> <li>Front locking door</li> <li>3.5"H, 2 RU, 16.75 lbs/7.62 kg</li> </ul>
OR-FC03U-S	<ul> <li>Holds (22) 12-fiber or 48-fiber splice trays</li> <li>Front locking door</li> <li>5.25"H, 3 RU, 18.5 lbs/8.4 kg</li> </ul>
OR-FC04U-S	<ul> <li>Holds (32) 12-fiber or 48-fiber splice trays</li> <li>Front locking door</li> <li>7"H, 4 RU, 20.65 lbs/9.36 kg</li> </ul>

Notes: Fiber enclosures come in black. Splice trays sold separately. See page 232.

Standard Density Infinium™ MTP®-to-LC Cassettes and Adapter Panels

#### OR-M2 **Standard Density Cassettes**







#### **OR-OFP** Adapter Panels









OR-OFP-MPA72LA OR-OFP-MPA72CA OR-OFP-MPA72MA

#### **Standard Density Cassettes**

Standard density modular fiber optic pre-terminated cassettes provide the fastest method of structured cabling deployment: plug it in and you're ready to go. Factory-terminated/tested cassettes guarantee field performance.

Full support of today's most rigorous transmission technologies up through 10 Gb/s and beyond.

- 1.05 dB total insertion loss for single-mode
- Single-unit footprint for space savings in patch panels and cabinets
- Data label printed with insertion loss value for each port adhered to the cassette housing
- Premium performance cassette insertion loss: 0.50dB maximum
- Standard performance cassette insertion loss: 0.75dB maximum

PART NO.	DESCRIPTION
OR-M2LCQ24-50E3A1	LC quad, 24-fiber, 50-micron LOMF*, (2) MTP(M), premium performance, single-unit
OR-M2LCQ24-50E	LC quad, 24-fiber, 50-micron LOMF*, (2) MTP(M), high performance, single-unit
OR-M2LCQ24-09	LC quad, 24-fiber, single-mode, (2) MTP(M), high performance, single-unit
OR-M2LCD12-50E	LC duplex, 12-fiber, 50-micron LOMF*, (1) MTP(M), high performance, single-unit
OR-M2LCD12-09	LC duplex, 12-fiber, single-mode, (1) MTP(M), high performance, single-unit
OR-M2SCD12-50E	SC duplex, 12-fiber, 50-micron LOMF*, (1) MTP(M), high performance, single-unit
OR-M2SCD12-09	SC duplex, 12-fiber, single-mode, (1) MTP(M), high performance, single-unit

Notes: \*Effective modal bandwidth 4900 MHz-km @ 850nm (OM4+). Other cassette fiber types are available. Contact Legrand sales.

#### **Adapter Panels**

PART NO.	DESCRIPTION
OR-OFP-MPA96LA	8-MPO adapter panel, feed-through, multimode, aqua adapters, type A*
OR-OFP-MPA96CA	8-MPO adapter panel, feed-through, single-mode, green adapters, type A*
OR-OFP-MPA96MA	8-MPO adapter panel, feed-through, multimode, beige adapters, type A*
OR-OFP-MPA72LA	6-MPO adapter panel, feed-through, multimode, aqua adapters, type A*
OR-OFP-MPA72CA	6-MPO adapter panel, feed-through, single-mode, green adapters, type A*
OR-OFP-MPA72MA	6-MPO adapter panel, feed-through, multi-mode, beige adapters, type A*

Notes: \*Type A MPO adapters are key up/key down.

## **La legrand**®

## STANDARD DENSITY SYSTEMS

#### Adapter Panels

#### **OR-OFP Adapter Panels**







OR-OFP-LCQ24LC

OR-OFP-LCQ24AC

OR-OFP-LCQ24MB







OR-OFP-LCD12LC

OR-OFP-LCD12AC

OR-OFP-LCD12MB







OR-OFP-SCD06MB

OR-OFP-SCD06AC

OR-OFP-SCD06LC







OR-OFP-SCD08MB

OR-OFP-SCD08AC

OR-OFP-SCD08LC







OR-OFP-SCD12MB

OR-OFP-SCD12AC

OR-OFP-SCD12LC







OR-OFP-SCS06MB

OR-OFP-SCS06AC

OR-OFP-SCS06LC







OR-OFP-MTD12MA

OR-OFP-MTD12AA

OR-OFP-MTD12LA

#### **Adapter Panels (cont)**

PART NO.	DESCRIPTION
OR-OFP-LCQ24LC	6-LC quad (24-fiber) adapter panel, multi-mode, aqua adapters, ceramic alignment sleeves
OR-OFP-LCQ24AC	6-LC quad (24-fiber) adapter panel, single-mode, blue adapters, ceramic alignment sleeves
OR-OFP-LCQ24MB	6-LC quad (24-fiber) adapter panel, multimode, beige adapters, phosphor-bronze alignment sleeves
OR-OFP-LCD12LC	6-LC duplex (12-fiber) adapter panel, multimode, aqua adapters, ceramic alignment sleeves
OR-OFP-LCD12AC	6-LC duplex (12-fiber) adapter panel, single-mode, blue adapters, ceramic alignment sleeves
OR-OFP-LCD12MB	6-LC duplex (12-fiber) adapter panel, multimode, beige adapters, phosphor-bronze alignment sleeves
OR-OFP-SCD06MB	3-SC duplex (6-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves*
OR-OFP-SCD06AC	3-SC duplex (6-fibers) single-mode, blue adapters, ceramic alignment sleeves*
OR-OFP-SCD06LC	3-SC duplex (6-fibers) multimode, aqua adapters, ceramic alignment sleeves*
OR-OFP-SCD08MB	4-SC duplex (8-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-OFP-SCD08AC	4-SC duplex (8-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-OFP-SCD08LC	4-SC duplex (8-fibers) multimode, aqua adapters, ceramic alignment sleeves
OR-OFP-SCD12MB	6-SC duplex (12-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-OFP-SCD12AC	6-SC duplex (12-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-OFP-SCD12LC	6-SC duplex (12-fibers) multimode, aqua adapters, ceramic alignment sleeves
OR-OFP-SCS06MB	6-SC simplex (6-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-OFP-SCS06AC	6-SC simplex (6-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-OFP-SCS06LC	6-SC simplex (6-fibers) multimode, aqua adapters, ceramic alignment sleeves
OR-OFP-MTD12MA	6-MT-RJ duplex (12-fibers) multimode, beige adapters
OR-OFP-MTD12AA	6-MT-RJ duplex (12-fibers) single-mode, blue adapters
OR-OFP-MTD12LA	6-MT-RJ duplex (12-fibers) multimode, aqua adapters

Notes: \*Designation strip kit provided for accurate port identification.

## SPECIALTY CASSETTES

Optical Splitters

# OR-M4S, OR-RMS Splitters







#### **Splitters**

Legrand® optical splitters are used in passive optical LAN systems. Ours are available in our high density (M4) form factor.

PART NO.	DESCRIPTION
OR-M4S1108SA091M	1x8 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 1M
OR-M4S1108SA092M	1x8 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 2M
OR-M4S1116SA091M	1x16 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 1M
OR-M4S1116SA092M	1x16 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 2M
OR-M4S1132SA091M	1x32 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 1M
OR-M4S1132SA092M	1x32 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 2M
OR-RMS011164SA09	1x64 rack mount single-mode passive optical splitter, SC/APC adapters, 1RU
OR-M4S1216SA091M	Dual 1x16 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 1M
OR-M4S1216SA092M	Dual 1x16 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 2M
OR-M4S2132SA091M	2x32 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 1M
OR-M4S2132SA092M	2x32 single-mode passive optical splitter, HD form factor, SC/APC pigtails, 2M

# FIBER OPTIC SOLUTIONS

## SPECIALTY CASSETTES

Pigtail Cassettes and Tapped Cassettes

# OR-M3LCQ24-50GAZT1 Tapped Cassettes



#### **Tapped Cassettes**

Legrand® tapped cassette modules enable passive optical network monitoring for analysis of network traffic.

PART NO.	DESCRIPTION
OR-M3LCQ24-50GAZT1	Cassette assembly secure tapped 70/30 ratio 24F LC quad, MTP(M) 50/125 LOMF (0M4+), SD form factor

Notes: Please consult your Legrand representative for additional configurations.

# OR-868 Pigtail Cassettes



#### **Pigtail Cassettes**

Legrand pigtail cassettes eliminate the MPO connection on the back side of the module and directly connect the backbone cable to the adapters on the front face of the cassette. The attached backbone cable is cut to your specified length for splicing in the field.

PART NO.	DESCRIPTION
OR-86800116-50T	Cassette assembly, pigtailed, LC duplex, 12F, 50/125 LOMF (OM3), SD form factor
OR-86800116-09	Cassette assembly, pigtailed, LC duplex, 12F single-mode, SD form factor

 ${\tt Notes: Please \ consult \ your \ Legrand \ representative \ for \ additional \ configurations.}$ 

## INFINIUM CLEANING TOOLS

#### **OR-603 Mechanical Ferrule Cleaner**



OR-60300211



OR-60300212





OR-60300215

#### **Mechanical Ferrule Cleaner**

Connector end-faces must always be cleaned with the appropriate cleaning tool.

Legrand® offers Infinium™ cleaning tools for single fiber connectors and for MTP®/MPO connectors. The ferrule cleaner tools are designed to clean ferrules residing inside an adapter, faceplate or bulkhead. The cleaning tools are simple to use and highly effective at removing oil and dust contaminants. Choose from several configurations for cleaning either single or multi-fiber connectors.

PART NO.	DESCRIPTION
OR-60300211	Ferrule Cleaner MTP/MP0
OR-60300212	Ferrule Cleaner 1.25 for LC and MU; PC and APC
OR-60300216	Ferrule Cleaner 1.25 replacement cartridge
OR-60300213	Ferrule Cleaner 2.50 for SC, FC, ST and E-2000; PC and APC
OR-60300217	Ferrule Cleaner 2.50 replacement cartridge
OR-60300214	Ferrule Cleaner Mini disposable LC
OR-60300215	Ferrule Cleaner Mini disposable SC

#### OR-60300228 **Tape Cassette Cleaner**



#### **Tape Cassette Cleaner**

The Infinium cassette style fiber optic connector cleaner system utilizes a removable cartridge containing the cleaning fabric. It uses a densely woven micro-fiber cleaning fabric to remove harmful contaminates off of the ferrule end-face. The cartridge supports 400 cleaning cycles.

PART NO.	DESCRIPTION
OR-60300228	Cleaning cassette

#### **Li** legrand

## INFINIUM CLEANING TOOLS

#### OR-603 Sticklers CleanStixx









#### OR-60300225

Fiber Optic Splice and Connector Cleaner



#### OR-603 Sticklers CleanWipes





#### Sticklers CleanStixx

Sticklers® CleanStixx™ connector cleaning sticks are designed with Sticklers Fiber Optic Splice and Connector Cleaner to deliver unbeatable "wet/dry" fiber optic cleaning. The unique, patented, high-purity fibrous CleanStixx tips leave perfectly clean fiber optic end-faces. Used with the Sticklers Fiber Optic Splice and Connector Cleaner, CleanStixx connector cleaning sticks out-perform foam or cloth swabs.

PART NO.	DESCRIPTION
OR-60300221	Blue 2.5mm connector cleaning stick, for cleaning SC, ST, FC, 50pk.
OR-60300222	Green 1.25mm connector cleaning stick, for cleaning LC, MU, 50pk
OR-60300223	Pink label cleaning stick for larger connectors and lenses, such as SMA, MPO, MTP® (with or without pins), 50pk
OR-60300224	Yellow label cleaning stick with a recessed nib, for all exposed termini 2.5mm or smaller, 50pk

#### Fiber Optic Splice and Connector Cleaner

Sticklers fiber optic splice and connector cleaner is the only optical-grade cleaning fluid on the market, specifically engineered for fast, reliable and low-cost cleaning of fiber optic network connectors, receptacles and fibers. Use with the Sticklers CleanStixx for greatly improved cleaning results.

PART NO.	DESCRIPTION
OR-60300225	Each 3 oz can contains 400 cleanings

#### Sticklers CleanWipes

Sticklers CleanWipes benchtop wipes are high quality, lint-free wipes engineered for use on bare fiber before splicing, and also for cleaning fiber optic jumpers. They are exactly the right size and the right material to make "wet-dry" cleaning simple and cost-effective.

PART NO.	DESCRIPTION
OR-60300226	Sticklers CleanWipes 90 – Each mini-tub contains 90 perforated lint-free wipes, each being 4" x 2" (10 cm x 5 cm). Each wipe can clean up to (6) fiber optic connectors or (1) bare fiber.
OR-60300227	Sticklers CleanWipes 400 – A convenient, transportable fiber optic cleaning tool designed for the high-speed cleaning of fiber optic jumpers and patch cords out in the field. Each cleaning tool delivers more than 400 perfect cleanings in each box.

## FIBER FOR MIXED MEDIA

High Density Fiber Modules



Legrand® has successfully introduced a new high density jack footprint in Category 6a, 6 and 5e - the Clarity® High Density Copper Solution – as found on page 25. To add to the options, Legrand has designed optical fiber adapters and cassettes available in the same HD footprint. Now you can easily combine and readily swap out copper and fiber elements in the same patch panel.

#### **OR-HDFM High Density Fiber Module**







OR-HDFM-FLC2CG-00

OR-HDFM-FMTZNC-00

#### **High Density Fiber Module**

Fitted in the black housing, modules are available in LC duplex, SC simplex and MPO. LC duplex and SC adapters are available in aqua, blue, green, beige, red and yellow. MPO adapters are available in agua, green, beige, black, red, blue and magenta. LC and SC adapters contain ceramic alignment sleeves.

PART NO.	DESCRIPTION
OR-HDFM-FLC2CL-00	Duplex LC, aqua
OR-HDFM-FLC2CA-00	Duplex LC, blue
OR-HDFM-FLC2CC-00	Duplex LC, green
OR-HDFM-FLC2CM-00	Duplex LC, beige
OR-HDFM-FLC2CG-00	Duplex LC, red
OR-HDFM-FLC2CI-00	Duplex LC, yellow
OR-HDFM-FSC1CL-00	Simplex SC, aqua
OR-HDFM-FSC1CA-00	Simplex SC, blue
OR-HDFM-FSC1CC-00	Simplex SC, green
OR-HDFM-FSC1CM-00	Simplex SC, beige
OR-HDFM-FSC1CG-00	Simplex SC, red
OR-HDFM-FSC1CI-00	Simplex SC, yellow
OR-HDFM-FMTZNL-00	MPO, aqua, type A
OR-HDFM-FMTZNC-00	MPO, green, type A
OR-HDFM-FMTZNM-00	MPO, beige, type A
OR-HDFM-FMTZNH-00	MPO, black, type A
OR-HDFM-FMTZNN-00	MPO, magenta, type A
OR-HDFM-FMTZNG-00	MPO, red, type A
OR-HDFM-FMTZNA-00	MPO, blue, type A
OR-HDFM-FMTZNE-00	MPO, gray aligned key, type B

Notes: Type A MPO adapters are key up/key down. Type B MPO adapters are key up/key up.

222



## FIBER MODULES FOR MIXED MEDIA

High Density Fiber Modules

#### **OR-HDCA** MTP-to-LC 12-Fiber Cassette





#### OR-HDCM-001 **High Density Cable Manager**



#### OR-PHA, OR-PHD **High Density Panels**





#### MTP-to-LC 12-Fiber Cassette

Spanning 6-positions in the patch panel, the MTP®-to-LC 12-fiber cassette is available with 50-micron laser optimized (OM4+) fiber or with single-mode (OS2) fiber.

PART NO.	DESCRIPTION
OR-HDCA6LC12AH	High density cassette assembly, 50 LOMF (0M4+)*, 12-fiber, 1-MTP(M), 6-LC DX, 0.5dB max cassette insertion loss
OR-HDCA6LC12AJ	High density cassette assembly, single-mode, 12-fiber, 1-MTP(M), 6-LC DX, 1.05dB max cassette insertion loss

Notes: \*Effective modal bandwidth 4900 MHz-km at 850nm. Contact a Legrand representative for additional configurations.

#### **High Density Cable Manager**

The high density cable manager was created to organize and protect connections to the high density panel. The cable manager includes cable management spools to manage excess slack. The cable manager can be used in conjunction with the cable management bar included with the patch panel.

PART NO.	DESCRIPTION
OR-HDCM-001	High density cable manager, black, includes (1) 8pk of 1/4 round cable management spools, makes (2) complete spools

#### **High Density Panels**

Fiber modules, cassettes and copper jacks are supported by high density flat or angled panel options, which include 24-port (1 RU), 48-port (1 RU) and 72-port (2 RU) sizes. All panels are supplied with a rear cable management bar, straps and ties.

PART NO.	DESCRIPTION
OR-PHAHJU24	24-port angled HDJ jack panel, unloaded 1.75" x 19", 1 RU
OR-PHAHJU48	48-port angled HDJ jack panel, unloaded 1.75" x 19", 1 RU
OR-PHAHJU72	72-port angled HDJ jack panel, unloaded 3.5" x 19", 2 RU
OR-PHDHJU24	24-port flat HDJ jack panel, unloaded 1.75" x 19", 1 RU
OR-PHDHJU48	48-port flat HDJ jack panel, unloaded 1.75" x 19", 1 RU
OR-PHDHJU72	72-port flat HDJ jack panel, unloaded 3.5" x 19", 2 RU

## FIBER PATCH PANELS

#### Raised Floor Panels and Overhead Rack Panels

Legrand® raised floor patch panels allow data center managers and designers to take advantage of under-utilized installation space beneath the raised floor structure, providing greater flexibility in structured cabling design and maximizing usage of premium data center floor space. Specifically designed to be installed in raised floor enclosures that are part of the cabling pathways, the raised floor fiber patch panels address the special bend radius and depth requirements of fiber optic cabling systems.

The raised floor patch panel is also often used with the Mighty Mo® overhead rack, found on page 136. The Mighty Mo overhead cable pathway racks provide cable management and an innovative mounting method for 19" rack mount copper and fiber panels and enclosures. The overhead pathway racks allow horizontal connectivity to be supported by the overhead pathway, freeing up valuable rack or cabinet space below.

#### **Features**

- Fiber patch panel for underfloor or overhead installation
- 19"W, 1-unit or 2-unit high models available
- Designed for installation within 2' x 2' underfloor box with angled mounting rails
- Removable/reusable labeling cards

#### **Benefits**

- Allows data center manager to take advantage of under-utilized space beneath raised floor or overhead
- Provides the flexibility to suit any installation
- Horizontal patch panel orientation
- Convenient and accurate cabling administration and record keeping that is easily removed to provide rear patching access

#### OR-RFPHD

#### **High Density Flush Mounting Rails**





OR-RFPHD02U

#### High Density Flush Mounting Rails

PART NO.	DESCRIPTION
OR-RFPHD01U	<ul> <li>1 RU</li> <li>Holds (4) high density adapter panels (HDFP Series) or (4) high density cassettes</li> <li>LC quad, 96-fibers</li> </ul>
OR-RFPHD02U	<ul> <li>2 RU</li> <li>Holds (8) high density adapter panels (HDFP Series) or (8) high density cassettes</li> <li>LC quad, 192-fibers</li> </ul>

## OR-RFP

#### Flush Mounting Rails



OR-RFP02U

#### Flush Mounting Rails

PART NO.	DESCRIPTION
OR-RFP01U	<ul> <li>1 RU</li> <li>Holds (3) standard adapter panels (OFP Series) or (3) standard density cassettes</li> <li>ST, SC, FC capacity: 36-fibers</li> <li>MT-RJ, LC: 36-fibers</li> <li>LC quad: 72-fibers</li> </ul>
OR-RFP02U	<ul> <li>2 RU</li> <li>Holds (6) standard adapter panels (OFP Series) or (6) standard density cassettes</li> <li>ST, SC, FC capacity: 72-fibers</li> <li>MT-RJ, LC: 72-fibers</li> <li>LC quad: 144-fibers</li> </ul>



## FIBER PATCH PANELS

#### Raised Floor Panels and Overhead Rack Panels

## OR-RFPA

High Density Angled Mounting Rails 45°



OR-RFPAHD01U



OR-RFPAHD02U

#### High Density Angled Mounting Rails 45°

PART NO.	DESCRIPTION
OR-RFPAHD01U	<ul> <li>1 RU</li> <li>Holds (4) high density adapter panels (HDFP Series)</li> <li>Holds (4) high density cassettes</li> <li>LC quad, 96-fibers</li> </ul>
OR-RFPAHD02U	<ul> <li>2 RU</li> <li>Holds (8) high density adapter panels (HDFP Series)</li> <li>Holds (8) high density cassettes</li> <li>LC quad: 192-fibers</li> </ul>

# **OR-RFPA**Angled Mounting Rails 45°



OR-RFPA01U



OR-RFPA02U

#### **Angled Mounting Rails 45º**

PART NO.	DESCRIPTION
OR-RFPA01U	<ul> <li>1 RU</li> <li>Holds (3) standard adapter panels (0FP Series)</li> <li>Holds (3) standard density cassettes</li> <li>ST, SC, FC: 18-fibers</li> <li>MT-RJ, LC: 36-fibers</li> <li>High density ST, SC: 36-fibers</li> <li>LC quad: 72-fibers</li> </ul>
OR-RFPA02U	<ul> <li>2 RU</li> <li>Holds (6) standard adapter panels (0FP Series)</li> <li>Holds (6) standard density cassettes</li> <li>ST, SC, FC: 36-fibers</li> <li>MT-RJ, LC: 72-fibers</li> <li>High density ST, SC: 72-fibers</li> <li>LC quad: 144-fibers</li> </ul>

# OR-HDCM-001 High Density Cable Manager



#### **High Density Cable Manager**

The high density cable manager can be used behind the Mighty Mo® overhead cable pathway rack to manage excess slack.

PART NO.	DESCRIPTION
OR-HDCM-001	High density cable manager, black, includes (1) 8pk of 1/4 round cable management spools, makes (2) complete spools

## FIBER PATCH PANELS

Raised Floor Panels and Overhead Rack Panels

#### **OR-RFPA**

High Density Angled Mounting Rails 56°-60°





# OR-RFPA Angled Mounting Rails 56°-60°





#### OR-60400968 Angled Stand-off Bracket Kit



OR-60400968

#### High Density Angled Mounting Rails 56°-60°

PART NO.	DESCRIPTION
OR-RFPAHD01U-A	<ul> <li>1 RU</li> <li>Holds (4) high density adapter panels (HDFP series)</li> <li>Holds (4) high density cassettes</li> <li>LC quad, 96-fibers</li> </ul>
OR-RFPAHD02U-A	<ul> <li>2 RU</li> <li>Holds (8) high density adapter panels (HDFP series)</li> <li>Holds (8) high density cassettes</li> <li>LC quad: 192-fibers</li> </ul>

Notes: Please contact raised floor enclosure manufacturer to verify rail angle. May require stand-off bracket kit when using Momentum cassettes.

#### Angled Mounting Rails 560-600

PART NO.	DESCRIPTION
OR-RFPA01U-A	<ul> <li>1 RU</li> <li>Holds (3) standard adapter panels (OFP Series)</li> <li>Holds (3) standard density cassettes</li> <li>ST, SC, FC: 18-fibers</li> <li>MT-RJ, LC: 36-fibers</li> <li>High density ST, SC: 36-fibers</li> <li>LC quad: 72-fibers</li> </ul>
OR-RFPA02U-A	<ul> <li>2 RU</li> <li>Holds (6) standard adapter panels (0FP Series)</li> <li>Holds (6) standard density cassettes</li> <li>ST, SC, FC: 36-fibers</li> <li>MT-RJ, LC: 72-fibers</li> <li>High density ST, SC: 72-fibers</li> <li>LC quad: 144-fibers</li> </ul>

Notes: Please contact raised floor enclosure manufacturer to verify rail angle. May require stand-off bracket kit when using cassettes.

#### **Angled Stand-off Bracket Kit**

Kit used with raised floor enclosure with  $56^{\circ}$ – $60^{\circ}$  mounting rails. These stand-off brackets may be needed to extend the mounting surface of the raised floor enclosure to accommodate the depth limitations of some 2' x 2' raised floor enclosures. Includes left and right bracket.

PART NO.	DESCRIPTION
OR-60400968	Kit used with raised floor enclosure

#### **La legrand**

## HILOC SYSTEM



No other media can provide more bandwidth in the data center for your high performance networks than optical fiber. Even so, the data center is being squeezed to produce more with less. System loss budgets are growing increasingly tighter and designing a fiber optic system has become a balancing act, with fiber loss having the greatest impact on the overall system performance. In order to help conserve this fiber loss, Legrand has created an alternative to the traditional MTP $^{\circ}$ -to-LC cassette: the Harness in Lieu Of Cassette, or the HiLOC $^{\text{TM}}$  system. The Legrand $^{\circ}$  HiLOC system harness is used as the interface from the trunk cable to the switch or other device, taking the place of the cassette.

The HiLOC pre-terminated harness is customizable and nearly infinitely configurable. It can be created to exactly suit your installation. Customizable features include:

- The cable length from the MTP connector to the HiLOC furcation shell
- The length of the breakout tube from the HiLOC shell to the LC connector
- The breakout legs can either be staggered or not to match the pitch of the switch port locations
- The MTP connector can be fitted with or without pins (male or female)
- The harness jacket can either be plenum-rated (OFNP) or a low smoke, zero halogen (LSZH) material The harness is designed for strength and durability. The cable assembly is constructed with round, high-density distribution cable on the MTP side and aramid fiber strengthened breakout tubes on the LC side.

#### Hil OC Shell

One of the remarkable features about the HiLOC system is the breakout element – the HiLOC furcation shell. It organizes and protects the cable as it transitions from the (typically) 12-fiber MTP cable to the duplex breakout legs. The HiLOC shell provides a physical support connector for the harness cables, relieving strain on the cables. The furcation shell is constructed with a foot so it can be toollessly mounted to a variety of Legrand cable management elements. It has been designed to integrate into other connectivity equipment by locking into the HiLOC Multi-Use Panel.

Notes: HiLOC Harness part numbers configurator found in the following cable assembly section on pages 245 and 246.

## HILOC SYSTEM

#### OR-HC02U-P **HiLOC 2U Enclosure**



#### **OR-HDFP High Density Adapter Panels**





#### OR-60401144 HiLOC Multi-Use Panel



#### OR-MM20UCT2X2-X Mighty Mo 20 Universal Cable Trough



#### HiLOC 2U Enclosure

Combines all of the standard features of FC-series of fiber enclosures with the space to lock in 24 HiLOC™ shells. The 2U enclosure has a tray lock for security and a sliding drawer for easier access.

PART NO.	DESCRIPTION
OR-HC02U-P	Holds (24) HiLOC shells

#### **High Density Adapter Panels**

HDFP Adapter Panels are used as a pass-through adapter connecting the HiLOC Harness to the Infinium™ trunk cable assembly. Up to 4 of these 6-adapter panels can be used in the HiLOC 2U enclosure to enable management of 24 harnesses

PART NO.	DESCRIPTION
OR-HDFP-MPA72LA	6-MPO aqua adapters, feed-through, multimode, type A*
OR-HDFP-MPA72CA	6-MPO green adapters, feed-through, single-mode, type A*

Notes: \*Type A MPO adapters are key up/key down.

#### HiLOC Multi-Use Panel

The HiLOC multi-use panel incorporates female channels that are designed to accept up to 4 HiLOC shells, providing strain relief for each harness without using any rack units. The Multi-Use Panel can be locked into place onto any Mighty Mo® cable management cage or in a Cablofil® cable tray product.

PART NO.	DESCRIPTION
OR-60401144	Holds (4) HiLOC shells

#### Mighty Mo 20 Universal Cable Trough

Universal cable troughs snap into the hex pattern on the Mighty Mo 20 channel racks and are used to create a front to rear or vertical trough on the inside or outside of the channel. They can be mounted in a row to create a continuous trough or rotated at 30 degree increments to support cables through directional changes. Up to 3 HiLOC harnesses can be toollessly mounted into each trough. The 2" x 2" size is equipped with slots to allow it to be joined to Mighty Mo Fiber Raceway.

PART NO.	DESCRIPTION
OR-MM20UCT2X2-X	Holds (3) HiLOC shells

Notes: Replace the "X" tail code with "B" for black or "W" for white.

## **ACCESSORIES**

Rack Mount Fiber Enclosure Accessories

#### OR-70700107-00 D-Ring Cable Management Straps



# **OR-FCBL**Fiber Cabinet Bend Limiting Clips





# OR-FCTL-001 Tray Lock Kit



OR-FCBL-002

# **OR-FCBR**Cable Fastening Brackets



#### **D-Ring Cable Management Straps**

Legrand® D-ring cable management straps include a D-ring for easy adjustments. The straps have a hook and loop type closure to secure and administer cables without damage. 12pk.

PART NO.	DESCRIPTION
OR-70700107-00	.75" W x 12"L, black

Notes: For additional styles and colors, see page XX.

#### **Fiber Cabinet Bend Limiting Clips**

Helps maintain minimum bend radius and prevent micro bends on sharp edges of front and rear access points.

PART NO.	DESCRIPTION
OR-FCBL-002	2pk, black, outside
OR-FCBL-003	2pk, black, inside

#### **Tray Lock Kit**

The tray lock kit can be easily installed into any FC Series cabinet tray to prevent it from sliding forward or backwards.

PART NO.	DESCRIPTION
OR-FCTL-001	Tray lock kit

#### **Cable Fastening Brackets**

Provides robust backbone cable retention for FC cabinets when installing from above or below cabinet. Accommodates cable of all diameters; fastens using flexible and strong hook and loop straps.

PART NO.	DESCRIPTION
OR-FCBR-001	For use with 1 RU cabinet, top position
OR-FCBR-002	For use with 2, 3, and 4 RU cabinet, top position
OR-FCBR-003	For use with 2, 3, and 4 RU unit cabinet, bottom position

Notes: (2) hook and loop straps included.

## **ACCESSORIES**

Rack Mount Fiber Enclosure Accessories FC Series

# OR-60401185 Cable Management Spool



# **OR-FST**Splice Tray for Fusion Splices



#### OR-20500 Splice Protection



#### OR-615008 Infinium Breakout Kits



# OR-70800158 Internal Fiber Management Clips





#### **Cable Management Spool**

PART NO.	DESCRIPTION
OR-60401185	Cable management spool, 1/4 round, makes (2) complete spools, 8pk

#### **Splice Tray for Fusion Splices**

Transparent stackable design with hinged cover and mylar insert. Ideal for VFL verification.

PART NO.	DESCRIPTION
OR-FST2-F012	Fusion splice tray for 12-splices
OR-FST3-F048	Fusion splice tray for 48-splices*

Notes: \*OR-FST3-F048 requires the use of OR-20500337 splice sleeves.

#### **Splice Protection**

PART NO.	DESCRIPTION
OR-20500043	Heat shrink sleeves, 40 mm, 3.0 mm, 50pk
OR-20500337	Heat shrink sleeves, 40 mm, 2.5 mm, 50pk

Notes: \*OR-FST3-F048 requires the use of OR-20500337 splice sleeves.

#### Infinium™ Breakout Kits

To be used with loose tube cables.

PART NO.	DESCRIPTION
OR-61500858	Breakout kit, 12-fiber
OR-61500868	Breakout kit, 6-fiber

#### **Internal Fiber Management Clips**

PART NO.	DESCRIPTION
OR-70800158	Kit of (8) clips

\_fiber management clips installed

## **ENCLOSURE ACCESSORIES**

Rack Mount Fiber Enclosure Accessories FC Series

#### **OR-ECDL001**

**Enclosure Door Key Lock Kit** 



# **OR-ECDL002**Enclosure Thumblatch Kit



## OR-FCWK-01 Enclosure Cable Management Kit



#### **Enclosure Door Key Lock Kit**

Legrand® D-ring cable management straps include a D-ring for easy adjustments. The straps have a hook and loop type closure to secure and administer cables without damage. 12pk.

PART NO.	DESCRIPTION
OR-ECDL001	Enclosure door key lock kit

Notes: Also compatible with EC series.

#### **Enclosure Thumblatch Kit**

PART NO.	DESCRIPTION
OR-ECDL002	Enclosure thumblatch kit

Notes: Also compatible with EC series.

#### **Enclosure Cable Management Kit**

PART NO.	DESCRIPTION
OR-FCWK-01	Enclosure cable management kit, bend limiting clips plus edge guards, 2pk

## **ENCLOSURES**

#### Surface Mount Enclosures

Legrand® 615 series surface mount fiber cabinets secure, protect, and organize up to 384 single-mode or multimode optical terminations.

- Standard OFP series adapter panels snap in for easy installation, removal, and expansion
- Surface/wall mountable is ideal for space limited installations
- Top/bottom cable entry simplifies installations, moves, adds, and changes
- Internal cable management included facilitates organization and clean installations
- Open designs with available latch are economical and easily accessible

Notes: Contact Legrand sales for cassette compatibility.

#### OR-615SMFC **615 Series Surface Mount Fiber Cabinets**







OR-HDSMFC-24P/S-00





OR-615SMFC-24P/S

OR-615SMFC-48P

OR-615SMFC-48P/S



OR-615SMFC-96P

#### OR-HDSMFC **High Density Series Surface Mount Fiber Cabinets**





#### **615 Series Surface Mount Fiber Cabinets**

PART NO.	DESCRIPTION
OR-615SMFC-12P	<ul> <li>Patch cabinet: holds (2) OFP adapter panels</li> <li>Open access, 10" x 9" x 3.5", latching door, 5.5 lbs</li> </ul>
OR-615SMFC-LX-12P	<ul> <li>Patch cabinet: holds (2) OFP adapter panels</li> <li>10" x 9" x 3.5", locking door, 6 lbs</li> </ul>
OR-HDSMFC-24P/S-00	<ul> <li>Patch cabinet: holds (4) HDFP adapter panels</li> <li>12" x 12" x 3.5", 9 lbs</li> </ul>
OR-615SMFC-24P/S	<ul> <li>Patch/splice cabinet: holds (4) OFP adapter panels</li> <li>12" x 16" x 3.5", 9 lbs</li> </ul>
OR-615SMFC-48P	<ul><li>Patch cabinet: holds (8) OFP adapter panels</li><li>22" x 12" x 3.5", 15 lbs</li></ul>
OR-615SMFC-48P/S	<ul> <li>Patch/splice cabinet: holds (8) OFP adapter panels</li> <li>Holds four 12-fiber splice trays, 7" splice trays (up to 48-fibers)</li> <li>22" x 12" x 3.5", 15 lbs</li> </ul>
OR-615SMFC-96P	<ul> <li>Patch cabinet: holds (16) OFP adapter panels</li> <li>16.75" x 13.5" x 7", 20 lbs</li> </ul>

#### **High Density Series Surface Mount Fiber Cabinets**

PART NO.	DESCRIPTION
OR-HDSMFC-24P/S	Wall mount fiber patch/splice enclosure, HD, holds (4) HDFP modules, beige
OR-HDSMFC-48P/S	Wall mount fiber patch/splice enclosure, HD, holds (8) HDFP modules, beige

## **ENCLOSURES**

#### Surface Mount Enclosure Accessories

#### OR-615008 Breakout Kits



# OR-20500043 Splice Protection



# **OR-6260000** 7" Splice Trays





#### **Breakout Kits**

To be used with loose tube cables.

PART NO.	DESCRIPTION
OR-61500858	Breakout kit, 12-fiber
OR-61500868	Breakout kit, 6-fiber

#### **Splice Protection**

PART NO.	DESCRIPTION
OR-20500043	Heat shrink sleeves, 40 mm, 50pk, 3.0 mm


#### 7" Splice Trays

PART NO.	DESCRIPTION
OR-62600002	Mechanical, 12-fibers
OR-62600003	Fusion, 12-fibers

Notes: For use with surface mount cabinet only.

#### 233

## INFINIUM CABLE ASSEMBLY PRODUCTS

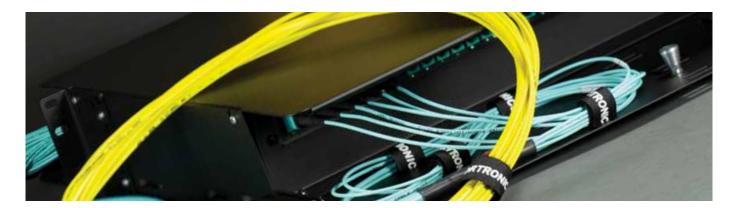

Legrand $^{\circ}$  uses quality engineering in each Infinium $^{\text{TM}}$  assembly to ensure performance, reliability and a successful installation. Infinium pre-terminated trunk cable assemblies, harnesses, pigtails and patch cords offer the ultimate in flexible and efficient design.

The  $HiLOC^TM$  Harness is fully customizable and configurable. Customizable features include cable length on both sides of the breakout, breakout leg stagger, if any, and  $MTP^{\oplus}$  alignment pins fitted or omitted. The harness jacket can either be plenum-rated (OFNP) or a low smoke, zero halogen (LSZH) material.

Infinium Multi-Fiber Trunk Cable Assemblies are fully configurable and available with a complete line of connectors, including 24-fiber MTP connectors. Speak with your Legrand rep to select the most effective cable construction for your application, then use the Multi-Fiber Trunk Cable configurator to customize connector type, breakout configurations, jacket material and more to complete your design. With industry-leading turn around on your custom design, your factory-guaranteed trunk cable assembly will be ready for installation when you are.

To overcome the challenges of an ever-changing technology landscape, Legrand and Superior Essex® have combined their leading industry expertise to create nCompass™, a suite of high-performing copper and fiber optic structured cabling systems. Built upon commitment and innovation, nCompass systems are comprehensive solutions that meet the needs of networks that require greater support, reliability, energy efficiency, and flexibility. See more on page 15.

Infinium Patch Cords are available as 2.0 mm zip cords or as round SpaceSaver cords. Zip cords use simplex connectors, clipped together as required, or taped inside the bag for field installation. SpaceSaver cords utilize duplex LC connectors in either A-B or A-A polarity configurations. Additionally, Infinium SpaceSaver cords are also available with reconfigurable LC duplex connectors, combining the convenience of a single connector shell with the ability to change polarity in the field. MTP Array Cords use a round cable and 12- or 24-fiber MTP connectors, with alignment pins on one end, neither end, or both ends.

All Infinium harnesses, trunk cable assemblies, pigtails and patch cords are manufactured with bend-insensitive fiber.



## INFINIUM FIBER TRUNK CABLE ASSEMBLY PRODUCTS



Pre-terminated cable assembly cuts out costly field-termination time, reducing installation costs and eliminating cable and connector scrap. Factory testing guarantees field-installed products that meet or exceed all industry standards for insertion loss and return loss.

Infinium™ trunk cables are fully configurable and available with a variety of cable and connector combinations, including connector type, breakout configurations and jacket material. Each trunk can have multiple connectors of different types and a choice of cable construction in between. Trunk cables are available with today's required fiber types with MTP®, LC and SC connectors.

The number of finished trunk cable configurations can be overwhelming due to unique network installations; variable transmission rates and multiple fiber, cable and connector choices. To meet specific requirements, Legrand® has simplified the complex process of designing customized trunk cable solutions by creating a simple, but powerful cable configurator.

The configurator takes into consideration the application, fiber and connector needs, as well as packaging requirements. It is designed to take into account all the variables of fiber cable assemblies, including validation rules, ensuring selections are correct in every way. These few steps ensure that the pre-terminated trunk cable solution is tailored to the demanding needs of the installation. Legrand field engineers, sales representatives and customer service personnel will quide you through the design process utilizing the part number matrix on the following pages.

### INFINIUM FIBER TRUNK CABLE ASSEMBLY PRODUCTS

Fiber Optic Trunk Cable Assemblies Part Matrix

#### **Example Part Number**

Р F U U OR-K Д Д  $\left(\right)$ Μ OR-3 5 7 8 9 10 11 12 13 4 14

#### 1. Choose Polarity

A = Type A MTP® to MTP

B = Type B MTP to MTP

C = Type C MTP to MTP

L = A-A Fixed Duplex

M = A-B Fixed Duplex

Z = Polarity Not Fixed

#### 2. Cable Type

A = Tight Buffered Distribution

C = Tight Buffered Indoor/Outdoor

D = Micro Array Data Center Loose Tube

E = Indoor/Outdoor Loose Tube

#### 3. Jacket Material and Armor

P = Plenum (OFNP)

R = Riser (OFNR)

B = Interlocking AL Armor Plenum

E = Interlocking AL Armor Riser

#### 4. Color

H = Black

I = Yellow

L = Aqua

#### 5. Fiber Count

F = 12

1 = 24

K = 48

M = 72

0 = 96

R = 144

#### 6. Fiber Type

F = 50 (Multimode - OM3)

G = 50 (Multimode - 0M4)

J = 9 (Single-mode – OS2)

#### 7. Standard Breakout End A

G = Standard Breakout LC, SC, ST (see Fig. 1 and 2)

U = Standard Breakout MTP on subunits (see Fig. 3)

Z = Standard Breakout MTP on main cable or No Connector (see Fig. 4)

## 8. Connector End A Multimode (OM3, OM4)

A = 12F MTP (Female - Unpinned) PC

B = 12F MTP (Male - Pinned) PC

E = ST, PC

F = SC, PC

G = LC, PC

H = LC (Duplex) PC

K = 24F MTP (Female - Unpinned) PC

N = 24F MTP (Male - Pinned) PC

T = SC, Duplex PC

W = Reconfigurable LC (Duplex) PC

Z = (10) Connector End B,

No Connector

#### Single-mode (OS2)

C = LC (Duplex) APC

D = LC (Duplex) UPC

I = 12F MTP (Female - Unpinned) APC

J = 12F MTP (Male - Pinned) APC

L = SC (Simplex) APC

M = LC, APC

0 = Reconfigurable LC (Duplex) APC

P = Reconfigurable LC (Duplex) UPC

Q = ST, UPC

R = SC, UPC

S = LC, UPC

U = SC (Duplex) APC

V = SC (Duplex) UPC

X = 24F MTP (Male - Pinned) APC

Y = 24F MTP (Female - Unpinned) APC

Z = (10) Connector End B,

No Connector

#### 9. Standard Breakout End B

See selections under item 7

#### 10. Connector End B

See selections under item 8

# 11. Length (Breakout to Breakout) and Pulling Eye

XXXM = (in Meters) no pulling eye.

End A unspools first

XXXF = (in Feet) no pulling eye.

End A unspools first

XXXQ = (in Meters) pulling eye.

End A unspools first

XXXH = (in Feet) pulling eye. End A unspools first

Notes: MTP is a registered trademark of US Conec Ltd.

Please contact a Legrand representative for additional configurations and custom assemblies.

## INFINIUM FIBER TRUNK CABLE ASSEMBLY PRODUCTS

Fiber Optic Trunk Cable Assemblies Part Matrix

Figure 1:




Figure 2:




Figure 3:




Figure 4:



## MICROARRAY CORDS

#### Microarray Data Center Interconnect

The Microarray Data Center Interconnect Cables from Superior Essex® are designed for high performance in a small package. The 2-fiber through 12-fiber interconnect has an outside diameter of only 3.0 mm. The 24-fiber single unit employs two, 12-fiber microtubes that are ideal for 24-fiber MTP®/MPO array connectors. The fibers can be fusion spliced, connectorized to high density MTP/MPO mechanical array connectors or attached to standard single ferrule mechanical connectors (LC, SC, ST, etc.) via a furcation kit. The loose fibers are surrounded by aramid yarns and a low smoke PVC (LSPVC) plenum-rated jacket. Its small size allows for denser fiber routing than traditional tight buffered cables; its loose-tube construction gives it superior performance and installation ease compared to ribbon interconnect cable.

#### Applications

- 10 Gb, 40 Gb, 100 Gb Ethernet and legacy speeds
- Data centers
- High density installations
- MTP/MPO array connectors

#### **Features**

- 3.0 mm interconnect with two through twelve 250 micron fibers
- 3.8 mm interconnect with two, 12-fiber microtubes
- Meets or exceeds ANSI/ICEA S-83-596 and GR-409-CORE requirements for interconnect cable
- Plenum (OFNP) rated design
- Available with TeraFlex® single mode, and laser-optimized 50/125 micron multimode fiber types
- Marked in feet and meters
- Designed for MTP/MPO connectors

#### **Benefits**

- Allows for direct connection to MTP/MPO array connectors
- Allows for direct connection to 24-fiber MTP/MPO array connectors
- Worry-free installation and performance
- Fire-listed cables allow placement in plenum and riser spaces
- Build your network with the fiber type that you need now or for the future
- Meets commercial and government requirements for length markings
- Economical plug and play solution

#### **Specifications**

≤ 12-Fiber Configuration	250 micron optical fibers surrounded by dielectric aramid yarns in a 3.0 mm loose tube			
24-Fiber Configuration	Two microtubes containing twelve 250 micron optical fibers; the microtubes are surrounded by dielectric aramid yarns and enclosed in a single 3.8 mm loose tube			
Jacket	Flame retardant, low smoke PVC			
Performance Compliance	<ul> <li>UL 1651</li> <li>CSA C22.2 No. 232</li> <li>UL 1666</li> <li>NFPA 262</li> <li>Telcordia GR-409-CORE, Issue 2</li> <li>ANSI/ICEA S-83-596</li> <li>ANSI/TIA-568-C.3</li> <li>ROHS-compliant</li> </ul>			
NRTL Programs	UL, c(UL) Listed OFNP			

#### **Environmental Specifications**

	PLENUM
Operation	0°C to +70°C
Storage/Shipping	-40°C to +75°C
Installation	10°C to +60°C




## MICROARRAY CORDS

#### Microarray Data Center Interconnect

#### **Physical Characteristics**

				MAXIMUM TENSILE LOADING		MINIMUM BEND RADIUS	
LISTING	FIBER COUNT	NOMINAL DIAMETER IN (MM)	NOMINAL WEIGHT LBS/KFT (KG/ KM)	INSTALL LBS (N)	LONG TERM LBS (N)	INSTALL IN (MM)	LONG TERM IN (MM)
OFNP	2	0.12 (3.0)	6 (9)	80 (370)	25 (110)	1.8 (47)	1.2 (30)
OFNP	4	0.12 (3.0)	6 (9)	80 (370)	25 (110)	1.8 (47)	1.2 (30)
OFNP	6	0.12 (3.0)	6 (9)	80 (370)	25 (110)	1.8 (47)	1.2 (30)
OFNP	8	0.12 (3.0)	6 (9)	80 (370)	25 (110)	1.8 (47)	1.2 (30)
OFNP	12	0.12 (3.0)	6 (9)	80 (370)	25 (110)	1.8 (47)	1.2 (30)
OFNP	24	0.15 (3.8)	8 (12)	80 (370)	25 (110)	3.0 (76)	1.5 (38)

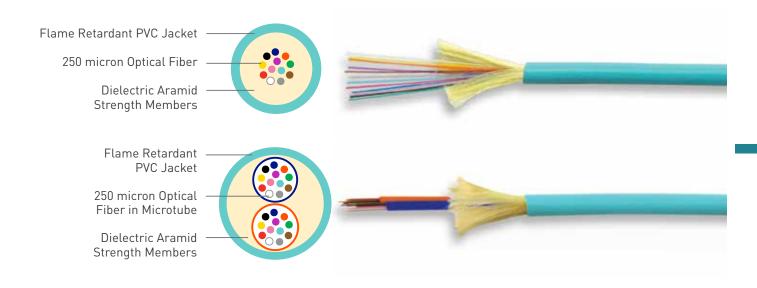

#### 3 mm Microarray Breakout

The 3 mm Microarray Breakout cable from Superior Essex® is designed for high performance in a small package. The design consists of 12-fiber 3 mm microarray interconnect cable subunits, each of which contain twelve 250 micron fibers. The aramid yarns inside the subunit allow the subunit to be crimped directly onto an MTP®/MPO connector. The 3 mm subunits are stranded around a central strength element that is both flexible and robust enough to pass backbone installation requirements. The stranded subunits are held to the strength element core by binder yarns and/ or tapes ensuring excellent temperature performance. Finally, a RoHS-compliant flexible jacket protects the core from the rigors of installation while providing riser or plenum fire protection. The cable is available with TeraFlex® single mode, and laser-optimized 50/125 micron 10G/150 (0M2+), 10G/300 (0M3) and 10G/550 (0M4) multimode fiber types.

#### **Applications**

- 10 Gb, 40 Gb, 100 Gb Ethernet and legacy speeds
- Data centers
- Trunk applications
- High density installations
- MTP/MPO array connectors
- Outside plant (OSP) to premises transitions

#### **Features**

- 12-fiber 3 mm interconnect subunits
- Meets or exceeds ICFA 83-596-2001 and GR-409-CORE requirements for interconnect subunits and trunk cable
- Plenum (OFNP) rated design
- Available with TeraFlex single mode, and laser-optimized 50/125 micron multimode fiber types

## **Specifications**

Cable Configuration	3 mm subunits around a central strength member and surrounded by polyester yarns and an outer jacket				
Subunit Configuration	3 mm Simplex cable with twelve 250 micron optical fibers surrounded by dielectric aramid strength members				
Subunit Marking	Unit 1, Unit 2, Unit 3, Unit 4				
Central Strength Element	Glass Reinforced Plastic (GRP) covered with a PVC jacket				
Subunit/Outer Jacket	Flame retardant, low smoke PVC				
Performance Compliance	<ul> <li>UL 1651</li> <li>CSA C22.2 No. 232</li> <li>UL 1666</li> <li>NFPA 262</li> <li>Telcordia GR-409-CORE, Issue 2</li> <li>ANSI/ICEA S-83-596</li> <li>ANSI/TIA-568-C.3</li> <li>ROHS-compliant</li> </ul>				
NRTL Programs	UL, c(UL) Listed OFNP				

#### **Benefits**

- Connects directly to MTP/MPO 12-fiber array connectors
- Worry-free installation and performance
- Fire-listed cables meet NEC requirements
- Build your network with the fiber type that you need now or for the future


#### **Environmental Specifications**

	PLENUM
Operation	0°C to +70°C
Storage/Shipping	-40°C to +75°C
Installation	10°C to +60°C

#### 3 mm Microarray Breakout

#### **Physical Characteristics**

				MAXIMUM TENSILE LOADING		MINIMUM BEND RADIUS	
LISTING	FIBER COUNT	NOMINAL DIAMETER IN (MM)	NOMINAL WEIGHT LBS/KFT (KG/ KM)	INSTALL LBS (N)	LONG TERM LBS (N)	INSTALL IN (MM)	LONG TERM IN (MM)
OFNP	24	0.35 (8.8)	54 (81)	150 (710)	45 (198)	5.2 (132)	3.5 (88)
OFNP	48	0.35 (8.8)	55 (82)	150 (710)	45 (198)	5.2 (132)	3.5 (88)
OFNP	72	0.43 (10.9)	81 (120)	150 (710)	45 (198)	6.5 (164)	4.3 (109)
OFNP	96	0.51 (13.0)	121 (180)	300 (1420)	90 (396)	11.4 (290)	6.0 (152)
OFNP	144	0.69 (17.6)	227 (336)	300 (1420)	90 (396)	13.8 (350)	6.9 (175)

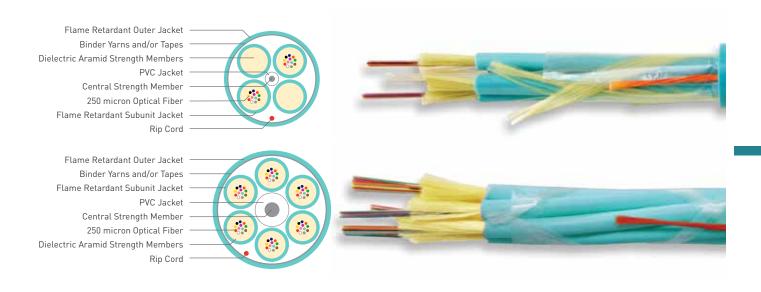

#### 3 mm Interlock Armored, Microarray Breakout

The Interlock Armored Microarray Breakout cable from Superior Essex® is designed for high performance with robust mechanical protection. The design consists of 12-fiber 3 mm microarray interconnect cable subunits, each of which contain twelve 250 micron fibers. The aramid yarns inside the subunit allow the subunit to be crimped directly onto an MTP®/MPO connector. The 3 mm subunits are stranded around a central strength element that is both flexible and robust enough to pass backbone installation requirements. The stranded subunits are held to the strength element core by binder yarns and/or tapes ensuring excellent temperature performance. A RoHS-compliant flexible jacket protects the core while providing fire protection. Finally, the cable is interlock armored with either aluminum (standard) or steel and jacketed. The cable is available with TeraFlex® single mode or laseroptimized 50/125 micron 10G/150 (0M2+), 10G/300 (0M3) or 10G/550 (0M4) multimode fiber types.

#### **Applications**

- 10 Gb, 40 Gb, 100 Gb Ethernet and legacy speeds
- Data centers
- Trunk applications
- High density installations
- MTP/MPO array connectors
- Outside plant (OSP) to premises transitions

#### **Features**

- 12-fiber 3 mm interconnect subunits
- Meets or exceeds ICEA 83-596-2001 and GR-409-CORE requirements for interconnect subunits and trunk cable
- Interlock armor
- (OFCP) rated design
- Available with TeraFlex single mode and TeraFlex laseroptimized 50/125 micron multimode bend-insensitive fiber types

#### **Specifications**

Subunit Configuration	3 mm Simplex cable with twelve 250 micron optical fibers surrounded by dielectric aramid strength members
Cable Configuration	3 mm subunits around a central strength member and surrounded by polyester yarns and an outer jacket
Subunit Marking	Unit 1, Unit 2, Unit 3, Unit 4
Central Strength Element	Glass Reinforced Plastic (GRP) covered with a PVC jacket
Subunit/Cable/Outer Jacket	Flame retardant, LSPVC
Armor	Flexible, heavy duty interlocking aluminum (standard) or steel tape helically applied over the inner cable core; further protection is provided by an optional flame retardant outer jacket
Performance Compliance	<ul> <li>UL 1651</li> <li>CSA C22.2 No. 232</li> <li>UL 1666</li> <li>NFPA 262</li> <li>Telcordia GR-409-CORE, Issue 2</li> <li>ANSI/ICEA S-83-596</li> <li>ANSI/TIA-568-C.3</li> <li>RoHS-compliant</li> </ul>
NRTL Programs	UL, c(UL) Listed OFCP

#### **Benefits**

- Connects directly to MTP/MPO 12-fiber array connectors
- Worry-free installation and performance
- Provides exceptional mechanical protection and crush resistance
- Fire-listed cables meet NEC requirements
- Build your network with the fiber type that you need now or for the future

#### **Environmental Specifications**


	PLENUM
Operation	0°C to +70°C
Storage/Shipping	-40°C to +70°C
Installation	10°C to +60°C



#### 3 mm Interlock Armored, Microarray Breakout

#### **Physical Characteristics**

				MAXIMUM TEN	ISILE LOADING	MINIMUM BEND RADIUS		
LISTING	FIBER COUNT	NOMINAL DIAMETER IN (MM)	NOMINAL WEIGHT LBS/KFT (KG/ KM)	INSTALL LBS (N)	LONG TERM LBS (N)	INSTALL IN (MM)	LONG TERM IN (MM)	
OFCP	24	0.77 (19.6)	195 (291)	150 (670)	50 (200)	11.6 (294)	7.7 (196)	
OFCP	48	0.77 (19.6)	196 (293)	150 (670)	50 (200)	11.6 (294)	7.7 (196)	
OFCP	72	0.87 (22.0)	248 (370)	150 (670)	150 (760)	13.0 (330)	8.7 (220)	
OFCP	96	0.95 (24.2)	290 (432)	300 (1340)	90 (400)	14.3 (363)	9.5 (242)	
OFCP	144	1.08 (27.4)	424 (632)	300 (1340)	50 (400)	16.2 (411)	10.8 (274)	

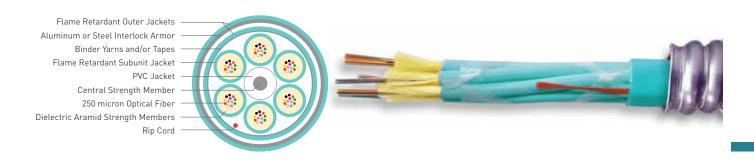

#### **Specifications**

Subunit Configuration	3 mm subunits around a central strength member and surrounded by polyester yarns and an outer jacket
Cable Configuration	3 mm Simplex cable with twelve 250 micron optical fibers surrounded by dielectric aramid strength members
Subunit Marking	Unit 1, Unit 2, Unit 3, Unit 4
Central Strength Element	Glass Reinforced Plastic (GRP) covered with a PVC jacket
Subunit/Cable/Outer Jacket	OFCR: Flame retardant (FR), PVC OFCP: FR, LSPVC
Armor	Flexible, heavy duty interlocking aluminum (standard) or steel tape helically applied over the inner cable core; further protection is provided by an optional flame retardant outer jacket
Performance Compliance	<ul> <li>UL 1651</li> <li>CSA C22.2 No. 232</li> <li>UL 1666</li> <li>NFPA 262</li> <li>Telcordia GR-409-CORE, Issue 2</li> <li>ANSI/ICEA S-83-596</li> <li>ANSI/TIA-568-C.3</li> <li>RoHS-compliant</li> </ul>
NRTL Programs	UL, c(UL) Listed OFNP and OFCP

242

#### 2 mm Microarray Breakout

The 2 mm Microarray Breakout cable from Superior Essex® is designed for high performance in a small package. The design consists of 12-fiber 2 mm microarray interconnect cable subunits, each of which contain twelve 250 micron fibers. The aramid yarns inside the subunit allow the subunit to be crimped directly onto an MTP®/MPO connector. The 2 mm subunits are stranded around a central strength element that is both flexible and robust enough to pass backbone installation requirements. The stranded subunits are held to the strength element core by binder yarns and/ or tapes ensuring excellent temperature performance. Finally, a RoHS-compliant flexible jacket protects the core from the rigors of installation while providing plenum fire protection. The cable is available with TeraFlex® single mode, and TeraFlex laser-optimized 50/125 micron 10G/150 (0M2+), 10G/300 (0M3) and 10G/550 (0M4) multimode fiber types.

#### **Applications**

- 10 Gb, 40 Gb, 100 Gb Ethernet and legacy speeds
- Data centers
- Trunk applications
- High density installations
- MTP/MPO array connectors
- Outside plant (OSP) to premises transitions

#### **Features**

- 12-fiber 2 mm interconnect subunits
- Meets or exceeds ICEA 83-596-2001 and GR-409-CORE requirements for interconnect subunits and trunk cable
- Plenum (OFNP) rated design
- Available with TeraFlex single mode, and TeraFlex laseroptimized 50/125 micron multimode fiber types

#### **Benefits**

- Connects directly to MTP/MPO 12-fiber array connectors
- Worry-free installation and performance
- Meets NEC requirements
- Build your network with the fiber type that you need now or for the future

#### **Specifications**

Cable Configuration	2 mm subunits around a central strength member and surrounded by polyester yarns and an outer jacket
Subunit Configuration	2 mm Simplex cable with twelve 250 micron optical fibers surrounded by dielectric aramid strength members
Subunit Marking	Unit 1, Unit 2, Unit 3, Unit 4
Central Strength Element	Glass Reinforced Plastic (GRP)
Subunit/Outer Jacket	Flame retardant, low smoke PVC
Performance Compliance	<ul> <li>UL 1651</li> <li>CSA C22.2 No. 232</li> <li>NFPA 262</li> <li>Telcordia GR-409-CORE, Issue 2</li> <li>ANSI/ICEA S-83-596</li> <li>ANSI/TIA-568-C.3</li> <li>RoHS-compliant</li> </ul>
NRTL Programs	UL, c(UL) Listed OFNP

#### **Environmental Specifications**

Operation	0°C to +70°C
Storage/Shipping	-40°C to +75°C
Installation	10°C to +60°C



#### 2 mm Microarray Breakout

#### **Physical Characteristics**

			MAXIMUM TENSILE LOADING		MINIMUM B	END RADIUS
FIBER COUNT	NOMINAL DIAMETER IN (MM)	NOMINAL WEIGHT LBS/KFT (KG/ KM)	INSTALL LBS (N)	LONG TERM LBS (N)	INSTALL IN (MM)	LONG TERM IN (MM)
48	0.26 (6.5)	29 (43)	150 (660)	45 (200)	3.8 (98)	2.6 (65)




# HILOC HARNESS

#### **Duplex Application Part Matrix**

The HiLOC™ harness is used as the interface from the trunk cable to the switch or other device, providing the transition from MTP® connectivity to LC connectors. For a complete description of the HiLOC system, please refer to page 226.

#### **Example Part Number**



#### 1. Fiber Count and Polarity

F = 8/F, A-B

G = 8/F, A-A

T = 12/F, A-B

U = 12/F, A-A

#### 2. Fiber Type

F = 50 (Multimode – OM3)

H = 50 (Multimode - 0M4)

#### 3. Stagger

A = .03m Duplex Stagger

N = No Stagger

#### 4. Connector End A

A = LC/PC Duplex

N = RLC/PC DX

#### 5. Length End A

XM = Meters

XF = Feet

XH = Feet (length + 1/2 foot)

XS = Meters (length + 1/2 meter)

#### 6. Connector End B

 $0 = 12F MTP^{\otimes} - F PC$ 

P = 12F MTP-M PC

#### 7. Length End B

XXM = Meters


XXF = Feet

XXH = Feet (length + 1/2 foot)

XXS = Meters (length + 1/2 meter)

Notes: HiLOC harness accessories are found in the previous section page 227.



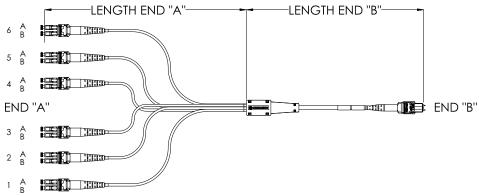

#### **Example Connection Table**

FIBER	END "A" FIBER	END "B" FIBER
Blue	1B	1
Orange	1A	2
Green	2B	3
Brown	2A	4
Slate	3B	5
White	3A	6

FIBER	END "A" FIBER	END "B" FIBER
Red	4B	7
Black	4A	8
Yellow	5B	9
Violet	5A	10
Rose	6B	11
Aqua	6A	12


# FIBER OPTIC SOLUTIONS

## HILOC HARNESS

#### Parallel Application Part Matrix

The  $HiLOC^{TM}$  harness is used as the interface from the trunk cable to the switch or other device, providing the transition from the trunk cable and the device. For a complete description of the HiLOC system, please refer to page 226.

#### **Example Part Number**



#### 1. Fiber Count and Polarity

D = 8F, 40GbE (see Fig 1) J = 24F, 100GbE, 3x12F to 2x12F

or 1x24F (see Fig 2)

#### 2. Fiber Type

F = 50 (Multimode - 0M3)

H = 50 (Multimode - 0M4)

#### 3. Stagger

A = .03m Array Stagger

N = No Stagger

#### 4. Connector End A

A = LC/PC Duplex

C = 12F MTP®-F PC

D = 12F MTP-M PC

N = RLC/PC DX

#### 5. Length End A

XM = Meters

XF = Feet

XH = Feet (length + 1/2 foot)

XS = Meters (length + 1/2 meter)

#### 6. Connector End B

M = 24F MTP-F PC

N = 24F MTP-M PC

0 = 12F MTP-F PC

P = 12F MTP-M PC

#### 7. Length End B

XXM = Meters


XXF = Feet

XXH = Feet (length + 1/2 foot)

XXS = Meters (length + 1/2 meter)

Notes: HiLOC harness accessories are found in the previous section page 227.


#### Figure 1:

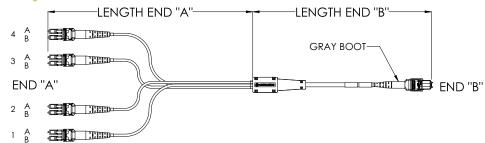

#### **Example Connection Table**

FIBER	END "A" FIBER	END "B" FIBER	FIBER	END "A" FIBER	END "B" FIBER
Blue	1B	1	Red	N/A	7
Orange	2B	2	Black	N/A	8
Green	3B	3	Yellow	4A	9
Brown	4B	4	Violet	3A	10
Slate	N/A	5	Rose	2A	11
White	N/A	6	Aqua	1A	12

#### Figure 2:

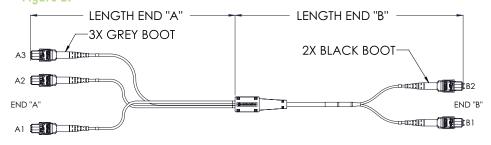

#### **Example Connection Table**

	FIBER	END "A" FIBER	END "B" FIBER	END "A" FIBER	END "B" FIBER	FIBER	END "A" FIBER	END "B" FIBER	END "A" FIBER	END "B" FIBER
	Blue	A1-12	B1-1	A1-1	B2-1	Red	A2-10	B1-7	A2-3	B2-7
	Orange	A1-11	B1-2	A1-2	B2-2	Black	A2-9	B1-8	A2-4	B2-8
1	Green	A1-10	B1-3	A1-3	B2-3	Yellow	A3-12	B1-9	A3-1	B2-9
	Brown	A1-9	B1-4	A1-4	B2-4	Violet	A3-11	B1-10	A3-2	B2-10
	Slate	A2-12	B1-5	A2-1	B2-5	Rose	A3-10	B1-11	A3-3	B2-11
	White	A2-11	B1-6	A2-2	B2-6	Aqua	A3-9	B1-12	A3-4	B2-12

246

### PATCH CORDS AND PIGTALLS

**la legrand**°

Infinium<sup>™</sup> patch cords are available as 2.0 mm zip cords or as round SpaceSaver cords. LC duplex connectors are used with SpaceSaver cables and are available in either A-B or A-A polarity per the TIA 568 standard. Infinium SpaceSaver cords are also available with reconfigurable LC duplex connectors, combining the convenience of a single connector shell with the ability to change polarity in the field. 50-micron laser optimized multimode LC fiber cords are available in either standard performance or premium performance. Standard performance 50-micron LC cords are polished to a 0.50 dB maximum insertion loss. Premium performance 50-micron LC cords are polished to a 0.15 dB maximum insertion loss. Single-mode insertion loss is 0.30 dB max.

2 mm duplex fiber optic zip cords are available using either 50-micron OM4, 50-micron OM3, or single-mode OS2 fiber. Standard configurations include LC-LC, SC-SC and SC-LC. Duplex zip cords include duplexing clips, either installed at the factory, or unassembled in the bag - your choice.

Array cords are the patch cords used in parallel optics systems. Since the switch gear utilizes MTP®/MPO connectors, the array cord is a 12 or 24 fiber MTP-to-MTP cable. Since the switch port has a male (pinned) MPO connection and the trunk cable connector is typically female (unpinned), the array cord may be unpinned on one end and pinned on the other.

Infinium array cords utilize small diameter microarray interconnect cable and 12 or 24 fiber MTP plugs. Many patch cord lengths are stocked. Most lengths are available with expedited delivery. Please speak to a Legrand® representative for assistance.

All Legrand patch cords and pigtails are manufactured with bend insensitive fiber.

Single connector, 6-connector and 12-connector LC and SC pigtails are stocked in 1 and 2-meter lengths. All pigtail products include a 1-meter breakout section consisting of 900-micron buffered fiber with terminated ends.

#### ISO/IEC 11801 OM (Optical Multimode) Designations

FIBER DESIGNATION	EMB (MHZ-KM) AT 850NM	OFL (MHZ-KM) AT 850NM	OFL (MHZ-KM) AT 1300 NM
OM2	-	500	500
OM3	2,000	1,500	500
OM4	4,700	3,500	500

## ARRAY CORDS

Fiber Optic Array Cable Assemblies



Array Cords are the patch cords used in parallel optics systems. Since the switch gear utilizes MTP®/MPO connectors, the array cord is a 12 or 24 fiber MTP-to-MTP cable. Since the switch port has a male (pinned) MPO connection, and the trunk cable connector is typically female (unpinned), the array cord may be unpinned on one end and pinned on the other. Infinium™ array cords utilize small diameter microarray interconnect cable and 12 or 24 fiber MTP plugs. 12 fiber 0.D. is 3.0mm and 24 fiber 0.D. is 3.8mm.

#### OR-A3A MTP-MTP 12 and 24 Fiber Array Cords



#### MTP-MTP 12 and 24 Fiber Array Cords

#### Laser Optimized (50/125) OM4, MTP-MTP, OFNP, Type A

PART NO.	DESCRIPTION
OR-A3AMPLAGAB001M	12F, OM4, female to male, 1M, type A
OR-A3AMPLAGAA001M	12F, OM4, female to female, 1M, type A
OR-A3AMPLBGAB001M	24F, OM4, female to male, 1M, type A
OR-A3AMPLBGAA001M	24F, OM4, female to female, 1M, type A

#### Laser Optimized (50/125) OM3 MTP-MTP OFNP Type A

PART NO.	DESCRIPTION
OR-A3AMPLAFAB001M	12F, OM3, female to male, 1M, type A
OR-A3AMPLAFAA001M	12F, OM3, female to female, 1M, type A
OR-A3AMPLBFAB001M	24F, OM3, female to male, 1M, type A
OR-A3AMPLBFAA001M	24F, OM3, female to female, 1M, type A

Notes: Other MTP polarity and gender options are available.


## PATCH CORDS

SpaceSaver Fiber Optic Cable Assemblies

#### SpaceSaver Fiber Optic Cable Assemblies

The SpaceSaver line of duplex fiber optic patch cords features a single round jacketed cable. These patch cords are available with duplex LC connectors at each end in either A-B or A-A polarity types per the TIA 568 standard. These patch cords are ideal for high density installations common in data centers and SANs optimizing the available vertical and horizontal cable routing spaces. SpaceSaver cords are available with fixed LC duplex connectors and reconfigurable LC connectors in OM3 with OM4 or single-mode fiber.

Notes: For other lengths and configurations, consult the Legrand sales department.

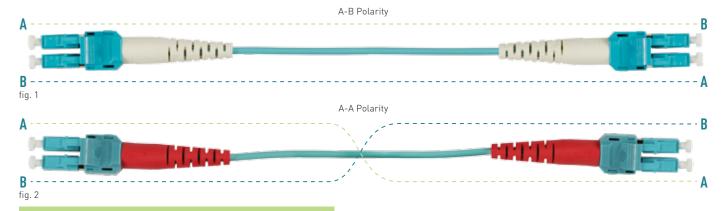

#### OR-P3

LC Duplex Fiber Optic Patch Cords for Premium Performance – 0M4



#### Laser Optimized (50/125) OM4 LC-PC OFNP (A-B\*)

PART NO.	DESCRIPTION
OR-P3DG8LPAZAZ001M	1 meter, aqua
OR-P3DG8LPAZAZ002M	2 meters, aqua
OR-P3DG8LPAZAZ003M	3 meters, aqua

Notes: \*A-B patch cords reverse the fiber positions (fig. 1).

#### Laser Optimized (50/125) OM4 LC-PC OFNP (A-A\*)


PART NO.	DESCRIPTION
OR-P3RG8LPAZAZ001M	1 meter, aqua
OR-P3RG8LPAZAZ002M	2 meters, aqua
OR-P3RG8LPAZAZ003M	3 meters, aqua


Notes: \*A-A patch cords do not reverse the fiber (fig. 2).


#### Laser Optimized (50/125) OM4 RLC-PC OFNP (Ships A-B)

PART NO.	DESCRIPTION
OR-P3DG8LPWZWZ001M	1 meter, aqua
OR-P3DG8LPWZWZ002M	2 meters, aqua
OR-P3DG8LPWZWZ003M	3 meters, aqua

#### Reconfigurable LC Connector (RLC)







# FIBER OPTIC SOLUTIONS

## PATCH CORDS

SpaceSaver Fiber Optic Cable Assemblies

#### OR-P3

Duplex Fiber Optic Patch Cords for Premium Performance Systems – OM3



OR-P3DF8LPAZAZ001M



OR-P3RF8LPAZAZ001M

#### Laser Optimized (50/125) OM3 LC-PC OFNP (A-B)\*

PART NO.	DESCRIPTION
OR-P3DF8LPAZAZ001M	1 meter, aqua
OR-P3DF8LPAZAZ002M	2 meters, aqua
OR-P3DF8LPAZAZ003M	3 meters, aqua

Notes: \*A-B patch cords reverse the fiber positions (fig. 1, page 249).

#### Laser Optimized (50/125) OM3 LC-PC OFNP (A-A)\*

PART NO.	DESCRIPTION
OR-P3RF8LPAZAZ001M	1 meter, aqua
OR-P3RF8LPAZAZ002M	2 meters, aqua
OR-P3RF8LPAZAZ003M	3 meters, aqua

Notes: \*A-A patch cords do not reverse the fiber (fig. 2, page 249).

#### Laser Optimized (50/125) OM3 RLC-PC OFNP (Ships A-B)

PART NO.	DESCRIPTION
OR-P3DF8LPWZWZ001M	1 meter, aqua
OR-P3DF8LPWZWZ002M	2 meters, aqua
OR-P3DF8LPWZWZ003M	3 meters, aqua

## PATCH CORDS

SpaceSaver Fiber Optic Cable Assemblies

#### OR-P0

Duplex Fiber Optic Patch Cords for Standard Performance Systems – 0M4



OR-PODG8LPAZAZ001M



OR-PORG8LPAZAZ001M

#### OR-PO

Duplex Fiber Optic Patch Cords for Standard Performance Systems – OM3



OR-PODF8LPAZAZO01M



#### Laser Optimized (50/125) OM4 LC-PC OFNP (A-B\*)

PART NO.	DESCRIPTION
OR-PODG8LPAZAZO01M	1 meter, aqua
OR-P0DG8LPAZAZ002M	2 meters, aqua
OR-PODG8LPAZAZ003M	3 meters, aqua

Notes: \*A-B patch cords reverse the fiber positions (fig. 1, page 249).

#### Laser Optimized (50/125) OM4 LC-PC OFNP (A-A\*)

PART NO.	DESCRIPTION
OR-PORG8LPAZAZ001M	1 meter, aqua
OR-PORG8LPAZAZ002M	2 meters, aqua
OR-PORG8LPAZAZ003M	3 meters, aqua

Notes: \*A-A patch cords do not reverse the fiber positions.

#### Laser Optimized (50/125) OM4 RLC-PC OFNP (Ships A-B)

PART NO.	DESCRIPTION
OR-P0DG8LPWZWZ001M	1 meter, aqua
OR-P0DG8LPWZWZ002M	2 meters, aqua
OR-P0DG8LPWZWZ003M	3 meters, aqua

#### Laser Optimized (50/125) OM3 LC-PC/OFNP (A-B\*)

PART NO.	DESCRIPTION
OR-PODF8LPAZAZO01M	1 meter, aqua
OR-P0DF8LPAZAZ002M	2 meters, aqua
OR-P0DF8LPAZAZ003M	3 meters, aqua

Notes: \*A-B patch cords reverse the fiber positions (fig. 1, page 249).

#### Laser Optimized (50/125) OM3 LC-PC/OFNP (A-A\*)

PART NO.	DESCRIPTION
OR-PORF8LPAZAZO01M	1 meter, aqua
OR-PORF8LPAZAZ002M	2 meters, aqua
OR-PORF8LPAZAZOO3M	3 meters, aqua

Notes: \*A-A patch cords do not reverse the fiber (fig. 2, page 249).

#### Laser Optimized (50/125) OM3 RLC-PC OFNP (Ships A-B)

PART NO.	DESCRIPTION
OR-P0DF8LPWZWZ001M	1 meter, aqua
OR-P0DF8LPWZWZ002M	2 meters, aqua
OR-P0DF8LPWZWZ003M	3 meters, aqua

# PATCH CORDS

SpaceSaver Fiber Optic Cable Assemblies

# OR-P0

Duplex Fiber Optic Patch Cords for Standard Performance Systems – 0S2



OR-P1RC8IPUZUZ001M

# Single-Mode OS2 LC-UPC OFNP (A-B\*)

PART NO.	DESCRIPTION
OR-P0DC8IPUZUZ001M	1 meter, yellow
OR-P0DC8IPUZUZ002M	2 meters, yellow
OR-P0DC8IPUZUZ003M	3 meters, yellow

Notes: \*A-B patch cords reverse the fiber positions (fig. 1, page 249).

# Single-Mode OS2 LC-UPC OFNP (A-A\*)

PART NO.	DESCRIPTION
OR-PORC8IPUZUZ001M	1 meter, yellow
OR-PORC8IPUZUZ002M	2 meters, yellow
OR-PORC8IPUZUZ003M	3 meters, yellow

Notes: \*A-A patch cords do not reverse the fiber (fig. 2, page 249).

# Single-Mode OS2 RLC-UPC OFNP (Ships A-B)

PART NO.	DESCRIPTION
OR-PODC8IPPZPZ001M	1 meter, yellow
OR-P0DC8IPPZPZ002M	2 meters, yellow
OR-P0DC8IPPZPZ003M	3 meters, yellow

# PATCH CORDS

# Duplex Zip Cord Fiber Optic Cable Assemblies

# OR-P3

**Duplex Fiber Optic Patch Cords** for Premium and High Performance Systems - 0M4







OR-P3DG2LRGZGZ001M OR-P3DG2LRFZFZ001M

OR-P3DG2LRFZGZ001M

# Laser Optimized (50/125) OM4, 2mm Zip Cord OFNR

DUPLEX, LC-PC TO LC-PC	DESCRIPTION
OR-P3DG2LRGZGZ001M	1 meter, aqua
OR-P3DG2LRGZGZ002M	2 meters, aqua
OR-P3DG2LRGZGZ003M	3 meters, aqua
DUPLEX, SC-PC TO SC-PC	DESCRIPTION
OR-P3DG2LRFZFZ001M	1 meter, aqua
OR-P3DG2LRFZFZ002M	2 meters, aqua
OR-P3DG2LRFZFZ003M	3 meters, aqua
DUPLEX, SC-PC TO LC-PC	DESCRIPTION
OR-P3DG2LRFZGZ001M	1 meter, aqua
OR-P3DG2LRFZGZ002M	2 meters, aqua
OR-P3DG2LRFZGZ003M	3 meters, aqua

# OR-P3

**Duplex Fiber Optic Patch Cords** for Premium Performance Systems - 0M3







OR-P3DF2LRGZGZ001M OR-P3DF2LRFZFZ001M

OR-P3DF2LRFZGZ001M

# Laser Optimized (50/125) OM3, 2mm Zip Cord OFNR

DUPLEX, LC-PC TO LC-PC	DESCRIPTION
OR-P3DF2LRGZGZ001M	1 meter, aqua
OR-P3DF2LRGZGZ002M	2 meters, aqua
OR-P3DF2LRGZGZ003M	3 meters, aqua
DUPLEX, SC-PC TO SC-PC	DESCRIPTION
OR-P3DF2LRFZFZ001M	1 meter, aqua
OR-P3DF2LRFZFZ002M	2 meters, aqua
OR-P3DF2LRFZFZ003M	3 meters, aqua
DUPLEX, SC-PC TO LC-PC	DESCRIPTION
OR-P3DF2LRFZGZ001M	1 meter, aqua
OR-P3DF2LRFZGZ002M	2 meters, aqua
OR-P3DF2LRFZGZ003M	3 meters, aqua

# FIBER OPTIC SOLUTIONS

# PATCH CORDS

Duplex Zip Cord Fiber Optic Cable Assemblies

# OR-PO

Duplex Fiber Optic Patch Cords for Standard Performance Systems – 0M4



OR-P3DG2LRGZGZ001M OR-P3DG2LRFZFZ001M OR-P3DG2LRFZGZ001M

# Laser Optimized (50/125) OM4 LC-PC TO LC-PC OFNR

PART NO.	DESCRIPTION
OR-P0DG2LRGZGZ001M	1 meter, aqua
OR-P0DG2LRGZGZ002M	2 meters, aqua
OR-P0DG2LRGZGZ003M	3 meters, aqua

# Laser Optimized (50/125) OM4 SC-PC TO SC-PC OFNR

PART NO.	DESCRIPTION
OR-P0DG2LRFZFZ001M	1 meter, aqua
OR-P0DG2LRFZFZ002M	2 meters, aqua
OR-P0DG2LRFZFZ003M	3 meters, aqua

# Laser Optimized (50/125) OM4 SC-PC TO LC-PC OFNR

PART NO.	DESCRIPTION
OR-P0DG2LRFZGZ001M	1 meter, aqua
OR-P0DG2LRFZGZ002M	2 meters, aqua
OR-P0DG2LRFZGZ003M	3 meters, aqua

# OR-P0

Duplex Fiber Optic Patch Cords for Standard Performance Systems – OM3







OR-P0DF2LRGZGZ001M OR-P0DF2LRFZFZ001M OR-P0DF2LRFZGZ001M

# Laser Optimized (50/125) OM3, 2mm Zip Cord

DUPLEX.

LC-PC TO LC-PC	DESCRIPTION
OR-P0DF2LRGZGZ001M	1 meter, aqua
OR-PODF2LRGZGZ002M	2 meters, aqua
OR-P0DF2LRGZGZ003M	3 meters, aqua
DUPLEX, SC-PC TO SC-PC	DESCRIPTION
OR-P0DF2LRFZFZ001M	1 meter, aqua
OR-PODF2LRFZFZ002M	2 meters, aqua
OR-PODF2LRFZFZ003M	3 meters, aqua
DUPLEX, SC-PC TO LC-PC	DESCRIPTION
OR-P0DF2LRFZGZ001M	1 meter, aqua
OR-P0DF2LRFZGZ002M	2 meters, aqua
OR-P0DF2LRFZGZ003M	3 meters, aqua

# PATCH CORDS

Duplex Zip Cord Fiber Optic Cable Assemblies

# OR-P0

**Duplex Fiber Optic Patch Cords** for Standard Performance Systems - 0S2







OR-PODC2IRSZSZ001M

OR-P0DC2IRRZRZ001M

OR-PODC2IRRZSZ001M

# Single-Mode OS2, 2mm Zip Cord OFNR

DUPLEX, LC-UPC TO LC-UPC	DESCRIPTION
OR-PODC2IRSZSZ001M	1 meter, yellow
OR-PODC2IRSZSZ002M	2 meters, yellow
OR-P0DC2IRSZSZ003M	3 meters, yellow
DUPLEX, SC-UPC TO SC-UPC	DESCRIPTION
OR-P0DC2IRRZRZ001M	1 meter, yellow
OR-P0DC2IRRZRZ002M	2 meters, yellow
OR-P0DC2IRRZRZ003M	3 meters, yellow
DUPLEX, SC-UPC TO LC-UPC	DESCRIPTION
OR-PODC2IRRZSZ001M	1 meter, yellow
OR-P0DC2IRRZSZ002M	2 meters, yellow
OR-PODC2IRRZSZ003M	3 meters, yellow

# FIBER OPTIC SOLUTIONS

# **PIGTAILS**

Fiber Optic Cable Assemblies

# **OR-P3PG**

Single-Connector Pigtails for Premium Performance Systems – 0M4





OR-P3PG9FRFZZZ001M

OR-P3PG9FRGZZZ001M

# OR-P3SG

Six-Connector Pigtails for Premium Performance Systems – 0M4





OR-P3SG4ZRFZZZ001M

OR-P3SG4ZRGZZZ001M

# **OR-P3TG**

Twelve-Connector Pigtails for Premium Performance Systems – 0M4





OR-P3TG4ZRFZZZ001M

OR-P3TG4ZRGZZZ001M

# Laser Optimized (50/125) OM4 PC/OFNR

1-FIBER CONNECTOR PIGTAIL, SC-PC, 50 LOMF	DESCRIPTION
OR-P3PG9FRFZZZ001M	1 meter, aqua
OR-P3PG9FRFZZZ002M	2 meter, aqua
1-FIBER CONNECTOR PIGTAIL, LC-PC, 50 LOMF	DESCRIPTION
OR-P3PG9FRGZZZ001M	1 meter, aqua
OR-P3PG9FRGZZZ002M	2 meter, aqua

# Laser Optimized (50/125) OM4 PC/OFNR

6-FIBER CONNECTOR PIGTAIL, SC-PC, 50 LOMF	DESCRIPTION
OR-P3SG4ZRFZZZ001M	1 meter, aqua
OR-P3SG4ZRFZZZ002M	2 meter, aqua
6-FIBER CONNECTOR PIGTAIL, LC-PC, 50 LOMF	DESCRIPTION
OR-P3SG4ZRGZZZ001M	1 meter, aqua
OR-P3SG4ZRGZZZ002M	2 meter, aqua

# Laser Optimized (50/125) OM4 PC/OFNR

12-FIBER CONNECTOR PIGTAIL, SC-PC, 50 LOMF	DESCRIPTION
OR-P3TG4ZRFZZZ001M	1 meter, aqua
OR-P3TG4ZRFZZZ002M	2 meter, aqua
12-FIBER CONNECTOR PIGTAIL, LC-PC, 50 LOMF	DESCRIPTION
OR-P3TG4ZRGZZZ001M	1 meter, aqua
OR-P3TG4ZRGZZZ001M	2 meter, aqua

Notes: All 6 and 12-connector pigtail products include a 1 meter breakout section consisting of 900  $\mu m$  buffered fiber with terminated ends. LC, SC and ST cable assemblies have connectors with ceramic ferrules. For other lengths and configurations, consult the Legrand sales department.

# **PIGTAILS**

Fiber Optic Cable Assemblies

# **OR-P3PF**

Single-Connector Pigtails for Premium Performance Systems – OM3





OR-P3PF9FRFZZZ001M

OR-P3PF9FRGZZZ001M

# **OR-P3SF**

Six-Connector Pigtails for Premium Performance Systems – OM3





OR-P3SF4ZRFZZZ001M

OR-P3SF4ZRGZZZ001M

# **OR-P3TF**

Twelve-Connector Pigtails for Premium Performance Systems – OM3





OR-P3TF4ZRFZZZ001M

OR-P3TF4ZRGZZZ001M

# Laser Optimized (50/125) OM3 PC/OFNR

1-FIBER CONNECTOR PIGTAIL, SC-PC, 50 LOMF	DESCRIPTION
OR-P3PF9FRFZZZ001M	1 meter, aqua
OR-P3PF9FRFZZZ002M	2 meters, aqua
1- FIBER CONNECTOR PIGTAIL, LC-PC, 50 LOMF	DESCRIPTION
OR-P3PF9FRGZZZ001M	1 meter, aqua
OR-P3PF9FRGZZZ002M	2 meters, aqua

# Laser Optimized (50/125) OM3 PC/OFNR

6-FIBER CONNECTOR PIGTAIL, SC-PC, 50 LOMF	DESCRIPTION
OR-P3SF4ZRFZZZ001M	1 meter, aqua
OR-P3SF4ZRFZZZ002M	2 meters, aqua
6-FIBER CONNECTOR PIGTAIL, LC-PC, 50 LOMF	DESCRIPTION
OR-P3SF4ZRGZZZ001M	1 meter, aqua
OR-P3SF4ZRGZZZ002M	2 meters, aqua

# Laser Optimized (50/125) OM3 PC/OFNR

12-FIBER CONNECTOR PIGTAIL, SC-PC, 50 LOMF	DESCRIPTION	
OR-P3TF4ZRFZZZ001M	1 meter, aqua	
OR-P3TF4ZRFZZZ002M	2 meters, aqua	
12-FIBER CONNECTOR PIGTAIL, LC-PC, 50 LOMF	DESCRIPTION	
OR-P3TF4ZRGZZZ001M	1 meter, aqua	
OR-P3TF4ZRGZZZ002M	2 meters, aqua	

Notes: All 6 and 12-connector pigtail products include a 1 meter breakout section consisting of 900  $\mu m$  buffered fiber with terminated ends. LC, SC and ST cable assemblies have connectors with ceramic ferrules. For other lengths and configurations, consult the Legrand sales department.

# FIBER OPTIC SOLUTIONS

# **PIGTAILS**

Fiber Optic Cable Assemblies

# **OR-P1PF**

Single-Connector Pigtails for Standard Performance Systems – 0M3





OR-P1PF9FRFZZZ001M

OR-P1PF9FRGZZZ001M

# **OR-P1SF**

Six-Connector Pigtails for Standard Performance Systems – 0M3





OR-P1SF4ZRFZZZ001M

OR-P1SF4ZRGZZZ001M

# **OR-P1TF**

Twelve-Connector Pigtails for Standard Performance Systems – OM3





OR-P1TF4ZRFZZZ001M

OR-P1TF4ZRGZZZ001M

# Laser Optimized (50/125) OM3 PC/OFNR

1-CONNECTOR PIGTAIL, SC-PC	DESCRIPTION	
OR-P1PF9FRFZZZ001M	1-fiber, 1 meter, aqua	
OR-P1PF9FRFZZZ002M	1-fiber, 2 meters, aqua	
1-CONNECTOR PIGTAIL, LC-PC	DESCRIPTION	
OR-P1PF9GRFZZZ001M	1-fiber, 1 meter, aqua	
OR-P1PF9FRGZZZ002M	1-fiber, 2 meters, aqua	

# Laser Optimized (50/125) OM3 PC/OFNR

6-CONNECTOR PIGTAIL, SC-PC	DESCRIPTION	
OR-P1SF4ZRFZZZ001M	6-fiber, 1 meter, aqua	
OR-P1SF4ZRFZZZ002M	6-fiber, 2 meters, aqua	
6-CONNECTOR PIGTAIL, LC-PC	DESCRIPTION	
OR-P1SF4ZRGZZZ001M	6-fiber, 1 meter, aqua	
OR-P1SF4ZRGZZZ002M	6-fiber, 2 meters, aqua	

# Laser Optimized (50/125) OM3 PC/OFNR

12-FIBER CONNECTOR PIGTAIL, SC-PC, 50 LOMF	DESCRIPTION
OR-P1TF4ZRFZZZ001M	1 meter, aqua
OR-P1TF4ZRFZZZ002M	2 meter, aqua

# Laser Optimized (50/125)PC/OFNR

12-FIBER CONNECTOR PIGTAIL, LC-PC, 50 LOMF	DESCRIPTION
OR-P1TF4ZRGZZZ001M	1 meter, aqua
OR-P1TF4ZRGZZZ002M	2 meter, aqua

Notes: All 6 and 12-connector pigtail products include a 1 meter breakout section consisting of 900  $\mu m$  buffered fiber with terminated ends. LC, SC and ST cable assemblies have connectors with ceramic ferrules. For other lengths and configurations, consult the Legrand sales department.

# **PIGTAILS**

Fiber Optic Cable Assemblies

# **OR-P1PC**

Single-Connector Pigtails for Standard Performance Systems – 0S2





OR-P1PC9FRRZZZ001M

OR-P1PC9FRSZZZ001M

# OR-P1S

Six-Connector Pigtails for Standard Performance Systems – 0S2





OR-P1SC4ZRRZZZ001M

OR-P1SC4ZRSZZZ001M

# **OR-P1TC**

Twelve-Connector Pigtails for Standard Performance Systems – 0S2





OR-P1TC4ZRRZZZ001M

OR-P1TC4ZRSZZZ001M

# Single-Mode OS2 UPC/OFNR

1-CONNECTOR PIGTAIL, SC-UPC	DESCRIPTION
OR-P1PC9FRRZZZ001M	1-fiber, 1 meter, yellow
OR-P1PC9FRRZZZ002M	1-fiber, 2 meters, yellow
1-CONNECTOR PIGTAIL, LC-UPC	DESCRIPTION
OR-P1PC9FRSZZZ001M	1-fiber, 1 meter, yellow

# Single-Mode OS2 UPC/OFNR

OR-P1PC9FRSZZZ002M 1-fiber, 2 meters, yellow

6-CONNECTOR PIGTAIL, SC-UPC	DESCRIPTION	
OR-P1SC4ZRRZZZ001M	6-fiber, 1 meter, yellow	
OR-P1SC4ZRRZZZ002M	6-fiber, 2 meters, yellow	
6-CONNECTOR PIGTAIL, LC-UPC	DESCRIPTION	
OR-P1SC4ZRSZZZ001M	6-fiber, 1 meter, yellow	
OR-P1SC4ZRSZZZ002M	6-fiber, 2 meters, yellow	

# Single-Mode OS2 UPC/OFNR

DESCRIPTION		
1 meter, yellow		
2 meter, yellow		
DESCRIPTION		
1 meter, yellow		
2 meter, yellow		

# INFINIUM CLEANING TOOLS

# OR-603 Mechanical Ferrule Cleaner



OR-60300211



OR-60300212





OR-60300215

### **Mechanical Ferrule Cleaner**

Connector end-faces must always be cleaned with the appropriate cleaning tool.

Legrand® offers Infinium™ cleaning tools for single fiber connectors and for MTP®/MPO connectors. The ferrule cleaner tools are designed to clean ferrules residing inside an adapter, faceplate or bulkhead. The cleaning tools are simple to use and highly effective at removing oil and dust contaminants. Choose from several configurations for cleaning either single or multi-fiber connectors.

PART NO.	DESCRIPTION
OR-60300211	Ferrule Cleaner MTP/MP0
OR-60300212	Ferrule Cleaner 1.25 for LC and MU; PC and APC
OR-60300216	Ferrule Cleaner 1.25 replacement cartridge
OR-60300213	Ferrule Cleaner 2.50 for SC, FC, ST and E-2000; PC and APC
OR-60300217	Ferrule Cleaner 2.50 replacement cartridge
OR-60300214	Ferrule Cleaner Mini disposable LC
OR-60300215	Ferrule Cleaner Mini disposable SC

Notes: MTP® is a registered trademark of US Conec.

# OR-60300228 Tape Cassette Cleaner



# **Tape Cassette Cleaner**

The Infinium cassette style fiber optic connector cleaner system utilizes a removable cartridge containing the cleaning fabric. It uses a densely woven micro-fiber cleaning fabric to remove harmful contaminates off of the ferrule end-face. The cartridge supports 400 cleaning cycles.

PART NO.	DESCRIPTION
OR-60300228	Cleaning cassette

# INFINIUM CLEANING TOOLS

# OR-603 Sticklers CleanStixx









# OR-603 Fiber Optic Splice and Connector Cleaner



# OR-603 Sticklers CleanWipes





### Sticklers CleanStixx

Sticklers® CleanStixx™ connector cleaning sticks are designed with Sticklers Fiber Optic Splice and Connector Cleaner to deliver unbeatable "wet/dry" fiber optic cleaning. The unique, patented, high-purity fibrous CleanStixx tips leave perfectly clean fiber optic end-faces. Used with the Sticklers Fiber Optic Splice and Connector Cleaner, CleanStixx connector cleaning sticks out-perform foam or cloth swabs.

PART NO.	DESCRIPTION
OR-60300221	Blue 2.5mm connector cleaning stick, for cleaning SC, ST, FC, 50pk
OR-60300222	Green 1.25mm connector cleaning stick, for cleaning LC, MU, 50pk
OR-60300223	Pink label cleaning stick for larger connectors and lenses, such as SMA, MPO, MTP® (with or without pins), 50pk
OR-60300224	Yellow label cleaning stick with a recessed nib, for all exposed termini 2.5mm or smaller, 50pk

Notes: MTP® is a registered trademark of US Conec.

# **Fiber Optic Splice and Connector Cleaner**

Sticklers fiber optic splice and connector cleaner is the only optical-grade cleaning fluid on the market, specifically engineered for fast, reliable and low-cost cleaning of fiber optic network connectors, receptacle and fiber. Use with the Sticklers CleanStixx for greatly improved cleaning results.

PART NO.	DESCRIPTION
OR-60300225	Each 3 oz can contains 400 cleanings

### **Sticklers CleanWipes**

Sticklers CleanWipes benchtop wipes are high quality, lint-free wipes engineered for use on bare fiber before splicing, and also for cleaning fiber optic jumpers. They are exactly the right size and the right material to make "wet-dry" cleaning simple and cost-effective.

PART NO.	DESCRIPTION
OR-60300226	Sticklers CleanWipes 90 – Each mini-tub contains 90 perforated lint-free wipes, each being 4" x 2" (10 cm x 5 cm). Each wipe can clean up to (6) fiber optic connectors or (1) bare fiber.
OR-60300227	Sticklers CleanWipes 400 – A convenient, transportable fiber optic cleaning tool designed for the high-speed cleaning of fiber optic jumpers and patch cords out in the field. Each cleaning tool delivers more than 400 perfect cleanings in each box.



# FIELD-INSTALLABLE CONNECTORS

The most critical point in any optical interconnect is the physical contact interface between mated connector pairs. When polishing fiber connectors, a small lens is created at the tip of the connector and the shape of this lens critically impacts transmission of light. Utilizing advanced laser interferometry equipment to monitor the manufacturing process, Infinium™ pre-polished field termination connectors exhibit highly controlled end-face geometry resulting in reliable, low insertion loss and minimal return loss connections. In addition, this approach eliminates imprecise epoxy application, time consuming curing and highly variable hand polishing from field installation practices. The net effect is reduced installation expense, higher yield field terminations and better performance.

### **Features**

- No epoxy, polishing or fusion splicing required
- Reusable termination capability (up to 3 times)
- VFL window
- No special tools required
- Fast installation
- Factory prepared and verified end-face
- 50/125 LOMF and single-mode versions available
- Unlimited shelf life

### **Benefits**

- Fast, easy assembly in the field
- Saves time and money, reduces scrap
- Immediate feedback on successful termination
- Common fiber tools, readily available
- Cost savings
- Reliability and superior performance
- Flexibility for many installation applications
- Ready when needed, reduced waste

SPECIFICATION	MULTIMODE	SINGLE-MODE
Infinium	Ту	pical
Insertion Loss at 1310mm	0.1dB	0.2dB (UPC) and 0.3dB (APC)
Return Loss at 1310mm	35dB	55dB (UPC) 60dB (APC)
Durability	< 0.1dB chan	ge, 500 matings
Operating Temperature	-40° C	to +75° C
Tensile	TIA/EIA	x 568-C.3
Interoperability	IEC 617	54-4 (SC)

# FIELD-INSTALLABLE CONNECTORS

### Infinium Pre-Polished Connectors

Infinium™ reusable pre-polished connectors can be installed in two minutes or less on a prepared optical fiber without the need for special installation tools or equipment. A good cleave is essential, and as always, cleanliness is crucial. With these two attributes - and the Infinium connector - consistent, low-loss connections can be expected.

Notes: Be sure to ask your Legrand® Representative about the Infinium line of cleaning tools.

# OR-205KNT **LC Connectors**



OR-205KNT9GA-50T



OR-205KNT9SA-09

# **LC Connectors**

Infinium connectors provide superior performance and ease of installation in the field. Connectors ship with an assembly jig and fiber holder, which some use for help in alignment and fiber cleaving when terminating the connector. Also includes a 12-pack of protective tubes for use when terminating on loose tube cable.

PART NO.	DESCRIPTION
OR-205KNT9GA-50T	LC PC reusable connector, field-installable, 50/125 LOMF, aqua housing, white 900 micron boot, packaged in boxes of 12
OR-205KNT9SA-09	LC UPC reusable connector, field-installable, single-mode, blue housing, white 900 micron boot, packaged in boxes of 12

# OR-205KNT **SC Connectors**



OR-205KNT9FA-50T



OR-205KNT9RA-09



### **SC Connectors**

Infinium connectors provide superior performance and ease of installation in the field. Connectors ship with an assembly jig and fiber holder, which some use for help in alignment and fiber cleaving when terminating the connector. Also includes a 12-pack of protective tubes for use when terminating on loose tube cable.

PART NO.	DESCRIPTION
OR-205KNT9FA-50T	SC PC reusable connector, field-installable, 50/125 LOMF, aqua housing, white 900 micron boot, packaged in boxes of 12
OR-205KNT9RA-09	SC UPC reusable connector, field-installable, single-mode, blue housing, white 900 micron boot, packaged in boxes of 12
OR-205KNT9LA-09	SC APC reusable connector, field-installable, single-mode, green housing, white 900 micron boot, packaged in boxes of 12

# FIBER OPTIC SOLUTIONS

# FIELD-INSTALLABLE CONNECTORS

# Infinium Tools and Termination Kit

Legrand® offers all the tools necessary for field termination of the Infinium™ reusable pre-polished connectors. A complete reusable connector kit option includes all the fiber preparation tools necessary to terminate the connector, including a battery operated VFL light source, cleave tool and other common tools required during field assembly.

# OR-854 Tool Kit



### Toolkit

PART NO.	DESCRIPTION
OR-85400016	Precision Install Kit – Standard Includes:  Precision cleaver with scrap basket  Tri-hole fiber stripper  Kevlar scissors  Fiber disposal bottle  Black marker  Non woven dry wipes (100pk)  Safety Glasses  Cleaning solution spray 2oz.  Metal ruler  Soft case
OR-85400017	Precision Install Kit – Premium Includes everything listed in Standard kit, plus:  200x microscope  Visual fault locater  Attenuator for VFL  VFL adapter for LC  SC-SC mating sleeve  LC-LC mating sleeve  VFL LC-LC cord SM 3mm, 1m  VFL SC-LC cord SM 3mm, 1m

# OR-603 VFL Kit



### **VFL Kit**

PART NO.	DESCRIPTION
OR-60300218	VFL kit
OR-60300219	2.5mm to 1.25mm adapter
OR-60300220	Premium attenuator SC, 5dB

# **OR-603**Single-Mode VFL Jumpers



# OR-60300232 Microscope



# Single-Mode VFL Jumpers

PART NO.	DESCRIPTION
OR-60300230	SC to SC SM simplex jumper, 1m
OR-60300231	SC to LC SM simplex jumper, 1m

# **Microscope**

PART NO.	DESCRIPTION
OR-60300232	Connector inspection microscope (200x), includes 2.5mm and 1.25 adapters

# FIRER OPTIC SOLUTIONS

# FIELD-INSTALLABLE CONNECTORS

### Infinium Tools and Kits

With any Infinium™ tool kits, components get lost or worn out over time. To accommodate replenishment needs, Legrand® offers a complete range of high quality accessory components supporting the field termination system. From cleaning supplies to cleavers, microscopes, instruction sheets, fiber strip and crimp tools, Legrand has the components to meet a range of needs and keep installations moving forward.

# OR-60300210 Precision Fiber CleaveTool



# **Precision Fiber Cleaver Tool**

PART NO.	DESCRIPTION
OR-60300210	Precision cleaver

# OR-603 Strip Tools



# **Strip Tools**

**Breakout Kits** 

PART NO.	DESCRIPTION
OR-60300124	Miller® style
OR-60300127	Nick-free style
OR-60300205	Universal jacket/buffer

# OR-61500858, OR-61500868 Breakout Kits



OR-61500858



OR-61500868

To be used with loose tube cables.

PART NO.	DESCRIPTION
OR-61500858	Breakout kit, 12-fiber
OR-61500868	Breakout kit, 6-fiber

# FIELD-INSTALLABLE CONNECTORS Infinium Field-Installable Anaerobic Connectors

Legrand® quick-cure, anaerobic epoxy field-installable connectors speed up installation time. Strip the fiber, inject the adhesive into the connector, insert and scribe the fiber, then polish the connector end face to perfection for a high performance termination. Users and installers will benefit from high productivity and low connector costs – which translates directly into savings.

### **Features**

- Simple design
- No capital equipment
- Fast application
- Precision ceramic ferrule
- Single-mode or multimode
- Pre-radius LC
- Reliable performance
- Minimal tools

### Benefits

- Allows for lower unit costs. Advanced engineering helps us ensure long life and saves replacement costs.
- With Legrand field polish connectors, there is no need for curing ovens, UV light sources, or expensive polishing machines. It is possible to terminate anywhere without worrying about power sources or charging batteries.
- Terminate fibers in about two minutes following the easy installation instructions, saving on installation time.
- Provides durability, temperature stability and scratch resistance.
- Simplistic offering reduces confusion by offering one style connector that covers all multimode applications to include 62.5/125, standard 50/125, or laser-optimized 50/125 for 10 Gigabit transmission, and single-mode.
- One-piece pre-radius LC connector for minimal polishing and consistent end-face geometry resulting in more consistent optical performance.
- Secure the installation of fiber using an adhesive and primer for a secure worry-free termination.
- A compact and economical tool kit contains all the common tools necessary to complete the termination.

# OR-205KAN9 Anaerobic Adhesive Connectors



# **Anaerobic Adhesive Connectors**

PART NO.	DESCRIPTION
OR-205KAN9GA-MM	LC, multimode, buffer size (µm) 900
OR-205KAN9GA-SM	LC, single-mode, buffer size (µm) 900
OR-205KAN9FA-MM	SC, multimode, buffer size (µm) 900
OR-205KAN9FA-SM	SC, single-mode, buffer size (µm) 900
OR-205KAN9EA-MM	ST, multimode, buffer size (µm) 900
OR-205KAN9EA-SM	ST, single-mode, buffer size (µm) 900

# FIELD-INSTALLABLE CONNECTORS Infinium<sup>™</sup> Field-Installable Anaerobic Connectors

# OR-85400010

**Anaerobic Field Installable Connector Termination Kit** 



OR-85400010

# OR-85400012, OR-85400011

**Anaerobic Field Installable Connector Polishing Kits** 



OR-85400012



# OR-706000, OR-60300 Individual Tools and Accessory Items (Anaerobic)







OR-70600022



OR-60300200



OR-60300182



OR-60300183



### **Anaerobic Field Installable Connector Termination Kit**

PART NO.	DESCRIPTION
OR-85400010	Contains all tools necessary for complete LC, ST and SC anaerobic terminations: contractor bag, micro strip tool, scribe tool, jacket strip tool, scissors, cut length templates, polishing pad, polishing pucks, microscope

Notes: Consumables: polishing paper, adhesive and primer are sold separately.

# **Anaerobic Field Installable Connector Multimode Polishing Kit**

PART NO.	DESCRIPTION
OR-85400012	Consumables necessary for complete LC, ST and SC terminations: dry wipes, dispensing tips, syringe, type G polishing paper, type F polishing paper, terminates approximately (100) connectors

# **Anaerobic Field Installable Connector Single-Mode Polishing Kit**

PART NO.	DESCRIPTION
OR-85400011	Consumables necessary for complete LC, ST and SC terminations: dry wipes, dispensing tips, syringe, type G polishing paper, type F polishing paper, type M polishing paper, terminates approximately (100) connectors

# Individual Tools and Accessory Items (Anaerobic)

PART NO.	DESCRIPTION
OR-70600021	Adhesive
OR-70600022	Primer
OR-60300200	LC stainless polishing puck also suitable for keyed LC connector
OR-60300179	Dry wipes, 250pk
OR-60300182	Dispensing tips, 125pk
OR-60300183	Syringe, 10pk
OR-60300184	Type M polishing paper, SM only, 10pk
OR-60300185	Type F polishing paper, 10pk
OR-60300186	Type G polishing paper, 20pk

### **ORTRONICS**

# **WORKSTATION SYSTEMS**

# Fib-or-Cop II

Fib-or-Cop II provides greater multimedia capacity, addressing the increasing need for fiber in horizontal cabling systems. This larger version of the Fib-or-Cop has the ability to mount six TracJack® or three Series II® modules in the face, with a choice of fiber (LC, SC, ST or MT-RJ) and/or copper (TracJack) exiting from the bottom. This design allows the cover to be removed without disrupting the connections in the faceplate. The wide variety of connectors located in the bottom positions can be further protected by an optional snap-on shroud.

In addition, the Legrand® line of workstation solutions offers many alternative designs to accommodate multimedia needs for in-wall and surface mount installations.

Fib-or-Cop II

OR-62100040

OR-62100041

PART NO.

# OR-62100040, OR-62100041 Fib-or-Cop II





OR-62100040

OR-62100041

# Fib-or-Cop II Protective Bottom Shroud

PART NO.	DESCRIPTION
OR-62100038	Protective bottom shrouds, 5pk

**DESCRIPTION** 

5" x 8" x 1.19"

5" x 8" x 1.19"

Base and cover for (3) Series II modules,

Base and cover for (6) TracJack modules,

# OR-62100038 Fib-or-Cop II Protective Bottom Shroud



OR-62100038

# OR-621000 Fib-or-Cop II Bottom Adapter Plates







OR-62100044

OR-62100046

OR-62100048





OR-62100050

OR-62100052

# Fib-or-Cop II Bottom Adapter Plates

PART NO.	DESCRIPTION
OR-62100044	3-ST duplex (6-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-62100045	3-ST duplex (6-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-62100046	6-SC simplex (6-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-62100047	6-SC simplex (6-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-62100048	3-SC duplex (6-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-62100049	3-SC duplex (6-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-62100050	6-LC duplex (12-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves
OR-62100051	6-LC duplex (12-fibers) single-mode, blue adapters, ceramic alignment sleeves
OR-62100052	6-MT-RJ (12-fibers) feed-through multimode, beige adapters
OR-62100053	6-MT-RJ (12-fibers) single-mode, blue adapters
OR-62100054	4-LC quad, 50 LOMF, aqua adapters

TracJack and Series II Modules and Faceplates

# OR-4030054 TracJack Faceplates









OR-40300549 OR-40300548



OR-40300546

OR-40300554

OR-40300545

# TracJack® Faceplates

PART NO.	DESCRIPTION
OR-40300549	Holds (1) TracJack, 2.75" x 4.5"
OR-40300548	Holds (2) TracJacks, 2.75" x 4.5"
OR-40300547	Holds (3) TracJacks, 2.75" x 4.5"
OR-40300546	Holds (4) TracJacks, 2.75" x 4.5"
OR-40300545	Holds (6) TracJacks, 2.75" x 4.5"
OR-40300554	Holds (8) TracJacks, 4.5" x 4.5"
OR-40300555	Holds (6) TracJacks, 4.5" x 4.5"

Notes: Standard color for plastic TracJack faceplates is fog white. For electrical ivory add -13, for white add -88 and for Wiremold® ivory add -99 to end of part number. For other colors, contact sales.



OR-40300555

# OR-404TJ4, OR-404TJ6 TracJack Surface Mount Boxes





OR-404TJ2X2

OR-404TJ6

### **TracJack Surface Mount Boxes**

PART NO.	DESCRIPTION
OR-404TJ2X2	Holds (4) TracJacks, jacks exit from both sides, 4.0" x 2.42" x 1.16"
OR-404TJ6*	Holds (6) TracJacks, 6.98" x 4.33" x 1.16"

Notes: \*Includes internal storage ring for fiber and two TracJack blanks. Can mount directly to single or double-gang recessed wall boxes.

# OR-4030018 **Surface Mount Outlet Boxes for TracJack**

and Series II







# TracJack Surface Mount Outlet Boxes for TracJack and Series II®

PART NO.	DESCRIPTION
OR-40300185-13*	Single gang, electrical white, 3" x 4.7" x 2"
OR-40300186	Double gang, fog white, 4.9" x 4.7" x 2"

Notes: \*Compatible with Wiremold 2700, 2800 and 2900 raceway series.

### **Optional Accessories**

•		
PART NO.	DESCRIPTION	
OR-70900020	Adhesive-back magnet for single-gang	
OR-70900022	Adhesive-back magnet for double-gang	
OR-70900070	Double-sided adhesive (order (2) for a double-gang)	

Notes: Compatible with Wiremold 2700, 2800 and 2900 Raceway Series.

# TracJack and Series II Modules and Faceplates

### TracJack Modules

TracJack® is a versatile single-module solution – the perfect combination of high quality, enhanced performance, labor savings, ease of use, and flexibility in design. TracJack front removable snap-in modules make moves, adds, and changes easy. TracJack products are compatible with Fib-or-Cop II and the complete line of TracJack faceplates and surface mount boxes. TracJack modules are available in LC, SC, ST, FC, and MT-RJ styles in order to suit any installation requirement.

### **Features**

-68

WM

-78

-88

WM

-99

WM

- Snap-in module
- Modular design
- Front removable
- No special tools required
- Fully compatible with all TracJack faceplates

# OR-637000



### **Benefits**

- Simple, secure installation
- Flexibility in structured cabling system design
- Facilitates quick moves, adds, and changes
- Reduced installation expense
- Provides wide range of design possibilities

### TracJack Modules

Tracouck Flourico			
PART NO.	DESCRIPTION		
OR-63700039*	(1) LC (2-fibers) multimode, beige adapter, phosphor-bronze alignment sleeves, 180° exit, flush, 1-unit		
OR-63700050	(1) LC (2-fibers) multimode, beige adapter, phosphor-bronze alignment sleeves, 45° angled exit, 2-units		
OR-63700075*	(1) LC (2-fibers) multimode, aqua adapter, ceramic alignment sleeves, 180° exit, flush, 1-unit		
OR-63700017*	(1) SC simplex multimode, beige adapter, phosphor-bronze alignment sleeves, 180° exit, flush, 1-unit		
OR-63700066*	(2) SC simplex multimode, beige adapters, phosphor-bronze alignment sleeves, 180° exit, 1-unit		
OR-63700051	(1) SC simplex multimode, beige adapter, phosphor-bronze alignment sleeves, 45° angled exit, flush, 2-units		
OR-63700078*	(1) SC simplex multimode, aqua adapter, ceramic alignment sleeve, 180° exit, flush, 1-unit		
OR-63700011	(1) ST simplex multimode, metal adapter, phosphor-bronze alignment sleeves, 180° exit, 1-unit		
OR-63700013	(2) ST multimode, metal adapter, phosphorbronze alignment sleeves, 180° exit, 1-unit		
OR-63700026	(1) MT-RJ (2-fibers) feed-through, multimode, beige adapter, 180° exit, flush, 1-unit		
OR-63700048	(1) MT-RJ (2-fibers) feed-through, multimode, beige adapter, 45° angled exit, 2-units		
OR-63700080	(1) LC (2-fibers) multimode, aqua adapter, ceramic alignment sleeves, 45° angled exit, 2-units		
OR-63700081	(2) SC simplex multimode, aqua adapters, ceramic alignment sleeves, 180° exit, 1-unit		
OR-63700082	(1) SC simplex multimode, aqua adapter, ceramic alignment sleeves, 45° angled exit, 2-units		

Notes: Consult sales at 800-934-5432 for single-mode part numbers.
\*Also available in black, red, orange, yellow, green, light green, WM light gray,
WM gray, white and WM ivory. Housing colors: -00, -25, -42, -43, -44, -45, -68,
-78, -88, -99.

TracJack and Series II Modules and Faceplates

# OR-40300 Series II Faceplates







Series II® Faceplates

PART NO.	DESCRIPTION
OR-40300011	Standard profile, .75"D, 2.75" x 4.5", fog white
OR-40300158	Low profile, .5"D, 2.75" x 4.5", fog white
OR-40300159	Standard profile, .75"D, 4.5" x 4.5", fog white
OR-40300175	High profile, 1.65"D, 4.5" x 4.5", fog white



OR-40300175

# OR-40300010 **Series II Extension Plate**



OR-40300010

# **Series II Extension Plate**

PART NO.	DESCRIPTION
OR-40300010	Single-gang extension plate, 2.75" x $4.5$ " x $.9$ ", fog white

# OR-404S2 **Surface Housings for Series II**







OR-404S21U

OR-404S22U

OR-404S21X1U





OR-404S23U

OR-404S22X2U

# **Surface Housings for Series II**

PART NO.	DESCRIPTION
OR-404S21U	Holds (1) 1-unit Series II module, 2.27" x 2.59" x 1.2", fog white
OR-404S22U	Holds (2) 1-unit Series II modules, includes (1) Series II blank, 3.6" x 4.8" x 1.16", fog white
OR-404S21X1U	Holds (2) 1-unit Series II modules, includes (1) Series II blank, 4" x 2.42" x 1.16", fog white,
OR-404S23U	Holds (3) 1-unit Series II modules, internal fiber storage ring, 4.33" x 6.98" x 1.16", fog white
OR-404S22X2U	Holds (4) 1-unit Series II modules, includes (2) Series II blanks, 4" x 4.71" x 1.16", fog white

Notes: Does not accept 45° modules.



# TracJack and Series II Modules and Faceplates

### Series II Modules

Legrand's® most popular line – Series II® modules are snap-in and front removable, making moves, adds and changes easy. All Series II products are compatible with Fib-or-Cop II and the complete line of Series II faceplates and surface mount interface boxes. Series II modules are available with LC, SC, ST, FC and MT-RJ adapter choices in a wide variety of designs to suit any installation.

### **Features**

- Snap-in module
- Modular design
- Front removable
- No special tools required
- Flush mounted

# **OR-60900** Series II Modules







OR-60900344

OR-60900341







OR-60900328 OR-6

OR-60900340 OR-60900343







OR-60900184

OR-60900324

OR-60900182







OR-60900086

OR-60900325

OR-60900330

### **Benefits**

- Simple, secure installation
- Flexibility in structured cabling system design
- Facilitates quick moves, adds, and changes
- Reduced installation expense
- Provides a greater depth to facilitate patch cord management

### **Series II Modules**

PART NO.	DESCRIPTION
OR-60900329	(2) LC (4-fibers) multimode, beige adapters, phosphor-bronze alignment sleeves, 180° exit, flush, 1-unit
OR-60900344	(1) LC duplex, multimode, beige adapter, phosphor-bronze alignment sleeves, 45° angled exit, 2-units
OR-60900341	(2) LC (4-fibers) phosphor-bronze alignment sleeves, multimode, beige adapters, 45° angled exit, 2-units
OR-60900328	(2) SC simplex, multimode, beige adapters, phosphor-bronze alignment sleeves, 180° exit, flush, 1-unit
OR-60900340	(2) SC simplex, multimode, beige adapters, phosphor-bronze alignment sleeves, 45° angled exit, 2-units
OR-60900343	(1) SC duplex, multimode, beige adapter, phosphor-bronze alignment sleeve, 180° exit, 1-unit
OR-60900184	(1) SC duplex, multimode, beige adapter, phosphor- bronze alignment sleeves, innie, 60° angled exit, 1.5-units
OR-60900324	(2) ST simplex, multimode adapters, phosphorbronze alignment sleeves, 180° exit, 1-unit
OR-60900182	(2) ST simplex, multimode adapters, phosphorbronze alignment sleeves, innie, 60° angled exit, 1.5-units
OR-60900086	(4) ST simplex, multimode adapters, phosphorbronze alignment sleeves, innie, 55° angled exit, 3-units
OR-60900325	(1) MT-RJ (2-fibers) feed-through, multimode, beige adapter, 180° exit, flush, 1-unit
OR-60900330	(2) MT-RJ (4-fibers) feed-through, multimode, beige adapters, 180° exit, flush, 1-unit



# TracJack and Series II Modules and Faceplates

# OR-60900 Series II Modules







OR-60900342

OR-60900339

OR-60900326







OR-60900365

OR-60900366

OR-60900367





OR-60900368


OR-60900370

# Series II® Faceplates

PART NO.	DESCRIPTION
OR-60900342	(1) MT-RJ (2-fibers) feed-through, multimode, beige adapter, 45° angled exit, 2-units
OR-60900339	(2) MT-RJ (4-fibers) feed-through, multimode, beige adapters, 45° angled exit, 2-units
OR-60900326	(2) FC simplex, multimode adapters, phosphorbronze alignment sleeves, 180° exit, 1-unit
OR-60900365	(2) LC (4-fibers) multimode, aqua adapters, ceramic alignment sleeves, 180° exit, flush, 1-unit
OR-60900366	(1) LC duplex, multimode, aqua adapter, ceramic alignment sleeves, 45° angled exit, 2-units
OR-60900367	(2) LC (4-fibers) ceramic alignment sleeves, multimode, aqua adapters, 45° angled exit, 2-units
OR-60900368	[2] SC simplex, multimode, aqua adapters, ceramic alignment sleeves, 180° exit, flush, 1-unit
OR-60900369	[2] SC simplex, multimode, aqua adapters, ceramic alignment sleeves, 45° angled exit, 2-units
OR-60900370	(1) SC duplex, multimode, aqua adapter, ceramic alignment sleeves, 180° exit, 1-unit
OR-60900371	(1) SC duplex, multimode, aqua adapter, ceramic alignment sleeves, innie, 60° angled exit, 1.5-units



# High performance cabling systems by Legrand and Superior Essex

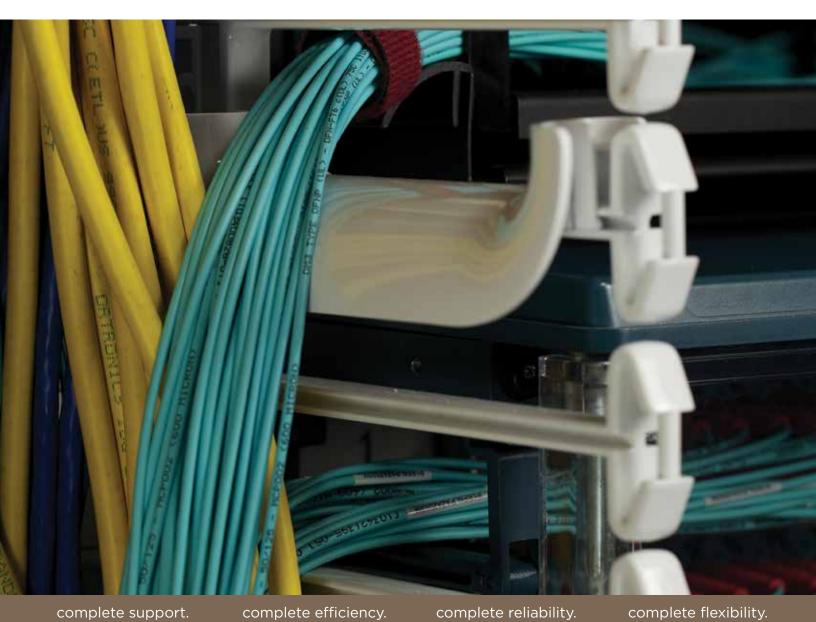

connect. completely.

# FIBER OPTIC SOLUTIONS

# TECHCHOICE SOLUTIONS



TechChoice® structured cabling solutions combine the efficiency, flexibility and easy to install design you'd expect from Legrand® with performance and rugged construction to provide a cost-effective option for communications technicians. Category 5e and 6 products are third party component tested to meet Category 5e and 6 component specifications for TIA/EIA-568-C.2 and ISO11801-2002.

# **Featured Products**



**TechChoice** Patch Panels

**TechChoice Fiber Cabinets** 





Fiher Modules



Multimodia Modulas

Faceplates, Frames and Bezels



Plastic Faceplates



Stainless Steel Faceplates



Frames and Bezel

**Patch Panels** 



Category 6 and Category 5e Patch Panels



Patch Panel Kit

**Patch Cords** 



Category 6 and Category 5e Patch Cords

**Surface Mount Boxes** 



283 Surface Mount Boxes

**Rack Mount Fiber Cabinets** 



Fiber Splice Cabinets

# KEYSTONE JACKS AND MODULES

TechChoice® Keystone jacks and modules feature an easy-to-follow universal wiring label and support standard termination using a 110-impact tool. The Keystone footprint allows for the greatest flexibility in installation scheduling because its rear insertion into the faceplate allows the technician to complete the termination before, during and after the construction process.

# OR-KS **Keystone Jacks** OR-KS6 OR-KS5E OR-KSR J25

# **Keystone Jacks and Icons**

, , , , , , , , , , , , , , , , , , , ,		
PART NO. SINGLE PACK	PART NO. PACK OF 25	DESCRIPTION
OR-KS6A	OR-KS6	Category 6, 8-position, T568A/B wiring, icon compatible
OR-KS5EA	OR-KS5E	Category 5e, 8-position, T568A/B wiring, icon compatible
OR-KSRJ25A	OR-KSRJ25	RJ25, 6-position jack, USOC wiring, icon compatible
-	OR-KSICON	TechChoice Keystone icon, 2-sided voice/data, 25pk

### **COLOR OPTIONS**

OR-KSICON

Add tailcode to end of part number (example: OR-KS6-42). WM indicates Wiremold® color match.



- -00=Black; -13=Electrical ivory; -36=Blue; -42=Red; -88=White; -99=Wiremold ivory; -43=Orange; -44=Yellow,
- -45=Green; -78=Gray.
- Standard color is fog white, requiring no tail code.

# OR-KS Fiber Keystone Modules









# Fiber Keystone Modules

PART NO.	DESCRIPTION
OR-KSST	(1) ST simplex multimode, phosphor-bronze alignment sleeves, 180° exit, fog white, includes dust cover
OR-KSSC	(1) SC simplex multimode, phosphor-bronze alignment sleeves, 180° exit, fog white, includes dust cover
OR-KSLC	(1) LC (2 fibers) multimode, phosphor-bronze alignment sleeves, 180° exit, fog white, includes dust cover
OR-KSMTRJ	(1) MT-RJ (2-fibers) multimode, feed-through, 180° exit, flush, fog white, includes dust cover

Notes: For Wiremold ivory, add tail code of -99 to end of part number (example OR-KSST-99) Sold individually.



# KEYSTONE JACKS AND MODULES

# **OR-KS**Multimedia Keystone Modules/AV







OR-KSSV



OR-KSSVIDC



OR-KSRCAR



OR-KSRCAG



OR-KSRCABL



OR-KSRCAY



OR-KSRCAW



OR-KSRCAB



OR-KS35ST



OR-KS35STST



OR-KS14ST



OR-KSUSBAA



OR-KSUSBAB



OR-KSBP



OR-KSBNC75



OR-KSBNC



OR-KSFCN



OR-KSFCNR



OR-KSS2210



OR-KSB10

# Multimedia Keystone Modules/AV

PART NO.	DESCRIPTION
OR-KSHDMI	HDMI, female to female, 19-pin
OR-KSSV	S-Video to 110
OR-KSSVIDC	S-Video, female to female
OR-KSRCAR	RCA red to 110
OR-KSRCAG	RCA green to 110
OR-KSRCABL	RCA blue to 110
OR-KSRCAY	RCA yellow to 110
OR-KSRCAW	RCA white to 110
OR-KSRCAB	RCA black to 110
OR-KS35ST	3.5mm, stereo jack, female to female
OR-KS35STST	3.5mm, stereo jack, female to screw term
OR-KS14ST	1/4" stereo jack, female to solder
OR-KSUSBAA	USB 2.0 A-A, female to female
OR-KSUSBAB	USB 2.0 A-B, female to female
OR-KSBP	Binding post, set of (2)
OR-KSBNC75	BNC 75 ohm, female to female, 75 ohm
OR-KSBNC	BNC 50 ohm, female to female, 50 ohm
OR-KSFCN	F Conn 75 ohm, female to female
OR-KSFCNR	F Conn 75 ohm, recessed, female to female
OR-KSS2210	Series II bezel, 2-port, TechChoice Keystone, 1-unit, 10pk
OR-KSB10	Blank, 10pk

Notes: Standard color is fog white. For other colors, contact sales. \\

# **FACEPLATES**

**La legrand**®

OR-KSFPR2



# **Faceplates**

TechChoice® faceplates are available in high impact 94V-0 rated thermoplastic and stainless steel, with a variety of port capacities to match your workstation applications. All faceplates allow for a flush jack finish.

# Plastic Faceplates with Label Fields

PART NO.	DESCRIPTION
OR-KSFP1	Single-gang, holds (1) Keystone
OR-KSFP2	Single-gang, holds (2) Keystones
OR-KSFP3	Single-gang, holds (3) Keystones
OR-KSFP4	Single-gang, holds (4) Keystones
OR-KSFP6	Single-gang, holds (6) Keystones
OR-KSFP8	Dual-gang, holds (8) Keystones
OR-KSFP12	Dual-gang, holds (12) Keystones

Notes: Standard color is fog white. Add -13 for electrical ivory, -88 for white or -99 for Wiremold  $^{\circ}$  ivory.

# Stainless Steel Faceplates with Label Fields

PART NO.	DESCRIPTION	
OR-KSSS1	Single-gang, holds (1) Keystone	
OR-KSSS2	Single-gang, holds (2) Keystones	
OR-KSSS3	Single-gang, holds (3) Keystones	
OR-KSSS4	Single-gang, holds (4) Keystones	
OR-KSSS6	Single-gang, holds (6) Keystones	
OR-KSSS8	Dual-gang, holds (8) Keystones	

# Plastic Faceplates without Label Fields

PART NO.	DESCRIPTION
OR-KSFPR1	Single-gang with (1) Keystone opening
OR-KSFPR2	Single-gang with (2) Keystone openings
OR-KSFPR3	Single-gang with (3) Keystone openings
OR-KSFPR4	Single-gang with (4) Keystone openings
OR-KSFPR6	Single-gang with (6) Keystone openings

Notes: Standard color is fog white, add -13 for electrical ivory, -88 for white, or -99 for Wiremold $^\circ$  ivory.



# FRAMES AND BEZELS

# **OR-KS** Frames and Bezels







Frames and Bezels

# Plastic Rectangular Stylistic GFCI and 106 Frames

PART NO.	DESCRIPTION
OR-KSDS2	Stylistic rectangular frame with (2) Keystone openings
OR-KSDS3	Stylistic rectangular frame with [3] Keystone openings
OR-KSDS4	Stylistic rectangular frame with (4) Keystone openings
OR-KS106S2	106 style frame with (2) Keystone openings
OR-KS106S4	106 style frame with (4) Keystone openings

Notes: Standard color is fog white, add -13 for electrical ivory, -88 for white, or -99 for Wiremold ivory.

PART NO.	DESCRIPTION	
OR-KSS2210	Series II® bezel, 2-port TechChoice® Keystone, 1-unit, 10pk	

Notes: Standard color is fog white, add -13 for electrical ivory, -88 for white, or -99 for Wiremold ivory.

# PATCH PANELS



# **OR-SP Patch Panels**



OR-SP6U48





OR-SP5EU24



OR-SPKFU24



OR-SPKFU48

### **Patch Panels**

24- and 48-port TechChoice® patch panels are available in the traditional multi-port panel format with 6-port modules for Cat 6 and Cat 5e. Patch panel kits are also available to support individual Keystone jacks: Cat 6, Cat 5e and multimedia (sold separately).

# Category 6 with 6-port modules

PART NO.	DESCRIPTION
OR-SP6U24	24-port, T568A/B, 1.75"H, 1 RU
OR-SP6U48	48-port, T568A/B, 3.5"H, 2 RU

### Category 6 angled with 6-port modules

PART NO.	DESCRIPTION
OR-SPA6U24	24-port, angled, T568A/B, 1.75"H,1 RU
OR-SPA6U48	48-port, angled, T568A/B, 3.5"H, 2 RU

### Category 5e with 6-port modules

PART NO.	DESCRIPTION
OR-SP5EU24	24-port, T568A/B, 1.75"H, 1 RU
OR-SP5EU48	48-port, T568A/B, 3.5"H, 2 RU

### Category 5e angled with 6-port modules

PART NO.	DESCRIPTION
OR-SPA5EU24	24-port, angled, T568A/B, 1.75"H, 1 RU
OR-SPA5EU48	48-port, angled, T568A/B, 3.5"H, 2 RU

# Flush Mount TechChoice Jack Panels (accepts KS series Keystone jacks and modules)

PART NO.	DESCRIPTION
OR-SPKFU24	24-port flush mount jack panel, 1.75"H, 1RU
OR-SPKFU48	48-port flush mount jack panel, 3.5"H, 1RU

# Standard Patch Panel Kit (accepts KS series Keystone jacks and modules)

<u>=</u>	-
PART NO.	DESCRIPTION
OR-SPKSU24	24-port, 1.75"H, 1 RU
OR-SPKSU48	48-port, 3.5"H, 2 RU
OR-SPAKSU24	24-port, angled, 1.75"H, 1 RU
OR-SPAKSU48	48-port, angled, 3.5"H, 2 RU

281



# PATCH CORDS

# OR-SPC Modular Patch Cords





OR-SPC607-00

### **Modular Patch Cords**

TechChoice® patch cords offer a slim design for high density applications and come factory terminated with a snag-less boot. Each cable is pre-tested for component performance.

# Category 6

PART NO. SINGLE PACK	PART NO. PACK OF 10	DESCRIPTION
OR-SPCA603-XX	OR-SPC603-XX	Four-pair stranded patch cord PVC, length 3'
OR-SPCA605-XX	OR-SPC605-XX	Four-pair stranded patch cord PVC, length 5'
OR-SPCA607-XX	OR-SPC607-XX	Four-pair stranded patch cord PVC, length 7'
OR-SPCA610-XX	OR-SPC610-XX	Four-pair stranded patch cord, PVC length 10'
OR-SPCA615-XX	OR-SPC615-XX	Four-pair stranded patch cord, PVC length 15'
OR-SPCA625-XX	OR-SPC625-XX	Four-pair stranded patch cord, PVC length 25'

Notes: Available in the following colors: -XX = -00 Black; -02 Red; -04 Yellow; -05 Green; -06 Blue; -08 Gray; -09 White. Add tailcode to end of part number (example: OR-SPC603-02).

# Category 5e

PART NO. SINGLE PACK	PART NO. PACK OF 10	DESCRIPTION
OR-SPCA5E03-XX	OR-SPC5E03-XX	Four-pair stranded patch cord PVC, length 3'
OR-SPCA5E05-XX	OR-SPC5E05-XX	Four-pair stranded patch cord PVC, length 5'
OR-SPCA5E07-XX	OR-SPC5E07-XX	Four-pair stranded patch cord PVC, length 7'
OR-SPCA5E10-XX	OR-SPC5E10-XX	Four-pair stranded patch cord, PVC length 10'
OR-SPCA5E15-XX	OR-SPC5E15-XX	Four-pair stranded patch cord, PVC length 15'
OR-SPCA5E25-XX	OR-SPC5E25-XX	Four-pair stranded patch cord, PVC length 25'

Notes: Available in the following colors: -XX = -00 Black; -02 Red;

-04 Yellow; -05 Green; -06 Blue; -08 Gray; -09 White.

Add tailcode to end of part number (example: OR-SPC5E03-02).

282

# IRER OPTIC SOLITIONS

### 283

# SURFACE MOUNT BOXES

# OR-KSSMB Surface Mount Boxes



OR-KSSMB2



OR-KSSMB4



OR-KSSMB6

### **Surface Mount Boxes**

TechChoice® high impact surface mount boxes accommodate two-, four- or six- port Keystone requirements. They are compatible with the Wiremold® Eclipse range of solutions, or can easily be surface installed with supplied screws or double-sided tape. Designation strips and clear covers included.

PART NO.	DESCRIPTION
OR-KSSMB2	Holds (2) Keystones, 2.42" x 2.18" x 1.16"
OR-KSSMB4	Holds (4) Keystones, 4.78" x 3.6" x 1.14"
OR-KSSMB6	Holds (6) Keystones, 6.76" x 3.6" x 1.14"

Notes: Available in fog white. Product dimensions are listed by length, width and height.



# RACK MOUNT FIBER CABINETS

TechChoice® rack mount fiber enclosures are designed to offer an economical solution for fiber patching required in LAN and campus wiring environments. These enclosures are used in conjunction with the Legrand®, OFP series adapter panels or standard density cassettes to provide a complete fiber cross connect patching solution.

# OR-ECO **Fiber Patch Cabinets**









# OR-EC02U-S, OR-EC04U-S Fiber Splice Cabinets





### **Fiber Patch Cabinets**

All enclosures are supplied with internal bend limiting spools, cable management bend limiters, a fixed front cassette/adapter panel mounting bracket and split removable top covers. The enclosures will accept two, six, ten and twelve splice trays per rack unit, respectively. The hardware package also includes rack mount screws and a data label.

PART NO.	DESCRIPTION
OR-EC01U-C	1 RU, black, holds (3) adapter panels, (2) splice trays and fixed cassette/adapter panel bracket
OR-EC02U-C	2 RU, black, holds (6) adapter panels, (4) splice trays and fixed cassette/adapter panel bracket
OR-EC03U-C	3 RU, black, holds [9] adapter panels, (6) splice trays and fixed cassette/adapter panel bracket
OR-EC04U-C	4 RU, black, holds (12) adapter panels, (8) splice trays and fixed cassette/adapter panel bracket

# **Fiber Splice Cabinets**

PART NO.	DESCRIPTION
OR-EC02U-S	TechChoice 2 RU rack mount fiber splice enclosure, holds (12) splice trays, black
OR-EC04U-S	TechChoice 4 RU rack mount fiber splice enclosure, holds (32) splice trays, black

# ADAPTERS

# CONNECTIONS FOR TERMINAL DEVICES AND PERIPHERALS



 $\label{lem:lemma} \textbf{Legrand}^{\circledcirc} \mbox{ offers adapters which provide connections for terminal devices and peripherals.}$ 

# **Featured Products**





# **ADAPTERS**

# CONNECTIONS FOR TERMINAL DEVICES AND PERIPHERALS

# OR-DB25HDMM,OR-DB25HDFF Gender Changer



# OR-2110 Data Adapters



# OR-21109DA8MKIT

# **Gender Changer**

The Legrand® gender changers allow cabling connections to be made between identical connector terminations where gender matching or correction is required.

PART NO.	DESCRIPTION
OR-DB25HDMM	Male-male
OR-DB25HDFF	Female-female

# **Data Adapters**

Legrand data adapters are interfaces between data terminal equipment (DTE) and data communications equipment (DCE). They are used for high density applications where width between ports is critical and dimensions are within the basic DB9, DB15 and DB25 envelope.

# 9-Pin Data Adapter

PART NO.	DESCRIPTION
OR-21109DA8MKIT	(8) wires x (8) positions, male, (8) pins
OR-21109DA8FKIT	(8) wires x (8) positions, female, (8) pins

### 15-Pin Data Adapter

PART NO.	DESCRIPTION
OR-211015DA8MKIT	(8) wires x (8) positions, male, (8) pins
OR-211015DA8FKIT	(8) wires x (8) positions, female, (8) pins

# 25-Pin Data Adapter

PART NO.	DESCRIPTION
OR-211025DA8MKIT	(8) wires x (8) positions, male, (8) pins

# CABLOFI

# CABLOFIL SOLUTIONS



Cablofil® Cable Management is constructed of precision engineered, high quality, welded steel wire and is the result of decades of research gained from the installation of 110,000 miles of tray across the globe. Our tray is subjected to testing at every stage of the manufacturing process. In actual use, it has performed in a wide variety of applications from heavy power cable pathways on oil drilling platforms in the North Sea, to data installation above the ceiling in modern office buildings.

### Resistance to Fire

Cablofil Cable Management is certified E-30 to E-90. This German standard is the only certification of its kind in the world and requires that the tray and its supports withstand 1000°C or 1832°F heat for a period of 90 minutes. This is an important safety consideration when planning fire exit routes from a burning building.


### **Excellent EMC**

Testing by independent laboratories show that Cablofil Cable Management, when installed and earthed correctly, significantly reduces electromagnetic disturbances. The steel structure of tray absorbs EMI and drains the disturbance away from cables causing minimal effect to the connected equipment. Cable pathways constructed of aluminum alloys or plastics have no effect on EMI reduction.

### **UL Classified Painted Wire Cable Tray**

Our UL Classified painted wire tray meets NEC392 from the National Electric Code that states, "all cable tray systems must be properly bonded, per 250.96". It is also UL Classified as an EGC (Equipment Grounding Conductor). Installation requires a SWK splice on adjoining tray bottoms that features a copper strip.

# **Featured Products**




UL Classified Painted
Wire Cable Tray

289



### WIRE MESH CABLE TRAY

# **CF**Wire Mesh Cable Tray









#### Wire Mesh Cable Tray

Unique Safe-T-Edge design keeps cables and the installer safe from sharp edges. All trays are available in 10' lengths.

PART NO.	DESCRIPTION
CF 30	1" deep, widths from 2" to 12"
CF 54	2" deep, widths from 2" to 24"
CF 105	4" deep, widths from 4" to 24"
CF 150	6" deep, widths from 6" to 24"

#### **UL Classified Painted Wire Cable Tray**

- Industry's only UL-Classified painted wire cable tray per NEC 392
- Standard on all Cablofil BL or PE painted tray

#### Directions for use:

- 1. Remove outer mask of folded copper strip (that has been painted over) at the end of each section of tray.
- 2. Splice tray section with SWK splice (sold separately) on copper strip of adjoining trays to maintain proper bonding.




## UNDERFLOOR CABLE MANAGEMENT SYSTEM (UFS)


#### **Truly Designed for Raised Access Floors**

Legrand offers a wide variety of Cablofil® options for raised access floor installations. The UFS Underfloor Cable management system is independently supported so that it doesn't void the warranty of the raised access floor and it is engineered with 2-foot tray sections so that it can be installed entirely through the floor opening.


# **UFCF2**UFS2 Wire Tray Sections



#### UFCRSBAR, EDF, UFCSTCLP UFS Support Kit



# UFT 90 Kit



# UFC550KIT Under Floor Support Kit



#### **UFCF2 Wire Tray Sections**

Tray sections are available in 2' lengths; 2", 4" and 6" depths; and 12", 16" and 20" widths.

PART NO.	DESCRIPTION
UFCF2	Tray sections are available in 2' lengths; 2", 4" and 6" depths; and 12", 16" and 20" widths

#### **UFS Support Kit**

PART NO.	DESCRIPTION
UFCRSBAR	Kit includes one crossbar (all crossbars fit within standard floor leg positions)
EDF	Kit includes two leg supports (leg heights are available from 3.5"H to 21.2"H)
UFCSTCLP	Two leg attachment clips

Notes: Other sizes are available upon request.

#### UFT 90 Kit

PART NO.	DESCRIPTION
UFT	Flat tray and tray clips are used to construct corners, tees and junctions

#### **Under Floor Support Kit**

PART NO.	DESCRIPTION
UFC550KIT	<ul> <li>UFC550KIT supports Cablofil tray in raised floor applications</li> <li>The kit includes 2 UFC clamps, 1 FASP 550, and 2 EZBN1/4 bolt/nuts</li> </ul>

### SPLICE AND CONNECTOR HARDWARE

Cablofil® has a splice for every need. Our EDRN is the fastest splice we offer, saving up to half the installation time compared to bolted connections. Other splices are available that give your installation additional strength or have improved electrical continuity. The choice is yours.

# **EDRN**Fast Splice




#### **Fast Splice**

Unique Safe-T-Edge design keeps cables and the installer safe from sharp edges. All trays are available in 10' lengths.

PART NO.	DESCRIPTION
EDRN	<ul> <li>EDRN is our fastest splice – saves up to half the install time compared to using bolted connections</li> <li>Special assembly tool (EDRNTOOL) is included in every bag of 50 splices</li> <li>UL classified splice</li> </ul>

#### RADT90KIT Radius Tee 90° Kit




#### Radius Tee 90° Kit

PART NO.	DESCRIPTION
RADT90KIT	<ul> <li>RADT90KIT creates secure tray junctions</li> <li>Facilitates easy cable pulling into the cable pathway</li> <li>Available for 2", 4" and 6" depth tray</li> <li>*RADT9012KIT now available with a wider radius that makes pulling large power cables into Cablofil much easier</li> </ul>

Notes: \*Denotes separate product offering with different part numbers for available sizes and finishes.

#### FASLOCK 90° Splice



#### FASLOCK

#### 90° Splice

PART NO.	DESCRIPTION
FASLOCK	<ul> <li>FASLOCK splice creates sweeps and bends without the need for bolted hardware</li> <li>Available in S and XL sizes</li> <li>Use FASLOCK S for CF54/100, 150, 200, CF 105/100, 150, 200, 300</li> <li>Use FASLOCK XL for all other larger sizes</li> </ul>

# **SWK**Splice Washer Kit



#### **Splice Washer Kit**


PART NO.	DESCRIPTION
SWK	<ul> <li>SWK is designed with a 1/4" x 20" threaded bolt compatible with standard US tools</li> <li>Use SWK to splice any two sections of Cablofil tray</li> <li>Swaged nut allows clamp to be stationary while nut is tightened</li> <li>Also use for fabricating bends, turns and tees</li> <li>UL classified splice</li> </ul>



# FAST ASSEMBLY SYSTEM (FAS)

The FAS system utilizes simple one-step locking tabs that require no additional hardware to secure tray runs to its supports, reducing installation time and saving money.


### FASP FAS Profile



#### **FAS Profile**

PART NO.	DESCRIPTION
FASP	<ul> <li>FASP supports Cablofil® tray in trapeze hung and/or wall mounted applications</li> <li>Available in 6" through 120" lengths</li> <li>For trapeze hung installations, use a FAS Profile that is 4" longer than the tray width</li> </ul>


#### FASPCH FAS Center Hanger



#### **FAS Center Hanger**

PART NO.	DESCRIPTION
FASPCH	<ul> <li>FASPCH supports Cablofil tray in center hung ceiling installations</li> <li>Supports tray widths from 8" to 24"</li> <li>Only one threaded rod is needed to suspend the tray</li> </ul>

# FASL Bracket



#### **FAS L Bracket**

PART NO.	DESCRIPTION
FASL	<ul> <li>FASL supports Cablofil tray in wall-mounted applications</li> <li>FAS L supports Cablofil tray in under floor applications (in combination with UFC Clamp or EDF Rail)</li> <li>Supports tray widths from 4" to 18"</li> <li>Patented FAS style attachment holds cable tray secure without nuts and bolts</li> </ul>




# FAST ASSEMBLY SYSTEM (FAS)

# FASC Bracket



#### FASU FAS Universal Bracket



# FASROLLER FAS Roller



FASROLLER

#### **FAS C Bracket**

PART NO.	DESCRIPTION
FASC	<ul> <li>FASC supports Cablofil® tray in wall-mounted or ceiling-mounted applications</li> <li>Use one or more FASC brackets to create multiple tray level installations</li> <li>Patented FAS style attachment holds cable tray secure without nuts and bolts</li> <li>Supports tray widths from 4" to 18"</li> </ul>

#### FAS Universal Bracket

PART NO.	DESCRIPTION
FASU	<ul> <li>FASU supports Cablofil tray in wall-mounted applications</li> <li>Supports tray widths from 4" to 24"</li> <li>Patented FAS style attachment holds cable tray secure without nuts and bolts</li> </ul>


#### **FAS Roller**

PART NO.	DESCRIPTION
FASROLLER	<ul> <li>FASROLLER installs directly onto Cablofil tray, facilitating the pulling of cables around bends, beams, and under floor</li> <li>Unique, four roller design, prevents cable snagging</li> <li>Easy open gate allows full access to FASROLLER</li> <li>Sold in sets of six – includes carrying case</li> </ul>



### ACCESSORIES

#### EZJB 5/16 J-Bolt



#### J-Bolt

PART NO.	DESCRIPTION
EZJB 5/16	<ul> <li>Use this J-Bolt in conjunction with a FASP 200 or a FASP 300 for attachment to a 19" or 23" rack</li> <li>No Drilling needed</li> <li>FAS Profile sold separately</li> <li>Nut included</li> </ul>

# **CABLEXIT**Cable Exit Snap in Mounting Tabs



#### **Cable Exit Snap in Mounting Tabs**

PART NO.	DESCRIPTION
CABLEXIT	Protects cables when exiting or entering tray. Snap in mounting tabs eliminate the need for attachment hardware and speeds install time

# **COUPFIL**Cable Tray Cutter



#### **Cable Tray Cutter**

PART NO.	DESCRIPTION
COUPFIL	Side action angle bolt cutters



### FINISHES

Cablofil® wire cable tray and accessories are available in a variety of finishes to meet any industry need, from decorative to extreme environments. Use this chart to help you determine the best finish for your application and its availability.

SYMBOL	MATERIAL	FINISH AND STANDARD	Interior Installations	Exterior Installations	Petroleum/ Chemical Plants	Marine/Salt, Environments	Acidic, Alkaline Environments	Food Production, Wash-down, Clean rooms	Halogen Environments
PG	Carbon Steel ASTM A653	<b>Pre-Galvanized:</b> Continuous Galvanization Before Fabrication ASTM A 653	•						
EZ	Carbon Steel ASTM A510 Grade 1008	Electrozinc: After Fabrication ASTM A 123	•						
GC	Carbon Steel ASTM A510 Grade 1008	Hot Dipped Galvanized: After Fabrication ASTM A 123		•					
DC	Carbon Steel ASTM A510 Grade 1008	Geomet: Zinc and Aluminum Protection Equivalent to Hot Dip Galvanization ASTM F 1136		•					
304L	Stainless Steel AISI Type 304L	Stainless Steel 304L: Cleaned and Passivated ASTM 380		•	•			•	-
316L	Carbon Steel ASTM A510 Grade 1008	Stainless Steel 316L: Cleaned and Passivated ASTM A 380		•		•	•	•	•
BL	Carbon Steel ASTM A510 Grade 1008	<b>Black Painted:</b> Black Powder Coated ASTM D 3451	•						
PE	Carbon Steel ASTM A510 Grade 1008	Custom Painted: Custom Color Powder Coated ASTM D 3451	•						

Notes: For a more detailed explanation of finish standards and compatibility, visit www.legrand.us/cablofil.

■ Recommended □ Possible



### CERTIFICATIONS

#### **Certifications**

Cablofil® products have been independently evaluated by UL, CSA, ABS, DNV, ETL and VDE to meet applicable standards and requirements. Our products hold UL Classification to NEC requirements, cCSAus certification to NEMA and CSA requirements, ABS Product Design Assessment certification and E90 certification. Our products also meet the standards requirements of IEC, EIA-TIA and BICSI. For more information on Cablofil certifications, please visit www.legrand.us/cablofil.

#### **Memberships**

NEMA, CTI, EIA-TIA, NFPA, IEC, BICSI

REGISTERED TO



















### WIREMOLD SOLUTIONS



Legrand® offers fully integrated cabling infrastructure solutions that support the entire range of workstation services. Engineered to provide the highest degree of support for high performance cabling, these systems feature bend radius control to protect UTP and fiber optic cable during lay-in and cable pull installations – plus a host of installation features developed through extensive field work with customers.

Legrand cable management systems now fully integrate across a wide range of Legrand technology solutions. These platforms have been modified to seamlessly accept front-loading TracJack® and Series II® modules for voice, data, audio, and video.

### **Featured Products**



Meeting Room Solutions



#### **Steel Raceways**



4000® Designer Series Raceway



2400 Series Raceway



OFR Series Raceway


### **Nonmetallic Raceways**



Uniduct® and Eclipse™ Series Single-Channel Latching Raceway



5400 Series Large Capacity Dual-Channel Raceway



CableSmart™ 40N2 Series Large Capacity Raceway

#### **Poke-Thru Devices**



Evolution™ Series Poke-Thru Devices



Furniture Feed Poke-Thru Devices



Communications Poke-Thru Devices

#### Floor Boxes and Raised Floor Solutions



Walkerflex® Modular Wiring Systems



Recessed Floor Boxes and FloorPort™ Flanged Cover Assemblies



Floorport™ Series Cover Assemblies

### Fire Stop Fittings Work Surface and Vertical Solutions



InteGreat™ A/V Table Box



FlameStopper™ Thru-Wall and Thru-Floor Fittings



Vista™ Architectural Columns and Tele-Power Poles

Wireless and Zone Cabling Enclosures and Power Distribution



Ceiling Zone Cabling Enclosure



Power Commander®



Plug-In Outlet Center® Units

# WIREMOLD

### STEEL RACEWAYS

#### 4000 Designer Series Raceway

Legrand 4000® Designer Series Raceway is the next generation in innovative surface raceway systems, providing an aesthetically pleasing and functionally superior alternative to existing raceway profiles. DS4000® Series Raceway includes a variety of innovative features and fittings that save installation time, cost less to specify, and provide 1/3 more wiring capacity than conventional box-style raceway profiles.

#### **Innovative Profile**

Design allows for more efficient use of raceway capacity and provides 1/3 more wiring capacity than conventional raceways.

#### **Unique Downward-Facing Activations**

Raceway can be loaded with either downward-facing or conventional activations, or a combination of both as needed.

#### **Adjust-to-Fit Couplings**

Adjust-to-Fit couplings provide up to four inches [102 mm] of lateral adjustment, eliminating the need for precision cuts and reducing waste caused by measuring errors.

#### **Obstacle-Avoidance Fittings**


Bypass large and small obstacles, as well as small offsets in supporting walls. Small obstacle avoidance fitting also can be used as a transition fitting to other Legrand metal raceway systems. Eliminates all barriers to installation.

#### Cross-Over Feature

Better utilization of raceway wiring capacity while maintaining separation of services. All fittings are bend radius compliant for fiber optic and UTP/STP cabling and exceed the TIA 569 requirements for communications pathways.

#### **Updated Color Palette**

DS4000 Steel Raceway is available in fog white, designer gray, matte black, and metallic bronze. Custom colors are also available.

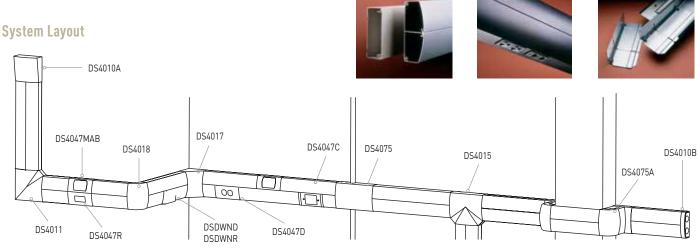

#### Key

DS4010A

DS4047MAB	Single-Channel MAB Device Plate
DS4011	Flat Elbow
DS4047R	Single-Channel Decorator Device Plate
DS4018	External Elbow
DS4017	Internal Elbow
DSDWND	Downward Duplex Device Plate
DSDWNR	Downward Decorator Device Plate
DS4047D	Single-Channel Duplex Device Plate
DS4047C	Single-Channel NEMA Device Plate
DS4075	Small Obstacle Transition Fitting
DS4015	Divided Tee Fitting
DS4075A	Offset Fitting
DS4010B	Blank End Fitting

Entrance End Fitting

#### Additional 4000 Designer Series Raceway Components Available:

DS4000B	Raceway Base
DS4000C	Raceway Cover
DS4000WC	Wire Clips
DS4001	Adjust-to-Fit Coupling
DS4006	Seam Clip
DS4006B	Half Seam Clip/Blank Faceplate
DS4014A	Backfeed Coupling
DS4047DQ	Single-Channel Duplex Device Plate
DSDWNDQ	Downward Duplex Device Plate
DSDWNX	Crossover Kit
DS4089	Adapter to 4000 Series Raceway
DSTRK	Tamper-Resistance Kit
640DS	DS4000C Cutter
650RT	Cover Removal Tool

### STEEL RACEWAYS

#### 2400 Series Raceway

The V2400 Series Raceway from Legrand® is a single compartment raceway for communication or power applications ideal for use in classrooms, offices and hotel applications, or anywhere a small low profile raceway is needed. V2400D Divided Raceway is a low profile steel raceway for use where a limited number of power and low-voltage cables are required in the same raceway.



#### **V2400 Series Raceway**


Ideal for use in applications where low profile and small capacity are required. Shown with downward facing device brackets in an office environment.

System Layout (Single Channel Application)

Key

5744

Extra Deep Box

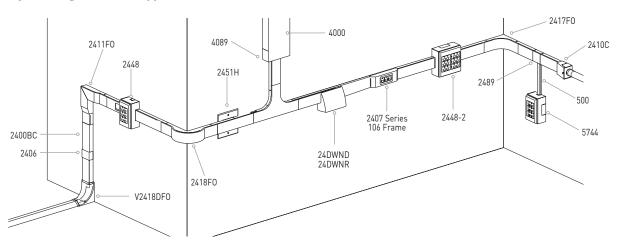

Additional 2400 and 2400D Series Raceway Components Available:

				,		
4000	)	4000 Series Raceway Section	624	2400 Raceway Base and Cover Cutter	2417M	Internal Elbow
4089	7	Reducing Connector	640BCK	Replacement Blades for 624 Cutter	2418M	External Corner Coupling
24D\	WND	Downward Duplex Device Bracket	2400WC	Wire Clips	2418DF0	Bend Radius Compliant
24D\	WNR	Downward Decorator Device Bracket	2400BD	Divided Raceway Base		External Elbow
2400	OBC	Single-channel Raceway Base and Cover	2401D	Divided Coupling	2426	Lamp Holder
2406	5	Cover Clip	2407-2CM	106 Device Bracket and Frame	2427GT	Duplex Receptacle
2407	7	106 Device Bracket and Frame	2407-2TJ	106 Device Bracket and Frame	2427GA	Duplex Receptacle
2410	C	Entrance End Fitting	2407-3TJ	106 Device Bracket and Frame	2435D	Feed Box
2411	1F0	Radiused Flat Elbow	2409	Ground Clamp	2444	One-Gang Deep Device Box
2415	5F0	Radiused Tee Fitting	2410A	Entrance End Fitting	2444D	One-Gang Device Box
2417	7F0	Radiused Internal Elbow	2410B	Blank End Fitting	2444D-2A	Two-Gang Divided Device Box
2418	3F0	Radiused External Elbow	2410BD	Divided Blank End Fitting	2444-2	Two-Gang Extra Deep Device Box
2448	3	One-Gang Device Box	2410DF0	Bend Radius Compliant Divided	2444-2LS	Two-Gang OTR Device Box
2448	3-2	Two-Gang Device Box		Entrance End Fitting	2475D	2400 Series Bridge Fitting
2451	1 H	Back Feed Fitting	2410FC	Full Capacity Entrance End Fitting	2686FO	Bend Radius Compliant
2489	9	Side Reducing Connector	2411DF0	Bend Radius Compliant 90° Elbow		Transition Feed Fitting
2686	5F0	Transition Feed Fitting	2415DF0	Bend Radius Compliant Divided Tee	IG2427GA	Isolated Ground Duplex Receptacle
500		500 Series Raceway	2415M	Tee	IG2427GT	Isolated Ground Duplex Receptacle

Bend Radius Compliant

Divided Internal Elbow

Notes: 2400 and 2400D Series Raceways are compatible with 5507 Series Faceplates. Add "V" prefix to part number to indicate ivory color, add "-FW" suffix to indicate fog white color.

2417DF0

End Plates


**End Plates** 

CM-EPLA S2-EPL

### OFR SERIES RACEWAY

OFR Series Overfloor Raceway System provides four-channels of capacity and access to a wide range of power, communications, and A/V connectivity options in the smallest, lowest, narrowest, ADA compliant profile available in overfloor raceway systems. This system installs over existing floor coverings and is both tamper-resistant and installer-friendly, making it an ideal solution for relocatable or permanent installations where access through floors and ceilings is not an option. There are also transition fittings to feed OFR Series Raceway from Legrand® wall-mounted raceway systems and Vista™ Architectural Columns. OFR Series Raceway accepts Open System device plates that provide connectivity to a wide range of devices from leading communication and A/V providers.

#### **OFR Series Overfloor Raceway System Layout**

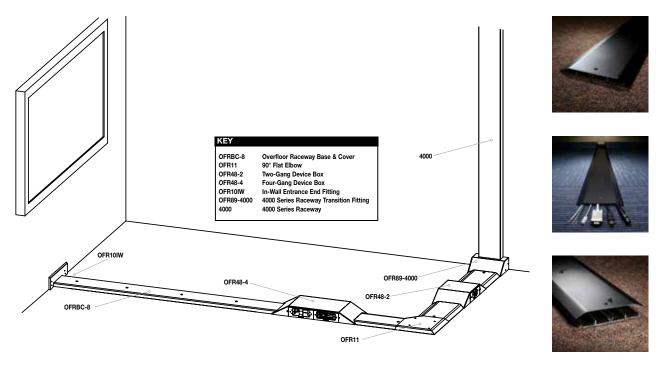

# **OFR**OFR Series Overfloor Raceway System

#### **OFR Series Overfloor Raceway System**

PART NO.	DESCRIPTION			
OFRB-8	Overfloor raceway base, base: .080" [2mm] aluminum, divided into four channels, packed [4] 8' [2.4m] lengths per carton			
OFRC-8	Overfloor raceway cover, cover: .040" [1mm] steel, durable black powder coat finish, packed [4] 8' [2.4m] lengths of cover per carton			
OFRBC-8	Overfloor raceway base and cover, cover: .040" [1mm] steel, base: 0.080" [2.0mm] aluminum, durable black powder coat finish, divided into four channels, packed (1) 8' [2.4m] length of base and cover per carton.			
OFR6	Overfloor raceway seam clip, covers seam where two sections, of OFR series overfloor raceway cover come together			
OFR10IW	Overfloor raceway in-wall entrance end fitting, feeds OFR series overfloor raceway from behind wall, configurable to provide one or two channels of power, 1/2" trade size KO for single channel and 3/4" trade KO for two channel			



### OFR SERIES RACEWAY

# **OFR**OFR Series Overfloor Raceway System



**OFR Transition Fitting** 

#### **OFR Series Overfloor Raceway System (cont)**

PART NO.	DESCRIPTION
OFR10A	Overfloor raceway entrance end fitting, feeds OFR series raceway, [2] concentric 1/2" and 1-1/4" trade size KOs on end, includes removable divider that can be positioned to feed any raceway channel, can be used to feed raceway from wall or into furniture
OFR48-2	Overfloor raceway two-gang box, divided two-gang device box, allows multiple services (power, communication, A/V) at a single point-of-use, side facing device mounting provides low profile, with space for large cable bend radius, accepts OFR series device plates, removable divider can be aligned with any of the raceway channels
OFR48-4	Overfloor raceway four-gang box, divided four-gang device box, allows multiple services (power, communication, A/V) at a single point-of-use, side facing device mounting provides low profile, with space for large cable bend radius, accepts OFR series device plates, removable divider can be aligned with any of the raceway channels
OFR48-4GX	OFR crossover kit, allows access to power and communication on both sides of OFR48-4 four-gang device box
OFRWC	Overfloor raceway wire clips, for holding conductors in place, 12pk
OFR89-2400	OFR 2400 raceway transition, for connecting vertical runs of 2400 and 2400D series raceway with OFR series raceway, includes removable divider than can be positioned to feed any raceway channel
OFR89-4000	OFR 4000 raceway transition, for connecting vertical runs of 4000 series raceway with OFR series raceway, includes removable divider than can be positioned to feed any raceway channel
OFR89-DS4000	OFR DS4000 raceway transition, for connecting vertical runs of DS4000 series raceway with OFR series raceway, includes removable divider than can be positioned to feed any raceway channel
OFR89-VIS	OFR Vista™ Point5 transition, for connecting OFR series raceway to Vista Point5 architectural columns
OFR89-VFL	OFR large Vista transition, for connecting OFR series raceway to Vista architectural columns
OFR11	OFR flat elbow, for making right angle turns on the same surface
OFR12	OFR 45° flat elbow, for making diagonal 45° turns on the same surface



### OFR SERIES RACEWAY

# **OFR**OFR Series Overfloor Raceway System



OFR Poke-Thru Transition

#### **OFR Series Overfloor Raceway System (cont)**

PART NO.	DESCRIPTION
OFR15	OFR tee/cross, for branching OFR series raceway at right angles, remove twistout on cover to make a cross
OFR17	OFR inside elbow, for internal right angle turns of OFR series raceway
OFRPT3	OFR 3" poke-thru transition, for bringing power, A/V, and data through abandoned poke-thru openings to open spaces, will replace any 3" poke-thru
OFRPT4	OFR 4" poke-thru Transition, for bringing power, A/V, and data through abandoned poke-thru openings to open spaces, will replace any 4" poke-thru
0FR1	OFR coupling, joins lengths of OFRB-8 OFR series raceway base together, sold in pairs
OFR9	OFR grounding clip, connects equipment grounding conductor to provide ground to OFR series raceway, #10 ground screw provided
OFR47-B	OFR blank device plate, for covering unused compartments in OFR48-2 and OFR48-4 device boxes
OFR47-D	OFR duplex device plate, for covering duplex style devices in OFR48-2 and OFR48-4 device boxes, accepts 106 frame
OFR47-R	OFR decorator device plate, for covering rectangular decorator style devices in OFR48-2 and OFR48-4 device boxes
OFR47-U	OFR Extron® MAAP device plate, device plate that will accept up to (4) Extron Electronics MAAP style plates in OFR48-2 and OFR48-4 device boxes
OFR47-V	OFR Extron AAP device plate, device plate that will accept (2) Extron Electronics AAP single space modules
OFR47-2A	OFR communications device plate, device plate that will accept up to (4) ports of communications devices, includes adapters for Ortronics® TracJack®, Series II®, Pass & Seymour® activate inserts and Wiremold® open system communication modules
OFR47-U2A	OFR Extron MAAP-2A combo device plate, combination device plate that will accept up to (2) Extron Electronics MAAP style plates and up to (2) ports of communications devices, includes adapters for Ortronics TracJack, Series II, Pass & Seymour activate inserts and Wiremold open system communication modules




### NONMETALLIC RACEWAYS

Uniduct 2700, 2800, 2900 Series and Eclipse PN03, PN05 and PN10 Series Raceways


The Uniduct® 2700, 2800, and 2900 Series Nonmetallic Latching Raceway System is a one-piece single-channel design, ideally suited to route and protect fiber optic, UTP, and other low-voltage (50V or less) cables in an easy to install and aesthetically pleasing application. The 2800 and 2900 Fiber Optic (FO) fittings maintain a 1-1/4" [32mm] bend radius and are the perfect solution for even the most demanding cabling applications. Uniduct Series Raceway is available in ivory, white, and fog white and is paintable using latex paint. Consult the factory for custom color options.

#### **System Layout**

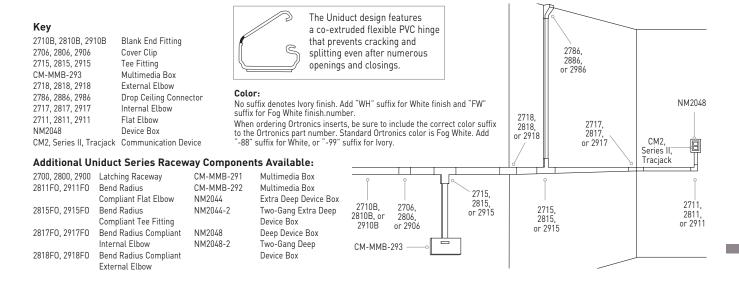

Eclipse<sup>™</sup> PN03, PN05 and PN10 Series is a family of single-channel raceways available in fog white. These raceways are perfect for communication and/or power applications. Ideal for classrooms, offices and hotel applications or anywhere a small, low profile raceway is needed. They are specifically designed for workstations and accept Series II® and TracJack® devices.

#### **System Layout**

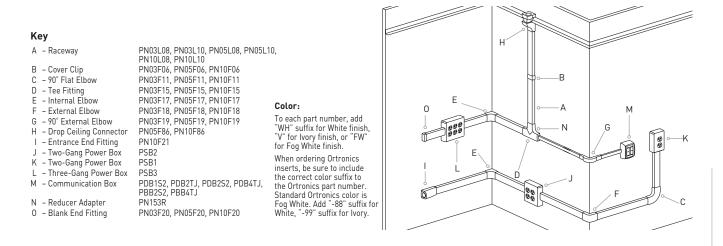


### NONMETALLIC RACEWAYS

#### 5400 Series and CableSmart 40N2 Series Raceways

The 5400 Series large capacity nonmetallic raceway provides wire and cable management for data, voice, video, and power applications. The unique Twin Snap™ cover allows complete segregation of access to power and low voltage services for installation flexibility. FiberReady® fittings provide a 2" bend radius. For school and office applications, this is an ideal solution for providing flexibility and accessibility of wire and cable. Available factory prewired.

#### **System Layout**

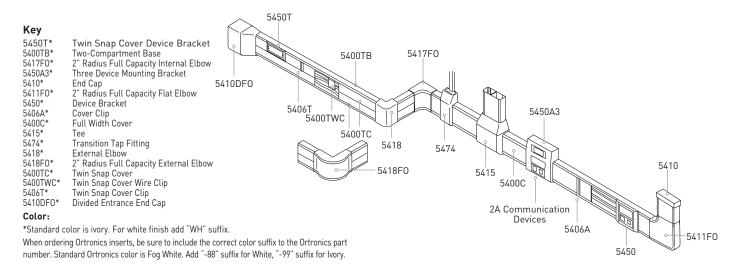


#### **System Layout**

Key	
40N2F21	Twin Cover Device Bracket
40N2F06	Cover Clip
40N2F19	2" Bend Radius Full Capacity External Elbow
40N2F31	Twin Cover Device Bracket
40N2F15	2" Bend Radius Full Capacity Tee
40N2F74	Divided Transition Fitting
PSB1	One-Gang Power Box
40N2F11	2" Bend Radius Full Capacity Flat Elbow
40N2F20	Blank End Fitting
40N2F17	2" Bend Radius Full Capacity Internal Elbow
40N2C08	Full Width Cover
40N2F05	Base Clip
40N2B08	Two-Compartment Base
Color:	

To each part number, add "WH" suffix for White finish or "V" for Ivory finish.

When ordering Ortronics inserts, be sure to include the correct color suffix to the Ortronics part number. Standard Ortronics color is Fog White. Add "-88" suffix for White, "-99" suffix for Ivorv.

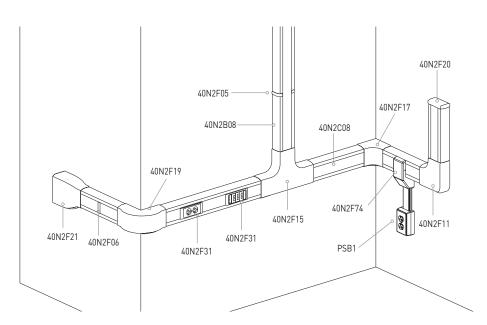

### MEETING ROOM SOLUTIONS

An emerging trend in workplace design is to allocate more open space for meetings and collaboration. This trend presents a challenge for routing and managing the "last meter" of cables from the infrastructure of the building to the point-of-use. Furthermore, connectivity and power configurations required to help business run smoothly change quickly as new technologies are introduced. Legrand® Meeting Room Solutions solve all these issues with the new InteGreat™ Series of products. InteGreat Products are specifically designed to fit together and protect the routing of power, communication and A/V cables from the building infrastructure to the point-of-use. InteGreat Series products are also designed to work with other Legrand products, such as OFR Series Overfloor Raceway and Poke-Thru Devices.

- A. AVIP Device Plates A/V interface plates and devices mounted in InteGreat A/V Table Box.
- B. InteGreat A/V Table Box –
  Provides unique work surface
  solution to deliver devices access
  on the table surface and is
  fed from InteGreat UTCM system.
- C. InteGreat Cable Retractors –
  Protects and organizes cabling
  while keeping table surface free
  of excess cabling.
- D. InteGreat Under Table Cable Management - Provides clean cable management for power, communication and A/V cables on the underside of the table.
- E. InteGreat Transition Channel –
  Connects with Poke-Thru devices
  or OFR Series Overfloor Raceway
  to transition cables from the floor
  to the underside of the table.
- F. OFR Series Overfloor Raceway Feeds power, communication and A/V cabling from wall to the underside of meeting table when feeding through the floor is not possible.
- **G. EvolutionTM Series Poke- Thru Device –** Delivers power, communication and A/V cabling through the floor.
- H. Evolution Series A/V Wall Box Provides power, communication and A/V services to flat screen monitors, while allowing the monitor to sit flush against the wall.





### MEETING ROOM SOLUTIONS

# TB672AP InteGreat AV Table Boxes



#### **InteGreat AV Table Boxes**

InteGreat™ A/V table boxes are an elegant solution for extending power, communication and A/V to the meeting presenter's point-of use. InteGreat A/V table boxes provide the depth to mount devices, especially A/V devices, below the table top. It has attractive finishes that can match any room décor. Combine it with other InteGreat products, such as InteGreat Retractors, InteGreat Under Table Cable Management and InteGreat Transition Channel for a comprehensive solution to managing and delivering power, communication and A/V connectivity for conference rooms.

PART NO.	DESCRIPTION
TB672APBK	Table Box with 12' [3.66m] cord. Unit comes with [2] 15A receptacles in the recessed compartments and [1] 15A receptacle on the underside of the box. Hardware bag includes AVIP Series Cable Kit with [8] openings. Can accept up to [5] Legrand AVIP device plates or [5] Extron® Electronics MAAP device plates [sold separately], black finish.
TB672APAL	Table Box with 12' [3.66m] cord. Unit comes with (2) 15A receptacles in the recessed compartments and (1) 15A receptacle on the underside of the box. Hardware bag includes AVIP Series Cable Kit with (8) openings. Can accept up to (5) Legrand AVIP device plates or (5) Extron® Electronics MAAP device plates (sold separately), aluminum finish.

### TABLE BOXES

# TBCR InteGreat Cable Retractors



InteGreat Cable Retractors

#### **InteGreat Cable Retractors**

InteGreat<sup>™</sup> Cable Retractors attach easily to InteGreat A/V Table Boxes, or can be mounted directly to the underside of conference room tables. InteGreat Cable Retractors have 5' [1.52m] of retractable cable that allows users to have easy access to A/V and communication services. With a simple pull, the cable locks into place or retracts back into the table box, keeping the conference room table neat and organized.

PART NO.	DESCRIPTION
TBCRCAT6	Loaded with 12' [3.66m] of Cat6 cable that extends out 5' [1.52m] from the retractor. Retractor has a female input from building infrastructure, and a male connector on the output side.
TBCRVGA	Loaded with 12' [3.66m] of VGA cable that extends out 5' [1.52m] from the retractor. Retractor has a female input from building infrastructure, and a male connector on the output side.
TBCRHDMI	Loaded with 12' [3.66m] of HDMI cable that extends out 5' [1.52m] from the retractor. Retractor has a female input from building infrastructure, and a male connector on the output side.
TBCR3.5MM	3.5mm audio cable. Loaded with 12 [3.66m] of audio cable that extends out 5 [1.52m] from the retractor. Retractor has a female input from building infrastructure, and a male connector on the output side.
TBCRHMK	Multiple retractors can be mounted to each other by attaching the TBCRHMK mounting brackets to each other.

# MRTC InteGreat Transition Channel



#### InteGreat Transition Channel

InteGreat Transition Channel continues the cable management and protection from the underside of the table to the floor, where cables can gain access to the building infrastructure. The Transition Channel fits directly into InteGreat Under Table Cable Management on the underside of the table and mates with Poke-Thru Devices or OFR Series Overfloor Raceway for a smooth transition to the building infrastructure.

PART NO.	DESCRIPTION
MRTC	(1) aluminum center spine with steel mounting plate and (4) screws, black aluminum side channels, black nonmetallic bottom boot and (2) black nonmetallic transition covers

### MEETING ROOM SOLUTIONS

# UTCM5 InteGreat Under Table Cable Management



#### InteGreat Under Table Cable Management

InteGreat<sup>™</sup> Under Table Cable Management provides clean cable management for power, communication and A/V cables on the horizontal underside of the table. The simple hinge mechanism allows for easy access for future technology upgrades. InteGreat Under Table Cable Management mates with the InteGreat Transition Channel for a true cable management solution.

PART NO.	DESCRIPTION
UTCM5	(1) 5' [1.524mm] length of divided base, 5' [1.524mm] length of mounting hinge rail and (4) latching clips, black, nonmetallic construction

Legrand® offers a full line of enclosures which support integrated zone systems. These enclosures create an intermediate or remote consolidation point that may be tested and secured prior to adding drops for voice and data outlets. Furthermore, a remote consolidation point or zone enclosure reduces costs associated with moves, adds and changes. The enclosures also allow the user to save space in tight areas and reduce cooling requirements in potentially crowded equipment and data rooms by moving active equipment to alternative sites.



### TABLE BOXES AND ZONE CABLING ENCLOSURES

#### KC, KF, KA deQuorum Table Box



#### deQuorum Table Box

The deQuorum<sup>™</sup> table box modules are recessed and covers can be closed during use to make the portal unobtrusive. Covers are available flush or contoured, in black or silver tone finishes. The contoured cover has an area to insert a laminate to match that of the table.

It is available in a cord ended, or field installed configuration. The cord ended configuration comes with two 20A gasketed prewired receptacle with 12' [3.65m] 14/3 SJT black cord. The field installed configuration comes with two 20A gasketed prewired receptacle with gasketed plate and a 3/8" [9.5mm] diameter 6' [1.83m] flexible whip. For each configuration, the communications plate includes user chosen bezels which the installer must connect to communications modules purchased separately.

#### deQuorum Table Box

PART NO.	DESCRIPTION
KC10CM2	Cord-ended, flush black, open system, decorative recess
KC10RT8	Cord-ended, flush black, Ortronics® system
KC15RT8	Cord-ended, flush graphite, Ortronics system
KF10CM8	Field installed, flush black, open system
KF15RT2	Field installed, flush graphite, Ortronics system, decorative recess

#### deQuorum Table Box Communications Plates

PART NO.	DESCRIPTION
KA102RT	Replacement Ortronics communications plate, adapters accept Series II® or TracJack® system
KA104CM	Replacement Wiremold open system communications plates, adapters accept Wiremold CM Series modules
KA700	Replacement 15A gasketed receptacle and mounting plate
KA301	Single gang opening plate
KA302	Cable cord keeper plate
KA305	Extron Mini AAP AV adapter plate



### TABLE BOXES AND ZONE CABLING ENCLOSURES

# **DQFP**deQuorum Flip-Up Table Box



deQuorum Flip-Up Table Box

#### deQuorum Flip-Up Table Box

#### Single Flip-Up Unit (Black Finish Cover)

PART NO.	DESCRIPTION
DQFP20BK	Includes (1) 20A black gasketed duplex receptacle, a second opening for (1) Wiremold® CM Series Open System 2A module, (1) Ortronics® Series II® or (1) TracJack® adapter to accommodate a wide range of communication outlets, adapters are included in hardware bag, (1) 12° [3.66m] cord
DQFP15BK	Includes (1) 15A black gasketed duplex receptacle, (1) 12' [3.66m] cord

#### Single Flip-Up Unit (Stainless Finish Cover)

DFQFP20ST	Includes (1) 20A black gasketed duplex receptacle, (1) 6' [1.83m] cord
DQFP20ST	Includes (1) 15A gasketed duplex receptacle, (1) 6' [1.83m] cord

#### Dual Flip-Up Unit (Black Finish Cover)

DQFP20BK-2A	Includes (1) 20A black gasketed duplex receptacle, a second opening for (1) Wiremold CM Series Open System 2A module, (1) Ortronics Series II or (1) TracJack adapter to accommodate a wide range of communication outlets, adapters are included in hardware bag, (1) 12' [3.66m] cord
DQFP15BK-2A	Includes (1) 15A black gasketed duplex receptacle, (1) 12' [3.66m] cord

#### Dual Flip-Up Unit (Stainless Finish Cover)

DFQFP20ST-2A	Includes (1) 20A black gasketed duplex receptacle, a second opening for (1) Wiremold CM Series Open System 2A module, (1) Ortronics Series II or (1) TracJack adapter to accommodate a wide range of communication outlets, adapters are included in hardware bag, (1) 12' [3.66m] cord
DQFP15ST-2A	Includes (1) 15A black gasketed duplex receptacle, (1) 12' [3.66m] cord



### TABLE BOXES AND ZONE CABLING ENCLOSURES

PART NO.

TSAX1F0AL1U

TSAX1F1AL1U

TSAX1F2AL1U

TSAM1F0AL1U

TSAM1F1AL1U

TSAM1F2AL1U

# TSAM, TSAX TableSource Table Box



TableSource Table Box

#### TableSource Table Box

TableSource™ Table Boxes provide flexibility in décor, datacomm connectivity options, and installation to meet specific functional and aesthetic needs.

	UNIT LENGTH		15A CORD LENGTH		сомм.	
FINISH	INCHES	MM	DUPLEX	FEET	MM	OPENINGS
Clear Anodized	13"	330.2mm	1	12'	3.7m	0
Clear Anodized	15-1/2"	393.7mm	1	12'	3.7m	1
Clear Anodized	18-5/32"	461.2mm	1	12'	3.7m	2
Clear Anodized	13"	330.2mm	1	12'	3.7m	0
Clear Anodized	15-1/2"	393.7mm	1	12'	3.7m	1
Clear Anodized	18-5/32"	461.2mm	1	12'	3.7m	2

# **CZE**Ceiling Zone Cabling Enclosure



CZE Series Enclosure

#### **Ceiling Zone Cabling Enclosure**

Designed to integrate into standard 2' x 2' drop ceiling grids. Accepts a wide variety of patch panels and wiring blocks for copper and fiber applications. Key locks provide added security. Custom units available. UL50, UL1863, and UL2043 listed.

PART NO.	DESCRIPTION
CZE-242412A	12"D telecommunications enclosure, (1) removable 7 RMU bracket for 19" patch panels and equipment, includes junction box and fan
CZE-242412WB	12"D termination block enclosure, (1) removable mounting plate for (2) 300-pair 1100 style termination blocks (without legs)
CZE-242412PP	12"D patch panel enclosure, (1) bracket for 19"patch panels, bracket supports 5 RMU

# RFE Raised Floor Zone Cabling Enclosure



#### Raised Floor Zone Cabling Enclosure

Designed to integrate into standard 2' x 2' floor tile openings. Accepts a wide variety of patch panels and wiring blocks for copper and fiber applications. Custom units available. UL50, UL1863, and UL2043 listed.

PART NO.	DESCRIPTION
RFE-25256	Enclosure for 6"D floor, (2) pairs of pivoting mounting rails for 19" patch panels, rails support 2 RMU each
RFE-25257RB	Enclosure for 8"D floor, (2) pairs of pivoting mounting rails for 19" patch panels, rails support 4 RMU each
RFE-242412	Enclosure for 14"D floor, (1) mounting rail for 19" patch panels, rail supports 11 RMU

### WIRELESS ENCLOSURES

#### Wireless Access Point Enclosures and Brackets

Wireless Access Point (WAP) Enclosures from Legrand® provide a secure, aesthetically pleasing means for integrating access points for wireless connectivity into a building's communications infrastructure. Enclosure options include the Vista™ architectural column for open space applications, a nonmetallic enclosure for wall mounting, a ceiling enclosure for installation in ceiling grid systems, and a mounting bracket for attaching to cable tray in overhead spaces. All Wireless Access Point Enclosures provide ample space for most leading manufacturer's access points.

#### VLWAP Vista WAP Enclosure




#### Vista WAP Enclosure

The VLWAP is an open space solution for mounting wireless access points in Vista architectural columns. The VLWAP provides a means for integrating the access points necessary for wireless connectivity into a building's communications infrastructure. Access points installed in a Vista Column can be located to provide optimal Wi-Fi signal coverage in a secure, yet accessible environment having built-in connectivity and power options.

PART NO.	DESCRIPTION
VLWAP9	<ul> <li>Superior signal access</li> <li>Reduced signal interference</li> <li>Lockable hinged glass panel</li> <li>Large capacity compartment</li> <li>Multiple mounting options</li> <li>Convenient termination point</li> <li>On-board 120V electrical outlet,</li> <li>(1) 20A duplex</li> <li>UL and cUL Listed</li> </ul>

#### WAPBRKT Overhead WAP Bracket



WAPBRKT

#### **Overhead WAP Bracket**

The WAPBRKT provides a secure support for mounting wireless access points in overhead applications. The bracket can be mounted directly to basket tray or threaded rod, or to threaded rod attached to cable tray. Wireless Access Point Mounting Bracket can be located for high visibility, convenience, and optimal Wi-Fi signal coverage.

PART NO.	DESCRIPTION
WAPBRKT	<ul> <li>Versatile design works with most cable tray products</li> <li>Support bars provided for threaded rod attachment</li> <li>Multiple mounting options</li> <li>Multiple openings to accommodate most access points</li> <li>Large capacity compartment</li> <li>Galvanized steel construction for maximum strength</li> </ul>

### WIRELESS ENCLOSURES

Wireless Access Point Enclosures and Brackets

# NME1250AP Nonmetallic WAP Wall Enclosure



#### Nonmetallic WAP Wall Enclosure

A solution is now available for mounting wireless access points to wall surfaces in an accessible, secure, and aesthetically acceptable manner. The NME1250AP conceals wireless access points in a durable ETL/cETL listed enclosure. Designed to provide a permanent location for wireless connectivity hardware within a building's communications infrastructure, the enclosure can be easily secured to any structure allowing optimal Wi-Fi signal coverage to adjacent spaces while supporting industry standard POE (Power over Ethernet).

PART NO.	DESCRIPTION
NME1250AP	<ul> <li>Thermoplastic wall construction</li> <li>Convenient termination point and raceway connectivity</li> <li>Security lock included</li> <li>Large capacity compartment</li> <li>Flexible AP installation, including Cisco® Aironet 1250 Series</li> <li>Multiple mounting options</li> <li>ETL and cETL Listed</li> </ul>



### WIRELESS ENCLOSURES

Wireless Access Point Enclosures and Brackets

#### WAPE, WAPENCL Ceiling WAP Enclosure



#### **Ceiling WAP Enclosure**

The WAPE and WAPENCL Series provide secure enclosures for mounting wireless access points into a grid ceiling system. Designed for easy installation, these enclosures can be fully assembled into a ceiling tile on a work surface before being installed into the overhead ceiling grid system. Available in multiple depths with several cover options to accommodate a variety of wireless access points.

PART NO.	DESCRIPTION
WAPE5-BLKIT	5"D enclosure, blank cover, 12"W x 14"L
WAPE10-BLKIT	10"D enclosure, blank cover, 12"W x 14"L
WAPE5-1200KIT	5"D enclosure, faceplate for CISCO® Aironet 1200, 12"W x 14"L
WAPE10-1200KIT	10"D enclosure, faceplate for CISCO Aironet 1200, 12"W x 14"L
WAPE5-1232KIT	5"D enclosure, faceplate for CISCO Aironet 1232, 12"W x 14"L
WAPE10-1232KIT	10"D enclosure, faceplate for CISCO Aironet 1232, 12"W x 14"L
WAPE5-1242KIT	5"D enclosure. Faceplate for CISCO Aironet 1242, 12"W x 14"L
WAPE10-1242KIT	10"D enclosure, faceplate for CISCO Aironet 1242, 12"W x 14"L
WAPE5-1250KITD	5"D enclosure, faceplate for CISCO Aironet 1250 with Dipole Antennas, 13"W x 14"L
WAPE5-1250KITR	5"D enclosure, faceplate for CISCO Aironet 1250 with Remote Antennas, 13"W x 14"L
WAPE5-UNIKIT	5"D enclosure, universal faceplate, 12"W x 14"L
WAPE10-UNIKIT	10"D enclosure, universal faceplate, 12"W x 14"L
WAPE10-DOME	3"D enclosure, 14" diameter by 6-1/2"D transmission dome
WAPENCL	4"D enclosure. Cover with knockouts, 13-3/8"W x 13 1/2"L
WAPENCL-24-24-4	4"D enclosure cover with knockouts, 24"W x 24"L



#### Walkerflex Modular Wiring System

The new Walkerflex® Modular Wiring System is a factory assembled modular wiring system, designed to interface with various power applications: raised floor boxes, poke-thru systems, service poles, surface raceways, wireways, and convenience outlets. This design, with its plug-in feature, provides tremendous wire management flexibility and labor savings vs. traditional pipe and box wiring methods. Walkerflex is ideal for use in raised floor systems in combination with FloorSource™ Raised Floor Boxes. Both products are suitable for use in commercial offices, computer rooms, schools and any facility with a demand for high flexibility in wiring requirements.

Walkerflex power adapters, cable splitters, and male and female wire connectors




Prewired AF Series box



Color-coded snap-in components ensure secure, accurate wiring connections

#### **System Layout**

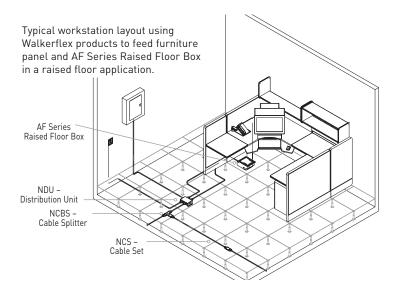



#### Poke-Thru Devices

Evolution™ Series large capacity, recessed poke-thru devices and the surface, flush, and furniture feed style poke-thru devices are excellent solutions for bringing both power and communication services to the workstation in an open space, above-grade floor environment. Each device provides an excellent solution for both new or retrofit construction, with typical applications including office buildings, airports, malls, shopping centers, libraries, and schools. Devices provide TopGuard<sup>™</sup> protection.

#### 6ATC, 8ATC

**Evolution Series Recessed Poke-Thru Device** 



**Evolution Series** 

#### **Evolution Series Recessed Poke-Thru Device**

Large capacity for power, voice, data, or A/V communications. All metal die-cast aluminum cover. 6ATC Series has three gangs capacity and requires 6" core hole. 8ATC Series has five gang capacity and requires 8" core hole.

PART NO.	DESCRIPTION
6ATCPBK	6" poke-thru assembly with black cover
6ATCPGY	6" poke-thru assembly with gray cover
6ATCPNK	6" poke-thru assembly with nickel cover
6ATCPBS	6" poke-thru assembly with brass cover
6ATCPBZ	6" poke-thru assembly with bronze cover
8ATCPBK	8" poke-thru assembly with black cover
8ATCPGY	8" poke-thru assembly with gray cover
8ATCPNK	8" poke-thru assembly with nickel cover
8ATCPBS	8" poke-thru assembly with brass cover
8ATCPBZ	8" poke-thru assembly with bronze cover

#### RC4 Surface Poke-Thru Device



RC4 Series

#### Surface Poke-Thru Device

Unit includes four prewired 20A receptacles. Each duplex receptacle can be wired as standard duplex or isolated ground. Unit also includes TracJack® mounting bezels, four blank TracJack inserts for closing off unused communication openings and Series II® bezels.

PART NO.	DESCRIPTION
RC4ATCGY	Poke-thru assembly with painted gray flange
RC4ATCBK	Poke-thru assembly with black flange
RC4ATCAL	Poke-thru assembly with aluminum flange
RC4ATCBS	Poke-thru assembly with brass flange











Poke-Thru Devices

#### **6ATCFF**

**Evolution Furniture Feed Poke-Thru Devices** 



6ATCFF Series

### Evolution Furniture Feed Poke-Thru Devices

Complete with one 3/4" trade size opening for power and a 2"/1-1/4" concentric opening for communications.

PART NO.	DESCRIPTION
6ATCFFGY	Poke-thru assembly with painted gray flange
6ATCFFBK	Poke-thru assembly with painted black flange
6ATCFFBS	Poke-thru assembly with painted brass flange
6ATCFFNK	Poke-thru assembly with painted nickel flange
6ATCFFBZ	Poke-thru assembly with painted bronze flange

# RC9AM2TC Furniture Feed Poke-Thru Device



RC9AM2TC Series

#### Furniture Feed Poke-Thru Device

Complete with combination 1-1/4" and 2" trade size threaded conduit openings and closure plugs.

PART NO.	DESCRIPTION
RC9AM2TCGY	Poke-thru assembly with painted gray flange
RC9AM2TCBK	Poke-thru assembly with black flange
RC9AM2TCAL	Poke-thru assembly with aluminum flange

# **4FFATC**Dual Service Furniture Feed Poke-Thru Device



4FFATC Series

#### **Dual Service Furniture Feed Poke-Thru Device**

Complete with one 3/4" opening for power and one 1-1/4" opening for communications.

PART NO.	DESCRIPTION
4FFATCGY	Poke-thru assembly with painted gray flange
4FFATCBK	Poke-thru assembly with black flange
4FFATCAL	Poke-thru assembly with aluminum flange
4FFATCBS	Poke-thru assembly with brass flange

#### **COLOR OPTIONS**





Poke-Thru Devices

# AMD8 All Communications Poke-Thru Device



# AV3 A/V Poke-Thru Device



### All Communications Poke-Thru Device

All communication flush style poke-thru device will accept up to eight ports for connectivity devices. For both new and retrofit installations in schools, commercial offices, government and institutional facilities.

PART NO.	DESCRIPTION
AMD8ATCGY	Poke-thru assembly with painted gray flange
AMD8ATCBK	Poke-thru assembly with black flange
AMD8ATCAL	Poke-thru assembly with aluminum flange
AMD8ATCBS	Poke-thru assembly with brass flange

#### A/V Poke-Thru Device

Flush style poke-thru device specifically designed for the audio/video market. Includes 20A duplex receptacle and three ports for A/V style connectivity devices.

PART NO.	DESCRIPTION
AV3ATCGY	Poke-thru assembly with painted gray flange
AV3ATCBK	Poke-thru assembly with black flange
AV3ATCAL	Poke-thru assembly with aluminum flange
AV3ATCBS	Poke-thru assembly with brass flange



#### Recessed Floor Boxes

Legrand® floor boxes offer unsurpassed flexibility and a wide range of configurations, thanks to independent wiring compartments and feed-through wiring capability. Floor boxes offer versatile activation solutions ideal for areas with different needs at different times. The Evolution $^{\text{TM}}$  Series and the Resource RFB® Series provides independent wiring compartments for power, communications and audio/video services to open space areas or directly to workstations. Features TopGuard $^{\text{TM}}$  protection that exceeds 2003 UL scrub water standards.

#### EFB6S 6-Gang Floor Box



#### EFB8S 8-Gang Floor Box



#### EFB10S 10-Gang Floor Box



# EFB610CTC, EFB610BTC Floor Box Covers





EFB610CTC

EFB610BTC

#### 6-Gang Floor Box

The 6-gang floor box has been designed to be installed in concrete floors, raised floors, and wood floor applications. Box has a fully finished interior to assist plugging and unplugging of devices. Designed to work with standard size wall plates. Box comes complete with all components needed for initial installation.

PART NO.	DESCRIPTION
EFB6S	15-1/8" x 11-3/16 x 4-1/16"

#### 8-Gang Floor Box

The 8-gang has been designed to be installed in concrete floors, raised floors, and wood floor applications. Box has a fully finished interior to assist plugging and unplugging of devices. Designed to work with standard size wall plates. Box comes complete with all components needed for initial installation.

PART NO.	DESCRIPTION
EFB8S	15-1/8" x 11-3/16 x 6"

#### 10-Gang Floor Box

The 10-gang floor box has been designed to be installed in concrete floors, raised floors, and wood floor applications. Box has a fully finished interior to assist plugging and unplugging of devices. Box comes complete with all components needed for initial installation.

PART NO.	DESCRIPTION
EFB10S	15-1/8" x 11-3/16 x 6"

#### Floor Box Covers

PART NO.	DESCRIPTION
EFB610CTC	Die cast aluminum cover assembly. For use on Evolution Series 6, 8 and 10-gang floor boxes.
EFB610BTC	Die cast aluminum cover assembly. For use on Evolution Series 6, 8 and 10-gang floor boxes.

Notes: Available in black, gray, brass, nickel, and bronze.

Recessed Floor Boxes

# RFB2 RFB2 Series Multiservice Recessed Floor Boxes



# RFB4 Series Multiservice Recessed Floor Boxes



# RFB6 RFB6 Series Multiservice Recessed Floor Boxes



#### RFB6E

RFB6E Series Multiservice Recessed Floor Boxes with the Evolution Cover



#### **RFB2 Series Multiservice Recessed Floor Boxes**

Two-compartment, combination floor box available in steel, shallow, and on-grade versions. Fully adjustable with tunnel compartment. Supplied with one duplex receptacle, mounting plate, and one communication mounting plate.

PART NO.	DESCRIPTION
RFB2	Steel, 13-1/8"L x 6-1/2"W x 3-7/16"D
RFB2-0G	On-grade, 13-1/8"L x 6-1/2"W x 3-7/16"D
RFB2-SS	Shallow steel, 13-1/8"L x 6-1/2"W x 2-5/8"D

#### **RFB4 Series Multiservice Recessed Floor Boxes**

Four-compartment, combination floor box available in steel, cast iron and steel shallow depth versions. Each is fully adjustable with a tunnel compartment and two receptacle brackets.

PART NO.	DESCRIPTION
RFB4	Steel, 12-3/4"L x 10"W x 3-7/16"D
RFB4-CI-1	Cast iron, 14-1/2"L x 11-7/8"W x 3-7/16"D
RFB4-SS	Shallow steel, 13-5/8"L x 10"W x 2-7/16"D

#### RFB6 Series Multiservice Recessed Floor Boxes

Six-compartment, multiservice combination floor box in steel and on-grade versions. Supplied with two duplex receptacles mounting plates, two communication plates, and two blank plates.

PART NO.	DESCRIPTION
RFB6	Steel
RFB6-0G	On-grade

# RFB6E Series Multiservice Recessed Floor Boxes with the Evolution Cover

Six-compartment, multiservice combination floor box in steel and on-grade versions. Supplied with two duplex receptacle mounting plates.

PART NO.	DESCRIPTION
RFB6E	Steel
RFB6E-OG	On-grade

Recessed and Raised Floor Boxes

#### EFB6S

RFB9 and RFB11 Large Capacity A/V Recessed Floor Boxes



# AF AF Series Raised Floor Boxes



#### RFB9 and RFB11 Large Capacity A/V Recessed Floor Boxes

Provide power, communications, and the special space requirements of audio/visual type connectors to above grade floors and on-grade floor applications, in open space areas, or directly to the workstation. Adjustable before concrete pour. Provided with mudcap to prevent entry of concrete during pour.

PART NO.	DESCRIPTION
RFB9	9-gang box, 14-5/16"L x 12-1/8"W x 4-1/8"D
RFB9-0G	9-gang on-grade box, 14-5/16"L x 12-1/8"W x 4 1/8"D
RFB11	11-gang box, 14-5/16"L x 12-1/8"W x 6-1/8"D
RFB11-0G	11-gang on-grade box, 14-5/16"L x 12-1/8"W x 6-1/8"D
RFB119CTC*	Carpet cover assembly includes carpet cutout area
RFB119BTC*	Flush assembly

Notes: \*Add "AL" for die-cast aluminum with brushed aluminum finish, "BK" for die-cast aluminum with painted black finish, or "GY" for die-cast aluminum assembly with gray finish.

#### **AF Series Raised Floor Boxes**

Available in three (AF1) or four (AF3) compartment models that accommodate a combination of both power and communication devices. This combination is accomplished with the built-in service dividers. These dividers are arranged in a single-double, single-gang configuration. Die-cast aluminum housing provides added strength and reliability. Polycarbonate hinged lid and trim flange are available for carpet or tile applications, as well as a color choice of black, brown, or gray.

PART NO.	DESCRIPTION
AF1-KC	(3) compartments, black carpet cover, 8" x 6" x 5"
AF1-KT	(3) compartments, black tile cover, 8" x 6" x 5"
AF1-NC	(3) compartments, brown carpet cover, 8" x 6" x 5"
AF1-NT	(3) compartments, black tile cover, 8" x 6" x 5"
AF1-YC	[3] compartments, gray carpet cover, 8" x 6" x 5"
AF1-YT	[3] compartments, gray tile cover, 8" x 6" x 5"
AF3-KC	[4] compartments, black tile cover, 8" x 10" x 5"
AF3-KT	[4] compartments, black tile cover, 8" x 10" x 5"
AF3-NC	(4) compartments, brown carpet cover, 8" x 10" x 5" $$
AF3-NT	[4] compartments, black tile cover, 8" x 10" x 5" $$
AF3-YC	(4) compartments, gray carpet cover, 8" x 10" x 5" $$
AF3-YT	(4) compartments, gray tile cover, 8" x 10" x 5"

Notes: A full selection of single- and double-gang Panel Device Plates for the AF1 and AF3 floor boxes is available. Visit www.legrand.us/wiremold.



Raised Floor Boxes

# AC Series Raised Floor Boxes



#### **AC Series Raised Floor Boxes**

The AC8850 and AC8105 are boxes with a 5" [127mm] depth design, with the AC8105 providing an extra 2" [51mm] of width for additional wiring capacity. These boxes can accommodate four duplex power receptacles on one side. Power plate with duplex knockouts included with box. The communication plate will accept at least three communication bezels for up to 18 ports of activation. Lids rotate 180° for easy orientation. Gray lids are die-cast zinc construction.

The AC8840 and AC8104 are boxes with a 4" [102mm] depth design, with the AC8104 providing an extra 2" [51mm] of width for added wiring capacity. These boxes can accommodate two duplex power receptacles on one side. Power plate with duplex knockouts included with box. The communication plate will accept two communication bezels for up to 12 ports of activation. Lids can be rotated 180° for easy orientation. Gray lids are die-cast zinc construction.

PART NO.	DESCRIPTION
AC8840	8" x 8" x 4" box
AC8850	8" x 8" x 5" box
AC8104	8" x 10" x 4" box
AC8105	8" x 10" x 5" box
AC10105-2	10" x 10" x 5" box

Notes: A full selection of Power and Communication Plates is available for the AC floor boxes.

# FLOOR BOXES AND RAISED FLOOR SOLUTIONS

Floorport Series Cover Assemblies

#### Floorport<sup>™</sup> Series Flanged Cover Assemblies Ordering Information

#### FPCTC Cutout Cover Assembly



**FPCTCBK** 

#### **Cutout Cover Assembly**

Flanged cover for use in tile or carpet installation. Die-cast aluminum assembly available in black (BK), bronze (BZ), brass (BS), nickel (NK), gray (GY), or brushed aluminum (AL). Insert in lid allows for carpet or tile cutouts to match finished floor.

PART NO.	DESCRIPTION
FPCTCBK	Black
FPCTCBZ	Bronze
FPCTCBS	Brass
FPCTCNK	Nickel
FPCTCAL	Brushed aluminum
FPCTCGY	Gray

#### FPBTC Blank Cover Assembly



**FPBTGY** 

#### **Blank Cover Assembly**

Flanged cover for use in tile or carpet installation. Die-cast aluminum assembly available in black (BK), bronze (BZ), brass (BS), nickel (NK), gray (GY), or brushed aluminum (AL). Lid area is flush with the finished floor, no cutouts provided.

PART NO.	DESCRIPTION
FPBTCBK	Black
FPBTCBZ	Bronze
FPBTCBS	Brass
FPBTCNK	Nickel
FPBTCAL	Brushed aluminum
FPBTCGY	Gray

# **FPCTC**Furniture Feed Cover Assembly



**FPCTCBZ** 

#### **Furniture Feed Cover Assembly**

Flanged cover for use in tile or carpet installation. Die-cast aluminum assembly available in black (BK), bronze (BZ), brass (BS), nickel (NK), gray (GY), or brushed aluminum (AL). Insert in lid allows for carpet or tile cutouts to match finished floor.

PART NO.	DESCRIPTION
FPCTCBK	Black
FPCTCBZ	Bronze
FPCTCBS	Brass
FPCTCNK	Nickel
FPCTCAL	Brushed aluminum
FPCTCGY	Gray

# FLOOR BOXES AND RAISED FLOOR SOLUTIONS

Floorport Series Cover Assemblies

#### Floorport<sup>™</sup> Series Accessories Ordering Information

# PKKKIT, RFBKIT, RFBCIKIT Barrier Kits






#### **Barrier Kit**

Barrier kit used to separate power and communication wires in partition feed covers. Supplied with base and three extensions to adjust to cover height. Kits are sold separately.

PART NO.	DESCRIPTION
PKKKIT	Use with PK presets (Walkercell, Walkerdeck)
RFBKIT	Use with RFB2, RFB2-0G, RFB4, and RFB4-SS Floor Boxes
RFBCIKIT	Used with RFB4-CI floor boxes

# **S3AXBP**Blanking Plate



#### **Blanking Plate**

PART NO.	DESCRIPTION
S3AXBP	Aluminum top plate with steel support plate and (4) adjusting screws.


# WPACR-1G Internal Bracket



#### **Internal Bracket**

PART NO.	DESCRIPTION
WPACR-1G	(2) duplex receptacle brackets, receptacle insulators, power grommets, and bend radius control grommets. Communication brackets ordered separately.

# DTB-2-2A Communication Bracket



#### **Communication Bracket**

PART NO.	DESCRIPTION
DTB-2-2A	Plastic clips on back of bracket provide cable storage loop. For use with WPACR. Activate 2A jacks snap directly into bracket.



# FIRE STOP FITTINGS

#### FlameStopper Fittings for Fire Walls and Floors

The FS Series thru-wall and thru-floor fittings have been redesigned to provide firestopping solutions for both new and retrofit applications. FlameStopper™ fittings provide installers with a variety of UL Classified ready-to-use options for transitioning cables through firewalls and floors to ensure that the integrity of the fire rating is maintained.

#### FS FlameStopper Fittings





FS4R-RED

2" and 4" models with EMT conduit

#### **Installation Directions for New Construction**



Determine location and cut hole in wall using hole saw, keyhole saw or a core drill.



Insert the appropriate length of conduit into the opening.



Place the FlameStopper Thru-Wall fitting box over the opening and secure the two bolts.

#### FlameStopper Fittings


Fittings are shipped in pairs and designed for use on both sides of a wall/floor fitted with 2" or 4" trade size EMT conduit. Available in red or G90 galvanized finish. A heat shield and retrofit kit is available for use in existing installations in walls. FlameStopper fittings have been tested by Underwriters Laboratories Inc. to ASTM E814 UL1479, Fire Tests of Through-Penetration Firestops. The Flamestopper Thru-Wall fittings offer a passive fire and life safety system with ratings up to four hours (with or without cables installed) to complement existing sprinkler systems, and up to three hours for fire rated floors.

PART NO.	DESCRIPTION
FS4R-RED	Fire stop 4" trade EMT conduit fitting, red
FS4R-GA	Fire stop 4" trade EMT conduit fitting, galvanized
FS2R-RED	Fire stop 2" trade EMT conduit fitting, red
FS2R-GA	Fire stop 2" trade EMT conduit fitting, galvanized
FSPCC4758	Precut conduit 4" trade size EMT, 7-5/8"L
FSPCC2758	Precut conduit 2" trade size EMT, 7-5/8"L
SPMGL	Grounding lug, for use with cable trays
WBSBC	Split bolt connector, for use with wire tray
FS4RHS	Heat shield 4" trade size conduit, used only when an existing installed conduit extends 1" to 6" beyond surface
FS2RHS	Heat shield 2" trade size conduit, used only when an existing installed conduit extends 1" to 6" beyond surface
FS4RWP12	Retrofit kit for existing installations – 4"
FS2RWP8	Retrofit kit for existing installations – 2"



#### Power Commander IQ Network Controlled PDU

Keep up with the ever increasing management demands of your data center with Power Commander® IQ Network Controlled Power Distribution Units (PDUs) from Legrand®. These models offer secure remote access for all power outlets, giving users the flexibility they need to manage the ever increasing loads placed on IT infrastructure. All models have current and temperature monitoring, critical in today's higher power density environments.



#### **SPDU20-0U Specifications**

AC Voltage Input	100V to 125V
AC Voltage Output	100V to 125V
Frequency	60 Hz
Load Capacity	20A
Output Receptacle	(20) switched NEMA 5-15
Product Warranty	2 years
Power Cable – AWG Length and Plug Type	12/3 SJT Type, L5-20P locking plug, 9 1/2' [2.9m]
AC Current Draw Monitoring	Measurement of true RMS from all circuits
Console Interface – Local Master Port	(1) RS232 Port. RJ-45 connector type. Data: 7 or 8 bits. Stop bits: 1 or 2. Parity: none, odd or even. Flow control: none or RTS/CTS. Baud rate 2400 to 115200.
Audio Buzzer	85 dB
Display	<ul> <li>(20) power outlet on/off status LEDs,</li> <li>(1) power on/off LED. (2) Network LEDs.</li> <li>(2) digit LED display (1.00" x 0.65")</li> <li>[25mm x 16.5mm] for AC current draw status.</li> </ul>
Temperature Sensing Port	Digital input port – RJ11
Network Interface	10BASE-T RJ45
Network Protocols	CMP, TCP/IP, DHCP, Telnet, DNS, POP3/ SMTP, SNMP, HTTP, and BootP
Weight	18 lbs. shipping weight
Dimensions	61"L [1.5m] x 1-3/4"W [44mm] x 2-1/2"D [60mm]
Operational Temp. Environment	32F°-122F° (0C°-50C°)
Storage Temperature	-20F°-140F° (-29C°-60C°)
Ll. maidit.	10%-90% RH
Humidity	1070 70701111



Power Commander IQ Network Controlled PDU

# SPDU8-1U, SPDU16-2U Power Commander IQ Network Controlled PDU





#### SPDU8-1U and SPDU16-2U Specifications

	1
AC Voltage Input	100V-125V
AC Voltage Output	100V-125V
Frequency	60 Hz
Load Capacity	SPDU8-1U: 15A SPDU16-2U: 30A (2 circuits, 15A each)
Output Receptacle	SPDU8-1U: (8) switched NEMA 5-15 SPDU16-2U: (16) switched NEMA 5-15 (8 each circ.)
Product Warranty	2 years
Power Cable – AWG Length and Plug Type	14/3 SJT Type, 5-15P straight blade, 4-1/2' [1.4m] SPDU16-2U has 2 power cables]
Console Interface – Local Master Port	1 RS232 Port. RJ-45 connector type. Data: 7 or 8 bits. Stop bits: 1 or 2. Parity: none, odd or even. Flow control: None or RTS/CTS. Baud rate 2400 to 115200.
Display	(8) SPDU8-1U or (16) SPDU16-2U power outlet on/off status LEDs, (1) power on/off LED. (2) Network LEDs. 2 digit LED display (1.00" x 0.65") [25mm x 16.5mm] for AC current draw status.
Temperature Sensing Port	Digital input port – RJ11
Network Interface	10BASE-T RJ45
Network Protocols	CMP, TCP/IP, DHCP, Telnet, DNS, P0P3/ SMTP, SNMP, HTTPs/HTTP, and BootP
Shipping Weight	SPDU8-1U: 7 lbs. SPDU16-2U: 10 lbs.
Dimensions	61"L [1.5m] x 1-3/4"W [44mm] x 2 1/2"D [60mm]
Operational Temp. Environment	32F°-122F° (0C°-50C°)
Storage Temperature	-20F°-140F° (-29C°-60C°)
Humidity	10%-90% RH




Power Commander Plus Power Distribution Units

#### 6B21N, 6W21N, 6B21E, 6W21E Power Commander Plus PDUs



# **6B22E, 6W22E**Power Commander Plus PDUs



#### **Power Commander Plus PDUs**

#### 60A Units, 120/208V Input, 120V Output, NEMA Outlets

PART NO.	DESCRIPTION
6B21N	60A PDU, 67"L, (24) outlets, black
6W21N	60A PDU, 67"L, (24) outlets, black/white

#### 60A Units, 120/208V Input, 120V Output, IEC Outlets

PART NO.	DESCRIPTION
6B21E	60A PDU, 67"L, (24) outlets, black
6W21E	60A PDU, 67"L, (24) outlets, black/white

#### Specifications for 60A Units: 120V System

AC Voltage Input	120/208V
AC Voltage Output	100V to 125V
Frequency	60 Hz
Load Capacity	30A 3-phase, derated to 24A: 3-20A circuits derated to 16A (circuits 1, 2 and 3)
Circuit Breaker	3–20A (circuits 1, 2 and 3), UL489 listed
Output Receptacles	NEMA 5-20R, IEC C13 or IEC C19
Product Warranty	2 years
Power Cord	10/5 SOOW type, L21-30P plug, 10' [3.05m]

#### **Power Commander Plus PDUs**

#### 60A Units, 120/208V Input, 208V Output, IEC Outlets

PART NO.	DESCRIPTION
6B22E	60A PDU, 67"L, (24) outlets, black
6W22E	60A PDU, 67"L, (24) outlets, black/white

# Specifications for 60 Amp Units: 120/208V System, 208V Output

AC Voltage Input	120/208V
AC Voltage Output	200 to 230V
Frequency	60 Hz
Load Capacity	30 A 3-phase, derated to 24A: 3-20A circuits derated to 16A (circuits 1, 2 and 3)
Circuit Breaker	3–20A (circuits 1, 2 and 3), UL489 listed
Output Receptacles	IEC C13 or IEC C19
Product Warranty	2 years
Power Cord	10/5 S00W type, L21-30P plug, 10' [3.05m]

#### Power Commander Plus Power Distribution Units

Increase your IT closet's potential with our high amperage 30A or 40A PDU. Allows you to safely draw a total of 30 or 40A per unit, twice as much power as the standard 15A power strip. Among the first in the industry to meet the new UL60950-1 1st edition and ITE standards, the 30A and 40A Power Commander PDUs feature UL489 Listed breakers, increasing the safety and reliability of distributed power.

#### **Custom Options**

- Increase voltage of 125V, 208V or 250V
- Multiple circuits available
- Dual input system
- Ammeter options available
- Increased amperage available
- Plug type: L5-30P, L14-20P,
- L6-20P, L14-30P, L21-20P
- Outlet types: simplex or duplex, NEMA

- 5-15R, 5-20R, and 5-15IG; IEC receptacles
- C13, C19
- Lower profile housing available (2"W x 1-3/4"H)
- Number of receptacles: 2-106
- Length: 12"-144"
- Custom mounting options
- Double pole 10KA AIC breaker
- UL approval available on select custom options
- Surge protection

#### 3A, 3B, 4B Power Commander PDUs



#### **Power Commander PDUs**

High amperage 30A or 40A 120V and 208V units feature an aesthetic narrow aluminum profile available in black or gray. Two easy access circuit breakers provide overload protection and the T-slot mounting rail allows several mounting options in tight spaces.

Current monitoring allows you to distribute power loads evenly to maximize current draw and avoid circuit overloads.

Extensive custom options are available.

#### 30A and 40A Units

PART NO.	DESCRIPTION
3A44B2-1	30A PDU, (24) 20A simplex outlets, 48"L, gray
3B44B2-1	30A PDU, [24] 20A simplex outlets. 48"L, black
3A86B2-1	30A PDU, (36) 20A simplex outlets, 70"L, gray
3B86B2-1	30A PDU, (36) 20A simplex outlets, 70"L, black
3B53B2-1-AM	30A PDU, (18) 20A simplex outlets, (2) lighted LCD digital ammeters, 54"L
3B43B2-1-RAM	30A PDU, (18) 20A simplex outlets, (2) lighted remote LCD ammeters, 48"L
4B44B2-2	40A PDU, (24) 20A simplex outlets, 48"L
4B86B2-2	40A PDU, (36) 20A simplex outlets, 70"L
4B53B2-2-AM	40A PDU, (18) 20A simplex outlets,(2) lighted LCD digital ammeters, 54"L
4B43B2-2-RAM	40A PDU, [18] 20A simplex outlets, [2] lighted remote LCD ammeters. 48"L

(cont)



Power Commander Power Distribution Units

3A, 3B, 4B Power Commander PDUs

#### **Power Commander PDUs (cont)**

#### **30A Unit Specifications**

AC Voltage Input	100V to 127V
AC Voltage Output	100V to 127V
Frequency	60 Hz
Load Capacity	UL rated 24A max – (2) 12A circuits
Circuit Breaker	(2) 15A UL489 listed circuit breakers
Output Receptacle	NEMA 5-20R
Conformance Standards	UL60950-1 1st edition
Product Warranty	2 years
Power Cable – AWG Length and Plug Type	10/3 SJT type, L5-30P, 12 <sup>-</sup> [3.6m]

#### **40A Unit Specifications**

AC Voltage Input	200V to 230V			
AC Voltage Output	100V to 115V			
Frequency	60 Hz			
Load Capacity	UL rated 32A max – (2) 16A circuits			
Circuit Breaker	(2) 20A UL489 listed circuit breakers			
Output Receptacle	NEMA 5-20R			
Conformance Standards	UL60950-1 1st edition			
Product Warranty	2 years			
Power Cable – AWG Length and Plug Type	12/4 SJT type, L14-20P, 12' [3.6m]			

#### Power Commander Power Distribution Units

Bring power safely and conveniently to your communications closet, rack, or cabinet with a full line of Plug-In Outlet Center Units from Legrand®. Units are available in both 15A and 20A configurations. Legrand also offers extensive custom capabilities for Plug-In Outlet Center Units.

#### J08B, J06B Rack Mount PIOC Units



J06B0B (front)



# **4810, 7011, 7712** Cabinet MATE PIOC Units



#### **Rack Mount PIOC Units**

Fit standard 19" [482mm] relay racks. Compact 1U design takes up minimum space. 23" [584mm] units available. Include a black matte finish and a 6' or 15' black cord. All units are UL and cUL recognized components. 15A or 20A units available. Units also available with surge protection.

#### Rack Mount Units - 15A

PART NO.	DESCRIPTION
J08B0B	<ul><li>(8) rear outlets, receptacles rotated 90°,</li><li>(4) outlets spaced for transformers, lighted switch, 6' cord</li></ul>
J08B2B	<ul><li>(8) rear outlets, receptacles rotated 90°,</li><li>(4) outlets spaced for transformers, lighted switch, 6' cord</li></ul>
J06B0B	(6) rear outlets, lighted switch, 6' cord
J06B2B	(6) rear outlets, lighted switch, 15' cord
J06B0BX	(6) rear outlets, 6' cord
J06B2BX	(6) rear outlets, 15' cord

#### CabinetMATE PIOC Units

CabinetMATE® PIOC units include a narrow 1-1/2" x 1-3/16" [38mm x 20mm] aluminum housing. Include gray finish and 6' or 15' black cord. All units are UL and cUL Recognized components. 15A or 20A units available. Units also available with surge protection.

#### Rack Mount Units - 15A

PART NO.	DESCRIPTION
4810ULBC	(10) outlets, 48"L, 6' cord
4810ULBD	(10) outlets, 48"L, 15' cord
7011ULBC	(11) outlets, 70"L, 6' cord
7011ULBD	(11) outlets, 70"L, 15' cord
7712ULBC	(12) outlets, 77"L, 6' cord
7712ULBD	(12) outlets, 77"L, 15' cord

#### Vista CP Consolidation Point

The Vista CP™ Consolidation Point provide channels that conceal wires and cables behind a decorative center panel and incorporate a user-installed patch panel with easy, secured access through a lockable door. They can be placed anywhere in an open space, providing maximum communication flexibility and unique design elements. These modular columns are easily relocated to accommodate changing space requirements.

# VFL66, VEL66 Rack Mount PIOC Units



89D Style Patch Panel

#### **Rack Mount PIOC Units**

The Vista Column Consolidation Point accommodates the 89D style patch panel, 12-ports maximum, and up to 4 panels per column.

Clarity® Modular to 110 Mini Patch Panels are an ideal solution.


#### Vista Column Options\*

	PART NO.	DESCRIPTION
	VFL662345RTGYD	Large anodized aluminum frame with round end channels, TracJack® and Series II® adapters in gray, accommodates a 10' ceiling
VEL66234524 to 12		Extension for the column to accommodate up to 12' ceilings, includes anodized aluminum center panel

Notes: Many other options are available.

Visit www.legrand.us/tools-resources/wiremold and check on the Vista configurator to design your own solution.


#### **System Layout**

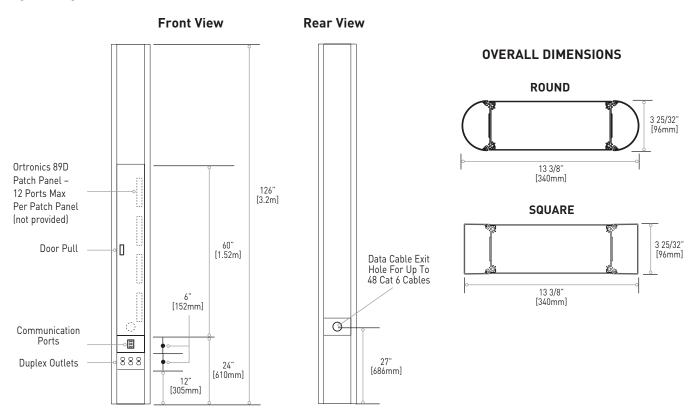

#### Vista Point5 Columns

Vista<sup>™</sup> Point5 Columns provide unobtrusive access to power, communications, and A/V services unopened spaces and conferencing areas. Customized Point5 Columns can be customized as a conference table leg or can even be mounted from the ceiling to provide services for environments with relocatable furniture, such as laboratories.

#### VSP5662345 Small Point5 Column




#### Small Point5 Column

Small Point5 Column, round end channels, 36" (914mm) high, anodized aluminum, adapters for TracJack® and Series II® devices. Two 20A duplex receptacles located 32-1/4" (819mm) above floor.

PART NO.	DESCRIPTION
VSP5662345	Small profile in-stock Point5 Column – small profile 36" [914mm] high column. Anodized aluminum frame with round end channels. Includes (4) adapters for Activate inserts, CM Series Open System communication modules, or TracJack or Series II devices. Includes (2) 20A duplex receptacles located 32-1/2" [819mm] above floor.

#### VLP5662345 Large Point5 Column



#### Large Point5 Column

Large Point5 Column, round end channels, 36" (914mm) high, anodized aluminum, adapters for TracJack and Series II devices, four 20A duplex receptacles located 32-1/4" (819mm) above floor.

PART NO.	DESCRIPTION
VLP5662345	Large Profile In-Stock Point5 Column – large profile 36" [914mm] high column. Anodized aluminum frame with round end channels. Includes two adapters for Activate inserts, CM Series Open System communication modules, or TracJack or Series II devices. Includes four 20A duplex receptacles located 32-1/2" [819mm] above floor.

#### Tele-Power Poles


Dropping power and communications – neatly and simply – from up there to down here; that's what Legrand® Tele-Power® poles are all about. Their sole purpose is to get the business end of your power, data, A/V and communication needs down to your office equipment, phones, PCs, and task lighting, specifically, in away-from-wall locations in open commercial office areas, schools, labs, stores and other sites. Whatever kind of power or communications wiring you need to bring down to the desk side, workstations, or cash registers – Legrand Tele-Power poles handle all your needs effortlessly.

#### **Tele-Power Poles**



Tele-Power Poles

#### Receptacle Heights

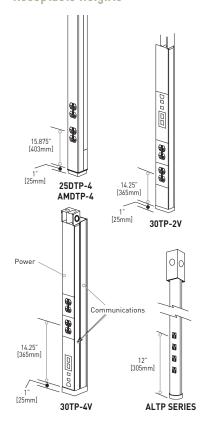

#### Tele-Power Poles

Tele-Power Poles are available in a wide selection of materials, wire fill capacities, heights, and devices and include all components required for a complete stationary installation. Dual-channel accommodates electrical power circuits plus receptacles and low voltage cabling.

#### Steel

DADT NO	OUTLETS	HEIGHT	FINISH	CAPACITY			
PART NO.				THHN/	THWN	UTP	
25DTP-4	(2) Duplex Receptacles (20A, 125V)	10'5" [3.175m]	lvory	#10	#12	CAT 5	CAT 6
30TP-2V				10	15	10	9
				9	14	16	13
30TP-4				18	18	19	15

#### Aluminum

DADT NO. OUTLET	OUTLETC	HEIGHT	FINISH	CAPACITY			
PART NO.	OUTLETS HEIGHT FINISH	THHN/THWN UTP					
AMDTP-4	Two Duplex	10'5"	Anodized	#10	#12	CAT 5	CAT 6
AMDTP-4 Receptacles (20A, 125V)	[3.175m]	Aluminum	10	15	10	8	
ALTD OC	Four Single	10'4"	Satin	10	15	10	8
ALTP-2S	Receptacles	[3.150m]	Anodized	-	-	2	2

#### **Communication Vertical Drop**

PART NO.	HEIGHT	FINISH
25DTC-4	10'5" [3.175m]	Ivory Steel
AMTC-4	10'4" [3.150m]	Anodized Aluminum
ALTC-2S	10'5" [3.175m]	Satin Anodized

Notes: Many other models and configurations are available. Visit www.legrand.us/wiremold


#### Tele-Power Pole Extenders

Designed off of the industry standard 25DTP Series Pole, Tele-Power® extenders can snap together to create a ten foot pole or extend the length of existing poles.

#### 25DTP-E10 Tele-Power Express Pole



# 25DTC-E10 Blank Steel Tele-Power Express Pole



# 25DTC-E5 Blank Steel Tele-Power Pole Extender



#### **Tele-Power Express Pole**

Two sections of two-compartment power and communications pole are assembled to make one complete pole.

PART NO.	DESCRIPTION
25DTP-E10	(2) sections of a two-compartment (power and communication) pole [5'-4" [1.626m] base + 5' [1.524m] extender) assembles to form a 10'-4" [3.148m] pole. Nominal material thickness .040" [1.0mm]. Ivory boot base. Factory wired with fed-spec general grade 20A 125V duplex style receptacles. An 8" [203mm] cover at top front (power side) of pole is removable for making power wiring connections. KOs provided in removable cover for RJ11/RJ45 and modular furniture communication connectors. Mounting hardware, entrance end plate and (2) ceiling trim plates furnished.

#### **Blank Steel Tele-Power Express Pole**

Two sections of the 25DTC style pole; a 5' 4" (1.626mm) base + 5' (1.524mm) extender assembles to form a 10' 4" pole.

PART NO.	DESCRIPTION
25DTC-E5	(2) compartment extender mounts onto existing 25DTP or 25DTC series pole.  Nominal material thickness .040" [1.0mm]. Furnished unwired without outlets. Use existing pole mounting hardware, entrance end plate and ceiling trim plate. Available in 5' [1.524m] length. Can be cut to desired length.

#### Blank Steel Tele-Power Pole Extender

Two compartment extender, mounts onto an existing 25DTP or 25DTC Series Tele-Power Pole for on site modification of the pole.

PART NO.	DESCRIPTION
25DTC-E5	[2] compartment extender mounts onto existing 25DTP or 25DTC series pole.  Nominal material thickness .040" [1.0mm].  Furnished unwired without outlets. Use existing pole mounting hardware, entrance end plate and ceiling trim plate. Available in 5' [1.524m] length. Can be cut to desired length.

# ON-Q SOLUTIONS



The On-Q® product line integrates home technology products to create a truly connected living experience. By consolidating telephone, networking, video, intercom, and other home technologies into a single Cat 5e-based structured wiring system, you get easily upgradeable amenities that not only enhance residents' quality of life now, but greatly increase the value and ease of upgrades for their home in the future.

# **Featured Products**



Power Management 345

Data Networking 348



#### Infrastructure







Enclosure Accessories



Keystone Wall Plates

#### Communications



Straps



Inserts

#### Entertainment



Power Management



HDMI



Communications – Data Networking

#### Comfort




349 Communications – Phone and Video




#### **Enclosures**

Durable Legrand® enclosures by On-Q® range in size from 12" to 42" to suit any installation. Every enclosure is made in the USA and is compatible with all major module mounting schemes. Available with hinged or screw-on doors, a Legrand enclosure is the easy choice for professional projects.

### EN1200 12" Enclosures



#### EN1400 14" Enclosures



#### 12" Enclosures

The 12" EN1200 is the perfect solution for a basic or entry-level structured wiring system. It features large top openings that make pulling wire easier than ever before. The enclosure also boasts multiple knockouts, side lances, and side tabs for more flexible mounting. Includes a screw-on cover.

#### **Enclosures and Accessories**

PART NO.	DESCRIPTION
EN1200	12" enclosure with screw-on cover

#### 14" Enclosures

The 14" EN1400 provides the perfect solution for a basic structured wiring system, with added flexibility. It features larger top openings that make pulling wire easier, as well as additional knockouts, more side lances, and side tabs for more flexible mounting.

#### **Enclosures and Accessories**

PART NO.	DESCRIPTION
EN1400	14" enclosure with screw-on cover
EN1420	14" enclosure with hinged door
EN1450	14" enclosure (no cover)
EN1460	14" hinged door
EN1480	14" screw-on cover
EN 1485	14" enclosure with knockouts (no cover)

#### EN2000 20" Enclosures



#### 20" Enclosures

This 20" enclosure features universal bay-style mounting holes that are compatible with all bay-style modules. It also includes larger top openings that make pulling wire easier, as well as additional knockouts, more side lances, and side tabs for more flexible mounting.

PART NO.	DESCRIPTION
EN2000	20" enclosure with screw-on cover
EN2020	20" screw-on cover
EN2050	20" enclosure with hinged door
EN2060	20" hinged door
EN2080	20" enclosure (no cover)
EN2085	20" enclosure with knockouts (no cover)

O-NC



#### **Enclosures**

# EN2800 28" Enclosures

EN2850





#### 28" Enclosures

This 28" enclosure ships with a hinged, locking door, and features universal style mounting holes that are compatible with all bay-style modules. It also includes larger top openings that make pulling wire easier, as well as additional knockouts, more side lances, and side tabs for more flexible mounting.

#### **Enclosures and Accessories**

PART NO.	DESCRIPTION
EN2800	28" enclosure with screw-on cover
EN2820	28" screw-on cover
EN2850	28" enclosure with hinged door
EN2860	28" hinged door
EN2880	28" enclosure (no cover)
EN2885	28" enclosure with knockouts (no cover)

#### 42" Enclosures

Perfect for larger installations, this 42" enclosure features universal style mounting holes that are compatible with all bay-style modules. It also includes larger top openings that make pulling wire easier, as well as additional knockouts, more side lances, and side tabs for more flexible mounting.

#### **Enclosures and Accessories**

PART NO.	DESCRIPTION
EN4200	42" enclosure with screw-on cover
EN4220	42" screw-on cover
EN4250	42" enclosure with hinged door
EN4260	42" hinged door
EN4280	42" enclosure (no cover)
EN4285	42" enclosure with knockouts (no cover)



**Enclosure Accessories** 

#### **Enclosure Accessories**



#### **Enclosure Accessories**

PART NO.	DESCRIPTION
364482-03	28" enclosure extender, adds 2.5" of additional depth to accommodate routers, switches and power supplies
364450-04	42" enclosure extender
364482-04	42" enclosure extender, add 2.5" of additional depth to accommodate routers, switches and power supplies
AC1007	(1) bay video bracket
364890-01	(1) bay bracket
364819-01	(2) bay bracket
F7510	(3) bay bracket
F9001	(6) bay bracket
363729-01	(10) pluggers and grommets
F2250	(50) pluggers and grommets
F7717	Blank plate for unused module spaces
F2242	2.5" grommet ring
F2249	2.5" knockout plug
364490-01	Replacement key kit – hinged door enclosure
364478-01	Replacement lock assembly – hinged door

#### 364904-01, 364896-01 Universal Mounting Plates



364904-01


#### **Universal Mounting Plates**

The universal mounting plate is designed to easily mount a variety of products into any enclosure. It has multiple slots for attaching products of varying thickness and in either vertical or horizontal orientation.

PART NO.	DESCRIPTION
364904-01	Universal mounting plate, full width
364896-01	Universal mounting plate, half width



#### Connectivity

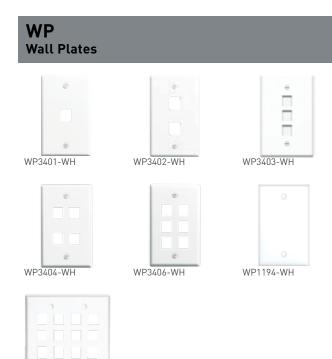

#### **Wall Plates**

PART NO.	DESCRIPTION
WP1194-XX	1-gang, blank wall plate, BK, BR, IV, LA, WH
WP3401-XX	1-gang, 1-port wall plate, BK, BR, IV, LA, WH
WP3402-XX	1-gang, 2-port wall plate, BK, BR, IV, LA, WH
WP3403-XX	1-gang, 3-port wall plate, BK, BR, IV, LA, WH
WP3404-XX	1-gang, 4-port wall plate, BK, BR, IV, LA, WH
WP3406-XX	1-gang, 6-port wall plate, BK, BR, IV, LA, WH
WP3212-XX	2-gang, 12-port wall plate, IV, LA, WH
WP3301-XX	1-gang, 1-port oversized wall plate, LA, WH
WP3302-XX	1-gang, 2-port oversized wall plate, LA, WH
WP3303-XX	1-gang, 3-port oversized wall plate, LA, WH
WP3304-XX	1-gang, 4-port oversized wall plate, LA, WH
WP3306-XX*	1-gang, 6-port oversized wall plate, LA, WH

Notes: Replace XX in part number with appropriate color code. See color options below.

# WP Pre-Configured Straps






WP3212-WH

#### **Pre-Configured Straps**

PART NO.	DESCRIPTION
WP3210-XX	Pre-configured 1-port strap, 1 RJ45
WP3211-XX	Pre-configured 2-port strap, phone/TV
WP3220-XX	Pre-configured 2-port strap, phone/data
WP3422-XX	Pre-configured 4-port strap, phone/data, TV/AUX

Notes: Pre-configured straps are available in black, light almond, and white. Replace XX in part number with appropriate color code. See color options below.

#### **COLOR OPTIONS**





#### Connectivity

# WP Cable Access Straps





WP9001-XX
Bull Nose Wall Plates



VVF 7001-VVII

# WP Decorator Straps WP3411-WH WP3412-WH WP3413-WH

WP3410-WH

WP3416-WH

#### **Cable Access Straps**

The pre-configured cables access strap provides clean cable access from the wall to any source. It also fits into any standard decorator style opening.

PART NO.	DESCRIPTION
WP1014-WH	Cable access strap, white
WP9001-XX	Single-gang hinged bull nose wall plate, available in white and black
WP9002-XX	Double-gang hinged bull nose wall plate, available in white and black

#### **Bull Nose Wall Plates**

The bull nose wall plate is a unique cable management solution. Its hinged design provides four distinct configurations for flexible routing of low voltage cables inside the wall – just turn and snap the scoop for your preferred setup.

PART NO.	DESCRIPTION
WP9001-XX	Single-gang hinged bull nose wall plate

#### **Decorator Straps**

PART NO.	DESCRIPTION
WP3411-XX	1-port decorator outlet strap
WP3412-XX	2-port decorator outlet strap
WP3413-XX	3-port decorator outlet strap
WP3414-XX	4-port decorator outlet strap
WP3410-XX	Blank decorator outlet strap
WP3416-XX	6-port decorator outlet strap

Notes: Replace XX in part number with appropriate color code. See color options below.

WP3414-WH





#### Connectivity



#### Inserts

PART NO.	DESCRIPTION
WP3450-XX	Cat 5e RJ45 Keystone connector, BE, BK, BR, GY, IV, LA, OR, RE, WH
WP3458-XX	Cat 5e keyed RJ45 Keystone connector, BK, BR, IV, LA, WH
WP3460-XX	Cat 6 RJ45 Keystone connector, BE, BK, BR, GY, IV, LA, OR, RE, WH
WP3425-XX	RJ25 6P6C Keystone connector, BK, BR, IV, LA, WH
WP3455-XX	Blank insert, BK, BR, IV, LA, WH
WP3481-XX	Standard F-connector, BK, BR, IV, LA, WH
WP3482-XX	Self-terminating F-connector, BK, BR, IV, LA, WH
WP3456-XX	Speaker outlet, BK, BR, IV, LA, WH
WP3457-XX	Audio binding post, BK, BR, IV, LA, WH
WP3461-XX	White RCA to F-connector, BK, BR, IV, LA, WH
WP3462-XX	Red RCA to F-connector, BK, BR, IV, LA, WH
WP3463-XX	Green RCA to F-connector, BK, BR, IV, LA, WH
WP3464-XX	Blue RCA to F-connector, BK, BR, IV, LA, WH
WP3465-XX	Yellow RCA to F-connector, BK, BR, IV, LA, WH
WP3466-XX	Purple RCA to F-connector, BK, BR, IV, LA, WH
WP3550-XX	Snap & Go Cat 5e Keystone connector, BE, BK, BR, GY, IV, LA, OR, RE, WH
WP3560-XX	Snap & Go Cat 6 Keystone connector, BE, BK, BR, GY, IV, LA, OR, RE, WH
WP1234-XX	HDMI insert, BK, BR, IV, LA, WH

Notes: Replace XX in part number with appropriate color code. See color options below.

# **WP Quick Connect Solution**



#### **Quick Connect Solution**

Improve productivity with the Legrand® Quick Connect Solution. The Punch & Go Tool improves termination speeds and reduces compromised connections of any compatible Quick Connect data insert.

PART NO.	DESCRIPTION
WP3475-XX	Quick Connect Cat 5e RJ45 Keystone insert
WP3476-XX	Quick Connect Cat 6 RJ45 Keystone insert
AC3400	RJ45 Quick Connect punch-down tool

#### **COLOR OPTIONS**

blue	black	brown	gray	ivory	light almond	orange	red	white
BE	ВК	BR	GY	IV	LA	OR	RE	WH

Power Management

# 364569-02-V1 Surge Protected Duplex Outlet Kit



#### Surge Protected Duplex Outlet Kit

Surge protected duplex outlet kit includes: duplex power outlets to provide power for system modules, while surge suppression provides protection for hot to neutral, hot to ground, and neutral to ground. The audible alarm signals when surge protection has expired.

PART NO.	DESCRIPTION
364569-02-V1	Duplex outlet power kit, surge protected

#### AC1031 Enclosure Power Strip Module – Half Width



#### **Enclosure Power Strip Module - Half Width**

The high density 110V enclosure power strip module is designed to natively handle 3 Unity/lyriQ/SCI series power supplies and 3 LV bricks, while it's space-efficient, half-width size allow two AC1031 modules to be installed side-by-side.

PART NO.	DESCRIPTION
AC1031	Enclosure power strip module – half width

#### DA2400 4 Port Power over Ethernet Injector



#### 4 Port Power over Ethernet Injector

The compact 4-port power over ethernet injector is designed to easily mount into any On-Q enclosure and provide power for a variety of PoE compatible devices including: wireless access points, IP cameras, touch screens and IP phones. The injector provides 15W of power via Cat 5/Cat 6 cabling.

PART NO.	DESCRIPTION
DA2400	4-port power over ethernet injector
DA2401	4-port high performance power over ethernet injector

# F7526, AC1025 Power Management Accessories



ΔC1025

#### **Power Management Accessories**

PART NO.	DESCRIPTION
F7526	AC power kit (duplex power outlet)
AC1025	Mounting plate for DA240X PoE injectors

Notes: Reference the Legrand website or On-Q catalog to view additional products.



**HDMI** 

# AC2M HDMI In-Wall Cables



#### **HDMI In-Wall Cables**

The full line of high speed HDMI cables with ethernet deliver uncompressed HD video and digital audio in a single cable. The cables are UL listed for in-wall use and are available in 10 different lengths to suit any A/V installation.

PART NO.	DESCRIPTION
AC2MXX-BK	High speed HDMI cable with ethernet
AC2M00-BK	0.7 meter HDMI cable
AC2M01-BK	1 meter HDMI cable
AC2M02-BK	2 meter HDMI cable
AC2M03-BK	3 meter HDMI cable
AC2M04-BK	4 meter HDMI cable
AC2M05-BK	5 meter HDMI cable
AC2M07-BK	7.5 meter HDMI cable
AC2M10-BK	10 meter HDMI cable
AC2M15-BK	15 meter HDMI cable
AC2M20-BK	20 meter HDMI cable

# AC3M HDMI Slimline Cables



#### **HDMI Slimline Cables**

The slimline high speed HDMI with ethernet cables are 75% thinner than regular HDMI cables and deliver uncompressed HD video and digital audio in a single cable. Slimline HDMI cables are available in three different lengths.

PART NO.	DESCRIPTION
AC3M01-WH-V1	1 meter HDMI slimline cable
AC3M02-WH-V1	2 meter HDMI slimline cable
AC3M04-WH-V1	4 meter HDMI slimline cable



**HDMI** 

#### AC2100 HDMI Repeater



AC2100

# AC2101 HDMI Hinged Coupler



AC2101

# AC2103-V1 HDMI Hinged Male-to-Female Adapter



AC2103-V1

#### **HDMI** Repeater

The HDMI repeater boosts the strength of HDMI signal, while supporting the connections of two high speed HDMI with ethernet cables. The repeater gets 5V power from the HDMI source unit.

PART NO.	DESCRIPTION
AC2100	HDMI repeater

#### **HDMI Hinged Coupler**

The flexible HDMI hinged coupler extends the length of the HDMI connection and includes a hinge for superior cable management. The coupler supports the connections of two high speed HDMI with ethernet cables.

PART NO.	DESCRIPTION
AC2101	HDMI hinged coupler

#### **HDMI Hinged Male-to-Female Adapter**

The hinged HDMI male-to-female adapter provides a flexible mounting point for tight wall mounted TV installations, allowing your cables to easily fit behind the TV. The adapter passes all high speed HDMI with ethernet cable signals.

PART NO.	DESCRIPTION
AC2103-V1	HDMI hinged male-to-female adapter



# COMMUNICATIONS

**Data Networking** 

#### 363486-01

#### 8-Port Network Interface Module



363486-01

#### AC<sub>1</sub>

#### **6-Port Network Interface Modules**



AC1000

# AC1 12-Port Network Interface Modules



# AC1033 Network Interface Module Installation Bracket



#### 8-Port Network Interface Module

The UL listed 8-port network interface module supports the termination of up to eight Legrand® Cat 5e cables for interconnection to a local area network or digital data services. It also provides a termination point for telephone cable runs when using the 1x8 enhanced telecom module and the 8-port telecom expansion module.

PART NO.	DESCRIPTION
363486-01	UL listed 8-port network interface module

#### 6-Port Network Interface Modules

The 6-port network interface module supports punch-down termination of up to 6 Cat 5e cable runs for easy interface within the home network. The RJ45 jacks provide simple line reconfiguration.

PART NO.	DESCRIPTION
AC1000	6-port network interface module
AC1001	6-port Cat 5e network interface module
AC1012	6-port Cat 6 network interface module
AC1013	6-port Cat 6 network interface module

#### 12-Port Network Interface Modules

The 12-port, Cat 6 network interface module allows you to easily switch an outlet from voice-to-data or from data-to-voice.

PART NO.	DESCRIPTION
AC1014	12-port Cat 5e network interface module
AC1015	12-port Cat 6 network interface module

#### Network Interface Module Installation Bracket

The reusable network interface module installation bracket improves productivity of network interface module (AC1012, AC1013, AC1014, AC1015) installations. The bracket temporarily mounts in the enclosure during installation, stabilizing the bracket and easing strain while terminating cable to the IDC 110 punch-down blocks on the specified modules.

PART NO.	DESCRIPTION
AC1033	12-port Cat 5e network interface module



# COMMUNICATIONS

Phone

#### TM1045 4x10 RJ45 Telecom Module with RJ31X




TM1045

#### 4x10 RJ45 Telecom Module with RJ31X

The UL listed TM1045 telecom module distributes up to four incoming RJ45 telephone lines to 10 locations. It also includes RJ31X line seizure port for security installations.

PART NO.	DESCRIPTION
TM1045	4x10 RJ45 telecom module with RJ31X

#### TM1110 4x10 IDC Telecom Module with RJ31X



TM1110

#### 4x10 IDC Telecom Module with RJ31X

The UL listed TM1110 telecom module distributes up to four incoming 110 IDC punch-down telephone lines to 10 locations. It also includes RJ31X line seizure port for security installations.

PART NO.	DESCRIPTION
TM1110	4x10 IDC telecom module with RJ31X

# TM Additional Telecom Modules



TM7556

#### **Additional Telecom Modules**

PART NO.	DESCRIPTION
TM7556	4x8 telecom module
TM1478	4x12 telecom module
TM7560	4x24 telecom module



# ENTERTAINMENT

Video

#### VM1002

1x8 Passive Video Splitter/Combiner



VM1002

#### 1x8 Passive Video Splitter/Combiner

The high-performance 1x8 passive video splitter/combiner handles up to eight outputs and one input and is ideal for use with digital cable or antenna TV and high-speed cable internet. The VM1002 provides 1 GHz bandwidth.

PART NO.	DESCRIPTION
VM1002	1x8 passive video splitter/combiner

#### VM2202-V1

2-Way Horizontal Video Splitter



VM2202-V1

#### 2-Way Horizontal Video Splitter

The professional-grade 2-way horizontal video splitter distributes HDTV antenna/digital cable and coax data network signals to two devices. The 1.525 GHz digital cable splitter is ideal for MoCA-capable networks.

PART NO.	DESCRIPTION
VM2202-V1	2-way horizontal video splitter

#### VM Passive Video Splitter/Combiners



VM1000

#### Passive Video Splitter/Combiners

PART NO.	DESCRIPTION
VM1000	1x4 passive video splitter/combiner
VM1100	1-port digital cable amplifier with mounting plate
VM2200-V1	Coax network signal blocker
VM2201-V1	1-port digital cable amplifier
VM2202-V1	2-way horizontal video splitter, 1.525 GHz
VM2203-V1	3-way horizontal video splitter, 1.525 GHz
VM2204-V1	4-way horizontal video splitter, 1.525 GHz



# ENTERTAINMENT

Video

#### CO1045

10x8 Combo Module, RJ45, with RJ31X, 1 GHz



CO1045

#### 10x8 Combo Module, RJ45, with RJ31X, 1 GHz

The C01045 combo module distributes up to 4 incoming RJ45 telephone lines to 10 locations, and 1 GHz video to eight locations. The innovative mounting bracket includes a detachable platform for the coax splitter, allowing easy access to all termination ports during installation. The platform attaches securely to create a compact form factor that takes up minimal space in the enclosure.

PART NO.	DESCRIPTION
CO1045	10x8 combo module, RJ45, with RJ31X, 1 GHz

#### CO1110

10x8 Combo Module, IDC, with RJ31X, 1 GHz



CO1110

#### 10x8 Combo Module, IDC, with RJ31X, 1 GHz

The C01110 combo module distributes up to 4 incoming 110 IDC punch-down telephone lines to 10 locations, and 1 GHz video to eight locations. The innovative mounting bracket includes a detachable platform for the coax splitter, allowing easy access to all termination ports during installation. The platform attaches securely to create a compact form factor that takes up minimal space in the enclosure.

PART NO.	DESCRIPTION
CO1110	10x8 combo module, IDC, with RJ31X, 1 GHz



# ENTERTAINMENT

Video

#### 364400-04

6x4 Basic Combo Module, 1GHz



364400-04

#### 6x4 Basic Combo Module, 1GHz

PART NO.	DESCRIPTION
364400-04	6x4 basic combo module, 1GHz

# PART NUMBER INDEX

#### Ortronics®











Copper
Connectivity

Physical Support

Infinium™ Fiber

 $\mathsf{TechChoice}^{\circ}$ Solutions

PART NO	PAGE
OR-2-E1-25C-A	186
OR-2-E1-75	 187
OR-19-21-T8D	149
OR-19-21-T8DB	149
OR-19-21-T12D	149
OR-19-21-T12DB	149
OR-19-21-T18D	149
OR-19-21-T18DB	149
OR-19-21-T25D	149
OR-19-21-T25DB	149
OR-19-21-T25DHYDT	150
OR-19-21-T25DHYDTB	150
OR-19-35-T8D	149
OR-19-35-T8DB	149
OR-19-35-T12D	149
OR-19-35-T12DB	149
OR-19-35-T18D	149
OR-19-35-T18DB	149
OR-19-35-T25D	149
OR-19-35-T25DB	149
OR-19-35-T25DHYDT	150
OR-19-35-T25DHYDTB	150
OR-19-48-T12D	149
OR-19-48-T12DB	149
OR-19-48-T18D	149
OR-19-48-T18DB	149
OR-19-48-T25D	149
OR-19-48-T25DB	149
OR-19-72-T2SD	143
OR-19-84-6T2SDB	143
OR-19-84-SSDA2132	138
OR-19-84-T2SD	143
OR-19-84-T4SDA1520	137
OR-19-84-T4SDA2132	137
OR-19-96-T2SD	143
OR-19-96-T4SDA2132	137
OR-23-72-T2SD	143
OR-23-84-6T2SDB	143
OR-23-84-T2SD	143
OR-23-96-T2SD	143
OR-110ABC5E050	77

DART NO	DAGE
PART NO	PAGE
OR-110ABC5E100	77
OR-110ABC5E300	77
OR-110ABC6050	77
OR-110ABC6100	77
OR-110ABC6300	77
OR-110C5E03-06	70
OR-110C5E05-06	70
OR-110C5E07-06	70
OR-110C5E09-06	70
OR-110C5E15-06	70
OR-110C603-06	70
OR-110C605-06	70
OR-110C607-06	70
OR-110C609-06	70
OR-110C615-06	70
OR-110DBC5E050	77
OR-110DBC5E100	77
OR-110DBC6050	77
OR-110DBC6100	77
OR-110PBC6300	80
OR-110PBC6900	80
OR-205KAN9EA-MM	266
OR-205KAN9EA-SM	266
OR-205KAN9FA-MM	266
OR-205KAN9FA-SM	266
OR-205KAN9GA-MM	266
OR-205KAN9GA-SM	266
OR-205KNT9FA-09	263
OR-205KNT9FA-50T	263
OR-205KNT9GA-09	263
OR-205KNT9GA-50T	263
OR-205KNT9LA-09	263
OR-403HDJ12	26
OR-403HDJ13	26
OR-403HDJ14	26
OR-403HDJ16	26
OR-403IPSS11	73
OR-403IPSS12	73
OR-403STJ1WP	31
OR-403STJ11	29
0.00.07.40	00

PART NO	PAGE
OR-403STJ13	29
OR-403STJ14	29
OR-403STJ16	29
OR-403STJ28	30
OR-403STJ212	30
OR-404HDJ4	26
OR-404IP2	73
OR-404S21U	35, 271
OR-404S21X1U	35, 271
OR-404S22U	35, 271
OR-404S22X2U	35, 271
OR-404S23U	35, 271
OR-404TJ2	31
OR-404TJ2X2	31, 269
OR-404TJ4	31
OR-404TJ6	31, 269
OR421HDJ-00	26
OR421HDJ-09	26
OR-615SMFC-12P	231
OR-615SMFC-24P/S	231
OR-615SMFC-48P	231
OR-615SMFC-48P/S	231
OR-615SMFC-96P	231
OR-615SMFC-LX-12P	231
OR-8050F66M150	83
OR-8050F157B	83
OR-8050M66M150	83
OR-21109DA8FKIT	286
OR-21109DA8MKIT	286
OR-211015DA8FKIT	286
OR-211015DA8MKIT	286
OR-211025DA8MKIT	286
OR-20500043	229, 232
OR-20500337	229
OR-30200020	80
OR-30200024	80
OR-30200026	80
OR-30200095	80
OR-30200108	77
OR-30200109	77
OR-30200110	77

PART NO	PAGE
OR-30200116	80 80
OR-30200110	81
OR-30200132	78
OR-30200140	78
OR-30203461	80
OR-30203506	80
OR-30203500	80
OR-30600150	79
OR-30600166	82
OR-30600167	79
OR-40300010	41, 271
OR-40300011	34, 271
OR-40300023	34
OR-40300061	41
OR-40300144	34
OR-40300158	34, 271
OR-40300159	34, 271
OR-40300164	34
OR-40300167	35
OR-40300167-09	35
OR-40300175	34, 271
OR-40300185	41
OR-40300185-13	41
OR-40300186	41
OR-40300191	34
OR-40300196	35
OR-40300196-00	35
OR-40300213	35
OR-40300255	30
OR-40300256	30
OR-40300270	31
OR-40300271	31
OR-40300545	29, 269
OR-40300546	29, 269
OR-40300547	29, 269
OR-40300548	29, 269
OR-40300549	29, 269
OR-40300554	29, 269
OR-40300555	29, 269
OR-40300575	32
OR-40300575-00	32

OR-403STJ12



#### Ortronics®





Support



Fiber



Solutions



PART NO         PAGE           OR-40300576         32           OR-40300577-00         32           OR-40300577-00         32           OR-40300577-00         32           OR-40300620         29           OR-40300633         32           OR-40300633-00         32           OR-40300656         34           OR-40700071         32           OR-40700072-00         32           OR-40700072-00         32           OR-40700073-00         32           OR-40800017         30           OR-40800018         30           OR-41200010         40           OR-41200017         30           OR-41900017         30           OR-41900018         30
OR-40300576-00       32         OR-40300577       32         OR-40300577-00       32         OR-40300620       29         OR-40300633       32         OR-40300656       34         OR-40300664       34         OR-40700071       32         OR-40700072       32         OR-40700073       32         OR-40700073-00       32         OR-40800017       30         OR-40800019       30         OR-41200004       40         OR-41200012       40         OR-41900017       30
OR-40300577       32         OR-40300577-00       32         OR-40300620       29         OR-40300633       32         OR-40300656       34         OR-40300664       34         OR-40700071       32         OR-40700072       32         OR-40700072-00       32         OR-40700073       32         OR-40800017       30         OR-40800019       30         OR-41200004       40         OR-41200012       40         OR-41900017       30
OR-40300577-00       32         OR-40300620       29         OR-40300633       32         OR-40300656       34         OR-40300664       34         OR-40700071       32         OR-40700072-00       32         OR-40700072-00       32         OR-40700073-00       32         OR-40800017       30         OR-40800018       30         OR-41200004       40         OR-41200012       40         OR-41900017       30
OR-40300620       29         OR-40300633       32         OR-40300633-00       32         OR-40300656       34         OR-40700071       32         OR-40700071-00       32         OR-40700072       32         OR-40700072-00       32         OR-40700073       32         OR-40700073-00       32         OR-40800017       30         OR-40800018       30         OR-41200004       40         OR-41200010       40         OR-41900017       30
OR-40300633 32 OR-40300633-00 32 OR-40300656 34 OR-40300664 34 OR-40700071 32 OR-40700071-00 32 OR-40700072 32 OR-40700072-00 32 OR-40700073 32 OR-40700073 32 OR-40800017 30 OR-40800018 30 OR-40800019 30 OR-41200004 40 OR-41200010 40 OR-41200011 40 OR-41200011 30
OR-40300633-00 32 OR-40300656 34 OR-40300664 34 OR-40700071 32 OR-40700072 32 OR-40700072 32 OR-40700073 32 OR-40700073 32 OR-40800017 30 OR-40800018 30 OR-41200004 40 OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-40300656 OR-40300664 OR-40700071 32 OR-40700071-00 32 OR-40700072 OR-40700072 OR-40700073 OR-40700073 OR-40800017 OR-40800018 OR-40800019 OR-41200004 OR-41200010 OR-41200012 OR-41900017 OR-41900017 OR-41900017
OR-40300664       34         OR-40700071       32         OR-40700071-00       32         OR-40700072       32         OR-40700073-00       32         OR-40700073-00       32         OR-40800017       30         OR-40800018       30         OR-40800019       30         OR-41200004       40         OR-41200012       40         OR-41900017       30
OR-40700071       32         OR-40700071-00       32         OR-40700072       32         OR-40700072-00       32         OR-40700073       32         OR-40700073-00       32         OR-40800017       30         OR-40800018       30         OR-40800019       30         OR-41200004       40         OR-41200010       40         OR-41200017       30
OR-40700071-00       32         OR-40700072       32         OR-40700072-00       32         OR-40700073       32         OR-40700073-00       32         OR-40800017       30         OR-40800018       30         OR-40800019       30         OR-41200004       40         OR-41200010       40         OR-41200012       40         OR-41900017       30
OR-40700072 32 OR-40700072-00 32 OR-40700073 32 OR-40700073-00 32 OR-40800017 30 OR-40800018 30 OR-40800019 30 OR-41200004 40 OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-40700072-00 32 OR-40700073 32 OR-40700073-00 32 OR-40800017 30 OR-40800018 30 OR-40800019 30 OR-41200004 40 OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-40700073 32 OR-40700073-00 32 OR-40800017 30 OR-40800018 30 OR-40800019 30 OR-41200004 40 OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-40700073-00 32 OR-40800017 30 OR-40800018 30 OR-40800019 30 OR-41200004 40 OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-40800017 30 OR-40800018 30 OR-40800019 30 OR-41200004 40 OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-40800018 30 OR-40800019 30 OR-41200004 40 OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-40800019 30 OR-41200004 40 OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-41200004 40 OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-41200010 40 OR-41200012 40 OR-41900017 30
OR-41200012 40 OR-41900017 30
OR-41900017 30
OR-41900018 30
OR-42100002 37
OR-42100009 32, 40
OR-42100009-00 32
OR-42100054 32
OR-50900051 166
OR-50900051-TL 166
OR-50900052 166
OR-50900052-TL 166
OR-60300124 265
OR-60300127 265
OR-60300128 264
OR-60300179 267
OR-60300182 267
OR-60300183 267
OR-60300184 267
OR-60300185 267
OR-60300186 267
OR-60300200 267

DADT NO	DACE
PART NO	PAGE
OR-60300205	267
OR-60300208	264
OR-60300209	264
OR-60300210	265
OR-60300211	219, 260
OR-60300212	219, 260
OR-60300213	219, 260
OR-60300214	219, 260
Or-60300215	219, 260
OR-60300216	219, 260
OR-60300217	219, 260
OR-60300218	264
OR-60300219 OR-60300220	264
OR-60300220	
OR-60300221	220, 261
OR-60300222	220, 261 220, 261
OR-60300223	220, 261
OR-60300225	220, 261
OR-60300226	220, 261
OR-60300227	220, 261
OR-60300228	220, 260
OR-60400005	168
OR-60400006	160
OR-60400010	176
OR-60400013	167
OR-60400020	81
OR-60400046	167
OR-60400054	157
OR-60400057	118, 155
OR-60400098	157
OR-60400099	157
OR-60400114	157
OR-60400129	156
OR-60400131	118, 155
OR-60400189	157
OR-60400199	170
OR-60400381	167
OR-60400383	166
OR-60400404	160

160

OR-60400405

PART NO	PAGE
OR-60400426	156
OR-60400533	98, 110, 113, 116, 120, 168
OR-60400550	163
OR-60400551	163
OR-60400575	163
OR-60400606	163
OR-60400681	167
OR-60400968	225
OR-60401001	136
OR-60401015	136
OR-60401089	136
OR-60401111	136
OR-60401144	227
OR-60900017	36
OR-60900019	36
OR-60900020	36
OR-60900073	36
OR-60900086	272
OR-60900182	272
OR-60900184	272
OR-60900225	36
OR-60900235	36
OR-60900273	36
OR-60900313	36
OR-60900314	36
OR-60900315	36
OR-60900316	36
OR-60900324	272
OR-60900325	272
OR-60900326	273
OR-60900328	272
OR-60900329	272
OR-60900330	272
OR-60900339	273
OR-60900340	272
OR-60900341	272
OR-60900342	273
OR-60900343	272
OR-60900344	272
OR-60900365	273

PART NO	PAGE
OR-60900366	273
OR-60900367	273
OR-60900368	273
OR-60900369	273
OR-60900370	273
OR-60900371	273
OR-60900372	36
OR-60900373	36
OR-60900374	36
OR-60900375	36
OR-60900376	36
OR-60900377	36
OR-60900378	36
OR-60900379	36
OR-60900380	36
OR-60900381	36
OR-60900382	36
OR-60950301	40
OR-61500858	229, 232, 265
OR-61500868	229, 232, 265
OR-62100001	40
OR-62100037	39
OR-62100038	39, 268
OR-62100040	39, 268
OR-62100041	39, 268
OR-62100044	39, 268
OR-62100045	39, 268
OR-62100046	39, 268
OR-62100047	39, 268
OR-62100048	39, 268
OR-62100049	39, 268
OR-62100050	39, 268
OR-62100051	39, 268
OR-62100052	39, 268
OR-62100053	39, 268
OR-62100054	268
OR-62600002	232
OR-62600003	232
OR-63700005	28
OR-63700006	37

#### Ortronics®



Connectivity



Support





Solutions



Adapters

PART NO	PAGE
OR-63700011	270
OR-63700013	270
OR-63700017	270
OR-63700023	37
OR-63700025	37
OR-63700026	270
OR-63700039	270
OR-63700046	37
OR-63700047	37
OR-63700048	270
OR-63700050	270
OR-63700051	270
OR-63700058	37
OR-63700059	37
OR-63700060	37
OR-63700066	270
OR-63700069	37
OR-63700070	37
OR-63700071	37
OR-63700075	270
OR-63700078	270
OR-63700080	270
OR-63700081	270
OR-63700082	270
OR-63700084	37
OR-63700085	37
OR-63700087	37
OR-63730003	28
OR-70300083	110, 113, 116
OR-70400202	42
OR-70400219	42
OR-70400272	78
OR-70400408	55
OR-70400408-26	55
OR-70400409	55
OR-70400409-24	55
OR-70400411	42
OR-70400411-22	42
OR-70400411-24	42
OR-70400411-26	42
OR-70400644	55

PART NO	PAGE
OR-70400646	78
OR-70400680	78
OR-70400692	55
OR-70600021	267
OR-70600022	267
OR-70700079	169
OR-70700080	169
OR-70700084-00	170
OR-70700107-00	170, 228
OR-70700143	170
OR-70700144	170
OR-70800158	229
OR-42100054-00	32
OR-70800205	169
OR-70900020	41, 269
OR-70900022	269
OR-70900070	269
OR-85400010	267
OR-85400011	267
OR-85400012	267
OR-85400016	264
OR-85400017	264
OR-302003251	79
OR-302003253	79
OR-302003282	79
OR-401004788	165
OR-401004789	165
OR-401004790	165
OR-401004791	165
OR-401045283	51
OR-401045285	51
OR-401045286	51
OR-401045289	51
OR-401045290	51
OR-401045291	51
OR-401045292	51
OR-401045773	165
OR-604004068	152
OR-604004301	152
OR-604004396	152

PART NO	PAGE
OR-604044486	161
OR-604044927	164
OR-604044938	161
OR-604045081	161
OR-604045108	166
OR-604045109	166
OR-604045110	166
OR-604045111	166
OR-604045112	166
OR-604045388	161
OR-604045400	151
OR-604045401	161
OR-604045450	151
OR-604045451	151
OR-805003202	83
OR-806003194	81
OR-806003196	81
OR-806003197	81
OR-806003199	81
OR-806003246	81
OR-808000010	157
OR-808004041	53
OR-808004042	53
OR-808004343	53
OR-808004388	53
OR-808004389	53
OR-808004759	155
OR-808004818	155
OR-808004867	155
OR-808004920	52
OR-808004921	52
OR-808004940	52
OR-808004941	52
OR-808044508	157
OR-808044549	157
OR-808044855	155
OR-808044915	156
OR-808044916	156
OR-808045030	157
OR-808045590	155
OR-808045768	155

PART NO	PAGE
OR-A3AMPLAFAA001M	248
OR-A3AMPLAFAB001M	248
OR-A3AMPLAGAA001M	248
OR-A3AMPLAGAB001M	248
OR-A3AMPLBFAA001M	248
OR-A3AMPLBFAB001M	248
OR-A3AMPLBGAB001M	248
OR-AJCA	177
OR-AJCA8	177
OR-AJCC	177
OR-AJCC8	177
OR-BCGFM3X9	103
OR-BCGFMC3X9	103
OR-BCGFME5X7	103
OR-BCGSM6X7	103
OR-BFPA-1RU	165
OR-BFPA-2RU	165
OR-BFPC-1RU	165
OR-BFPT-1RU-10	110, 113, 116, 165
OR-BFPT-1RU-10-W	165
OR-BFPT-2RU-10	165
OR-BFPT-2RU-10-W	165
OR-C01UA-A	207
OR-CA-93	169
OR-CB-93-6	147
OR-CB-93-6B	147
OR-CB-93-7	147
OR-CB-93-7B	147
OR-CB-93-8	147
OR-CB-93-8B	147
OR-CF-6B	183
OR-CF-12B	183
OR-CFTRC-6B	183
OR-CFTRC-12B	183
OR-CL2LB2A	174
OR-CL2LB2C	174
OR-CL2LB6A	174
OR-CL2LB6B	174
OR-CL2LB6C	174
OR-CL2LB10C	174
OR-CL2LB20C	174

OR-604004645



#### Ortronics®



PART NO



PAGE





Solutions



PART NO	PAGE
OR-CL2LB30C	174
OR-CL2LB40C	174
OR-CMBFR0RU	167
OR-COTL28	176
OR-COTL614	176
OR-COTL1014	176
OR-CR-93S-1B	146
OR-CR-93S-2B	146
OR-CR-93S-3B	146
OR-CR-93S-4B	146
OR-CTHD220	175
OR-CTHD2222	175
OR-CTHD2248	175
OR-CTHD4446	175
OR-CTHD4666	175
OR-DB25HDFF	286
OR-DB25HDMM	286
OR-DC6-19B	148
OR-DC6-23B	148
OR-DC-19	148
OR-DC-19B	148
OR-DC-23	148
OR-DC-23B	148
OR-DC1520-19	142
OR-DC2126-19	142
OR-DC2732-19	142
OR-DCW12M12-B	121
OR-DCW19M12-B	121
OR-DCW26M12-B	121
OR-DCW122424P-B	121
OR-DCW122424S-B	121
OR-DCW192424P-B	121
OR-DCW192424S-B	121
OR-DCW262424P-B	121
OR-DCW262424S-B	121
OR-DHMC1RU	154
OR-DHMC2RU	154
OR-DVMS704	144
OR-DVMS706	144
OR-DVMS804	144
OD DVMC904	1 / /

OR-DVMS806

144

OR-FC02U-M

PART NO	PAGE
OR-EC01U-C 284	284
OR-EC02U-C 284	284
OR-EC02U-S 284	284
OR-EC03U-C 284	284
OR-EC04U-C 284	284
OR-EC04U-S 284	284
OR-ECDL001 230	230
OR-ECDL002 230	230
OR-ES-19-3B 160	160
OR-ES-19-4B 160	160
OR-ES-19-FDR1520	139
OR-ES-19-FDR2126	139
OR-ES-19-FDR2732	139
OR-ES-19-MCSB	162
OR-ES-19-SDR1520F	140
OR-ES-19-SDR2126F	140
OR-ES-19-SDR2732F	140
OR-ES-23-3B	160
OR-ES-23-4B	160
OR-ES-23-FMB	162
OR-ESV-19-3B	160
OR-ESV-19-4B	160
OR-ESV-19-FDR1520	139
OR-ESV-19-FDR2126	139
OR-ESV-19-FDR2732	139
OR-ESV-19-FMB	162
OR-ESV-19-FST1520	141
OR-ESV-19-FST2126	141
OR-ESV-19-FST2732	141
OR-ESV-19-SDR1520F	140
OR-ESV-19-SDR2126F	140
OR-ESV-19-SDR2732F	140
OR-ESV-23-3B	160
OR-ESV-23-4B	160
OR-ESV-23-FMB	162
OR-FC01U-C	213
OR-FC01U-M	209
OR-FC01U-P	212
OR-FC01U-S	214
OR-FC02U-C	213
00 500011 14	000

PART NU	PAGE
OR-FC02U-P	212
OR-FC02U-S	214
OR-FC03U-C	213
OR-FC03U-M	209
OR-FC03U-P	212
OR-FC03U-S	214
OR-FC04U-C	213
OR-FC04U-M	209
OR-FC04U-P	212
OR-FC04U-S	214
OR-FCBL-002	228
OR-FCBL-003	228
OR-FCBR-002	228
OR-FCBR-003	228
OR-FCM-19-1XL	158
OR-FCM-19-2XL	158
OR-FCM-19-2XLH	158
OR-FCM-19-4XL	158
OR-FCTL-001	228
OR-FCWK-01	230
OR-FST2-F012	229
OR-FST3-F048	229
OR-FTBP-1RU	158
OR-GB4X12TMGB	171
OR-GB4X12TMGBKIT	171
OR-GB4X20TMGB	171
OR-GB4X20TMGBKIT	171
OR-GBH19KIT	174
OR-GJ8KIT	175
OR-GL2014	176
OR-GR-19	148
OR-GR-19B	148
OR-GR-23	148
OR-GR-23B	148
OR-GS-8	182
OR-GXC24VPMLD	110
OR-GXC29WMK-5	113, 117
OR-GXC31WMK-5	116, 117
OR-GXC42VFK	110, 113, 116, 117
OR-GXC42VPMLD	110, 113, 116

	PAGE
OR-GXC45VFK	110, 113, 116, 117
OR-GXC45VPMLD	110, 113, 116
OR-GXC48VFK	113, 116, 117
OR-GXC48VPMLD	110, 113, 116
OR-GXC2424DFM-B	109
OR-GXC2424DFP-B	109
OR-GXC2424DFS-B	109
OR-GXC2424DSM-B	109
OR-GXC2424DSS-B	109
OR-GXC2424M12-B	109
OR-GXC2424M38-B	109
OR-GXC2436SPSL-B	109
OR-GXC2436TPC4-B	109
OR-GXC2436TPC-B	109
OR-GXC2436TPS-B	109
OR-GXC2436TPV-B	109
OR-GXC2442SPSL-B	109
OR-GXC2442TPC4-B	109
OR-GXC2442TPC-B	109
OR-GXC2442TPS-B	109
OR-GXC2442TPV-B	109
OR-GXC2448TPC4-B	109
OR-GXC2448TPC-B	109
OR-GXC2448TPS-B	109
OR-GXC2448TPV-B	109
OR-GXC2906CTCE-B	119
OR-GXC2912CTCE-B	119
OR-GXC2918CTCE-B	119
OR-GXC2936TPC4-B	112
OR-GXC2936TPC-B	112
OR-GXC2936TPS-B	112
OR-GXC2936TPV-B	112
OR-GXC2942TPC4-B	112
OR-GXC2942TPC-B	112
OR-GXC2942TPS-B	112
OR-GXC2942TPV-B	112
OR-GXC2948TPC4-B	112
OR-GXC2948TPC-B	112

# PART NUMBER INDEX

#### Ortronics®



Connectivity



Support



Fiber





Solutions



PART NO	PAGE
OR-GXC2948TPV-B	112
OR-GXC3106CTCE-B	119
OR-GXC3112CTCE-B	119
OR-GXC3118CTCE-B	119
OR-GXC3136TPC4-B	115
OR-GXC3136TPC-B	115
OR-GXC3136TPS-B	115
OR-GXC3136TPV-B	115
OR-GXC3142TPC4-B	115
OR-GXC3142TPC-B	115
OR-GXC3142TPS-B	115
OR-GXC3142TPV-B	115
OR-GXC3148TPC4-B	115
OR-GXC3148TPC-B	115
OR-GXC3148TPS-B	115
OR-GXC3148TPV-B	115
OR-GXC4206VWT-B	110, 113, 116, 117
OR-GXC4224DFM-B	109
OR-GXC4224DFP-B	109
OR-GXC4224DFS-B	109
OR-GXC4224DSM-B	109
OR-GXC4224DSS-B	109
OR-GXC4224M12-B	109
OR-GXC4224M38-B	109
OR-GXC4229ADK-B	113
OR-GXC4229DFM-B	112
OR-GXC4229DFP-B	112
OR-GXC4229DFS-B	112
OR-GXC4229DSM-B	112
OR-GXC4229DSS-B	112
OR-GXC4229M12-B	112
OR-GXC4229M38-B	112
OR-GXC4229SPB-B	113
OR-GXC4231ADK-B	116
OR-GXC4231DFM-B	115
OR-GXC4231DFP-B	115
OR-GXC4231DFS-B	115
OR-GXC4231DSM-B	115
OR-GXC4231DSS-B	115
OR-GXC4231M12-B	115

PART NO	PAGE
OR-GXC4231SPB-B	116
OR-GXC4236SPSL-B	109, 112, 115
OR-GXC4242SPSL-B	109, 112, 115
OR-GXC4248SPSL-B	109, 112, 115
OR-GXC4506VWT-B	110, 113, 116, 117
OR-GXC4524DFM-B	109
OR-GXC4524DFP-B	109
OR-GXC4524DFS-B	109
OR-GXC4524DSM-B	109
OR-GXC4524DSS-B	109
OR-GXC4524M12-B	109
OR-GXC4524M38-B	109
OR-GXC4529ADK-B	113
OR-GXC4529DFM-B	112
OR-GXC4529DFP-B	112
OR-GXC4529DFS-B	112
OR-GXC4529DSM-B	112
OR-GXC4529DSS-B	112
OR-GXC4529M12-B	112
OR-GXC4529M38-B	112
OR-GXC4529SPB-B	113
OR-GXC4531ADK-B	116
OR-GXC4531DFM-B	115
OR-GXC4531DFP-B	115
OR-GXC4531DFS-B	115
OR-GXC4531DSM-B	115
OR-GXC4531DSS-B	115
OR-GXC4531M12-B	115
OR-GXC4531M38-B	115
OR-GXC4531SPB-B	116
OR-GXC4536SPSL-B	109, 112, 115
OR-GXC4542SPSL-B	109, 112, 115
OR-GXC4548SPSL-B	109, 112, 115
OR-GXC4806VWT-B	110, 113, 116, 117
OR-GXC4824DFM-B	109
OR-GXC4824DFP-B	109

PART NO	PAGE
OR-GXC4824DFS-B	109
OR-GXC4824DSM-B	109
OR-GXC4824DSS-B	109
OR-GXC4824M12-B	109
OR-GXC4824M38-B	109
OR-GXC4829ADK-B	113
OR-GXC4829DFM-B	112
OR-GXC4829DFP-B	112
OR-GXC4829DFS-B	112
OR-GXC4829DSM-B	112
OR-GXC4829DSS-B	112
OR-GXC4829M12-B	112
OR-GXC4829M38-B	112
OR-GXC4829SPB-B	113
OR-GXC4831ADK-B	116
OR-GXC4831DFM-B	115
OR-GXC4831DFP-B	115
OR-GXC4831DFS-B	115
OR-GXC4831DSM-B	115
OR-GXC4831DSS-B	115
OR-GXC4831M12-B	115
OR-GXC4831M38-B	115
OR-GXC4831SPB-B	116
OR-GXC4836SPSL-B	109, 112, 115
OR-GXC4842SPSL-B	109, 112, 115
OR-GXC4848SPSL-B	109, 112, 115
OR-GXC242436-B	108
OR-GXC242442-B	108
OR-GXC422436-B	108
OR-GXC422442-A1-B	107
OR-GXC422442-B	108
OR-GXC422448-B	108
OR-GXC422936-B	111
OR-GXC422942-A1-B	107
OR-GXC422942-B	111
OR-GXC422948-B	111
OR-GXC423136-B	114
OR-GXC423142-B	114
OR-GXC423148-B	114

PART NO	PAGE
OR-GXC452436-B	108
OR-GXC452442-B	108
OR-GXC452448-B	108
OR-GXC452936-B	111
OR-GXC452942-B	111
OR-GXC452948-B	111
OR-GXC453136-B	114
OR-GXC453142-B	114
OR-GXC453148-B	114
OR-GXC482436-B	108
OR-GXC482442-B	108
OR-GXC482448-B	108
OR-GXC482936-B	111
OR-GXC482942-B	111
OR-GXC482948-B	111
OR-GXC483136-B	114
OR-GXC483142-B	114
OR-GXC483148-B	114
OR-GXCAB421629	113
OR-GXCAB421631	116
OR-GXCAB423029	113
OR-GXCAB423031	116
OR-GXCAB451629	113
OR-GXCAB451631	116
OR-GXCAB453029	113
OR-GXCAB453031	116
OR-GXCAB481629	113
OR-GXCAB481631	116
OR-GXCAB483029	113
OR-GXCAB483031	116
OR-GXCCSTR-4	109, 112, 115
OR-GXCTPBK	109, 112, 115
OR-HC02U-P	227
OR-HDCA6LC12AH	222
OR-HDCA6LC12AJ	222
OR-HDCM-001	222, 224
OR-HDFM-FLC2CA-00	221
OR-HDFM-FLC2CC-00	221
OR-HDFM-FLC2CG-00	221
OR-HDFM-FLC2CI-00	221

OR-GXC4231M38-B



#### Ortronics®





Support



Fiber



Solutions



PART NO	PAGE
OR-HDFM-FLC2CL-00	221
OR-HDFM-FLC2CM-00	221
OR-HDFM-FMTZNA-00	221
OR-HDFM-FMTZNC-00	221
OR-HDFM-FMTZNE-00	221
OR-HDFM-FMTZNG-00	221
OR-HDFM-FMTZNH-00	221
OR-HDFM-FMTZNL-00	221
OR-HDFM-FMTZNM-00	221
OR-HDFM-FMTZNN-00	221
OR-HDFM-FSC1CA-00	221
OR-HDFM-FSC1CC-00	221
OR-HDFM-FSC1CG-00	221
OR-HDFM-FSC1CI-00	221
OR-HDFM-FSC1CL-00	221
OR-HDFM-FSC1CM-00	221
OR-HDFP-BLANK	211
OR-HDFP-LCQ24AC	211
OR-HDFP-LCQ24LC	211
OR-HDFP-LCQ24MB	211
OR-HDFP-MPA72CA	211, 227
OR-HDFP-MPA72LA	211, 227
OR-HDFP-MPA72MA	211
OR-HDJ5E	25, 48
OR-HDJ6	25, 48
OR-HDJ6A	25, 48
OR-HDJB20-8	26
OR-HDJB20-13	26
OR-HDJHCT	25
OR-HDJPCT	25
OR-HDJTJA20	26
OR-HDJTJA20-13	26
OR-HDJTJA20-88	26
OR-HDSMFC-24P/S-00	231
OR-HFM-19-2	150
OR-HTJB20	26
OR-HTJB20-00	26
OR-IPC5E03-00	74
OR-IPC5E05-00	74
OR-IPC5E07-00	74
OR-IPC5E010-00	74

DADT NO	DACE
PART NO	PAGE
OR-IPC5E015-00	74
OR-IPC5E020-00	74
OR-IPC5E025-00	74
OR-IPC603-00	74
OR-IPC605-00	74
OR-IPC607-00	74
OR-IPC6010-00	74
OR-IPC6015-00	74
OR-IPC6020-00	74
OR-IPC6025-00	74
OR-IPJ5E	73
OR-IPJ6	73
OR-IPK	144
OR-JH-93	169
OR-JP5E6U	40
OR-JP66U	40
OR-JP0606-6TB	147
OR-JP0606B	147
OR-JP0612-6TB	147
OR-JP0612B	147
OR-JP1218-6TB	147
OR-JP1218B	147
OR-JP1824-6TB	147
OR-JP1824B	147
OR-KS5E	277
OR-KS5EA	277
OR-KS6	277
OR-KS6A	277
OR-KS14ST	38, 278
OR-KS35ST	38, 278
OR-KS35STST	38, 278
OR-KS106S2	280
OR-KS106S4	280
OR-KSB10	38, 278
OR-KSBNC	38, 278
OR-KSBNC75	38, 278
OR-KSBP	38, 278
OR-KSDS2	280
OR-KSDS3	280
OR-KSDS4	280

OR-KSFCN

PART NO	PAGE
OR-KSFCNR	38, 278
OR-KSFP1	279
OR-KSFP2	279
OR-KSFP3	279
OR-KSFP4	279
OR-KSFP6	279
OR-KSFP8	279
OR-KSFP12	279
OR-KSFPR1	279
OR-KSFPR2	279
OR-KSFPR3	279
OR-KSFPR4	279
OR-KSFPR6	279
OR-KSHDMI	38, 278
OR-KSICON	277
OR-KSLC	277
OR-KSMTRJ	277
OR-KSRCAB	38, 278
OR-KSRCABL	38, 278
OR-KSRCAG	38, 278
OR-KSRCAR	38, 278
OR-KSRCAW	38, 278
OR-KSRCAY	38, 278
OR-KSRJ25	277
OR-KSRJ25A	277
OR-KSS2210	36, 278, 280
OR-KSSC	277
OR-KSSMB2	283
OR-KSSMB4	283
OR-KSSMB6	283
OR-KSSS1	279
OR-KSSS2	279
OR-KSSS3	279
OR-KSSS4	279
OR-KSSS6	279
OR-KSSS8	279
OR-KSST	277
OR-KSSV	38, 278
OR-KSSVIDC	38, 278
OR-KSUSBAA	38, 278
OR-KSUSBAB	38, 278

PART NO	PAGE
OR-KTF-19-DR	164
OR-KTR-19-DR	164
OR-M2LCD12-09	215
OR-M2LCD12-50E	215
OR-M2LCQ24-09	215
OR-M2LCQ24-50E	215
OR-M2LCQ24-50E3A1	215
OR-M2SCD12-09	215
OR-M2SCD12-50E	215
OR-M4LCQ24-09	210
OR-M4LCQ24-50E	210
OR-M4LCQ24-50EA3A1	210
OR-M4LCQ24-62	210
OR-M4MAE24-50EA3K1	211
OR-M4MAE24-50EB3K	211
OR-M4MAE48-50EA3K1	211
OR-M4MAE48-50EB3K1	211
OR-M4S1108SA091M	217
OR-M4S1108SA092M	217
OR-M4S1116SA091M	217
OR-M4S1116SA092M	217
OR-M4S1132SA091M	217
OR-M4S1132SA092M	217
OR-M4S1216SA091M	217
OR-M4S1216SA092M	217
OR-M4S2132SA091M	217
OR-M4S2132SA092M	217
OR-M6ALCQ12-09	208
OR-M6ALCQ12-50E	208
OR-M6DRSAK	141
OR-MC5E03-06	66
OR-MC5E05-06	66
OR-MC5E07-06	66
OR-MC5E09-06	66
OR-MC5E15-06	66
OR-MC5E20-06	66
OR-MC5E25-06	66
OR-MC6A03-09	65
OR-MC6A05-09	65
OR-MC6A07-09	65
OR-MC6A09-09	65

# PART NUMBER INDEX

#### Ortronics®











Copper		
Connec	tivity	

Physical Support

Infinium™ Fiber

TechChoice® Solutions

Adapters

PART NO	PAGE
OR-MC6A15-09	65
OR-MC6A20-09	65
OR-MC6A25-09	65
OR-MC18B5E03-06	70
OR-MC18B5E05-06	70
OR-MC18B5E07-06	70
OR-MC18B5E09-06	70
OR-MC18B5E15-06	70
OR-MC18B603-06	70
OR-MC18B605-06	70
OR-MC18B607-06	70
OR-MC18B609-06	70
OR-MC18B615-06	70
OR-MC603-06	66
OR-MC605-06	66
OR-MC607-06	66
OR-MC609-06	66
OR-MC615-06	66
OR-MC620-06	66
OR-MC625-06	66
OR-MC61003-09	65
OR-MC61005-09	65
OR-MC61007-09	65
OR-MC61009-09	65
OR-MC61015-09	65
OR-MC61020-09	65
OR-MC61025-09	65
OR-MCS5E03-08	69
OR-MCS5E05-08	69
OR-MCS5E07-08	69
OR-MCS5E09-08	69
OR-MCS5E15-08	69
OR-MCS5E25-0	69
OR-MCS6A03-08	69
OR-MCS6A05-08	69
OR-MCS6A07-08	69
OR-MCS6A09-08	69
OR-MCS6A15-08	69
OR-MCS6A25-08	69
OR-MCS603-08	69
OR-MCS605-08	69

PART NO	PAGE
OR-MCS607-08	69
OR-MCS609-08	69
OR-MCS615-08	69
OR-MCS625-08	69
OR-MCT810	175
OR-MCT840	175
OR-MM6BLC	98, 110, 113, 116, 117
OR-MM6HM6D2RU	153
OR-MM6HM61RU	153
OR-MM6HM62RU	153
OR-MM6HM81RU	153
OR-MM6HM82RU	153
OR-MM6HMF1RU	118, 153
OR-MM6HMF2RU	118, 153
OR-MM6HMF4RU	153
OR-MM6VML704	82
OR-MM6VML706	82
OR-MM20ABL71612-X	127
OR-MM20ABL71616-X	127
OR-MM20ABL72412-X	127
OR-MM20ABL72416-X	127
OR-MM20ABL73012-X	127
OR-MM20ABL73016-X	127
OR-MM20ABL81612-X	127
OR-MM20ABL81616-X	127
OR-MM20ABL82412-X	127
OR-MM20ABL82416-X	127
OR-MM20ABL83012-X	128
OR-MM20ABL83016-X	128
OR-MM20ABL91612-X	128
OR-MM20ABL91616-X	128
OR-MM20ABL92412-X	128
OR-MM20ABL92416-X	128
OR-MM20ABL93012-X	128
OR-MM20BDC06-X	133
OR-MM20BDC10-X	133
OR-MM20BDC16-X	133
OR-MM20BDC24-X	133
OR-MM20BDC30-X	133
OR-MM20BLC-X	129

PART NO	PAGE
OR-MM20CMR3-X	130
OR-MM20CMR6-X	130
OR-MM20CMS6-X	129
OR-MM20CMS10-X	129
OR-MM20CRB4PRU-X	131
OR-MM20CRB4PU-X	131
OR-MM20CRB6H4PRU-X	132
OR-MM20CRB6H4PU-X	132
OR-MM20CRB6H06-X	131
OR-MM20CRB6H10-X	131
OR-MM20CRB6H16-X	131
OR-MM20CRB6H24-X	131
OR-MM20CRB6H30-X	131
OR-MM20CRB6H1624-X	131
OR-MM20CRB06-X	131
OR-MM20CRB10-X	131
OR-MM20CRB16-X	131
OR-MM20CRB24-X	131
OR-MM20CRB30-X	131
OR-MM20CRB1624-X	131
OR-MM20CT4RUK-X	131
OR-MM20CT4RU-X	131
OR-MM20CTB4PRU-X	132
OR-MM20CTB4PU-X	132
OR-MM20CTB6H4PRU-X	132
OR-MM20CTB6H4PU-X	132
OR-MM20CTB6H06-X	132
OR-MM20CTB6H10-X	132
OR-MM20CTB6H16-X	132
OR-MM20CTB6H24-X	132
OR-MM20CTB6H30-X	132
OR-MM20CTB6H1624-X	132
OR-MM20CTB06-X	132
OR-MM20CTB10-X	132
OR-MM20CTB16-X	132
OR-MM20CTB24-X	132
OR-MM20CTB30-X	132
OR-MM20CTB1624-X	132
OR-MM20EP706-X	133
OR-MM20EP710-X	133
OR-MM20EP716-X	133

PART NO	PAGE
OR-MM20EP724-X	133
OR-MM20EP730-X	133
OR-MM20EP736-X	133
OR-MM20EP742-X	133
OR-MM20EP810-X	133
OR-MM20EP816-X	133
OR-MM20EP824-X	133
OR-MM20EP830-X	133
OR-MM20EP836-X	133
OR-MM20EP842-X	134
OR-MM20EP916-X	134
OR-MM20EP924-X	134
OR-MM20EP930-X	134
OR-MM20EPN706-X	134
OR-MM20EPN710-X	134
OR-MM20EPN716-X	134
OR-MM20EPN724-X	134
OR-MM20EPN730-X	134
OR-MM20EPN736-X	134
OR-MM20EPN742-X	134
OR-MM20EPN810-X	134
OR-MM20EPN816-X	134
OR-MM20EPN824-X	134
OR-MM20EPN830-X	134
OR-MM20EPN836-X	134
OR-MM20EPN842-X	135
OR-MM20EPN916-X	135
OR-MM20EPN924-X	135
OR-MM20EPN930-X	135
OR-MM20EPS16-X	135
OR-MM20EPS-X	135
OR-MM20ESB06-X	130
OR-MM20ESB16-X	130
OR-MM20ESB24-X	130
OR-MM20ESB30-X	130
OR-MM20HMZRU06-X	129
OR-MM20HMZRU10-X	129
OR-MM20HMZRU12-X	129
OR-MM20HMZRU16-X	129
OR-MM20HMZRU19-X	129
OR-MM20UCT2X2-X	128, 227

#### 

### PART NUMBER INDEX

#### Ortronics®





Support





Solutions



PART NO	PAGE
OR-MM20VCT70206-X	127
OR-MM20VCT70212-X	127
OR-MM20VCT80206-X	127
OR-MM20VCT80212-X	127
OR-MM20VMD7FC-X	135
OR-MM20VMD8FC-X	135
OR-MM20VMD9FC-X	135
OR-MM20VMD706-X	125
OR-MM20VMD710-X	125
OR-MM20VMD712-X	125
OR-MM20VMD716-X	125
OR-MM20VMD806-X	125
OR-MM20VMD810-X	125
OR-MM20VMD812-X	125
OR-MM20VMD816-X	125
OR-MM20VMD906-X	125
OR-MM20VMD910-X	125
OR-MM20VMD912-X	125
OR-MM20VMDSK	126
OR-MM20VML704-X	126
OR-MM20VML706-X	126
OR-MM20VML804-X	126
OR-MM20VML806-X	126
OR-MM20VMS704-X	126
OR-MM20VMS706-X	126
OR-MM20VMS710-X	126
OR-MM20VMS804-X	126
OR-MM20VMS806-X	126
OR-MM20VMS810-X	126
OR-MM20VMS904-X	126
OR-MM20VMS906-X	126
OR-MM20VMS910-X	126
OR-MM20WFE-X	130
OR-MM207ADJABR-X	125
OR-MM207FXDABR-X	125
OR-MM208ADJABR-X	125
OR-MM208FXDABR-X	125
OR-MM209FXDABR-X	125
OR-MM20706-X	123
OR-MM20710-X	123
OR-MM20716-X	123

PART NO	PAGE
OR-MM20724-X	123
OR-MM20730FXD12-X	124
OR-MM20730FXD38-X	124
OR-MM20730-X	123
OR-MM20736ADJ12-X	124
OR-MM20736ADJ38-X	124
OR-MM20742ADJ12-X	124
OR-MM20742ADJ38-X	124
OR-MM20810-X	123
OR-MM20816-X	123
OR-MM20824-X	123
OR-MM20830FXD12-X	124
OR-MM20830FXD38-X	124
OR-MM20830-X	123
OR-MM20836ADJ12-X	124
OR-MM20836ADJ38-X	124
OR-MM20842ADJ12-X	124
OR-MM20842ADJ38-X	124
OR-MM20916-X	123
OR-MM20924-X	123
OR-MM20930FXD12-X	124
OR-MM20930FXD38-X	124
OR-MM20930-X	123
OR-MM67110D	82
OR-MMC24VPMLD	94
OR-MMC24VPMLS	94
OR-MMC42VPMLD	94
OR-MMC42VPMLS	94
OR-MMC47VPMLD	94
OR-MMC47VPMLS	94
OR-MMC243UCTPB-B	97
OR-MMC323UCTPB-B	97
OR-MMC2402VMFL	95
OR-MMC2406CTCE-B	96, 119
OR-MMC2412CTCE-B	96, 119
OR-MMC2418CTCE-B	96, 119
OR-MMC3206CTCE-B	96
OR-MMC3212CTCE-B	96
OR-MMC3218CTCE-B	96
OR-MMC4202VMFL	95
00 14140 (040) (145)	05

OR-MMC4212VMFU

PART NO	PAGE
OR-MMC4232ADK	100
OR-MMC4702VMFL	95
OR-MMC4712VMFU	95
OR-MMC4732ADK	100
OR-MMC420206VCT	94
OR-MMC420846-SC001	92
OR-MMC421646-SC001	92
OR-MMC422434-00004	90
OR-MMC422440-00005	89
OR-MMC422440-00006	89
OR-MMC422446-00002	89
OR-MMC422446-00003	89
OR-MMC423234-0000A	90
OR-MMC423240-0000G	89
OR-MMC423240-0000H	89
OR-MMC423240-0001J	90
OR-MMC423246-00007	89
OR-MMC423246-00008	89
OR-MMC423246-00016	90
OR-MMC424846-00001	91
OR-MMC424846-00002	91
OR-MMC470206VCT	94
OR-MMC470846-SC001	92
OR-MMC471646-SC001	92
OR-MMC472440-00003	89
OR-MMC472440-00004	89
OR-MMC472446-00001	89
OR-MMC472446-00002	89
OR-MMC473240-0000L	90
OR-MMC473240-00003	89
OR-MMC473240-00004	89
OR-MMC473246-0000H	90
OR-MMC473246-00001	89
OR-MMC473246-00002	89
OR-MMC474846-00001	91
OR-MMC474846-00002	91
OR-MMCAB421612	100
OR-MMCAB421632SA	100
OR-MMCAB423012	100
OR-MMCAB427018	93
OR-MMCAB471612	100

PART NO	PAGE
OR-MMCAB471632SA	100
OR-MMCAB473012	100
OR-MMCAB477018	93
OR-MMCCNTOOL	98, 120
OR-MMCCRMB06-B	97, 119
OR-MMCCRMB12-B	97, 119
OR-MMCCRMB18-B	97, 119
OR-MMCCRMB24-B	97
OR-MMCCRMB4706-B	97
OR-MMCCSS1-1912	99, 120
OR-MMCCSS2-1915	99, 120
OR-MMCCSS3-1915	99, 120
OR-MMCCSV1-1912	99, 120
OR-MMCCSV2-1915	99, 120
OR-MMCCSV3-1915	99, 120
OR-MMCCTMB06-B	96, 118
OR-MMCCTMB12-B	96, 118
OR-MMCCTMB18-B	96, 118
OR-MMCCTMB4706-B	96
OR-MMCCTMB4712-B	96, 97
OR-MMCCTMB4718-B	96, 97
OR-MMCCTMB4724-B	97
OR-MMCDR2-1915	99, 120
OR-MMCDR4-1915	99, 120
OR-MMCFAN-4-50	105, 121
OR-MMCFAN-6	100, 109, 112, 115
OR-MMCFAN-6-2	100
OR-MMCFANP19-4-2	100
OR-MMCFPS-1-B	99
OR-MMCFPS-2-B	99
OR-MMCFPS-3-B	99
OR-MMCFPS-4-B	99
OR-MMCFPS-5-B	99
OR-MMCFPS-6-B	99
OR-MMCFPT-1-B	99
OR-MMCFPT-2-B	99
OR-MMCFPT-3-B	99
OR-MMCFPT-4-B	99
OR-MMCFPT-8-B	99

## Ortronics®

### PART NUMBER INDEX





Support





Solutions



Adapter

PART NO	PAGE
	99, 110,
OR-MMCFSV-1926	113, 116, 120
OR-MMCISOB-38	98
OR-MMCISOB-38  OR-MMCISOB-50	
	98
OR-MMCLVL-IP	98
OR-MMCMBK	98
OR-MMCPB11510-01	101
OR-MMCPB11518-01	101
OR-MMCPB11524-01	101
OR-MMCPB12010-01	101
OR-MMCPB12018-01	101
OR-MMCPB12024-01	101
OR-MMCPB13016-01	101
OR-MMCPB13024-01	101
OR-MMCPB22012-01	101
OR-MMCPB22018-01	101
OR-MMCPB22024-01	101
OR-MMCPB23016-01	101
OR-MMCPB23024-01	101
OR-MMCPB23024-02	101
OR-MMCPM12010-01	102
OR-MMCPM12018-01	102
OR-MMCPM12024-01	102
OR-MMCPM13016-01	102
OR-MMCPM13024-01	102
OR-MMCPM22012-01	102
OR-MMCPM22018-01	102
OR-MMCPM22024-01	102
OR-MMCPM23016-01	102
OR-MMCPM23024-01	102
OR-MMCPM23024-02	102
OR-MMCRULBL-60-A	98, 120
OR-MMCSSVH-1930	99, 120
OR-MMCSSVL-1924	99, 120
OR-MMCSSVM-1924	99, 120
OR-MMCUN-1420-10	98, 120
OR-MMF4X2R2X2-Y	197
OR-MMF4X4R2X2-Y	197
OR-MMF4X4R4X2-Y	197
OR-MMF12X4R8X4-Y	197
OR-MMFAK4X4ADC4-Y	199

PART NO	PAGE
OR-MMFAK12X4ADC6-Y	199
OR-MMFAKI 4X4ADC6-Y	199
OR-MMFAKL8X4ADC6-Y	199
OR-MMFAKL8X4PAN6-Y	199
OR-MMFAKR4X4ADC6-Y	199
OR-MMFAKR8X4ADC6-Y	199
OR-MMFAKR8X4PAN6-Y	199
OR-MMFC4X2R2X2-Y	197
OR-MMFC4X4R2X2-Y	197
OR-MMFC4X4R4X2-Y	197
OR-MMFC12X4R8X4-Y	197
OR-MMFCFMBKT	201
OR-MMFCOT6	202
OR-MMFCOT35	202
OR-MMFCT50D1M-B	198
OR-MMFCT50D1M-Y	198
OR-MMFCT50D2M-B	198
OR-MMFCT50D2M-Y	198
OR-MMFCT50S350-B	199
OR-MMFCT50S350-Y	199
OR-MMFCTF751M-Y	199
OR-MMFCTF752M-Y	199
OR-MMFCTOC50S350-Y	199
OR-MMFDMB2	201
OR-MMFDMB4	201
OR-MMFDMB8	201
OR-MMFDMB12	201
OR-MMFEC2X238CO-Y	197
OR-MMFEC2X244TO-Y	197
OR-MMFEC4X4ESB-Y	197
OR-MMFEC4X432KO-Y	197
OR-MMFEC4X446KO-Y	197
OR-MMFEC4X488TO-Y	197
OR-MMFEC8X488TO-Y	197
OR-MMFFSLIN2X2-Y	196
OR-MMFFSLIN4X2-Y	196
OR-MMFFSLIN4X4-Y	196
OR-MMFFSLIN8X4-Y	196
OR-MMFFSLIN12X4-Y	196
OR-MMFFSLOF2X2-Y	196

OR-MMFFSLOF4X2-Y 196

PART NO	PAGE
OR-MMFFSL0F4X4-Y	196
OR-MMFFSLOF8X4-Y	196
OR-MMFFSL0F12X4-Y	196
OR-MMFHC2X2-Y	195
OR-MMFHC4X2-Y	195
OR-MMFHC4X4-Y	195
OR-MMFHC8X4T4-Y	195
OR-MMFHC8X4T12-Y	195
OR-MMFHC8X4-Y	195
OR-MMFHC12X4T4-Y	195
OR-MMFHC12X4-Y	195
OR-MMFHCC2X2-Y	195
OR-MMFHCC4X2-Y	195
OR-MMFHCC4X4-Y	195
OR-MMFHCC8X4T4-Y	196
OR-MMFHCC8X4T12-Y	196
OR-MMFHCC8X4-Y	195
OR-MMFHCC12X4T4-Y	196
OR-MMFHCC12X4-Y	195
OR-MMFHCD04X4-Y	198
OR-MMFHCD08X4-Y	198
OR-MMFHCDOK4X4-Y	198
OR-MMFHCDOK8X4-Y	198
OR-MMFHE302X2-Y	193
OR-MMFHE304X4-Y	193
OR-MMFHE308X4-Y	193
OR-MMFHE452X2-Y	193
OR-MMFHE454X4-Y	193
OR-MMFHE458X4-Y	193
OR-MMFHE902X2-Y	193
OR-MMFHE904X2-Y	193
OR-MMFHE904X4-Y	193
OR-MMFHE908X4-Y	193
OR-MMFHE4512X4-Y	193
OR-MMFHE9012X4-Y	193
OR-MMFHEC302X2-Y	193
OR-MMFHEC304X4-Y	193
OR-MMFHEC308X4-Y	193
OR-MMFHEC452X2-Y	193
OR-MMFHEC454X4-Y	193
OR-MMFHEC458X4-Y	193

DARTNO	DAGE
PART NO	PAGE
OR-MMFHEC902X2-Y	194
OR-MMFHEC904X2-Y	194
OR-MMFHEC904X4-Y	194
OR-MMFHEC908X4-Y	194
OR-MMFHEC4512X4-Y	193
OR-MMFHEC9012X4-Y	194
OR-MMFHT2X2-Y	194
OR-MMFHT4X2-Y	194
OR-MMFHT4X4-Y	194
OR-MMFHT8X4-Y	194
OR-MMFHT12X4-Y	194
OR-MMFHTC2X2-Y	194
OR-MMFHTC4T8-Y	194
OR-MMFHTC4X2-Y	194
OR-MMFHTC4X4-Y	194
OR-MMFHTC8T4-Y	194
OR-MMFHTC8X4-Y	194
OR-MMFHTC12T4-Y	194
OR-MMFHTC12T8-Y	194
OR-MMFHTC12X4-Y	194
OR-MMFJ2X2-Y	191
OR-MMFJ4X2-Y	191
OR-MMFJ4X4-Y	191
OR-MMFJ8X4-Y	191
OR-MMFJ12X4-Y	191
OR-MMFJSL4X4-Y	191
OR-MMFJSL8X4-Y	191
OR-MMFJSL12X4-Y	191
OR-MMFL8X4R4X4-Y	197
OR-MMFLC8X4R4X4-Y	197
OR-MMFMB0X4812	202
OR-MMFMMK4	199
OR-MMFMMK8	199
OR-MMFMMKEX4	199
OR-MMFMMKEX8	199
OR-MMF0T2-Y	197
OR-MMFOT4-Y	197
OR-MMFOT8-Y	197
OR-MMFOT12-Y	197
OR-MMFR8X4R4X4-Y	197
OR-MMFRC8X4R4X4-Y	197



#### Ortronics®



PART NO



PAGE



Fiber





Solutions



PART NO	PAGE
OR-MMFRFPMK	201
OR-MMFRG10-Y	197
OR-MMFRMK2	200
OR-MMFRMK4	200
OR-MMFRMK8	200
OR-MMFRMK12	200
OR-MMFRUNBK2	201
OR-MMFRUNBK4812	201
OR-MMFSD2X2-Y	190
OR-MMFSD4X2-Y	190
OR-MMFSD4X4-Y	190
OR-MMFSD8X4-Y	190
OR-MMFSD12X4-Y	190
OR-MMFSDC2X2-Y	190
OR-MMFSDC4X2-Y	190
OR-MMFSDC4X4-Y	190
OR-MMFSDC8X4-Y	190
OR-MMFSDC12X4-Y	190
OR-MMFSDHC2X2-Y	190
OR-MMFSDHC4X2-Y	190
OR-MMFSDHC4X4-Y	190
OR-MMFSDHC8X4-Y	190
OR-MMFSDK2X2-Y	198
OR-MMFSDK4X2-Y	198
OR-MMFSDK4X4-Y	198
OR-MMFSDK50DCT-Y	198
OR-MMFSDK50SCT-Y	198
OR-MMFSL2X2-Y	190

190

190

190

190

201

200

OR-MMFSL4X2-Y OR-MMFSL4X4-Y

OR-MMFSLC2X2-Y

OR-MMFSLC4X2-Y OR-MMFSLC4X4-Y

OR-MMFSLHC2X2-Y OR-MMFSLHC4X2-Y OR-MMFSLHC4X4-Y

OR-MMFST2 OR-MMFST48 OR-MMFSTFO OR-MMFSTS4X2

OR-MMFSUSK124

PART NO	PAGE
OR-MMFSUSK128	200
OR-MMFSUSK164	200
OR-MMFSUSK168	200
OR-MMFSUSK1212	200
OR-MMFSUSK5812	200
OR-MMFSUSKNR12	200
OR-MMFU158MB4812	201
OR-MMFVE30D2X2-Y	191
OR-MMFVE30D4X4-Y	191
OR-MMFVE30D8X4-Y	191
OR-MMFVE30U4X4-Y	191
OR-MMFVE30U8X4-Y	191
OR-MMFVE45D2X2-Y	191
OR-MMFVE45D4X4-Y	191
OR-MMFVE45D8X4-Y	191
OR-MMFVE45D12X4-Y	191
OR-MMFVE45U2X2-Y	192
OR-MMFVE45U4X4-Y	192
OR-MMFVE45U8X4-Y	192
OR-MMFVE45U12X4-Y	192
OR-MMFVE90D2X2-Y	192
OR-MMFVE90D4X2-Y	192
OR-MMFVE90D4X4-Y	192
OR-MMFVE90D8X4-Y	192
OR-MMFVE90D12X4-Y	192
OR-MMFVE90U2X2-Y	192
OR-MMFVE90U4X2-Y	192
OR-MMFVE90U4X4-Y	192
OR-MMFVE90U8X4-Y	192
OR-MMFVE90U12X4-Y	192
OR-MMFVEC30D2X2-Y	191
OR-MMFVEC30D4X4-Y	191
OR-MMFVEC30D8X4-Y	191
OR-MMFVEC30U4X4-Y	191
OR-MMFVEC30U8X4-Y	191
OR-MMFVEC45D2X2-Y	192
OR-MMFVEC45D4X4-Y	192
OR-MMFVEC45D8X4-Y	192
OR-MMFVEC45D12X4-Y	192
OR-MMFVEC45U2X2-Y	192
OR-MMFVEC45U4X4-Y	192

OR-MMFVEC45U8X4-Y	192
OR-MMFVEC45U12X4-Y	192
OR-MMFVEC90D2X2-Y	192
OR-MMFVEC90D4X2-Y	192
OR-MMFVEC90D4X4-Y	192
OR-MMFVEC90D8X4-Y	192
OR-MMFVEC90D12X4-Y	192
OR-MMFVEC90U2X2-Y	193
OR-MMFVEC90U4X2-Y	193
OR-MMFVEC90U4X4-Y	193
OR-MMFVEC90U8X4-Y	193
OR-MMFVEC90U12X4-Y	193
OR-MMFVEE90UD4X4-Y	193
OR-MMFVEE90UD8X4-Y	193
OR-MMFVER30D4X4-Y	191
OR-MMFVER30D8X4-Y	191
OR-MMFVER30U4X4-Y	191
OR-MMFVER30U8X4-Y	191
OR-MMFVER45D4X4-Y	192
OR-MMFVER45D8X4-Y	192
OR-MMFVER45U2X2-Y	192
OR-MMFVER45U4X4-Y	192
OR-MMFVER45U8X4-Y	192
OR-MMFVER90D2X2-Y	192
OR-MMFVER90D4X2-Y	192
OR-MMFVER90D4X4-Y	192
OR-MMFVER90D8X4-Y	192
OR-MMFVER90U2X2-Y	193
OR-MMFVER90U4X2-Y	193
OR-MMFVER90U4X4-Y	193
OR-MMFVER90U8X4-Y	193
OR-MMFVT2X2T2-Y	195
OR-MMFVT4X2T4-Y	195
OR-MMFVT4X4T4-Y	195
OR-MMFVT8X4T4-Y	195
OR-MMFVT12X4T8-Y	195
OR-MMFVTC2X2T2-Y	195
OR-MMFVTC4X2T4-Y	195
OR-MMFVTC4X4T4-Y	195
OR-MMFVTC8X4T4-Y	195
OR-MMFVTC8X4T8-Y	195

PART NO	PAGE
OR-MMFVTC12X4T8-Y	195
OR-MMFVTR2X2T2-Y	195
OR-MMFVTR4X4T4-Y	195
OR-MMFVTR8X4T4-Y	195
OR-MMW12M12-B	105
OR-MMW19M12-B	105
OR-MMW26M12-B	105
OR-MMW122420P-B	105
OR-MMW122420S-B	105
OR-MMW122426P-B	105
OR-MMW122426S-B	105
OR-MMW192420P-B	105
OR-MMW192420S-B	105
OR-MMW192426P-B	105
OR-MMW192426S-B	105
OR-MMW262420P-B	105
OR-MMW262420S-B	105
OR-MMW262426P-B	105
OR-MMW262426S-B	105
OR-MMWBPK	105, 121
OR-MMWHMBM12-B	105
OR-OFP-LCD12AC	216
OR-OFP-LCD12LC	216
OR-OFP-LCD12MB	216
OR-OFP-LCQ24AC	216
OR-OFP-LCQ24LC	216
OR-OFP-LCQ24MB	216
OR-OFP-MPA72CA	215
OR-OFP-MPA72LA	215
OR-OFP-MPA72MA	215
OR-OFP-MPA96CA	215
OR-OFP-MPA96LA	215
OR-OFP-MPA96MA	215
OR-OFP-MTD12AA	216
OR-OFP-MTD12LA	216
OR-OFP-MTD12MA	216
OR-OFP-SCD06AC	216
OR-OFP-SCD06LC	216
OR-OFP-SCD06MB	216
OR-OFP-SCD08AC	216
OR-OFP-SCD08LC	216

Ortronics®

OR-OFP-SCS06AC OR-OFP-SCS06LC OR-OFP-SCS06MB OR-PODC8IPPZPZ001M OR-P0DC8IPPZPZ002M OR-PODC8IPPZPZ003M OR-PODF8LPWZWZ001M OR-P0DF8LPWZWZ002M OR-PODF8LPWZWZ003M OR-PODG8LPAZAZ001M OR-P0DG8LPAZAZ002M OR-PODG8LPAZAZ003M OR-P0DG8LPWZWZ001M OR-P0DG8LPWZWZ002M

OR-PODG8LPWZWZ003M

OR-PORG8LPAZAZ002M

OR-PORG8LPAZAZ003M

OR-P1DC2IRRZRZ001M

OR-P1DC2IRRZRZ002M

OR-P1DC2IRRZRZ003M

OR-P1DC2IRRZSZ001M

OR-P1DC2IRRZSZ002M

OR-P1DC2IRRZSZ003M

OR-P1DC2IRSZSZ001M

OR-P1DC2IRSZSZ002M

OR-P1DC2IRSZSZ003M

OR-P1DC6IPUZUZ001M

OR-P1DC6IPUZUZ002M

OR-P1DC6IPUZUZ003M

OR-P1DF2LRFZFZ001M

OR-P1DF2LRFZFZ002M

OR-P1DF2LRFZFZ003M

OR-P1DF2LRFZGZ001M

OR-P1DF2LRFZGZ002M

OR-P1DF2LRFZGZ003M

OR-P1DF2LRGZGZ001M

OR-P1DF2LRGZGZ002M



DART NO

Connectivity



DAGE





Solutions



Adapters

PART NO	PAGE	PART NO PAGE
OR-OFP-SCD08MB	216	OR-P1DF2LRGZGZ003M 254
OR-OFP-SCD12AC	216	OR-P1DF6LPAZAZ001M 251
OR-OFP-SCD12LC	216	OR-P1DF6LPAZAZ002M 251
OR-OFP-SCD12MB	216	OR-P1DF6LPAZAZ003M 251

OR-P1DF6LPAZAZ001M	251
OR-P1DF6LPAZAZ002M	251
OR-P1DF6LPAZAZ003M	251
OR-P1PC9FRRZZZ001M	259
OR-P1PC9FRRZZZ002M	259
OR-P1PC9FRSZZZ001M	259
OR-P1PC9FRSZZZ002M	259
OR-P1PF9FRFZZZ001M	258
OR-P1PF9FRFZZZ002M	258
OR-P1PF9FRGZZZ002M	258

OR-P1PC9FRSZZZ001M	259
OR-P1PC9FRSZZZ002M	259
OR-P1PF9FRFZZZ001M	258
OR-P1PF9FRFZZZ002M	258
OR-P1PF9FRGZZZ002M	258
OR-P1RC6IPUZUZ001M	252
OR-P1RC6IPUZUZ002M	252
OR-P1RC6IPUZUZ003M	252
OR-P1RF6LPAZAZ001M	251
OR-P1RF6LPAZAZ002M	251
OR-P1RF6LPAZAZ003M	251
OR-P1SC4ZRRZZZ001M	259

OR-P1RF6LPAZAZ003M	251
OR-P1SC4ZRRZZZ001M	259
OR-P1SC4ZRRZZZ002M	259
OR-P1SC4ZRSZZZ001M	259
OR-P1SC4ZRSZZZ002M	259
OR-P1SF4ZRFZZZ001M	258
OR-P1SF4ZRFZZZ002M	258
OR-P1SF4ZRGZZZ001M	258
OR-P1SF4ZRGZZZ002M	258
OR-P1TC4FRFZZZ001M	259
OR-P1TC4FRFZZZ002M	259
OP_D1TC/EDG777001M	250

OR-P1TC4FRGZZZ001M	259
OR-P1TC4FRGZZZ002M	259
OR-P3DF2LRFZFZ001M	253
OR-P3DF2LRFZFZ002M	253
OR-P3DF2LRFZFZ003M	253
OR-P3DF2LRFZGZ001M	253
OR-P3DF2LRFZGZ002M	253
OR-P3DF2LRFZGZ003M	253
OR-P3DF2LRGZGZ001M	253
OR-P3DF2LRGZGZ002M	253
OR-P3DF2LRGZGZ003M	253

OR-P3DF6LPAZAZ001M

OR-P3DF6LPAZAZ002M

OR-P3DF6LPAZAZ003M

PART NO	PAGE
OR-P3DF6LPWZWZ001M	250
OR-P3DF6LPWZWZ002M	250
OR-P3DF6LPWZWZ003M	250
OR-P3DG2LRFZFZ001M	253, 254
OR-P3DG2LRFZFZ002M	253, 254
OR-P3DG2LRFZFZ003M	253, 254
OR-P3DG2LRFZGZ001M	253, 254
OR-P3DG2LRFZGZ002M	253, 254
OR-P3DG2LRFZGZ003M	253, 254
OR-P3DG2LRGZGZ001M	253, 254
OR-P3DG2LRGZGZ002M	253, 254
OR-P3DG2LRGZGZ003M	253, 254
OR-P3DG8LPAZAZ001M	249
OR-P3DG8LPAZAZ002M	249
OR-P3DG8LPAZAZ003M	249
OR-P3DG8LPWZWZ001M	249
OR-P3DG8LPWZWZ002M	249
OR-P3DG8LPWZWZ003M	249
OR-P3PF9FRFZZZ001M	257
OR-P3PF9FRFZZZ002M	257
OR-P3PF9FRGZZZ001M	257
OR-P3PF9FRGZZZ002M	257
OR-P3PG9FRFZZZ001M	256
OR-P3PG9FRFZZZ002M	256
OR-P3PG9FRGZZZ001M	256
OR-P3PG9FRGZZZ002M	256
OR-P3RF6LPAZAZ001M	250
OR-P3RF6LPAZAZ002M	250
OR-P3RF6LPAZAZ003M	250
OR-P3RG8LPAZAZ001M	249
OR-P3RG8LPAZAZ002M	249
OR-P3RG8LPAZAZ003M	249
OR-P3SF4ZRFZZZ001M	257
OR-P3SF4ZRFZZZ002M	257
OR-P3SF4ZRGZZZ001M	257
OR-P3SF4ZRGZZZ002M	257
OR-P3SG4FRFZZZ001M	256
OR-P3SG4FRFZZZ002M	256
OR-P3SG4FRGZZZ001M	256
OD D000/ED0777000	05/

OR-P3SG4FRGZZZ002M

OR-P3TF4FRFZZZ001M

256, 258

OR-P987649H

PART NO	PAGE
OR-P3TF4FRFZZZ002M	256, 258
OR-P3TF4FRGZZZ001M	258
OR-P3TF4FRGZZZ002M	258
OR-P3TF4ZRFZZZ001M	257
OR-P3TF4ZRFZZZ002M	257
OR-P3TF4ZRGZZZ001M	257
OR-P3TF4ZRGZZZ002M	257
OR-P3TG4FRGZZZ001M	256
OR-P3TG4FRGZZZ002M	256
OR-P128040HB	185
OR-P128240HB	185
OR-P128440HB	185
OR-P128640HB	185
OR-P139240HB	184
OR-P139340HB	184
OR-P139540HB	184
OR-P139740HB	184
OR-P400298HB	186
OR-P401750H-1DB	183
OR-P406395H	186, 187
OR-P820127H	182
OR-P820127HA	182
OR-P820147H	182
OR-P820287H	183
OR-P820327H	183
OR-P820367H	182
OR-P820527HB	184
OR-P820547H	186, 187
OR-P820667HB	186
OR-P820677HB	186
OR-P820827HB	183
OR-P982078HB	187
OR-P987523H	188
OR-P987524H	188
OR-P987525H	188
OR-P987526H	188
OR-P987527H	188
OR-P987528H	188
OR-P987529H	188
OR-P987645H	187

#### 

### PART NUMBER INDEX

#### Ortronics®







Fiber



Solutions



PART NO	PAGE
OR-P987650H	187
OR-PCU56	177
OR-PCU152	177
OR-PCU253	177
OR-PCU354	177
OR-PCU575	177
OR-PCU1125	177
OR-PHA5E6U24	47
OR-PHA5E6U48	47
OR-PHA5E2124	52
OR-PHA5E2148	52
OR-PHA6AU24	45
OR-PHA6AU48	45
OR-PHA66U24	47
OR-PHA66U48	47
OR-PHAHJU24	48, 222
OR-PHAHJU48	48, 222
OR-PHAHJU72	48, 222
OR-PHASJU24	60
OR-PHASJU48	60
OR-PHATKS6A24	54
OR-PHATKS6A48	54
OR-PHATKSU24	54
OR-PHATKSU48	54
OR-PHC6AU24	45
OR-PHC6AU48	45
OR-PHC66U24	47
OR-PHC66U48	47
OR-PHD5E6U24	46
OR-PHD5E6U48	46
OR-PHD5E6U96	46
OR-PHD5E8U24	46
OR-PHD5E8U48	46
OR-PHD5E8U96	46
OR-PHD5E2124	52
OR-PHD5E2148	52
OR-PHD5EFF24	52
OR-PHD6AU24	45
OR-PHD6AU48	45
OR-PHD6FF24	52
OR-PHD66U24	46

PART NO	PAGE
OR-PHD66U24HM	50
OR-PHD66U48	46
OR-PHD66U48HM	50
OR-PHD66U96	46
OR-PHD68U24	46
OR-PHD68U48	46
OR-PHD68U96	46
OR-PHDHJU24	48, 222
OR-PHDHJU48	48, 222
OR-PHDHJU72	48, 222
OR-PHDPJS5E24	53
OR-PHDPJS6A24	53
OR-PHDSJU24	60
OR-PHDSJU48	60
OR-PHDTKS6A24	54
OR-PHDTKS6A48	54
OR-PHDTKSU24	54
OR-PHDTKSU48	54
OR-PHMC1RU	154
OR-PHMC2RU	154
OR-PJSN6A-XX	60
OR-PJSN6-XX	60
OR-PJSNIC-53	61
OR-PMP5E12H	46
OR-PMP5E1289	46
OR-PMP612H	46
OR-PMP61289	46
OR-PPCA66U24	60
OR-PPCA66U48	60
OR-PPCA610U24	60
OR-PPCA610U48	60
OR-PPCF66U24	60
OR-PPCF66U48	60
OR-PPCF610U24	60
OR-PPCF610U48	60
0R-PS-1032CN	168
OR-PS-1224CN	98, 110, 113, 116, 120, 168
OR-PSD5E6U12	46
OR-PSD5E6U24	46
OR-PSD5E6U48	46

OR-PSD5E6U96 OR-PSD66U12 OR-PSD66U24 OR-PSD66U24 OR-PSD66U24HM OR-PSD66U48 OR-PSD66U48HM OR-PSD66U96 OR-PSD66U96 OR-PS-M6X1-50 OR-PS-M6X1CN OR-PS-M6X1CN OR-RECBK-6 OR-RECBK-6B OR-RECBK-12B OR-RECBK-12B OR-RECBK-12B OR-RECBK-24B OR-RECBK-24B OR-REK-2-3 OR-REFP01U OR-RFP01U OR-RFPA01U-A OR-RFPA01U-A OR-RFPA01U-A OR-RFPAD01U-A OR-RFPAD01U-	PART NO	PAGE
OR-PSD66U24       46         OR-PSD66U24HM       50         OR-PSD66U48       46         OR-PSD66U48HM       50         OR-PSD66U96       46         OR-PS-M6X1-50       98, 120         OR-PS-M6X1CN       168         OR-PS-M6X1CN       168         OR-PS-M6X1CN       185         OR-RCBK-6       185         OR-RECBK-12B       181         OR-RECBK-18B       181         OR-RECBK-24B       181         OR-REK-4-6       185         OR-REK-4-6       185         OR-RFP01U       223         OR-RFPA01U       224         OR-RFPA01U-A       225         OR-RFPAD02U-A       225         OR-RFPAHD01U-A       225         OR-RFPAHD02U-A       225         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RHB-06B       186         OR-RHB-06B       186         OR-RRJC-S       142         OR-RRJC-T       147         OR-RRJC-T       147         OR-S21RJ25       33         OR-S22RJ25-5E       33         OR-S22RJ25-5E       33	OR-PSD5E6U96	46
OR-PSD66U24HM         50           OR-PSD66U48         46           OR-PSD66U48HM         50           OR-PSD66U96         46           OR-PS-M6X1-50         98, 120           OR-PS-M6X1CN         78, 120           OR-PS-M6X1CN         168           OR-PS-M6X1CN         185           OR-RECBK-6         185           OR-RECBK-12B         181           OR-RECBK-12B         181           OR-RECBK-24B         181           OR-RECBK-24B         181           OR-REK-2-3         185           OR-REK-4-6         185           OR-REFP01U         223           OR-RFP02U         223           OR-RFPA01U-A         225           OR-RFPAD02U         224           OR-RFPAHD01U-A         225           OR-RFPAHD02U-A         225           OR-RFPHD01U         223           OR-RFPHD02U         223           OR-RHB-06B         186           OR-RRJC-S         142           OR-RRJC-S         142           OR-RRJC-T         147           OR-S21RJ25         33           OR-S22RJ25         33           OR-S22RJ25-5E </td <td>OR-PSD66U12</td> <td>46</td>	OR-PSD66U12	46
OR-PSD66U48       46         OR-PSD66U96       46         OR-PSD66U96       46         OR-PS-M6X1-50       98, 120, 168         OR-PS-M6X1CN       185         OR-RCBK-6       185         OR-RECBK-6B       181         OR-RECBK-12B       181         OR-RECBK-18B       181         OR-RECBK-24B       185         OR-REK-4-6       185         OR-RFP01U       223         OR-RFPA01U       224         OR-RFPA02U       224         OR-RFPA02U-A       225         OR-RFPAHD01U-A       225         OR-RFPAHD01U-A       225         OR-RFPAHD02U-A       225         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U-A       225         OR-RFPHD01U       223         OR-RHB-06B       186         OR-RHB-06B       186         OR-RRJC-S       142         OR-RRJC-S       142         OR-RRJC-T       147         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-PSD66U24	46
OR-PSD66U48HM         50           OR-PSD66U96         46           OR-PS-M6X1-50         98, 120           OR-PS-M6X1CN         98, 120, 168           OR-PS-M6X1CN         185           OR-RECBK-6         185           OR-RECBK-6B         181           OR-RECBK-12B         181           OR-RECBK-24B         181           OR-RECBK-24B         185           OR-REK-2-3         185           OR-REK-4-6         185           OR-RFP01U         223           OR-RFPA01U         224           OR-RFPA01U-A         225           OR-RFPAD02U         224           OR-RFPAHD01U-A         225           OR-RFPAHD02U         224           OR-RFPAHD02U-A         225           OR-RFPHD01U         223           OR-RFPHD02U         223           OR-RHB-06B         186           OR-RHB-12B         186           OR-RRJC-S         142           OR-RRJC-S         142           OR-RRJC-T         147           OR-S21RJ25         33           OR-S22RJ25         33           OR-S22RJ25-5E         33	OR-PSD66U24HM	50
OR-PSD66U96       46         OR-PS-M6X1-50       98, 120         OR-PS-M6X1CN       168         OR-RCBK-6       185         OR-RECBK-6B       181         OR-RECBK-12B       181         OR-RECBK-18B       181         OR-RECBK-24B       185         OR-REK-2-3       185         OR-REK-4-6       185         OR-RFP01U       223         OR-RFPA01U-A       225         OR-RFPA01U-A       225         OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RRJC-S       142         OR-RRJC-T       147         OR-RC-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-PSD66U48	46
OR-PS-M6X1-50         98, 120           OR-PS-M6X1CN         98, 120, 168           OR-RCBK-6         185           OR-RECBK-6B         181           OR-RECBK-12B         181           OR-RECBK-18B         181           OR-RECBK-24B         181           OR-REK-2-3         185           OR-REK-4-6         185           OR-RFP01U         223           OR-RFPA01U         224           OR-RFPA01U-A         225           OR-RFPA02U-A         225           OR-RFPAHD01U-A         225           OR-RFPAHD01U-A         225           OR-RFPAHD02U-A         225           OR-RFPAHD01U         223           OR-RFPHD01U         223           OR-RFPHD02U         223           OR-RHB-06B         186           OR-RHB-06B         186           OR-RRJC-S         142           OR-RRJC-S         142           OR-RRJC-T         147           OR-S21RJ25         33           OR-S22RJ25         33           OR-S22RJ25-5E         33	OR-PSD66U48HM	50
OR-PS-M6X1CN       98, 120, 168         OR-RCBK-6       185         OR-RECBK-6B       181         OR-RECBK-12B       181         OR-RECBK-18B       181         OR-RECBK-24B       181         OR-REK-2-3       185         OR-REK-4-6       185         OR-RFP01U       223         OR-RFPA01U       224         OR-RFPA02U       224         OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U       224         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RRJC-S       142         OR-RRJC-S       142         OR-RRJC-T       147         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-PSD66U96	46
OR-PS-M6XICN  OR-RCBK-6  OR-RECBK-6B  OR-RECBK-12B  OR-RECBK-18B  OR-RECBK-24B  OR-RECBK-24B  OR-REK-2-3  OR-REK-4-6  OR-RFP01U  OR-RFP01U  OR-RFPA01U-A  OR-RFPA01U-A  OR-RFPA02U  OR-RFPAD01U  OR-RFPAHD01U  OR-RFPAHD01U  OR-RFPAHD01U-A  OR-RFPAHD01U-A  OR-RFPAHD01U-A  OR-RFPAHD01U-A  OR-RFPAHD01U-A  OR-RFPAHD01U-A  OR-RFPAHD01U-A  OR-RFPAHD01U  OR-RFPAHD01U  OR-RFPAHD01U  OR-RFPAHD01U  OR-RFPAHD01U  OR-RFPAHD01U  OR-RFPAHD01U  OR-RFPAHD01U  OR-RFPHD01U  OR-RFPHD01U  OR-RFPHD01U  OR-RHB-06B  OR-RHB-12B  OR-RMS011164SA09  OR-RMS011164SA09  OR-RRJC-T  OR-RU-1224CN  OR-S21RJ25  OR-S21RJ25  OR-S22RJ25  OR-S22RJ25-5E  33  OR-S22RJ25-5E	OR-PS-M6X1-50	
OR-RECBK-6B       181         OR-RECBK-12B       181         OR-RECBK-18B       181         OR-RECBK-24B       181         OR-REK-2-3       185         OR-REK-4-6       185         OR-RFP01U       223         OR-RFPA01U       224         OR-RFPA01U-A       225         OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U       224         OR-RFPAHD02U-A       225         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RRJC-S       142         OR-RRJC-T       147         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-PS-M6X1CN	
OR-RECBK-12B       181         OR-RECBK-18B       181         OR-RECBK-24B       181         OR-REK-2-3       185         OR-REK-4-6       185         OR-RFP01U       223         OR-RFP02U       223         OR-RFPA01U-A       225         OR-RFPA02U       224         OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U       224         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RMS011164SA09       217         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-M6X1CN       98         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RCBK-6	185
OR-RECBK-18B       181         OR-RECBK-24B       181         OR-REK-2-3       185         OR-REK-4-6       185         OR-RFP01U       223         OR-RFP02U       223         OR-RFPA01U       224         OR-RFPA01U-A       225         OR-RFPA02U-A       224         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U-A       225         OR-RFPAHD01U       223         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RMS011164SA09       217         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RECBK-6B	181
OR-RECBK-24B       181         OR-REK-2-3       185         OR-REK-4-6       185         OR-RFP01U       223         OR-RFP02U       223         OR-RFPA01U       224         OR-RFPA01U-A       225         OR-RFPA02U       224         OR-RFPAD02U-A       225         OR-RFPAHD01U-A       225         OR-RFPAHD02U-A       225         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RMS011164SA09       217         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RECBK-12B	181
OR-REK-2-3       185         OR-REK-4-6       185         OR-RFP01U       223         OR-RFP02U       223         OR-RFPA01U       224         OR-RFPA01U-A       225         OR-RFPA02U       224         OR-RFPAD02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD02U       224         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RMS011164SA09       217         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98,120,168         OR-RU-M6X1CN       98         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RECBK-18B	181
OR-REK-4-6 OR-RFP01U OR-RFP02U OR-RFP02U OR-RFPA01U OR-RFPA01U-A OR-RFPA02U OR-RFPA02U-A OR-RFPAHD01U OR-RFPAHD01U-A OR-RFPAHD01U-A OR-RFPAHD01U-A OR-RFPAHD02U-A OR-RFPAHD02U-A OR-RFPAHD02U-A OR-RFPAHD02U-A OR-RFPAHD02U OR-RFPHD01U OR-RFPHD02U OR-RFPHD01U OR-RFPHD02U OR-RHB-06B OR-RHB-12B OR-RMS011164SA09 OR-RMS011164SA09 OR-RRJC-S OR-RRJC-T OR-RU-1224CN OR-RU-1224CN OR-S21RJ25 OR-S21RJ25 OR-S22RJ25 OR-S22RJ25-5E  33 OR-S22RJ25-5E	OR-RECBK-24B	181
OR-RFP01U       223         OR-RFP02U       223         OR-RFPA01U       224         OR-RFPA01U-A       225         OR-RFPA02U       224         OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U       224         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RMS011164SA09       217         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-S21RJ25       33         OR-S21RJ61       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-REK-2-3	185
OR-RFP02U       223         OR-RFPA01U       224         OR-RFPA01U-A       225         OR-RFPA02U       224         OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RMS011164SA09       217         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-REK-4-6	185
OR-RFPA01U       224         OR-RFPA01U-A       225         OR-RFPA02U       224         OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U       224         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RMS011164SA09       217         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-RU-M6X1CN       98         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RFP01U	223
OR-RFPA01U-A       225         OR-RFPA02U       224         OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-RU-M6X1CN       98         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RFP02U	223
OR-RFPA02U       224         OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U-A       225         OR-RFPAHD01U       223         OR-RFPHD01U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RMS011164SA09       217         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-RU-M6X1CN       98         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RFPA01U	224
OR-RFPA02U-A       225         OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U       224         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RMS011164SA09       217         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-RU-M6X1CN       98         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RFPA01U-A	225
OR-RFPAHD01U       224         OR-RFPAHD01U-A       225         OR-RFPAHD02U       224         OR-RFPAHD02U-A       225         OR-RFPHD01U       223         OR-RFPHD02U       223         OR-RHB-06B       186         OR-RHB-12B       186         OR-RRJC-S       142         OR-RRJC-T       147         OR-RU-1224CN       98, 120, 168         OR-RU-M6X1CN       98         OR-S21RJ25       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RFPA02U	224
OR-RFPAHD01U-A  OR-RFPAHD02U  OR-RFPAHD02U-A  OR-RFPHD01U  OR-RFPHD02U  OR-RFPHD02U  OR-RHB-06B  OR-RHB-12B  OR-RMS011164SA09  OR-RRJC-S  OR-RRJC-T  OR-RU-1224CN  OR-RU-1224CN  OR-S21RJ25  OR-S21RJ61  OR-S22RJ25-5E  32  32  33  OR-S22RJ25-5E	OR-RFPA02U-A	225
OR-RFPAHD02U 224  OR-RFPAHD02U-A 225  OR-RFPHD01U 223  OR-RFPHD02U 223  OR-RHB-06B 186  OR-RHB-12B 186  OR-RMS011164SA09 217  OR-RRJC-S 142  OR-RRJC-T 147  OR-RU-1224CN 98, 120, 168  OR-S21RJ25 33  OR-S21RJ61 33  OR-S22RJ25-5E 33	OR-RFPAHD01U	224
OR-RFPAHD02U-A  OR-RFPHD01U  OR-RFPHD02U  OR-RFPHD02U  OR-RHB-06B  OR-RHB-12B  OR-RMS011164SA09  OR-RRJC-S  OR-RRJC-T  OR-RU-1224CN  OR-RU-1224CN  OR-S21RJ25  OR-S21RJ61  OR-S22RJ25  OR-S22RJ25-5E  33  OR-S22RJ25-5E	OR-RFPAHD01U-A	225
OR-RFPHD01U 223 OR-RFPHD02U 223 OR-RHB-06B 186 OR-RHB-12B 186 OR-RMS011164SA09 217 OR-RRJC-S 142 OR-RRJC-T 147 OR-RU-1224CN 98, 120, 168 OR-S21RJ25 33 OR-S21RJ61 33 OR-S22RJ25 33 OR-S22RJ25 33	OR-RFPAHD02U	224
OR-RFPHD02U 223 OR-RHB-06B 186 OR-RHB-12B 186 OR-RMS011164SA09 217 OR-RRJC-S 142 OR-RRJC-T 147 OR-RU-1224CN 98, 120, 168 OR-S21RJ25 33 OR-S21RJ61 33 OR-S22RJ25 33 OR-S22RJ25 33	OR-RFPAHD02U-A	225
OR-RHB-06B 186 OR-RHB-12B 186 OR-RMS011164SA09 217 OR-RRJC-S 142 OR-RRJC-T 147 OR-RU-1224CN 98, 120, 168 OR-S21RJ25 33 OR-S21RJ61 33 OR-S22RJ25 33 OR-S22RJ25 33	OR-RFPHD01U	223
OR-RHB-12B 186 OR-RMS011164SA09 217 OR-RRJC-S 142 OR-RRJC-T 147 OR-RU-1224CN 98, 120, 168 OR-RU-M6X1CN 98 OR-S21RJ25 33 OR-S21RJ61 33 OR-S22RJ25 33 OR-S22RJ25 33	OR-RFPHD02U	223
OR-RMS011164SA09 217 OR-RRJC-S 142 OR-RRJC-T 147 OR-RU-1224CN 98, 120, 168 OR-RU-M6X1CN 98 OR-S21RJ25 33 OR-S21RJ61 33 OR-S22RJ25 33 OR-S22RJ25 33	OR-RHB-06B	186
OR-RRJC-S 142 OR-RRJC-T 147 OR-RU-1224CN 98, 120, 168 OR-RU-M6X1CN 98 OR-S21RJ25 33 OR-S21RJ61 33 OR-S22RJ25 33 OR-S22RJ25 33	OR-RHB-12B	186
OR-RRJC-T 147  OR-RU-1224CN 98, 120, 168  OR-RU-M6X1CN 98  OR-S21RJ25 33  OR-S21RJ61 33  OR-S22RJ25 33  OR-S22RJ25 33	OR-RMS011164SA09	217
OR-RU-1224CN       98, 120, 168         OR-RU-M6X1CN       98         OR-S21RJ25       33         OR-S21RJ61       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RRJC-S	142
OR-RU-M6X1CN 98 OR-S21RJ25 33 OR-S21RJ61 33 OR-S22RJ25 33 OR-S22RJ25 33	OR-RRJC-T	147
OR-S21RJ25       33         OR-S21RJ61       33         OR-S22RJ25       33         OR-S22RJ25-5E       33	OR-RU-1224CN	
OR-S21RJ61 33 OR-S22RJ25 33 OR-S22RJ25-5E 33	OR-RU-M6X1CN	98
OR-S22RJ25     33       OR-S22RJ25-5E     33	OR-S21RJ25	33
OR-S22RJ25-5E 33	OR-S21RJ61	33
	OR-S22RJ25	33
OR-S22RJ61 33	OR-S22RJ25-5E	33
	OR-S22RJ61	33

PART NO	PAGE
OR-S215E00	33
OR-S225E00	33
OR-S21600	33
OR-S22600	33
OR-SHMC1RU	154
OR-SHMC2RU	154
OR-SP5EU24	281
OR-SP5EU48	281
OR-SP6U24	281
OR-SP6U48	281
OR-SPA5EU24	281
OR-SPA5EU48	281
OR-SPA6U24	281
OR-SPA6U48	281
OR-SPAKSU24	281
OR-SPAKSU48	281
OR-SPC5E03-XX	282
OR-SPC5E05-XX	282
OR-SPC5E07-XX	282
OR-SPC5E10-XX	282
OR-SPC5E15-XX	282
OR-SPC5E25-XX	282
OR-SPC603-XX	282
OR-SPC605-XX	282
OR-SPC607-XX	282
OR-SPC610-XX	282
OR-SPC615-XX	282
OR-SPC625-XX	282
OR-SPCA5E03-XX	282
OR-SPCA5E05-XX	282
OR-SPCA5E07-XX	282
OR-SPCA5E10-XX	282
OR-SPCA5E15-XX	282
OR-SPCA5E25-XX	282
OR-SPCA603-XX	282
OR-SPCA605-XX	282
OR-SPCA607-XX	282
OR-SPCA610-XX	282
OR-SPCA615-XX	282
OR-SPCA625-XX	282
OR-SPKFU24	281

## PART NUMBER INDEX

Ortronics®





Support





Solutions



OR-SPKFU48  OR-SPKSU2  OR-SPKSU2  OR-SPKSU48  OR-SVMS704  OR-SVMS706  144  OR-SVMS804  OR-SVMS806  OR-TJ5E00  OR-TJ5E45  OR-TJ6A0  OR-TJ6A0  OR-TJ645  OR-TJS5E00  OR-TJS5E00  OR-TJS600  OR-TJS600  OR-TJS600  OR-TJSN6A-XX  OR-TJSN6A-XX  OR-TJSN6-XX  OR-TJSN6-XX  OR-TJSNIC-53  OR-TK6-6B  OR-TR6-12B  OR-TR6-12B  OR-TR6-18B  OR-TR6-24B  OR-TR10-6B  178
OR-SPKSU48       281         OR-SVMS704       144         OR-SVMS706       144         OR-SVMS804       144         OR-SVMS806       144         OR-TJ5E00       27         OR-TJ5E45       27         OR-TJ6A       27, 28         OR-TJ645       27         OR-TJS5E00       28         OR-TJSN600       28         OR-TJSN6A-XX       61         OR-TJSNIC-53       61         OR-TK66A       28, 54         OR-TR6-12B       178         OR-TR6-18B       178         OR-TR6-24B       178
OR-SVMS704 144 OR-SVMS706 144 OR-SVMS804 144 OR-SVMS806 144 OR-TJ5E00 27 OR-TJ5E45 27 OR-TJ6A 27, 28 OR-TJ600 27 OR-TJ645 27 OR-TJS5E00 28 OR-TJS600 28 OR-TJS600 28 OR-TJSN6A-XX 61 OR-TJSN6-XX 61 OR-TK6-6B 178 OR-TR6-12B 178 OR-TR6-12B 178
OR-SVMS706 OR-SVMS804 OR-SVMS804 OR-SVMS806 OR-TJ5E00 OR-TJ5E45 OR-TJ6A OR-TJ6A0 OR-TJ645 OR-TJ645 OR-TJS5E00 OR-TJS600 OR-TJS600 OR-TJSN6A-XX OR-TJSN6A-XX OR-TJSN6-XX OR-TJSNIC-53 OR-TKS6A OR-TK6-6B OR-TR6-12B OR-TR6-12B OR-TR6-24B 178
OR-SVMS804       144         OR-SVMS806       144         OR-TJ5E00       27         OR-TJ5E45       27         OR-TJ6A       27, 28         OR-TJ600       27         OR-TJS5E00       28         OR-TJSN600       28         OR-TJSN6A-XX       61         OR-TJSNIC-53       61         OR-TKS6A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-24B       178
OR-SVMS806 OR-SVMS806 OR-TJ5E00 OR-TJ5E45 OR-TJ6A OR-TJ6A OR-TJ645 OR-TJ645 OR-TJS5E00 OR-TJS5E00 OR-TJS600 OR-TJSN6A-XX OR-TJSN6-XX OR-TJSNIC-53 OR-TJSNIC-53 OR-TKS6A OR-TKS6A OR-TR6-6B DR-TR6-12B OR-TR6-12B OR-TR6-18B OR-TR6-24B
OR-TJ5E00       27         OR-TJ5E45       27         OR-TJ6A       27, 28         OR-TJ600       27         OR-TJ645       27         OR-TJS5E00       28         OR-TJSN60       28         OR-TJSN6A-XX       61         OR-TJSNIC-53       61         OR-TKS6A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-24B       178
OR-TJ5E45       27         OR-TJ6A       27, 28         OR-TJ600       27         OR-TJ645       27         OR-TJS5E00       28         OR-TJSN6O0       28         OR-TJSN6A-XX       61         OR-TJSNIC-53       61         OR-TKS6A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-24B       178
OR-TJ6A       27, 28         OR-TJ600       27         OR-TJ645       27         OR-TJS5E00       28         OR-TJS600       28         OR-TJSN6A-XX       61         OR-TJSN6-XX       61         OR-TJSNIC-53       61         OR-TK66A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-24B       178
OR-TJ600       27         OR-TJ645       27         OR-TJS5E00       28         OR-TJS600       28         OR-TJSN6A-XX       61         OR-TJSNIC-53       61         OR-TKS6A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-18B       178         OR-TR6-24B       178
OR-TJ645       27         OR-TJS5E00       28         OR-TJS600       28         OR-TJSN6A-XX       61         OR-TJSNIC-53       61         OR-TKS6A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-24B       178
OR-TJS5E00       28         OR-TJS600       28         OR-TJSN6A-XX       61         OR-TJSNIC-53       61         OR-TKS6A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-18B       178         OR-TR6-24B       178
OR-TJS600 28 OR-TJSN6A-XX 61 OR-TJSN6-XX 61 OR-TJSNIC-53 61 OR-TKS6A 28, 54 OR-TR6-6B 178 OR-TR6-12B 178 OR-TR6-18B 178 OR-TR6-24B 178
OR-TJSN6A-XX       61         OR-TJSN6-XX       61         OR-TJSNIC-53       61         OR-TKS6A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-18B       178         OR-TR6-24B       178
OR-TJSN6-XX 61 OR-TJSNIC-53 61 OR-TKS6A 28, 54 OR-TR6-6B 178 OR-TR6-12B 178 OR-TR6-18B 178 OR-TR6-24B 178
OR-TJSNIC-53       61         OR-TKS6A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-18B       178         OR-TR6-24B       178
OR-TKS6A       28, 54         OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-18B       178         OR-TR6-24B       178
OR-TR6-6B       178         OR-TR6-12B       178         OR-TR6-18B       178         OR-TR6-24B       178
OR-TR6-12B     178       OR-TR6-18B     178       OR-TR6-24B     178
OR-TR6-18B 178 OR-TR6-24B 178
OR-TR6-24B 178
OR-TR10-6B 178
OR-TR10-12B 178
OR-TR10-18B 178
OR-TR10-24B 178
OR-TRHR-12B 178
OR-TRHR-18B 178
OR-TRP5-CM 184
OR-TRP8-CM 184
OR-TRP8-S 184
OR-TRP11-CM 184
OR-TRP17-CM 184
OR-TRT10-6B 179
OR-TRT10-12B 179
OR-TRT10-18B 179
OR-TRT10-24B 179
OR-TRTC-6B 180
OR-TRTC-12B 180
OR-TRTC-18B 180
OR-TRTC-24B 180

PART NO	PAGE
OR-TRTCI-6B	180
OR-TRTCI-12B	180
OR-TRTCI-18B	180
OR-TRTCI-24B	180
OR-TRTHR-12B	180
OR-TRTHR-18B	180
OR-UC01UA-P	207
OR-UC04UA-P	207
OR-UHDFP-MPA48CA	208
OR-UHDFP-MPA48LA	208
OR-URT10-6B	179
OR-URT10-12B	179
OR-URT10-18B	179
OR-URT10-24B	179
OR-VC603-09	69
OR-VC605-09	69
OR-VC607-09	69
OR-VC609-09	69
OR-VC615-09	69
OR-VCB-93-6H	146
OR-VCB-93-6L	146
OR-VCB-93-6U	146
OR-VCB-93-6UH	146
OR-V0-84-T3E	145
OR-VO-84-T3FTE	145
OR-VO-84-T6E	145
OR-VO-84-T6FTE	145
OR-WA-93	169
OR-WMBV2U	152
OR-WMBV3U	152
OR-WMBV4U	152
OR-WMRF-8-12	151
OR-WMRF-8-18	151
OR-WMRF-15-12	151
OR-WMRF-15-18	151
OR-WMRF-30-12	151
OR-WMRF-30-18	151
OR-WRTRT-12B	181
OR-Z4-RR-WC	168

#### Cablofil®

CABLEXIT 294  CF 30 289  CF 54 289  CF 105 289  CF 150 289  COUPFIL 294  CZE-242412A 312  CZE-242412PP 312  CZE-242412WB 312  DFQFP20ST 311  DQFP15BK 311  DQFP15BK 311  DQFP15ST-2A 311  DQFP20BK 311  DQFP20BK 311  DQFP20BK 311  DQFP20BK 311  EDF 290  EDRN 291  EZJB 5/16 294  FASC 293  FASL 292  FASLOCK 291  FASP 292  FASPCH 292  FASPCH 292  FASPCH 292  FASPOLLER 293  RADT90KIT 291  UFC550KIT 290  UFCRSBAR 290  UFCRSBAR 290  UFCSTCLP 290  UFCSTCLP 290  UFCSTCLP 290	PART NO	PAGE
CF 54       289         CF 105       289         CF 150       289         COUPFIL       294         CZE-242412A       312         CZE-242412PP       312         CZE-242412WB       312         DFQFP20ST       311         DFQFP20ST-2A       311         DQFP15BK       311         DQFP15BK-2A       311         DQFP20BK       311         DQFP20BK       311         DQFP20BK-2A       311         DQFP20BT       311         EDF       290         EDRN       291         EZJB 5/16       294         FASC       293         FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASPCH       292         FASU       293         RADT90KIT       291         UFC550KIT       290         UFCRSBAR       290         UFCSTCLP       290	CABLEXIT	294
CF 105       289         CF 150       289         COUPFIL       294         CZE-242412A       312         CZE-242412PP       312         CZE-242412WB       312         DFQFP20ST       311         DFQFP20ST-2A       311         DQFP15BK       311         DQFP15BK-2A       311         DQFP20BK       311         DQFP20BK       311         DQFP20BK-2A       311         DQFP20BK-3       311         EDF       290         EDRN       291         EZJB 5/16       294         FASC       293         FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASPCH       292         FASROLLER       293         FASU       293         RADT90KIT       291         UFC550KIT       290         UFCRSBAR       290         UFCSTCLP       290	CF 30	289
CF 150 289 COUPFIL 294 CZE-242412A 312 CZE-242412PP 312 CZE-242412WB 312 DFQFP20ST 311 DFQFP20ST-2A 311 DQFP15BK 311 DQFP15BK-2A 311 DQFP20BK 311 DQFP20BK 311 DQFP20BK 311 EDF 290 EDRN 291 EZJB 5/16 294 FASC 293 FASL 292 FASLOCK 291 FASP 292 FASPCH 292 FASPCH 292 FASROLLER 293 RADT90KIT 291 UFC550KIT 290 UFCRSBAR 290 UFCSTCLP 290	CF 54	289
COUPFIL 294  CZE-242412A 312  CZE-242412PP 312  CZE-242412WB 312  DFQFP20ST 311  DFQFP20ST-2A 311  DQFP15BK 311  DQFP15BK-2A 311  DQFP15ST-2A 311  DQFP20BK 311  DQFP20BK 311  DQFP20BK-2A 311  EDF 290  EDRN 291  EZJB 5/16 294  FASC 293  FASL 292  FASLOCK 291  FASP 292  FASPCH 292  FASROLLER 293  RADT90KIT 291  UFC550KIT 290  UFCRSBAR 290  UFCSTCLP 290	CF 105	289
CZE-242412A 312 CZE-242412PP 312 CZE-242412WB 312 DFQFP20ST 311 DFQFP20ST-2A 311 DQFP15BK 311 DQFP15BK-2A 311 DQFP15ST-2A 311 DQFP20BK 311 DQFP20BK 311 DQFP20BK 311 EDF 290 EDRN 291 EZJB 5/16 294 FASC 293 FASL 292 FASLOCK 291 FASP 292 FASPCH 292 FASPCH 292 FASROLLER 293 FASU 293 RADT90KIT 291 UFC550KIT 290 UFCRSBAR 290 UFCSTCLP 290	CF 150	289
CZE-242412PP 312 CZE-242412WB 312 DFQFP20ST 311 DFQFP20ST-2A 311 DQFP15BK 311 DQFP15BK-2A 311 DQFP15ST-2A 311 DQFP20BK 311 DQFP20BK 311 DQFP20BK-2A 311 EDF 290 EDRN 291 EZJB 5/16 294 FASC 293 FASL 292 FASLOCK 291 FASP 292 FASPCH 292 FASPCH 292 FASROLLER 293 FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCRSBAR 290 UFCSTCLP 290	COUPFIL	294
CZE-242412WB       312         DFQFP20ST       311         DFQFP20ST-2A       311         DQFP15BK       311         DQFP15BK-2A       311         DQFP15ST-2A       311         DQFP20BK       311         DQFP20BK-2A       311         DQFP20ST       311         EDF       290         EDRN       291         EZJB 5/16       294         FASC       293         FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASPCH       292         FASROLLER       293         FASU       293         RADT90KIT       291         UFC550KIT       290         UFCRSBAR       290         UFCSTCLP       290	CZE-242412A	312
DFQFP20ST 311 DFQFP20ST-2A 311 DQFP15BK 311 DQFP15BK-2A 311 DQFP15ST-2A 311 DQFP20BK 311 DQFP20BK 311 DQFP20BK-2A 311 DQFP20ST 311 EDF 290 EDRN 291 EZJB 5/16 294 FASC 293 FASL 292 FASLOCK 291 FASP 292 FASPCH 292 FASPCH 292 FASROLLER 293 FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCRSBAR 290 UFCSTCLP 290	CZE-242412PP	312
DFQFP20ST-2A 311 DQFP15BK 311 DQFP15BK-2A 311 DQFP15ST-2A 311 DQFP20BK 311 DQFP20BK-2A 311 DQFP20BK-2A 311 EDF 290 EDRN 291 EZJB 5/16 294 FASC 293 FASL 292 FASLOCK 291 FASP 292 FASPCH 292 FASROLLER 293 FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCRSBAR 290 UFCSTCLP 290	CZE-242412WB	312
DQFP15BK       311         DQFP15BK-2A       311         DQFP15ST-2A       311         DQFP20BK       311         DQFP20BK-2A       311         DQFP20ST       311         EDF       290         EDRN       291         EZJB 5/16       294         FASC       293         FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASPCH       292         FASROLLER       293         FASU       293         RADT90KIT       291         UFC550KIT       290         UFCF2       290         UFCRSBAR       290         UFCSTCLP       290	DFQFP20ST	311
DQFP15BK-2A       311         DQFP15ST-2A       311         DQFP20BK       311         DQFP20BK-2A       311         DQFP20ST       311         EDF       290         EDRN       291         EZJB 5/16       294         FASC       293         FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASPCH       292         FASU       293         RADT90KIT       291         SWK       291         UFC550KIT       290         UFCRSBAR       290         UFCSTCLP       290	DFQFP20ST-2A	311
DQFP15ST-2A       311         DQFP20BK       311         DQFP20BK-2A       311         DQFP20ST       311         EDF       290         EDRN       291         EZJB 5/16       294         FASC       293         FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASROLLER       293         FASU       293         RADT90KIT       291         SWK       291         UFC550KIT       290         UFCRSBAR       290         UFCSTCLP       290	DQFP15BK	311
DQFP20BK       311         DQFP20BK-2A       311         DQFP20ST       311         EDF       290         EDRN       291         EZJB 5/16       294         FASC       293         FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASROLLER       293         FASU       293         RADT90KIT       291         UFC550KIT       290         UFCF2       290         UFCSTCLP       290	DQFP15BK-2A	311
DQFP20BK-2A       311         DQFP20ST       311         EDF       290         EDRN       291         EZJB 5/16       294         FASC       293         FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASROLLER       293         RADT90KIT       291         SWK       291         UFC550KIT       290         UFCF2       290         UFCSTCLP       290	DQFP15ST-2A	311
DQFP20ST       311         EDF       290         EDRN       291         EZJB 5/16       294         FASC       293         FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASROLLER       293         RADT90KIT       291         SWK       291         UFC550KIT       290         UFCRSBAR       290         UFCSTCLP       290	DQFP20BK	311
EDF 290 EDRN 291 EZJB 5/16 294 FASC 293 FASL 292 FASLOCK 291 FASP 292 FASPCH 292 FASROLLER 293 FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCRSBAR 290 UFCSTCLP 290	DQFP20BK-2A	311
EDRN 291 EZJB 5/16 294 FASC 293 FASL 292 FASLOCK 291 FASP 292 FASPCH 292 FASROLLER 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCRSBAR 290 UFCSTCLP 290	DQFP20ST	311
EZJB 5/16 294  FASC 293  FASL 292  FASLOCK 291  FASP 292  FASPCH 292  FASROLLER 293  FASU 293  RADT90KIT 291  SWK 291  UFC550KIT 290  UFCF2 290  UFCRSBAR 290  UFCSTCLP 290	EDF	290
FASC 293 FASL 292 FASLOCK 291 FASP 292 FASPCH 292 FASROLLER 293 FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCRSBAR 290 UFCSTCLP 290	EDRN	291
FASL       292         FASLOCK       291         FASP       292         FASPCH       292         FASROLLER       293         FASU       293         RADT90KIT       291         SWK       291         UFC550KIT       290         UFCF2       290         UFCRSBAR       290         UFCSTCLP       290	EZJB 5/16	294
FASLOCK 291 FASP 292 FASPCH 292 FASROLLER 293 FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCF2 290 UFCRSBAR 290 UFCSTCLP 290	FASC	293
FASP 292 FASPCH 292 FASROLLER 293 FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCF2 290 UFCRSBAR 290 UFCSTCLP 290	FASL	292
FASPCH 292 FASROLLER 293 FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCF2 290 UFCRSBAR 290 UFCSTCLP 290	FASLOCK	291
FASROLLER 293 FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCF2 290 UFCRSBAR 290 UFCSTCLP 290	FASP	292
FASU 293 RADT90KIT 291 SWK 291 UFC550KIT 290 UFCF2 290 UFCRSBAR 290 UFCSTCLP 290	FASPCH	292
RADT90KIT 291 SWK 291 UFC550KIT 290 UFCF2 290 UFCRSBAR 290 UFCSTCLP 290	FASROLLER	293
SWK         291           UFC550KIT         290           UFCF2         290           UFCRSBAR         290           UFCSTCLP         290	FASU	293
UFC550KIT         290           UFCF2         290           UFCRSBAR         290           UFCSTCLP         290	RADT90KIT	291
UFCF2         290           UFCRSBAR         290           UFCSTCLP         290	SWK	291
UFCRSBAR 290 UFCSTCLP 290	UFC550KIT	290
UFCSTCLP 290	UFCF2	290
	UFCRSBAR	290
UFT 290	UFCSTCLP	290
	UFT	290

Wiremold®

PART NO	PAGE	PART NO	PAGE	PART NO	PAGE	PART NO	PAGE
3A44B2-1	330	4810ULBC	332	FS2RHS	326	0FR47-U	303
3A86B2-1	330	4810ULBD	332	FS2R-RED	326	OFR47-U2A	303
3B43B2-1-RAM	330	7011ULBC	332	FS2RWP8	326	OFR47-V	303
3B44B2-1	330	7011ULBD	332	FS4R-GA	326	OFR48-2	302
3B53B2-1-AM	330	7712ULBC	332	FS4RHS	326	OFR48-4	302
3B86B2-1	330	7712ULBD	332	FS4R-RED	326	OFR48-4GX	302
4B43B2-2-RAM	330	AC8104	323	FS4RWP12	326	OFR89-2400	302
4B44B2-2	330	AC8105	323	FSPCC2758	326	OFR89-4000	302
4B53B2-2-AM	330	AC8840	323	FSPCC4758	326	OFR89-DS4000	302
4B86B2-2	330	AC8850	323	J06B0B	332	OFR89-VFL	302
4FFATCAL	318	AC10105-2	323	J06B0BX	332	OFR89-VIS	302
4FFATCBK	318	AF1-KC	322	J06B2B	332	OFRB-8	301
4FFATCBS	318	AF1-KT	322	J06B2BX	332	OFRBC-8	301
4FFATCGY	318	AF1-NC	322	J08B0B	332	OFRC-8	301
6ATCFFBK	318	AF1-NT	322	J08B2B	332	OFRPT3	303
6ATCFFBS	318	AF1-YC	322	KA102RT	310	OFRPT4	303
6ATCFFBZ	318	AF1-YT	322	KA104CM	310	OFRWC	302
6ATCFFGY	318	AF3-KC	322	KA301	310	PKKKIT	325
6ATCFFNK	318	AF3-KT	322	KA302	310	RC4ATCAL	317
6ATCPBK	317	AV3ATCAL	319	KA305	310	RC4ATCBK	317
6ATCPBS	317	AV3ATCBK	319	KA700	310	RC4ATCBS	317
6ATCPBZ	317	AV3ATCBS	319	KC10CM2	310	RC4ATCGY	317
6ATCPGY	317	AV3ATCGY	319	KC10RT8	310	RC9AM2TCAL	318
6ATCPNK	317	EFB6S	320	KC15RT8	310	RC9AM2TCBK	318
6B21E	329	EFB8S	320	KF10CM8	310	RC9AM2TCGY	318
6B21N	329	EFB10S	320	KF15RT2	310	RFB2	321
6B22E	329	EFB610BTC	320	MRTC	308	RFB2-0G	321
6W21E	329	EFB610CTC	320	NME1250AP	314	RFB2-SS	321
6W21N	329	FPBTCAL	324	OFR1	303	RFB4	321
6W22E	329	FPBTCBK	324	OFR6	301	RFB4-CI-1	321
8ATCPBK	317	FPBTCBS	324	OFR9	303	RFB4-SS	321
8ATCPBS	317	FPBTCBZ	324	OFR10A	302	RFB6	321
8ATCPBZ	317	FPBTCGY	324	OFR10IW	301	RFB6E	321
8ATCPGY	317	FPBTCNK	324	OFR11	302	RFB6E-OG	321
8ATCPNK	317	FPCTCAL	324	OFR12	302	RFB6-0G	321
25DTC-4	335	FPCTCBK	324	OFR15	303	RFB9	322
25DTC-E5	336	FPCTCBS	324	OFR17	303	RFB9-0G	322
25DTP-4	335	FPCTCBZ	324	OFR47-2	303	RFB11	322
25DTP-E10	336	FPCTCGY	324	OFR47-B	303	RFB11-0G	322
30TP-2V	335	FPCTCNK	324	OFR47-D	303	RFB119BTC	322
30TP-4	335	FS2R-GA	326	OFR47-R	303	RFB119CTC	322



#### Wiremold®

PART NO	PAGE
RFBCIKIT	325
RFBKIT	325
RFE-25256	312
RFE-25257RB	312
RFE-242412	312
S3AXBP	325
SPDU8-1U	328
SPDU16-2U	328
SPDU20-0U	327
SPMGL	326
TB672APAL	307
TB672APBK	307
TBCR3.5MM	308
TBCRCAT6	308
TBCRHDMI	308
TBCRHMK	308
TBCRVGA	308
TSAM1F0AL1U	312
TSAM1F1AL1U	312
TSAM1F2AL1U	312
TSAX1F0AL1U	312
TSAX1F1AL1U	312
TSAX1F2AL1U	312
UTCM5	309
VEL66234524	333
VFL662345RTGYD	333
VLP5662345	334
VLWAP9	313
VSP5662345	334
WAPBRKT	313
WAPE5-1200KIT	315
WAPE5-1232KIT	315
WAPE5-1242KIT	315
WAPE5-1250KITD	315
WAPE5-1250KITR	315
WAPE5-BLKIT	315
WAPE5-UNIKIT	315
WAPE10-1200KIT	315
WAPE10-1232KIT	315
WAPE10-1242KIT	315
WAREAG BLAUT	0.4.5

WAPE10-BLKIT

315

PART NO	PAGE
WAPE10-DOME	315
WAPE10-UNIKIT	315
WAPENCL	315
WAPENCL-24-24-4	315
WBSBC	326
WPACR-1G	325



## PART NUMBER INDEX

On-Q®

PART NO	PAGE	PART NO	PAGE	PART NO	PAGE	PART NO	PAGE
363486-01	348	AF3-NC	322	EN1420	339	VM2203-V1	350
363729-01	341	AF3-NT	322	EN1450	339	VM2204-V1	350
364400-04	352	AF3-YC	322	EN1460	339	WP1014-WH	343
364450-04	341	AF3-YT	322	EN1480	339	WP1194-XX	342
364478-01	341	ALTC-2S	335	EN 1485	339	WP1234-XX	344
364482-03	341	ALTP-2S	335	EN2000	339	WP3210-XX	342
364482-04	341	AMD8ATCAL	319	EN2020	339	WP3211-XX	342
364490-01	341	AMD8ATCBK	319	EN2050	339	WP3212-XX	342
364569-02-V1	345	AMD8ATCBS	319	EN2060	339	WP3220-XX	342
364819-01	341	AMD8ATCGY	319	EN2080	339	WP3301-XX	342
364890-01	341	AMDTP-4	335	EN2085	339	WP3302-XX	342
364896-01	341	AMTC-4	335	EN2800	340	WP3303-XX	342
364904-01	341	AC2M00-BK	346	EN2820	340	WP3304-XX	342
AC2M00-BK	346	AC2M01-BK	346	EN2850	340	WP3306-XX	342
AC2M01-BK	346	AC2M02-BK	346	EN2860	340	WP3401-XX	342
AC2M02-BK	346	AC2M03-BK	346	EN2880	340	WP3402-XX	342
AC2M03-BK	346	AC2M04-BK	346	EN2885	340	WP3403-XX	342
AC2M04-BK	346	AC2M05-BK	346	EN4200	340	WP3404-XX	342
AC2M05-BK	346	AC2M07-BK	346	EN4220	340	WP3406-XX	342
AC2M07-BK	346	AC2M10-BK	346	EN4250	340	WP3410-XX	343
AC2M10-BK	346	AC2M15-BK	346	EN4260	340	WP3411-XX	343
AC2M15-BK	346	AC2M20-BK	346	EN4280	340	WP3412-XX	343
AC2M20-BK	346	AC2MXX-BK	346	EN4285	340	WP3413-XX	343
AC2MXX-BK	346	AC3M01-WH-V1	346	F2242	341	WP3414-XX	343
AC3M01-WH-V1	346	AC3M02-WH-V1	346	F2249	341	WP3416-XX	343
AC3M02-WH-V1	346	AC3M04-WH-V1	346	F2250	341	WP3422-XX	342
AC3M04-WH-V1	346	AC1000	348	F7510	341	WP3425-XX	344
AC1000	348	AC1001	348	F7526	345	WP3450-XX	344
AC1001	348	AC1007	341	F7717	341	WP3455-XX	344
AC1007	341	AC1012	348	F9001	341	WP3456-XX	344
AC1012	348	AC1013	348	TM1045	349	WP3457-XX	344
AC1013	348	AC1014	348	TM1110	349	WP3458-XX	344
AC1014	348	AC1015	348	TM1478	349	WP3460-XX	344
AC1015	348	AC1025	345	TM7556	349	WP3461-XX	344
AC1025	345	AC1031	345	TM7560	349	WP3462-XX	344
AC1031	345	AC1033	348	VM1000	350	WP3463-XX	344
AC1033	348	AC2100	347	VM1002	350	WP3464-XX	344
AC2100	347	AC2101	347	VM1100	350	WP3465-XX	344
AC2101	347	AC2103-V1	347	VM2200-V1	350	WP3466-XX	344
AC2103-V1	347	EN1200	339	VM2201-V1	350	WP3475-XX	344
AC3400	344	EN1400	339	VM2202-V1	350	WP3476-XX	344



On-Q®

PART NO	PAGE
WP3481-XX	344
WP3482-XX	344
WP3550-XX	344
WP3560-XX	344
WP9001-XX	343
WP9002-XX	343



NOTES


NOTES



# NOTES



designed to be better.™



#### **Data Communications**

125 Eugene O'Neill Drive New London, CT 06320 800.934.5432 www.legrand.us

570 Applewood Crescent Vaughan, Ontario L4K 4B4 905.738.9195 www.legrand.ca





