




APC MODEL	APC PART#	VERTIV EQUIVALENT MODEL	VERTIV PART#	POWER RATING		RUNTIME (MINS)		NOMINAL INPUT VOLTAGE	INPUT CONNECTOR	OUTPUT CONNECTOR	COMM PORTS	SNMP/NETWORK MANAGEMENT CARD	FORM FACTOR	DIMENSION & WEIGHT VA WATTS HALF FULL LOAD (HXWXD - MM)
				VA	WATTS	HALF	FULL LOAD							
Liebert® PSA 3G - Desktop application														
	BK350E1, BK500E1, BH500INET		PSA500MT3-230U	500	300	15	4	230VAC	IEC C14/10A	4 x IEC C13	USB	✓	Tower	171 x 95 x 356, 5.4 kg
	BE550G-AZ, BK650-AS, BX650CI, BR550GI		PSA650MT3-230U	650	390	12	3	230VAC	IEC C14/10A	4 x IEC C13	USB	✓	Tower	171 x 95 x 356, 5.9 kg
	BX700U-AZ, BE700G-AZ, BX800CI, BX950U-AZ, BR900GI		PSA1000MT3-230U	1000	600	14	4	230VAC	IEC C14/10A	8 x IEC C13	USB	✓	Tower	234 x 147 x 360, 9.5 kg
	BX1100CI, BX1400U-AZ, BR1200GI, BR1500GI		PSA1500MT3-230U	1500	900	11	4	230VAC	IEC C14/10A	8 x IEC C13	USB	✓	Tower	234 x 147 x 360, 11.6 kg
Liebert® PSI 3G - Servers and networking equipment application														
	BX700U-AZ, BE700G-AZ		PS750RT3-230	750	675	11	3	220/230/240VAC	IEC-320 C-14	8 x IEC C13	Serial Port, USB Port, Intellislot Port	✓	Rack/Tower	88 x 440 x 412 mm, 15kg
	BX800CI, BX950U-AZ, BR900GI		PS1000RT3-230	1000	900	12	4	220/230/240VAC	IEC-320 C-14	8 x IEC C13	Serial Port, USB Port, Intellislot Port	✓	Rack/Tower	88 x 440 x 412 mm, 19.4kg
	BX1100CI, BX1400U-AZ, BR1200GI, BR1500GI		PS1500RT3-230	1500	1350	12	3	220/230/240VAC	IEC-320 C-14	8 x IEC C13	Serial Port, USB Port, Intellislot Port	✓	Rack/Tower	88 x 440 x 412 mm, 20.9kg
	N/A		PS2200RT3-230	2200	1980	11	3	220/230/240VAC	IEC-320 C20	8 x IEC C13 + 1 x IEC C19	Serial Port, USB Port, Intellislot Port	✓	Rack/Tower	88 x 440 x 657 mm, 33.8 kg
	N/A		PS3000RT3-230	3000	2700	9	3	220/230/240VAC	IEC-320 C20	8 x IEC C13 + 1 x IEC C19	Serial Port, USB Port, Intellislot Port	✓	Rack/Tower	88 x 440 x 657 mm, 37.2 kg
Liebert® GXT4 Online UPS - Servers, network closets and other mission-critical applications														
	SURT1000RMXLI-NC, SURT1000XLI, SURT1000RMXLI, SURT1000XLI-NC		GXT4-700RT230	700	630	27	11	220/230/240VAC	IEC C14	6 x IEC C13	USB Port, RS232 Port, Intellislot Port, Terminal Block Communication	✓	Rack/Tower	85 x 430 x 408 mm, 18.2kg
	SURT1000RMXLI-NC, SURT1000XLI, SURT1000RMXLI, SURT1000XLI-NC		GXT4-1000RT230	1000	900	17	6	220/230/240VAC	IEC C14	6 x IEC C13	USB Port, RS232 Port, Intellislot Port, Terminal Block Communication	✓	Rack/Tower	85 x 430 x 408 mm, 18.2kg
	SRT2200XLI, SRT2200RMXLI, SRT2200RMXLI-NC		GXT4-1500RT230	1500	1350	18	6	220/230/240VAC	IEC C14	6 x IEC C13	USB Port, RS232 Port, Intellislot Port, Terminal Block Communication	✓	Rack/Tower	85 x 430 x 497 mm, 23.2kg
	SRT2200XLI, SRT2200RMXLI, SRT2200RMXLI-NC		GXT4-2000RT230	2000	1800	12	3	220/230/240VAC	IEC C20	6 x IEC C13	USB Port, RS232 Port, Intellislot Port, Terminal Block Communication	✓	Rack/Tower	85 x 430 x 497 mm, 25.5kg
	SRT3000XLI, SRT3000RMXLI, SRT3000XLW-IEC, SRT3000RMXLI-NC		GXT4-3000RT230	3000	2700	12	3	220/230/240VAC	IEC C20	*1 x IEC C19 + 6 x IEC C13*	USB Port, RS232 Port, Intellislot Port, Terminal Block Communication	✓	Rack/Tower	85 x 430 x 602 mm, 32.4kg
	SRT5KXLI, SRT5KRMXLW-HW, SRT5KRMXLI		GXT4-5000RT230	5000	4000	21	9	220/230/240VAC	Hardwired 1 - phase	Hardwired & POD (2 x IEC C19 + 6 x IEC C19)	USB Port, Terminal Block, Intellislot Port, Communication	✓	Rack/Tower	217 x 430 x 574 mm, 60kg
	SRT6KRMXLI, SRT6KXLI		GXT4-6000RT230	6000	4800	17	6	220/230/240VAC	Hardwired 1 - phase	Hardwired & POD (2 x IEC C19 + 6 x IEC C19)	USB Port, Terminal Block, Intellislot Port, Communication	✓	Rack/Tower	217 x 430 x 574 mm, 60kg
	SRT8KRMXLI, SRT8KXLI, SRT10KRMXLI, SRT10KXLI		GXT4-10000RT230	10000	9000	12	4	220/230/240VAC	Hardwired 1 - phase	Hardwired & POD (4 x IEC C19 + 4 x IEC C19)	USB Port, Terminal Block, Intellislot Port, Communication*	✓	Rack/Tower	261 x 430 x 581 mm, 70kg

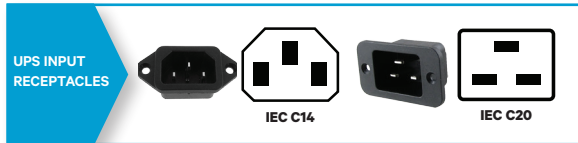

**This is just a supplementary file to help convert APC to Vertiv 'equivalents' and should not be used as a technical reference

APC MODEL	APC PART#	APC MODEL	APC PART#	VERTIV EQUIVALENT MODEL	VERTIV PART#	POWER RATING VA WATTS	RUNTIME (MINS) HALF FULL LOAD	NOMINAL INPUT VOLTAGE	INPUT CONNECTOR	OUTPUT CONNECTOR	COMM PORTS	SNMP/NETWORK MANAGEMENT CARD	FORM FACTOR	DIMENSION & WEIGHT VA WATTS HALF FULL LOAD (HxWxD - MM)
Liebert® ITA Online UPS - Standard and Long Backup Models														
	SRT5KRMXLI, SRT5KXLI, SRT5KRMXLW-HW			ITA 5KVA	ITA 5KVA	5000 4500	14 (one external battery pack)	5 (one external battery pack)	220/230/240VAC (1ph) 380/400/415VAC (3ph)	Hardwired 1-phase / 3-phase	Hardwired 1-phase	USB Port, Intellislot Port	✓	Rack/Tower 85 x 435 x 625 mm, 17kg
	SRT6KRMXLI, SRT6KXLI			ITA 6KVA	ITA 6KVA	6000 4800	17 (one external battery pack)	4 (one external battery pack)	220/230/240VAC (1ph) 380/400/415VAC (3ph)	Hardwired 1-phase / 3-phase	Hardwired 1-phase	USB Port, Intellislot Port	✓	Rack/Tower 85 x 435 x 625 mm, 17kg
	SRT8KRMXLI, SRT8KXLI, SRT10KRMXLI, SRT10KXLI			ITA 10KVA	ITA 10KVA	10000 9000	14 (two external battery packs)	6 (two external battery packs)	220/230/240VAC (1ph) 380/400/415VAC (3ph)	Hardwired 1-phase / 3-phase	Hardwired 1-phase	USB Port, REPO Port, Intellislot Port	✓	Rack/Tower 85 x 435 x 640 mm, 20.8kg
	SURT 15KRMXLI			ITA 16KVA	ITA 16KVA	16000 14400	8 (two external battery packs)	<5 (two external battery packs)	380/400/415VAC (3-phase)	Hardwired 1-phase / 3-phase	Hardwired 1-phase	Dry Contact Port, Intellislot Port, USB Port	✓	Rack/Tower 130 x 435 x 750 mm, 35kg
	SURT 20KRMXLI			ITA 20KVA	ITA 20KVA	20000 18000	5 (two external battery packs)	<5 (two external battery packs)	380/400/415VAC (3-phase)	Hardwired 1-phase / 3-phase	Hardwired 1-phase	Dry Contact Port, Intellislot Port, USB Port	✓	Rack/Tower 130 x 435 x 750 mm, 35kg
Liebert® NXC Online UPS														
	SUVTP10KH1B2S, SUVTP10KH1B4S, SUVTP10KH2B2S, SUVTP10KH2B4S, SUVTP10KH3B4S, SUVTP10KH4B4S, SUVTP10KHS	G35T10KH1B4S, G35T10KH2B4S, G35T10KH2B2S, G35T10KHS, G35T10KH1B2S, G35T10KH3B4S, G35T10KH4B4S		NXC 10KVA	NXC 10KVA	10000 9000	17	8	380/400/415VAC (3-phase)	Hardwired 3-phase	Hardwired 3-phase / 1-phase	Intellislot Port, Dry Contact Port, REPO Port, USB	✓	Tower 1240 x 500 x 860 mm, 115kg
	SUVTP15KH4B4S, SUVTP15KH2B2S, SUVTP15KH3B4S, SUVTP15KH2B4S, SUVTP15KHS, SUVTP20KH2B4S, SUVTP20KH2B2S, SUVTP20KHS, SUVTP20KH4B4S, SUVTP20KH3B4S	G35T15KHS, G35T15KH4B4S, G35T15KH2B4S, G35T15K31B4S, G35T15K31B4S, G35T15K31B4S, G35T15K31B2S, G35T15K31S, G35T15KH2B2S, G35T15KH3B4S, G35T20KH4B4S, G35T20K31B2S, G35T20KH2B4S, G35T20K31B4S, G35T20K31B4S, G35T20KHS, G35T20K31B4S, G35T20KH2B2S, G35T20K31S, G35T20KH3B4S		NXC 20KVA	NXC 20KVA	20000 18000	12	8	380/400/415VAC (3-phase)	Hardwired 3-phase	Hardwired 3-phase / 1-phase	Intellislot Port, Dry Contact Port, REPO Port, USB	✓	Tower 1240 x 500 x 860 mm, 115kg
	SUVTR30KH3B5S, SUVTP30KHS, SUVTP30KH4B4S, SUVTR30KHS, SUVTP30KH3B4S, SUVTR30KH5B5S, SUVTR30KH4B5S	G35T30KHS, G35T30KH4B4S, G35T30KH3B4S, G35T30K31B4S, G35T30K31S, G35T30KH4B4S		NXC 30KVA	NXC 30KVA	30000 27000	35	15	380/400/415VAC (3-phase)	Hardwired 3-phase	Hardwired 3-phase / 1-phase	Intellislot Port, Dry Contact Port, REPO Port, USB	✓	Tower 1600 x 600 x 850 mm, 215kg
	SUVTR40KHS, SUVTP40KHS, SUVTP40KH4B4S, SUVTR40KH4B5S, SUVTR40KH5B5S	G35T40K31B4S, G35T40KH4B4S, G35T40K31S, G35T40KHS		NXC 40KVA	NXC 40KVA	40000 36000	23	10	380/400/415VAC (3-phase)	Hardwired 3-phase	Hardwired 3-phase / 1-phase	Intellislot Port, Dry Contact Port, REPO Port, USB	✓	Tower 1600 x 600 x 850 mm, 215kg

AUSTRALIA

REGISTERED OFFICE:
Suite A, Level 6, 15 Talavera Road, North Ryde, NSW 2113, Australia, PO Box 149, Macquarie Park Business Hub, NSW 1670, Australia
Telephone: +61 2 9805 5800
Facsimile: +61 2 9805 9550
Email: salesnp@VertivCo.com
Emergency Service Tel: 1 300 367 686
Website: VertivCo.com

REGIONAL OFFICES:

Australian Capital Territory
Telephone: 1 800 005 161
Emergency Service: 1 300 367 686

Queensland
Telephone: 1 800 005 161
Emergency Service: 1 300 367 686

Western Australia
Telephone: 1 800 005 161
Emergency Service: 1 300 367 686

Victoria
Telephone: 1 800 005 161
Emergency Service: 1 300 367 686

NEW ZEALAND:

Auckland
Ph: +64 9 443 5495

Christchurch
Ph: +64 3 339 2060
FAX +64 3 339 2063

Stay connected:

Marketing.AP@vertivco.com
www.VertivCo.com

INGRAM MICRO®

HEAD OFFICE:

Auckland
78 Apollo Drive Rosedale, Albany North Shore City, 0632, New Zealand
Phone: +64 9 414 0100
Freephone: 0800 INGRAM (464726)
Website: nz.ingrammicro.com

Wellington
Level 7 TeRenCo House 86 – 96 Victoria Street, Wellington, New Zealand
Phone: +64 4 470 3880

Victoria
40 Ballarat Way Wigram Christchurch, 8042, New Zealand
Phone: +64 3 339 2850

While every precaution has been taken to ensure accuracy and completeness herein, Vertiv® assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice. Vertiv™ and Liebert® are trademarks of Vertiv Co. or one of its affiliated companies. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. ©2017 Vertiv Co. ANZ/ENT-UPSComparisonGuideListAPCV1

**This is just a supplementary file to help convert APC to Vertiv 'equivalents' and should not be used as a technical reference