

Qeedji

Installation manual

SMA300

4.13.11 001A



Legal notice

SMA300 4.13.11 (001A_en)

© 2020 Qeedji

Rights and Responsibilities

All rights reserved. No part of this manual may be reproduced in any form or by any means whatsoever. or by any means whatsoever without the written permission of the publisher. The products and services mentioned herein may be trademarks and/or service marks of the publisher. or trademarks of their respective owners. The publisher and the author do not claim any rights to these Marks.

Although every precaution has been taken in the preparation of this document, the publisher and the author assume no liability for errors or omissions, or for damages resulting from the use of the information contained in this document or the use of programs and source code that can go with it. Under no circumstances can the publisher and the author be held responsible for any loss of profits or any other commercial prejudice caused or alleged to have been caused directly or indirectly by this document.

Product information

Product design and specifications are subject to change at any time and Qeedji reserves the right to modify them without notice. This includes the hardware, the embedded software and this manual, which should be considered as a general guide to the product. The accessories supplied with the product may differ slightly from those described in this manual, depending on the developments of the various suppliers.

Precautions for use

Please read and heed the following warnings before turning on the power: - Installation and maintenance must be carried out by professionals. - Do not use the device near water. - Do not place anything on top of the device, including liquids (beverages) or flammable materials (fabrics, paper). - Do not expose the device to direct sunlight, near a heat source, or in a place susceptible to dust, vibration or shock.

Warranty clauses

The Qeedji device is guaranteed against material and manufacturing defects for a certain duration. Check the device warranty duration value at the end of the document. These warranty conditions do not apply if the failure is the result of improper use of the device, inappropriate maintenance, unauthorized modification, operation in an unspecified environment (see operating precautions at the beginning of the manual) or if the device has been damaged by shock or fall, incorrect operation, improper connection, lightning, insufficient protection against heat, humidity or frost.

WEEE Directive



This symbol means that your appliance at the end of its service life must not be disposed of with household waste, but must be taken to a collection point for waste electrical and electronic equipment or returned to your dealer. Your action will protect the environment. In this context, a collection and recycling system has been set up by the European Union

Table of contents

1 - Description and installation

Introduction	1.1
Getting started with the device	1.2
Device fixture	1.2.1
Device dimensions	1.2.2
Labelling	1.2.3
Device start-up step	1.2.4
Testcard	1.2.5
LEDs behaviour	1.3
Connectors pin-out	1.4

2 - Configuration

Configuration Web interface	2.1
Configuration > Administrator	2.1.1
Configuration > LAN	2.1.2
Configuration > WLAN	2.1.3
Configuration > Output	2.1.4
Configuration > App	2.1.5
Configuration > Servers	2.1.6
Configuration > License	2.1.7
Configuration > Date and time	2.1.8
Configuration > Regionality	2.1.9
Configuration > Tasks	2.1.10
Configuration > Variables	2.1.11
Configuration > AV commands	2.1.12
Maintenance > Testcard	2.1.13
Maintenance > Middleware	2.1.14
Maintenance > Preferences	2.1.15
Maintenance > Logs	2.1.16
Maintenance > Tools	2.1.17
Information > Device	2.1.18
Information > Network	2.1.19
Information > Screens	2.1.20
Configuration by script	2.2
Appendix	2.3

3 - Technical information

Technical specifications	3.1
Conformities	3.2

4 - Contacts

Contacts	4.1
----------------	-----

1.1 Introduction

This manual explains how to install and configure your device SMA300.

Recommendations and warnings

This device is designed to be used inside a building.

This device is intended to work with the power supply unit. This power supply unit must be connected to a mains socket conforming to standard NF C 15-100. If the AC power cable is damaged, it must be replaced. It is possible to order a power supply unit replacement by sending a request to the email address sales@qeedji.tech.

This device is a Class A device. In a residential environment this device may cause radio interference. In this case, the user is asked to take appropriate measures.

When powering the device from a PoE source, this PoE source must be "Limited Power Source" as defined in EN60950-1: 2006.

Content of the package

Items	Functions
Device	SMA300 with Gekkota embedded
One power supply unit	12V power supply unit with cable of 1.2m
Labels	One on the cardboard packaging and one at the back of the product. Additional label can be present in case build-in options.
One WLAN antenna	To be screwed on the dedicated WLAN locations (provided with the device when it is supporting the <code>WLAN</code> option)
One WWAN antenna	To be screwed on the dedicated WWAN locations (provided with the device when it is supporting the <code>WWAN</code> option)


1.2 Getting started with the device

Device front face




- 1 HDMI output connector
- 2 Audio connector

Device rear face

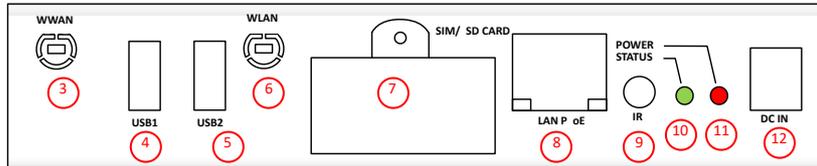


- 3 WWAN antenna slot
- 4 USB1 2.0 Host connector
- 5 USB2 2.0 Host connector
- 6 WLAN antenna slot
- 7 SIM & SD Card connector
- 8 LAN PoE RJ45 connector
- 9 GPIO1/IR connector
- 10 Status green LED
- 11 Power supply red LED
- 12 Power supply connector

Device rear face having the WLAN and WWAN options

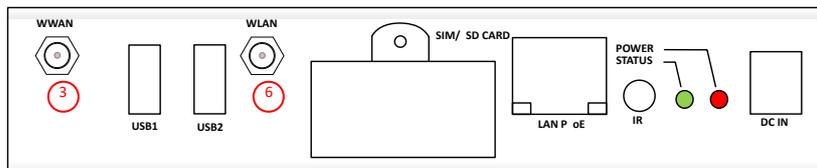


- 3 WWAN antenna scrolling location
- 6 WLAN antenna scrolling location

1.2.1 Device fixture

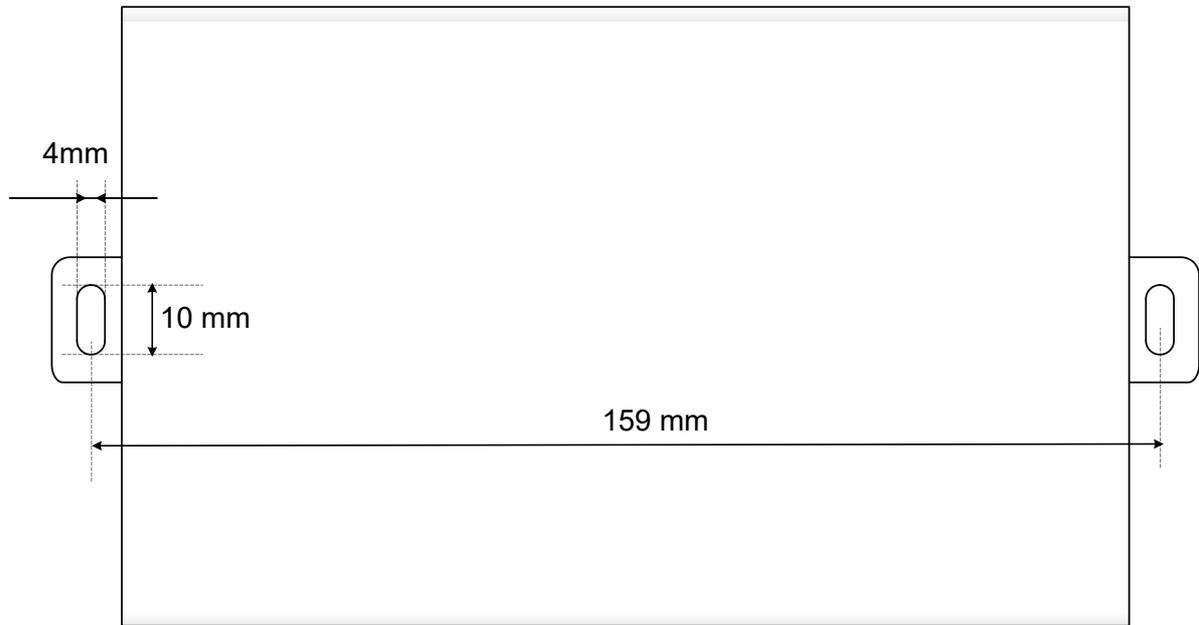

1.2.2 Device dimensions

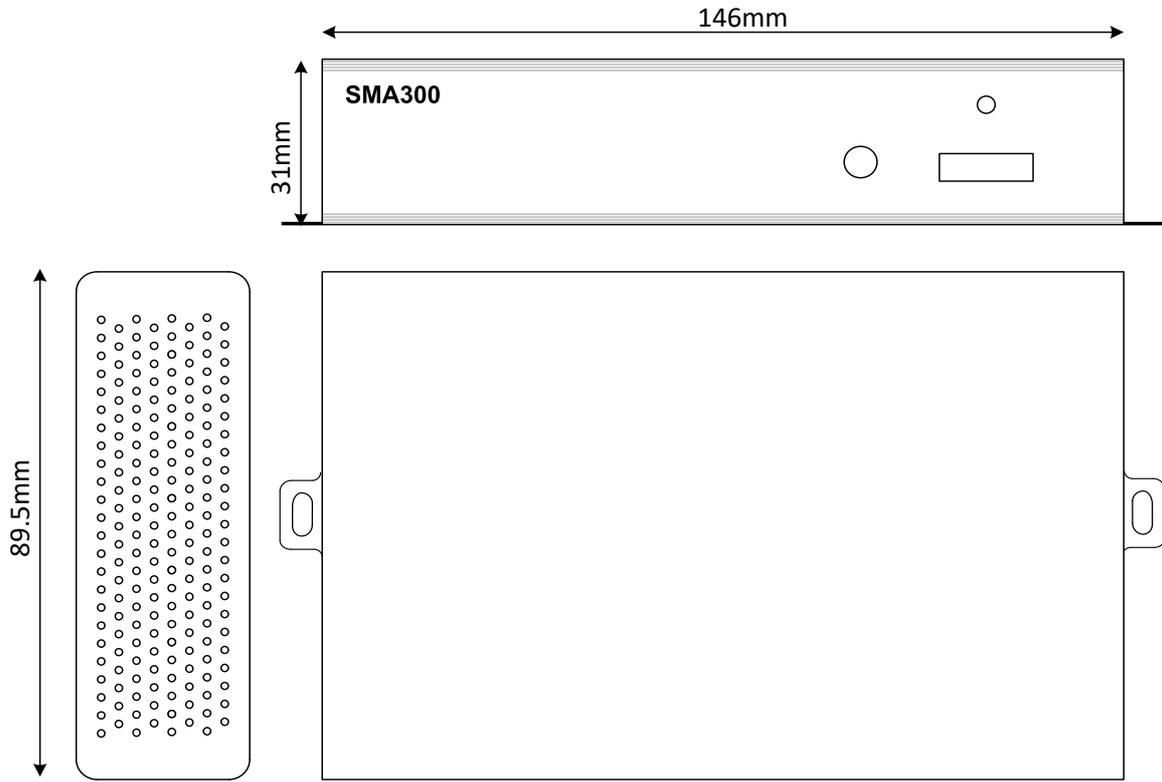


1.2.3 Labelling

The model of the device, the power supply characteristics, the serial number (PSN) and the MAC address are written on a label which is stuck on the case.

Some additional tags may be present in case of built-in options.

- ▣ The serial number of the device can be requested in case of technical support.

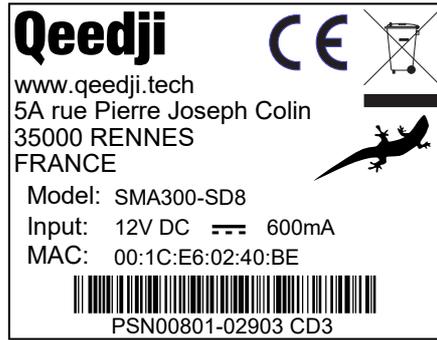

1.2.4 Device start-up step



1.2.5 Testcard

At the factory, the device content set by default is the Test Card. The chart displays important information to assist in the device configuration:



Disable the Test Card by using the WebUI.

If your monitor does support the CEC with its pass-through feature, the test card can be activated or inactivated thanks to the monitor remote control with the key combination [left, right, left, right] pressed in less than 10 seconds.

1.3 LEDs behaviour

LED POWER behaviour (power on device)

State	Information
Red	OK: Power supplied
Off	Error : Power supply issue ¹

LED LAN behaviour (power on device)

State	Information
Off	There is no network traffic on the Ethernet connector
Blinking	The blinking frequency is indicating the data rate on Ethernet connector

LED STATUS behaviour depending on device start-up steps

• Step 1 : Device start-up initialisation

State	Information
Green: continuous	OK
Always Off	Error : Power supply issue ¹

• Step 2 : Device start-up finalisation

State	Information
Off	OK. This step duration can be from several seconds to several minutes.
Green blinking: 1 second duration flash and periodicity every 2 seconds	Error: Boot issue ¹

• Step 3 : Nominal mode

State	Information
Green blinking: 1 very short flash (300 ms) spaced 4 seconds apart	OK
Green blinking: 2 very short and consecutive flashes (300 ms) spaced 4 seconds apart	Warning: Fail Soft Mode Level 1 Frequent device reboot detected (for example 4 times in less than ½ hour) Message is displayed on the monitor: «Fail Soft Mode: waiting for new content ». The instability has been caused probably by a content media not supported yet by the Gekkota OS. Consequently, to prevent any further reboot, the content has been invalidated. The message displayed on the monitor indicates that a new publication is needed to go ahead. ²
Green blinking: 3 very short and consecutive flashes (300 ms) spaced 4 seconds apart	Warning: Fail Soft Mode Level 2 Frequent device reboot detected (for example 4 times in less than ½ hour) Content is purged Message is displayed on the monitor «Fail Soft Mode: waiting for new content ». The instability has been caused probably by a content not supported yet by system or a user preference which has been modified. Consequently, to prevent any further reboot, the content has been invalidated and user preferences (saved before unexpected reboot) have been restored. The message displayed on the monitor indicates that a new publication is needed to go ahead. ²
Green blinking: 4 very short and consecutive flashes (300 ms) spaced 4 seconds apart	Warning: Check disk The device has detected memory corruption on content storage. The media storage is being repaired. This repair step is called Check-Disk and its duration can be several minutes. During this step, a message “checking the file system of data partition in progress” is displayed on the monitor. ³
Green blinking: 5 very short and consecutive flashes (300 ms) spaced 4 seconds apart	Warning: errors on system partition The user has to connect to device WebUI, go to <i>Maintenance > Tools</i> menu, and press button <i>Format</i> or <i>Repair</i> to solve the problem. ³
Green blinking: 6 very short and consecutive flashes (300 ms) spaced 4 seconds apart	Warning: a firmware update is pending During this phase, no content is played on the device, do not switch OFF the device.
Green blinking: 7 very short and consecutive flashes (300 ms) spaced 4 seconds apart	Error: write problem on the storage For an unknown reason, your storage space isn't usable any more. ³
Off	Error. ¹


¹ If the problem persists in despite of an appropriate power-supply, contact the technical support.

² If the problem persists, it is recommended to find out the media not supported yet by the system and remove it from content.

³ If the problem persists after a partition repairing, contact the technical support.


1.4 Connectors pin-out

Power supply connector (12VDC-0.6A)

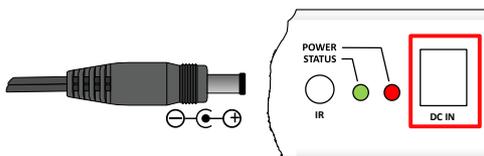


LAN connector

Ethernet RJ-45 PoE. 10/100 BaseT. It is recommended to use shielded cables.

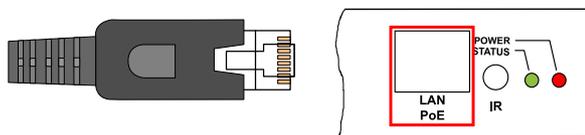


Audio Jack 3.5mm connector (stereo L+R)

It is recommended to use cables whose length is less than 3 meters.

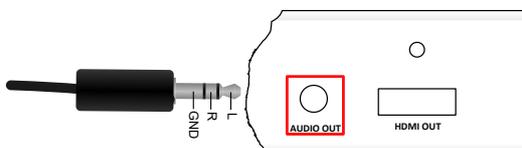

Jack 3.5mm connector (GPIO1/IR)

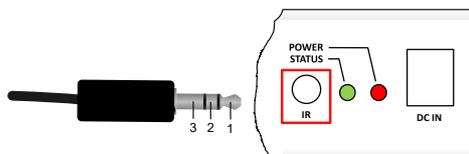

N°	Name	Write/Read	Control
1	Voltage reference 3.3V		
2	GPIO1	IN or OUT	CPU/GPIO1
3	Ground		

Electrical features

	Vin min	Vin max	VOH min	VOH max	IOH max	VOL max	IOL max	VIH min	VIL max
GPIO1	-0.5V	3.8V	3.1V (@ 20uA)	3.3V	-100A	0.6V (@ 2mA)	5mA	2.35V	0.8V

The 3.3V pin must not be used as a power supply, but rather as a reference voltage.

It has a rearmable fuse (350mA @ 20°C)


It is not recommended to hotplug/unplug GPIO1 connector, it could provoke a failure of the device.

During boot, the GPIO1 is configured in input during some seconds. And then after the system startup, the GPIO1 is operational.


The GPIO has a pull-up (4.7 KOhms on 3.3V).

Principle schematics for several use cases


Three wires input configuration for GPIO1:

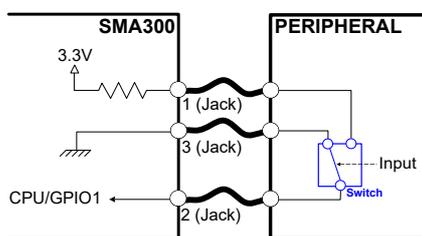

Two wires configuration for GPIO1:

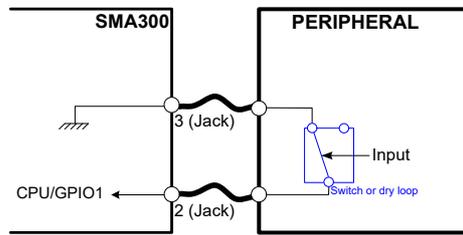

Output configuration for GPIO1:

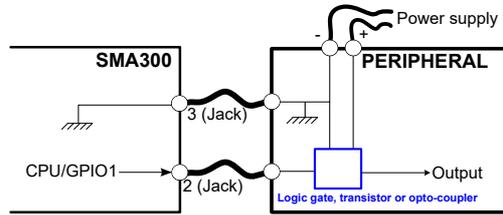

Configuration

GPIO1 connector configuration can be done through system preferences edition with device WebUI or with a configuration script. The GPIO1 configuration part for this script is described here:

How to configure the Jack 3.5 mm connector:

```
//Set Jack 3.5 mode infrared
if (aDirection == "disable")
{
  Services.prefs.setBoolPref("system.connector.jack35_1.1.io.uart_1.enabled", true);
}
else //Set Jack 3.5 mode GPIO
{
  Services.prefs.setBoolPref("system.connector.jack35_1.1.io.uart_1.enabled", false);
}

// Set the Jack 3.5 direction : input or output
if (aDirection == "out")
{
  Services.prefs.setBoolPref("innes.app-profile.gpio-input.jack35-gpio_1.jack35_1.*.authorized", false);
  Services.prefs.setBoolPref("innes.app-profile.gpio-output.jack35-gpio_1.jack35_1.*.authorized", true);
  Services.prefs.setBoolPref("system.connector.jack35_1.1.io.jack35-gpio_1.enabled", true);
}
else if (aDirection == "in")
{
  Services.prefs.setBoolPref("innes.app-profile.gpio-input.jack35-gpio_1.jack35_1.*.authorized", true);
  Services.prefs.setBoolPref("innes.app-profile.gpio-output.jack35-gpio_1.jack35_1.*.authorized", false);
  Services.prefs.setBoolPref("system.connector.jack35_1.1.io.jack35-gpio_1.enabled", true);
}
else if (aDirection == "disable")
{
  Services.prefs.setBoolPref("innes.app-profile.gpio-input.jack35-gpio_1.jack35_1.*.authorized", false);
  Services.prefs.setBoolPref("innes.app-profile.gpio-output.jack35-gpio_1.jack35_1.*.authorized", false);
  Services.prefs.setBoolPref("system.connector.jack35_1.1.io.jack35-gpio_1.enabled", false);
}
}
```

2.1 Configuration Web interface


The SMA300 device has a web-based configuration interface that can be accessed with a web browser. The supported browsers are: Google Chrome, Mozilla Firefox, MS-Edge and MS-Edge (Chromium).

It is accessible from the URL:

`http://<device_IP_addr>/`

By default, the login credentials for the configuration Web interface and the Web server are :

- login: admin
- password: admin

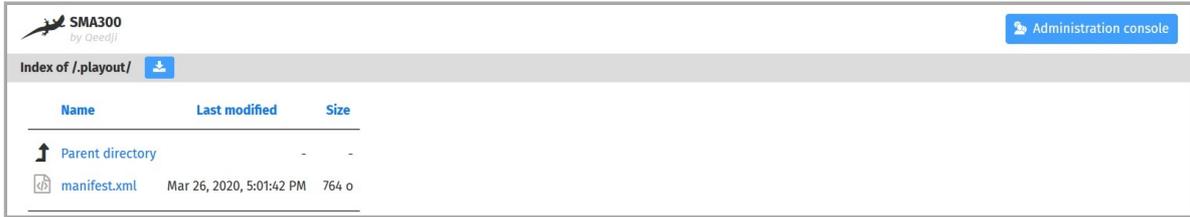


WebDAV directories

Clicking on the parent directory provides access to the root of the device's WebDAV server, which provides access to directories, among other things:

- `.playlog/` : location to store data for mediometry
- `.resources/` : location to store the resources of the configuration web interface
- `.software/` : location to store `.frm` middleware for updates
- `.status/` : location to store the device status file `status.xml`
- `.upnp/` : location to store `device.xml` device status for upnp detection
- `.assets/` : location to store some of the resources of the configuration web interface
- `.playout/` : location to store the the App is hosted when deployed on the device
- `.log/` : location to store the application logs, when they are activated

Administration console

Click on the `Administration Console` button to access the device configuration interface.

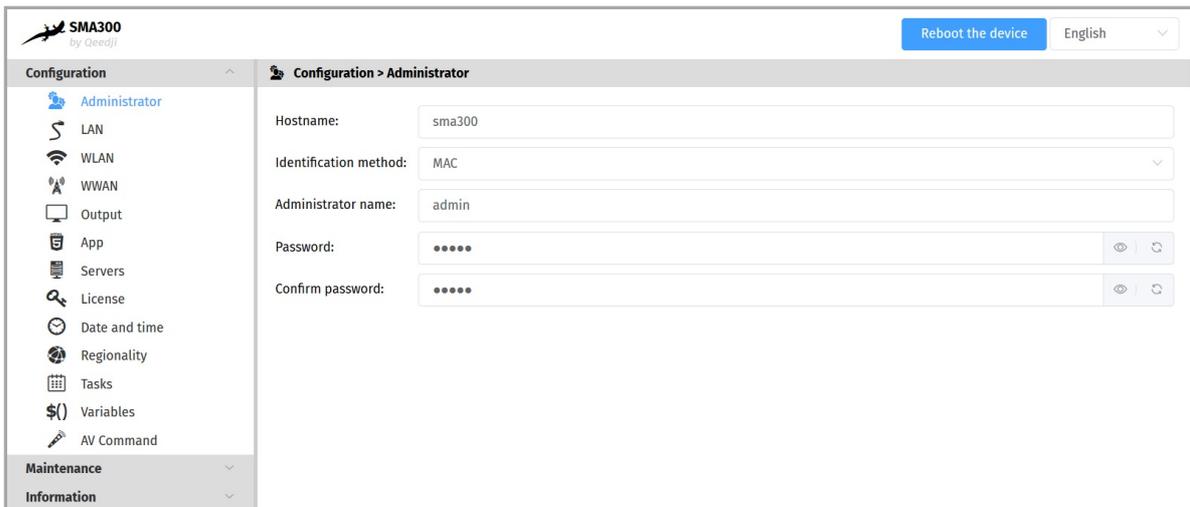

With the button at the top right corner, choose the language in which your web interface should be displayed. The supported languages are:

- *English*,
- *Spanish*,
- *German*,
- *French*.

⚠ It is desirable that your device SMA300 is on time. When possible, do synchronize it with an NTP server.

⚠ After you have changed and saved all your settings in the different panes, be sure to perform a restart of the device by clicking the `Reboot the device` button so that your changes are fully reflected.

Click on the device logo at the left top corner to return to main page.

⚠ If the device does not respond to its IP address, either the device power supply is unplugged, or the Ethernet cable is not connected, or the network configuration is not properly adjusted. To solve the problem, if your computer and local network supports IPV6, connect a Ethernet cable on the device and connect to the device Web interface with its IPV6 address, which can be found on the test pattern displayed on the monitor.


For example, for the MAC address value: `00-1c-e6-02-1e-45``,
In a Web browser, enter the URL: `http://[fc00::21c:e6ff:fe02:1e45]/.admin/`

To obtain the application note reminding some notions about IPV6 configuration, click on the [link to the Qeedji site](#)

2.1.1 Configuration > Administrator

In the `Configuration` pane, select the **Administrator** menu to change:

- the hostname,
- the login credentials and
- the device identification method:
 - MAC (default),
 - Hostname or
 - UUID

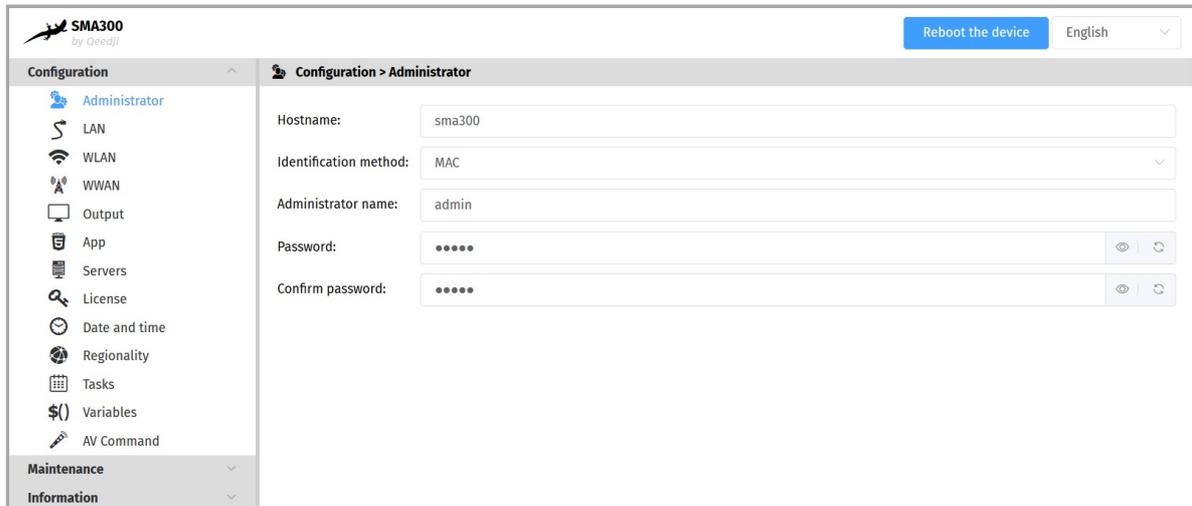

The screenshot shows the SMA300 configuration web interface. The top bar includes the SMA300 logo, a "Reboot the device" button, and a language dropdown set to "English". The left sidebar contains a "Configuration" menu with options: Administrator, LAN, WLAN, WWAN, Output, App, Servers, License, Date and time, Regionality, Tasks, Variables, and AV Command. Below this are "Maintenance" and "Information" sections. The main content area is titled "Configuration > Administrator" and contains the following fields:

- Hostname: sma300
- Identification method: MAC
- Administrator name: admin
- Password: [masked]
- Confirm password: [masked]

For security reasons, it may be useful to change the login credentials for the device's configuration Web interface. Please keep these login credentials in a safe place afterwards.

It is recommended that you enter a unique `Hostname` value for each device. In case several SMA300 devices are located in different buildings or geographical locations, we recommend that you enter hostname values with information about the building and the location (e.g. `Hall-RD-Paris-1`).

2.1.2 Configuration > LAN

In the **Configuration** pane, select the **LAN** menu to set up the network configuration of the **LAN** interface of your device:

The screenshot shows the SMA300 Configuration > LAN interface. The left sidebar contains a navigation menu with items: Administrator, LAN, WLAN, WWAN, Output, App, Servers, License, Date and time, Regionality, Tasks, Variables, AV Command, Maintenance, and Information. The main content area is titled 'Configuration > LAN' and features a 'Reboot the device' button and a language dropdown set to 'English'. The configuration options are as follows:

- Obtain IP address automatically by DHCP:
 - Pause between packets: 5 seconds
 - Number of connection attempts: 10
- Use the following IP address:
 - IP address: 192.168.160.2
 - Subnet mask: 255.255.255.0
 - Obtain default gateway automatically by UPnP IGD
 - Default gateway: 192.168.160.6
- IGMP: V2 V3
- Security: 802.1X
- Authentication method: EAP TLS

A note at the bottom right states: "Trusted certificate required, client certificate required".

If your device is not located in a secure network, select:

- Security: *None*

If your device is located and properly declared in a secure network, select **802.1X**, then select an **802.1X** authentication method supported by your RADIUS server:

- Security: **802.1x**

▣ In the context of a secure network, your device must first be declared to your dedicated RADIUS server. Some identification methods require you to add a **trusted certificate** (the one used by your RADIUS server) and/or a **client certificate** (generated with the MAC address of your device and the trusted certificate of the RADIUS server); For more information, please contact your IT department.

▣ When using a 802.1X certificate with an expiration date, in case your device is not on time or when the expiration date has expired, the device is not able to access the network anymore. To work around, you have to insert a USB stick containing a specific configuration script to set either a new certificate or update the device date and time.

▣ By default, the device is configured with DHCP activated. In case the end user doesn't have a DHCP server, after the DHCP timeout, the device ends up using the static IP address whose the default value is 192.168.0.2 when never changed yet by the end user.

2.1.3 Configuration > WLAN

From the **Configuration** pane, select the **WLAN** menu to set up the network configuration of the **WLAN** interface on your device.

The **WLAN** menu is only displayed when the **WLAN** option is supported by your device.

The screenshot shows the SMA300 web interface. The top bar includes a 'Reboot the device' button and a language dropdown set to 'English'. The left sidebar is titled 'Configuration' and lists various system settings. The main panel is 'Configuration > WLAN'. It has a 'WLAN' checkbox which is checked. Below it are two radio buttons: 'Obtain IP address automatically by DHCP' (unchecked) and 'Use the following IP address' (checked). Under DHCP, there are fields for 'Pause between packets' (5 seconds) and 'Number of connection attempts' (10). Under static IP, there are fields for 'IP address' (192.168.1.218), 'Subnet mask' (255.255.128.0), and 'Default gateway' (192.168.0.1). There is also an unchecked checkbox for 'Obtain default gateway automatically by UPnP IGD'. Below these are 'IGMP' options for V2 and V3 (V3 is selected). The 'SSID' field is filled with dots, with a visibility toggle and refresh icon. There is an unchecked 'SSID Hidden' checkbox. 'Connection mode' has 'Infrastructure' selected and 'Adhoc' unselected. A 'Channel' dropdown is set to 'Channel 1, 2412 MHz'. The 'Security' dropdown is set to 'WPA2-Enterprise (EAP)'. Below are dropdowns for 'Pairwise key cipher' (TKIP), 'Group key cipher' (TKIP), and 'Authentication method' (EAP TTLS - EAP TLS). A note at the bottom right says 'Trusted certificate required, client certificate required'.

- **Connection mode**
 - **Infrastructure:** Allows you to establish a WIFI connection between your device and a WIFI router.
 - **Security :**
 - *None,*
 - *WEP,*
 - *WPA-Personal (PSK),*
 - *WPA2-Personal (PSK),*
 - *WPA-Enterprise (EAP),*
 - *WPA2-Enterprise (EAP).*
 - **Adhoc:** Allows you to establish a direct WIFI connection between your device and e.g. your computer, without using a router.
 - **Security :**
 - *None,*
 - *WEP.*

The **SSID Hidden** option tells to the device whether or not the SSID value is broadcast over the network by your WIFI router. It also allows you to deduce the subset of **pair key encryption** and **group key encryption** modes supported.

TKIP **pair** (or **group**) key encryption is not supported if the router is in **IEEE 802.11n** mode.

Adhoc connection is not supported by all computer types. For more information, contact your IT department.


Selecting the **WPA-Enterprise (EAP)** or **WPA2-Enterprise (EAP)** security implies that your device is located in a secure network, and therefore connects to a properly configured WIFI router with a dedicated RADIUS server. Your device must first be registered inside your dedicated RADIUS server. Some **identification** methods may require you add a **trusted certificate** (the one used by your RADIUS server) and/or a **client certificate** (generated with the MAC address of your device and the trusted certificate of the RADIUS server); For more information, please contact your IT department.

The **WLAN** interface is not checked by default.

With some devices, if the **Pair Encryption Key** or **Group Encryption Key** is not the same as the WIFI router's, the **WLAN** interface may disappear for a while during a automatic restart of the **WLAN** driver.

2.1.4 Configuration > Output

From the Configuration pane, select the **Output** menu to configure, among other things, the device's video and audio output.

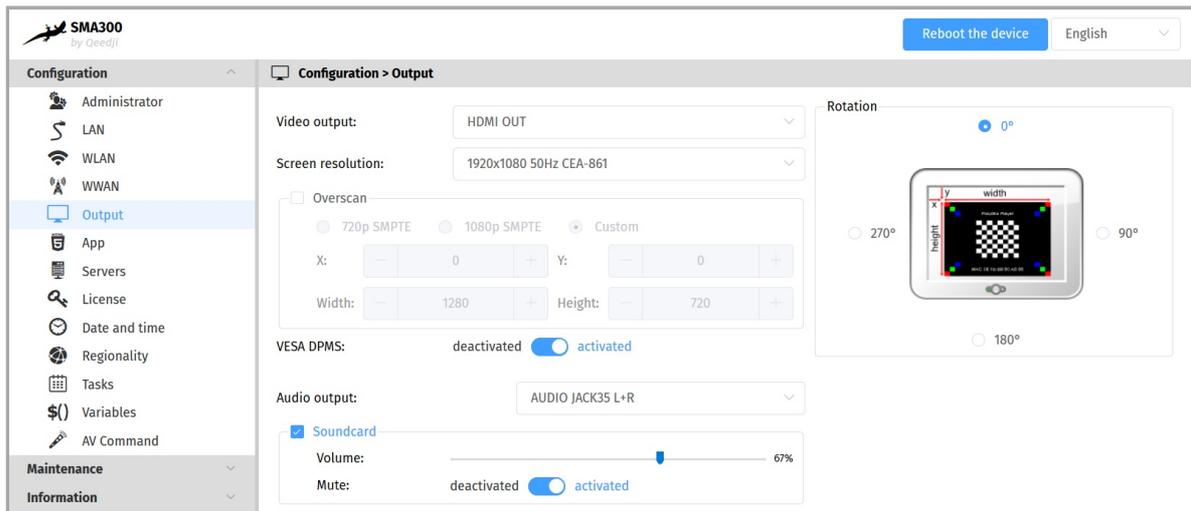

- Video output : *HDMI OUT*
- Screen resolution :
 - Resolution : *96x96 to 1920x1080*
 - Mode . *SMPTE, VESA, CEA-861, SONY, SAMSUNG, CGV CPLine AV-HD, PC, DENSITRON, XGA, ...*
 - Frequency : *60 Hz, 50 Hz,*
- Overscan : - *720p SMPTE*, - *1080p SMPTE - Personalized* - *x* : horizontal origin of the viewport in pixel, - *y* : vertical origin of the viewport in pixel, - *Width* : width of the viewport in pixels, - *Height* : height of the viewport in pixel.
- Rotation : *0°, 90°, 180°, 270°*
- VESA DPMS : *on* (vertical sync standby supported) or *off* (vertical sync standby not supported)
- Audio output : *AUDIO JACK35 L+R*
- option *Sound card* : allows you to activate or deactivate the sound card.
 - Volume : *0..100%*
 - option *Mute* : *on* (mute) or *off* (mute on).

▣ For the special case of scrolling text overlay, please do not exceed an area for scrolling text greater than 20% of your screen height.

▣ Warning: some screens may not support certain display modes. In this case, try another mode with the same resolution.

▣ When it is supported by your screen and device, if possible use a 60 Hz mode which is the smoothest mode.

Some monitors, due to their construction, have been designed with an overscan, which means that the edges of your broadcast content on your device may not be visible on your monitor even when choosing the right optimal resolution for your monitor. To alleviate this problem, use the overscan on your Qeedji device to slightly reduce the width and height of your container. While doing so, it is recommended to display the test pattern of the device.

⚠ when using the overscan, for a good configuration of your device, please make sure that your screen is not in *Wall*, *Mozaic* or *Tile* mode.

2.1.5 Configuration > App

An **App** is a custom application that, once loaded on the device, allows you to play a broadcast channel or play content that a user has programmed.


From the **Configuration** pane, select the **App** menu to select how the App is loaded.

For each mode, you can use the **Purge App** or **Restart App** buttons at any time to remove the App from the device or restart it, respectively.


▮ The **Restart App** or **Purge App** cannot work when **Testcard** is activated.

▮ In order to restart an App, the App must be present on the device.

- **Local Repository** : Allows you to load an App from the device's web interface and play its contents immediately.

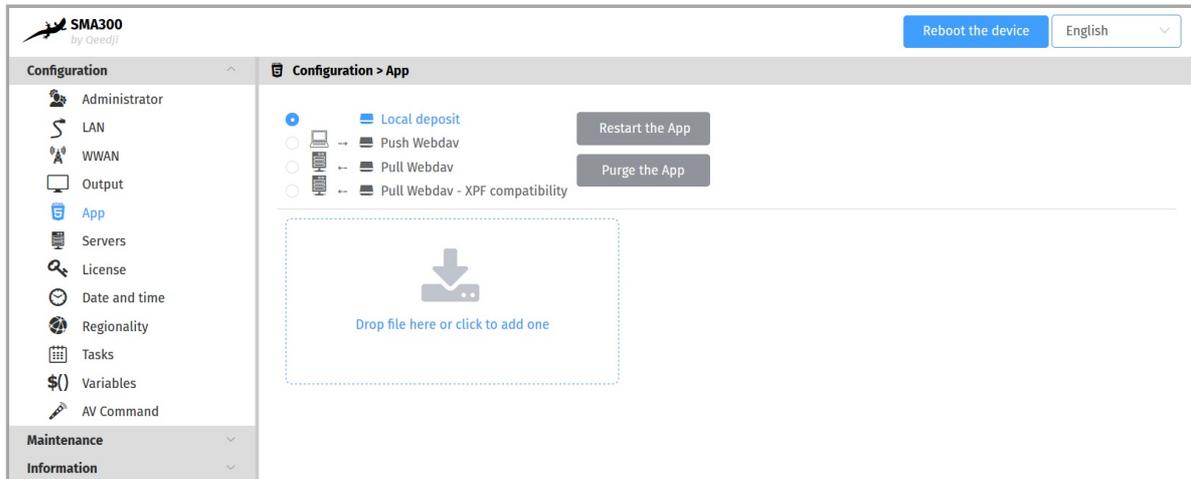


Use the **Drop file here** box or **click to add one** to drop your App .

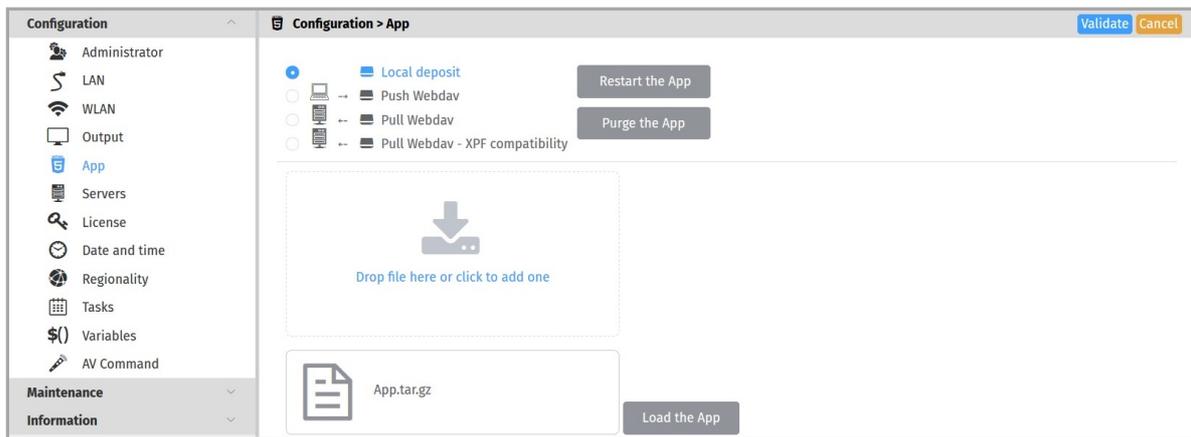

Then click on the **Load App** button. When the file disappears from the interface, the App is loaded and launches automatically.


▮ App development is reserved for advanced users with software development skills. The content of the App must contain at least these 2 files `manifest.xml` and `player.html`. Then archive your App in one of the supported formats: `*tar.gz`, `*.zip`, `*.tar`, `*.tgz`. App examples are available at [Link to Qeedji github SDK-G4 API \(PDF example\)](#). For more information, contact Qeedji support.

- **Push WebDAV** : Configure the device to receive a published App from any WebDAV client or compatible software suite. Once the App is received, its content is immediately played.

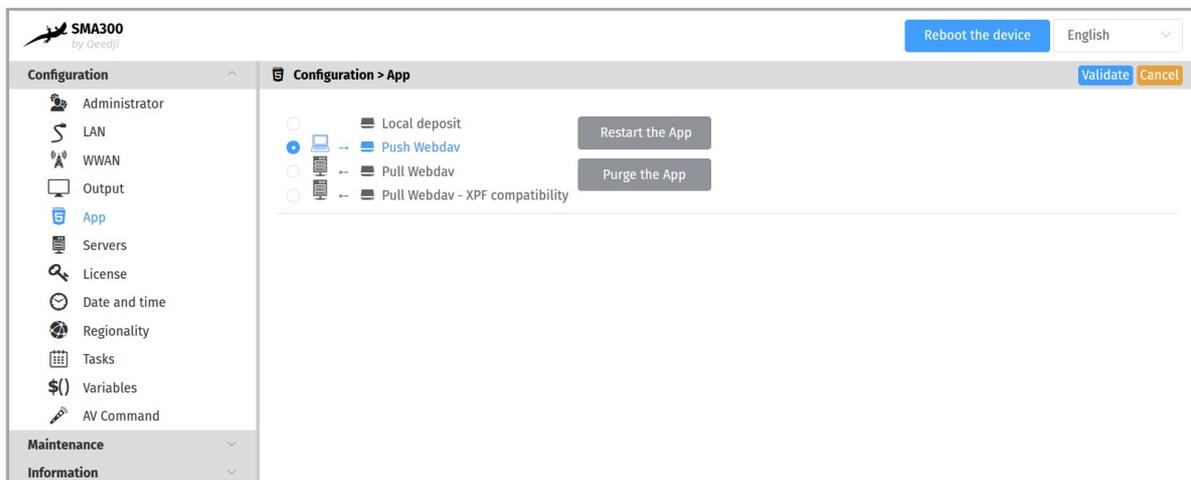

▮ To find out which software suites are capable of publishing an App on Qeedji devices, contact Qeedji support.

- **Pull WebDAV** : allows you to configure the device so that it can regularly retrieve an App from a remote WebDAV server. Once the App is retrieved, its content is immediately played.

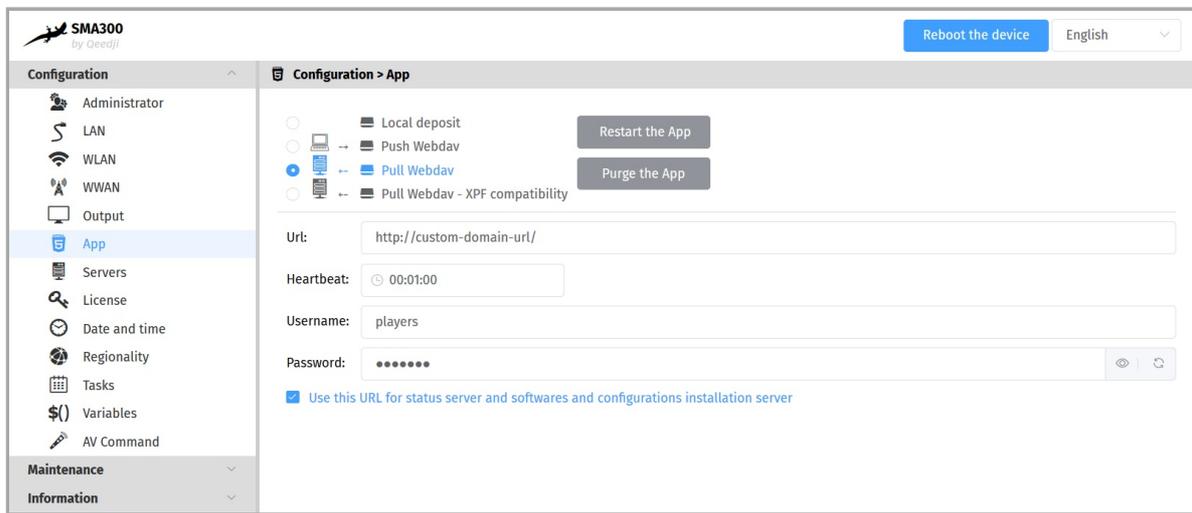

Fill in the fields below correctly:

- URL : URL of the remote server's WebDAV frontend. For example: URL : `http://domain:8080/directory/`
- ID/Password: login and password of the remote server's WebDAV frontend.
- Heartbeat: in `HH:MM:SS` format, time to connect to the remote server (default: 1 minute)
- option: Use this URL for the status server and the software and configuration installation server :
 - If enabled, this option allows, based on the defined URL, to automatically set the URLs of the remote servers for:
 - software updates and configuration scripts distribution
 - URL + suffix `.setup/` and
 - the diffusion of the device status
 - URL + suffix `.devices-status/`
 - If disabled, this allows you to set specific remote server URLs.


▮ The user preference `innes.app-profile.addon-manager.*.*.*.http-downloader.validity-calendar` allows to store the contents of an ICAL file defining the validity range for triggering software updates and configuration scripts

▮ The user preference `innes.app-profile.manifest-downloader:g3.*.*.*.validity-calendar` allows to store the content of an ICAL file defining the validity range for device content updates

▮ The user preference `innes.launcher.status.validity-calendar` allows to store the content of an ICAL file defining the validity range for the diffusion of the device status (status.xml)

▮ To find out which software suites are able to publish on a remote server, an App supporting Qeedji devices, contact Qeedji support.

- Pull WebDAV - XPF Compatibility : allows you to configure the device so that it can regularly retrieve XPF content from a remote WebDAV server and transform it into an App. Once the App is generated, its content is immediately played.

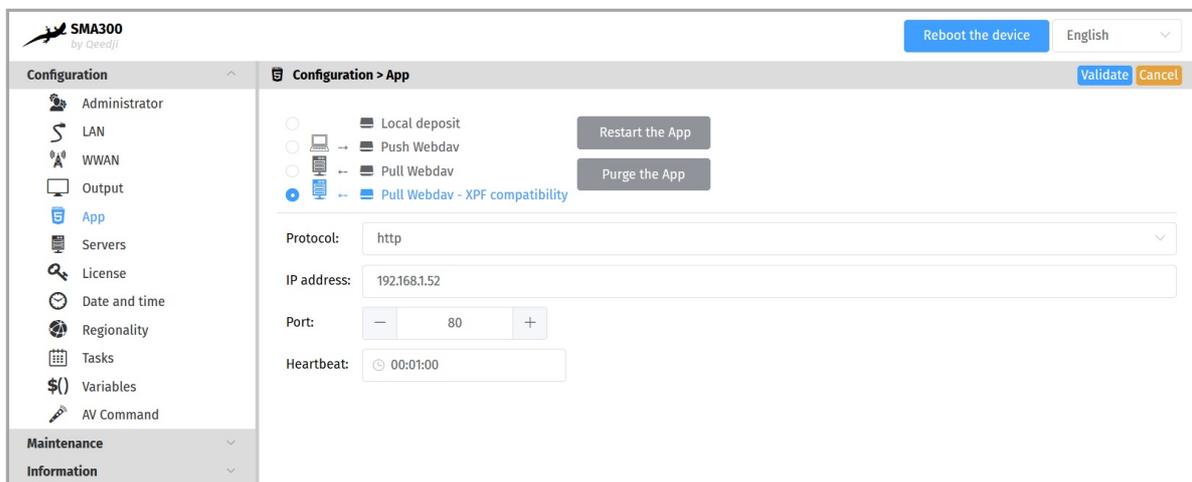

▮ The user preference `innes.app-profile.manifest-downloader:g2.*.*.*.validity-calendar` allows to store the content of an ICAL file defining the validity range for content updates of devices in Pull WebDAV - XPF compatibility mode.

Fill in the fields below correctly:

- Protocol : `http` or `https`
- IP address : IP address of the remote server (XPF compatibility)
- Port : port used by the remote server (XPF compatible)
- Heartbeat : in `HH:MM:SS` format, time to connect to the remote server (default: 1 minute)

App examples

Application for programmes broadcasting (Push WebDAV and Pull WebDAV)

HTML Apps are available to broadcast a program in a media skin, according to a programming schedule. Depending on your type of media players, content transitions are supported. For more information, contact support@qeedji.tech. Complete software suites compatible with the Push WebDAV or Pull WebDAV mode are also available to help you regularly update the programming of your broadcast channel. For further information, contact support@qeedji.tech.

App for resource reservation display (Push WebDAV and Pull WebDAV)

By regularly connecting to your calendar system, some available HTML Apps, compatible with the media players, are able to display the resources reservation of your company, like meetings, vehicles... For further information, contact support@qeedji.tech.

Qeedji PowerPoint editor for media players (Push WebDAV). Once this PowerPoint Add-on is installed on your computer, it allows you to:

- easily discover the compatible media players available on your local network
- select one or more of them
- Publish a PowerPoint of communication on each of your media players. For more information, contact Qeedji support.

2.1.6 Configuration > Servers

In the Configuration pane, select the Servers menu to define the configuration of the servers peripheral to your device.

The screenshot shows the SMA300 configuration interface for servers. The left sidebar lists various configuration categories, with 'Servers' selected. The main panel is titled 'Configuration > Servers' and contains several sections:

- Status, installation and configurations servers:** This section is checked and contains two server configurations. Each configuration has fields for 'Url' (e.g., `http://custom-domain-url/.device-status/`), 'Heartbeat' (e.g., `00:01:00`), 'Username' (e.g., `players`), and 'Password' (masked with dots).
- DNS Servers:** This section has a radio button selected for 'Obtain DNS server address automatically'. Below it are fields for 'Preferred DNS server' (e.g., `8.8.8.8`), 'Alternate DNS server' (e.g., `8.8.8.4`), and 'DNS suffixes'.
- NTP time server:** This section is checked and contains an 'NTP Server' field (e.g., `fr.pool.ntp.org`), a 'Maximum number of tries' spinner (set to 5), and a 'Maximum waiting time for each try' spinner (set to 10 seconds).
- Proxy servers:** This section is unchecked and contains a 'Manual proxy configuration' section with sub-sections for HTTP, HTTPS, and FTP. Each sub-section has fields for 'Address', 'Port' (e.g., 8080), 'Username', and 'Password'. There is also a 'No proxy for:' section with checkboxes for 'Delivery server', 'Status server', and 'Softwares and configurations installation server', and an 'Others:' field (e.g., `localhost, 127.0.0.1`).

- Status, software installation and configuration servers.

- Status server :

- URL : URL of the remote server's WebDAV frontend for the broadcast of the `.device-status/status.xml` device status file. For example: `http://domain:8080/.directory/`
 - Username/password : login and password for the remote server's WebDAV frontend connection.
 - Heartbeat : in `HH:MM:SS` format, period duration of the connection to the remote server (default: 1 minute)

- Software installation and configuration servers :

- URL : URL of the remote server's WebDAV frontend for hosting update software and configuration scripts. For example: `http://domain:8080/.directory/`
 - Username/password : login and password for the remote server's WebDAV frontend.
 - Heartbeat : in `HH:MM:SS` format, period duration of the connection to the remote server (default: 1 minute)

- DNS servers :


- NTP Time Servers : allows you to set a time server in order the the device is always on time. ¹

- Proxy server :

¹ If your device does not have access to the Internet, it is possible to turn an MS-Windows computer into an NTP server. For more information, contact your IT department.

2.1.7 Configuration > License


In the Configuration pane, select the License menu to view your device license number.

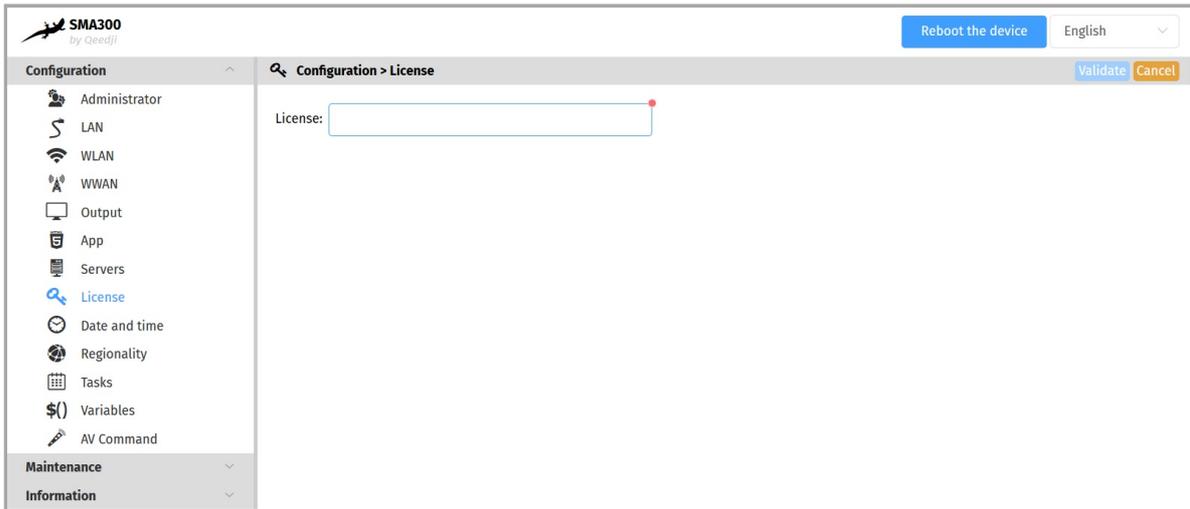

This license number is registered at the factory when the device is ordered. It is then sent to you by e-mail. If it has disappeared due to a handling error or after formatting your device, an error message indicating that the license is invalid will appear on your monitor. In this case, please re-enter the license for your device.

2.1.8 Configuration > Date and time

From the **Configuration** pane, select the **Date and Time** menu to check the system date and time of your device.

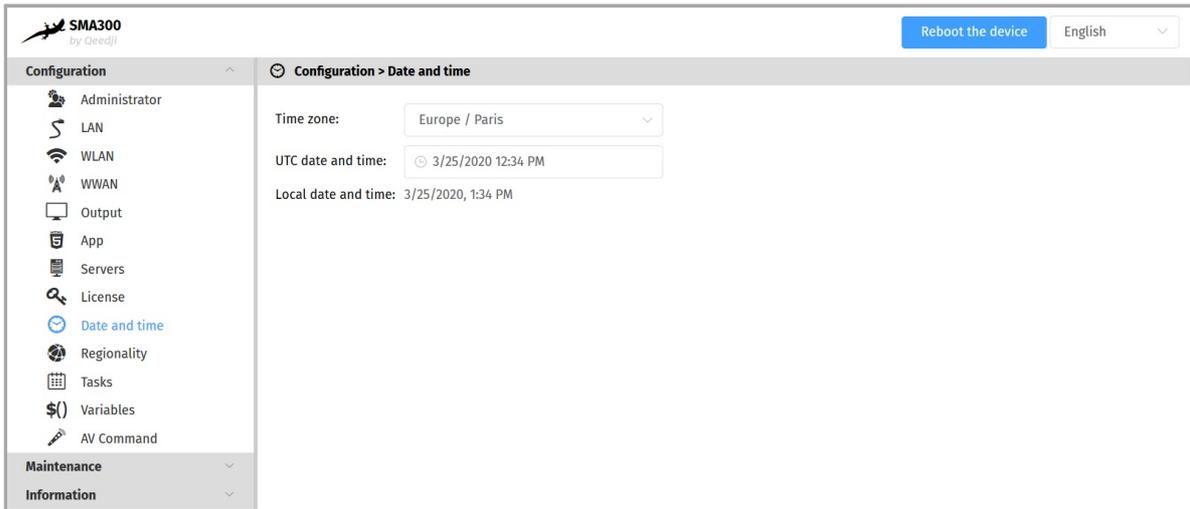


To update the date and time of your device, click on the **UTC Date and Time** value and then click the **Now** button.

- ⓘ Resetting the time involves a restart of the device. If you have several configuration settings to change, it is advisable to set the last time just before restarting the device.

2.1.9 Configuration > Regionality

From the **Configuration** pane, select the **Regionality** menu to choose the language in which information or error messages from the device should be displayed.

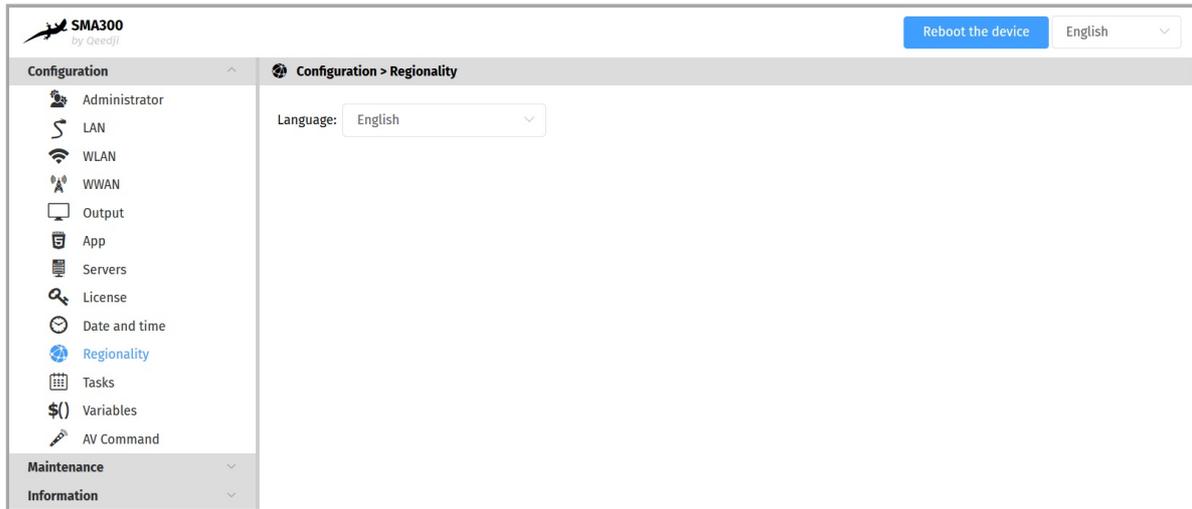

The supported languages are:

- *English,*
- *Spanish,*
- *German,*
- *French.*


2.1.10 Configuration > Tasks

From the Configuration pane, select the **Tasks** menu for:

- program a device reboot task, and for
- program an energy management task for the appliance to reduce its energy consumption.

Device restart tasks

To create a restart task, click on the  button and then the + button.

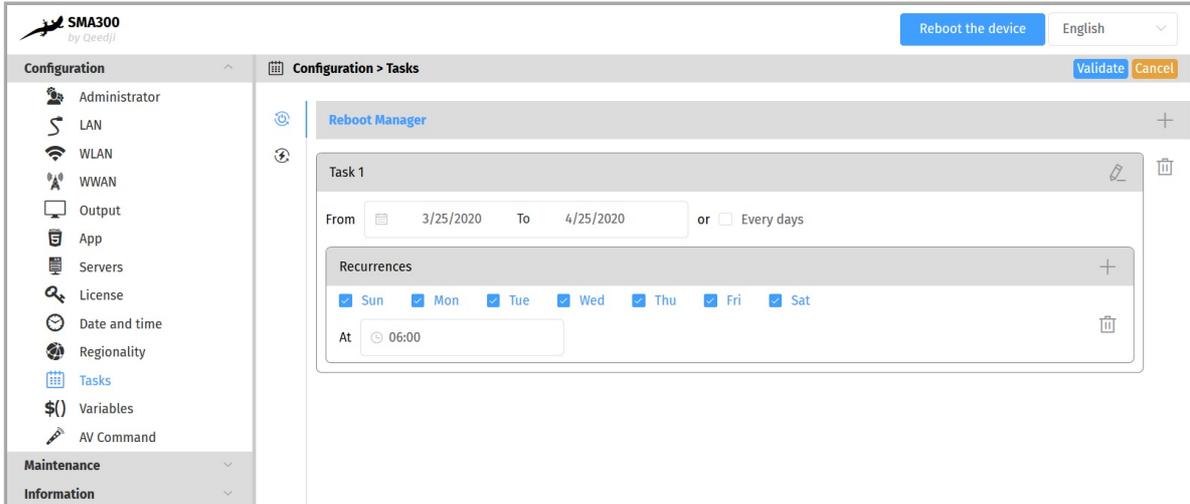


It is therefore possible to program in time several reboot occurrences whose parameters are stored in an ICAL format in the user preference `innes.reboot-manager.calendar`.

Example of value (ICAL format):

```
BEGIN:VCALENDAR
VERSION:1.0
BEGIN:VEVENT
SUMMARY: Reboot Task 1
DTSTART:20200407T091800
DTEND:20200407T091805
RRULE:FREQ=WEEKLY;BYDAY=MO,TU,WE,TH,FR,SA,SU;UNTIL=20200507T235959
END:VEVENT
END:VCALENDAR
```

Device power manager tasks

To create a device power manager task, click on the  button and then the + button.

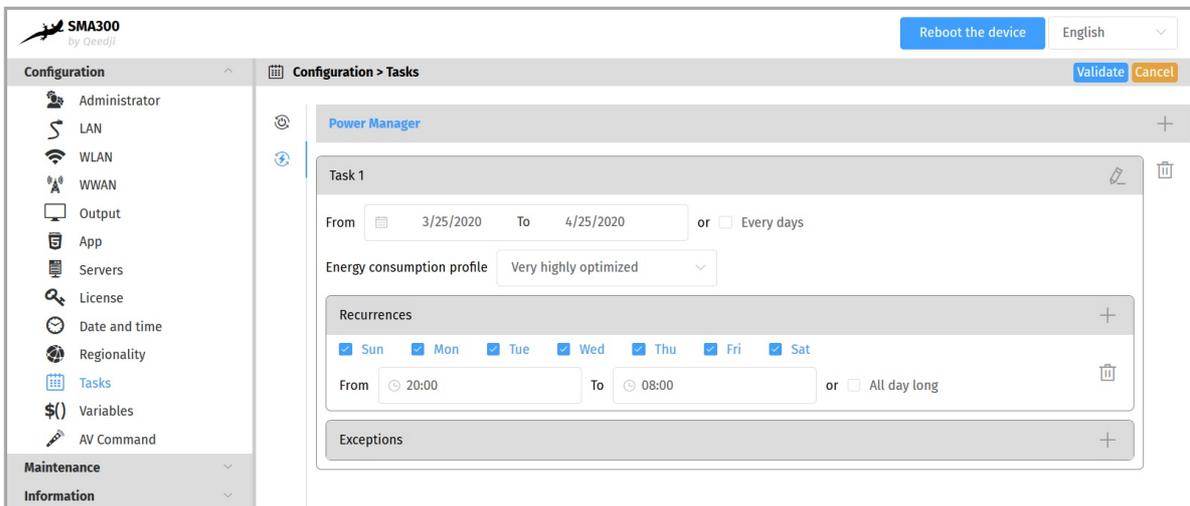

The possible values programmable in time are

- *Very highly optimized*
- *Highly optimized*
- *Optimized means,*
- *Nominal mode*

It is possible to create several energy manager tasks in the same day. These settings for scheduled power level, start time, end time, occurrence, and exception are stored in ICAL format in the user preference `innes.power-manager.calendar`.

Example value (ICAL format):

```
BEGIN:VCALENDAR
VERSION:1.0
BEGIN:VEVENT
SUMMARY: Standby Task 1
X-POWER-MANAGER-LEVEL:MIN
DTSTART:20190805T090000
DTEND:20190805T120000
RRULE:FREQ=WEEKLY;BYDAY=MO,TU,WE,TH,FR,SA,SU;UNTIL=20200416T0000
END:VEVENT
END:VCALENDAR
```

▮ The Power Manager task scheduled at the web interface has no effect when another sleep task is scheduled within the App.

In this version, here is the state of the device when the power manager is in the *Very highly optimized* state:

Function	Associated User Preferences
Sound: inactivated	<code>innes.power-manager.level.min.<>.mute = true</code>
Screen: off	<code>innes.power-manager.level.min.<>.power-mode = 0</code>
Volume: 0%	<code>innes.power-manager.level.min.<>.volume = 0</code>
Opacity: 100%	<code>innes.power-manager.level.min.<>.opacity = 100</code>
Brightness: 0%	<code>innes.power-manager.level.min.<>.brightness = 0</code>
Backlight: 0%	<code>innes.power-manager.level.min.<>.backlight = 0</code>

In this version, here is the state of the device when the power manager is in the *Highly optimized* state:

Function	Associated User Preferences
Sound: activated	<code>innes.power-manager.level.low.<>.mute = false</code>
Screen: on	<code>innes.power-manager.level.low.<>.power-mode = 1</code>
Volume: 10%	<code>innes.power-manager.level.low.<>.volume = 10</code>
Opacity: 80%	<code>innes.power-manager.level.low.<>.opacity = 80</code>
Brightness: 10%	<code>innes.power-manager.level.low.<>.brightness = 10</code>
Backlight: 10%	<code>innes.power-manager.level.low.<>.backlight = 10</code>

In this version, here is the state of the device when the power manager is in the *Medium Optimized* state:

Function	Associated User Preferences
Sound: activated	<code>innes.power-manager.level.high.<>.mute = false</code>
Screen: on	<code>innes.power-manager.level.high.<>.power-mode = 1</code>
Volume: 80%	<code>innes.power-manager.level.high.<>.volume = 80</code>
Opacity: 20%	<code>innes.power-manager.level.high.<>.opacity = 20</code>
Brightness: 80%	<code>innes.power-manager.level.high.<>.brightness = 80</code>
Backlight: 80%	<code>innes.power-manager.level.high.<>.backlight = 80</code>


In this version, here is the status of the device when the power manager is in the *Nominal mode* state, meaning the default mode when no other power manager tasks are running.

Function	Related User Preferences
Sound: activated	<code>innes.power-manager.level.max.<>.mute = false</code>
Screen: on	<code>innes.power-manager.level.max.<>.power-mode = 1</code>
Volume: 100%	<code>innes.power-manager.level.max.<>.volume = 100</code>
Opacity: 0%	<code>innes.power-manager.level.max.<>.opacity = 0</code>
Brightness: 100%	<code>innes.power-manager.level.max.<>.brightness = 100</code>
Backlight: 100%	<code>innes.power-manager.level.max.<>.backlight = 100</code>

▮ The values of these user preferences are all modifiable.

2.1.11 Configuration > Variables

From the Configuration pane, select the **Variables** menu to set variable (or TAG) values for this device.

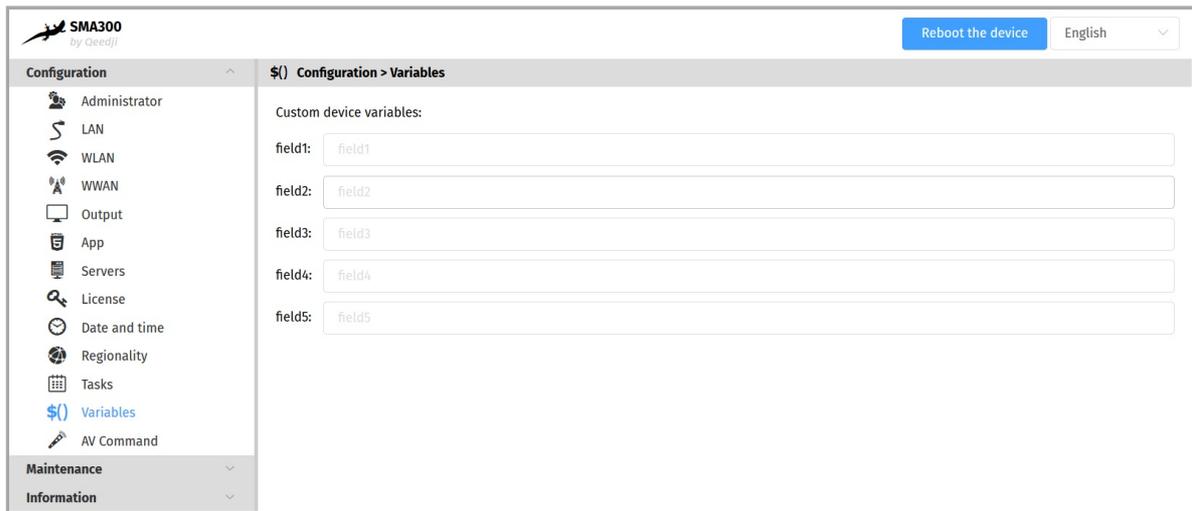

The screenshot shows the SMA300 configuration interface. At the top left, there is a logo for SMA300 by Qeedj. At the top right, there is a blue button labeled "Reboot the device" and a language dropdown menu set to "English". The main interface is divided into two panes. The left pane, titled "Configuration", contains a list of menu items: Administrator, LAN, WLAN, WWAN, Output, App, Servers, License, Date and time, Regionality, Tasks, Variables (highlighted in blue), and AV Command. Below this list are sections for "Maintenance" and "Information". The right pane, titled "\$() Configuration > Variables", displays "Custom device variables:" followed by five input fields labeled field1 through field5, each containing the text "field1" through "field5" respectively.

The variable names are:

```
- `field1`,  
- `field2`,  
- `field3`,  
- `field4`,  
- `field5`.
```

Variable values can only contain characters from the ASCII-7bits table.

These variable values can then be used in Apps to perform specific processing for certain devices only.


2.1.12 Configuration > AV commands

From the **Configuration** pane, select the **AV Commands** menu to enable control of peripheral displays by AV (Audio-Video) commands through the connectors:

- RS232,
- ETHERNET and/or
- HDMI.

AV Command name	Description
<i>brightness</i>	screen brightness control
<i>mute</i>	mute control
<i>power-mode</i>	screen saver control ¹
<i>back-light</i>	screen backlight control
<i>video-input</i>	display audio-video source selection control
<i>volume</i>	display volume control
<i>custom-commands</i>	control of specific devices (projectors, ...) via support for user-implemented AV commands

When the *power-mode* AV control is enabled through the specified connectors, it is automatically used when the App goes into screen saver mode or when a screen saver task is scheduled through the web-based configuration interface.

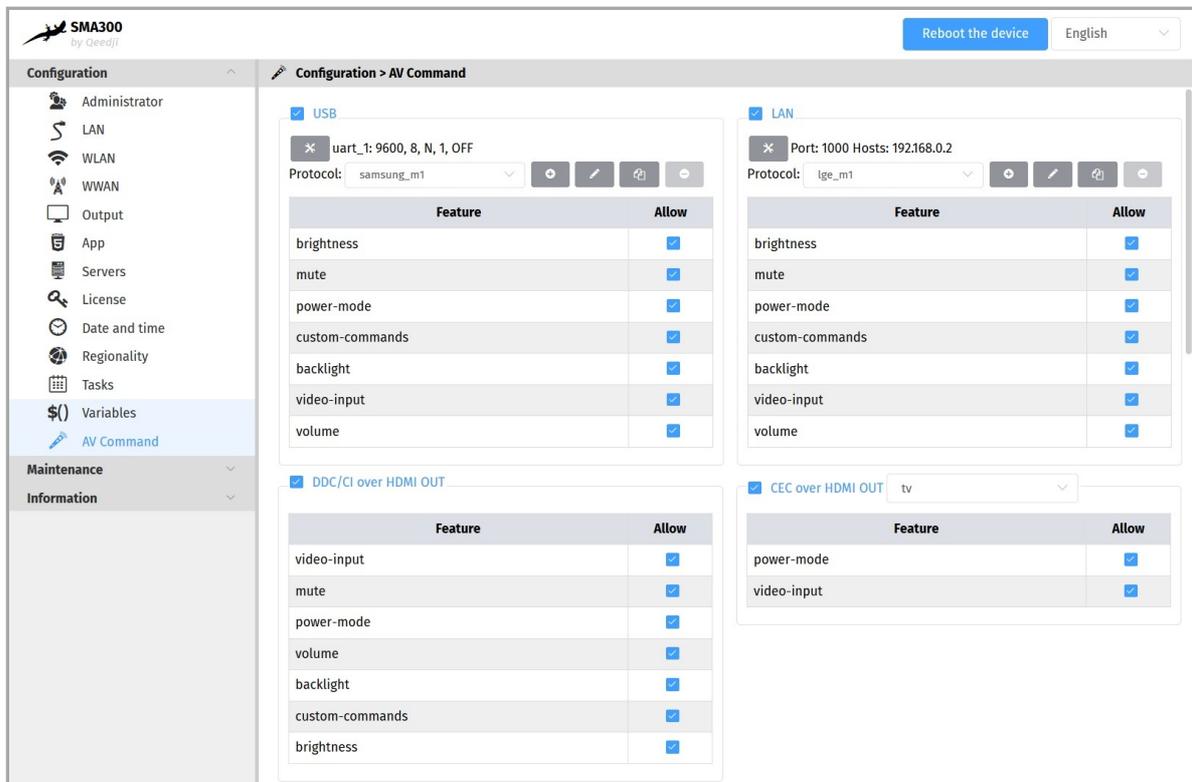

Depending on the connectors, not all AV commands are supported.

RS232

For screen control via AV Command RS232 DTE, select the **RS232 DTE** option.

First check in the datasheet that your monitor supports AV Command via RS232. Using the screen configuration menu, activate the support of AV Command via RS232 on your screen (example for a SAMSUNG screen: Menu Multicontrol then MDC Connection then select RS232 MDC)).

In order for your screen to be able to receive AV commands, connect a crossover serial cable between your device and your screen.

With the **X** button, configure the RS232 interface of your device to match the RS232 configuration of your screen.

Choose the appropriate protocol according to your monitor.

First check in the datasheet of your monitor or audio-video device which AV Command protocol is supported.

If none of the protocols are suitable, you can create your own protocol with the button **+** or duplicate an existing protocol with the button **⌘** and adapt it with your own AV Commands.

LAN

For screen control via AV Command LAN, select the **LAN** option.

With the **X** button, configure the LAN interface of your device by adding:

- the IP address(es) of the screen(s) to drive,
- the port to be used (for example, port 1015) for sending AV commands.

- ▮ Check beforehand in the datasheet that your monitor supports AV Command over Ethernet. Using the screen configuration menu, activate the support of AV commands over Ethernet on your screen (for example for a SAMSUNG screen: Menu `Multicontrol` then `MDC Connection` then select `Ethernet MDC`).
- ▮ In order for your display to receive AV commands over Ethernet, make sure that your device and display are in the same local network.

Choose the appropriate protocol based on your monitor.

- ▮ First check in the datasheet of your monitor or audio-video device which AV Command protocol is supported.
- ▮ If none of the protocols are suitable, you can create your own protocol with the button  or duplicate an existing protocol with the button  and adapt it with your own AV Commands.

DDC/CI on HDMI-OUT

For AV Command DDC/CI screen control through the HDMI-OUT connector, select the `DDC/CI on HDMI-OUT` option.

- ⚠ Some displays do not support AV Command DDC/CI correctly. If your screen does not exit from standby after activating AVCommand despite an App that is properly programmed, consider disabling DDC/CI AV Commands for that screen as it probably does not support standby output AV commands properly.

CEC on HDMI-OUT

For screen control by AV Command CEC through the HDMI connector, select the `CEC on HDMI-OUT` option.


- ⚠ Some screens do not correctly support AV commands by CEC. If your screen does not come out of standby after activating AVCommand despite an App that is properly programmed, consider disabling CEC AV Commands for that screen as it probably does not support standby output AV commands properly.

Next, to control your screen with the AV Controls, load and play an appropriate App. It is possible to create your own App that uses the AVCommand APIs available here: [GITHUB AVCommand API](#)

2.1.13 Maintenance > Testcard

From the Maintenance pane, select the **Testcard** menu to enable or disable the test pattern. The test pattern is often enabled during:

- installing devices on the network
 - the development of the output resolution and overscan
- ▮ When the test card is activated, the content of the App is not played.

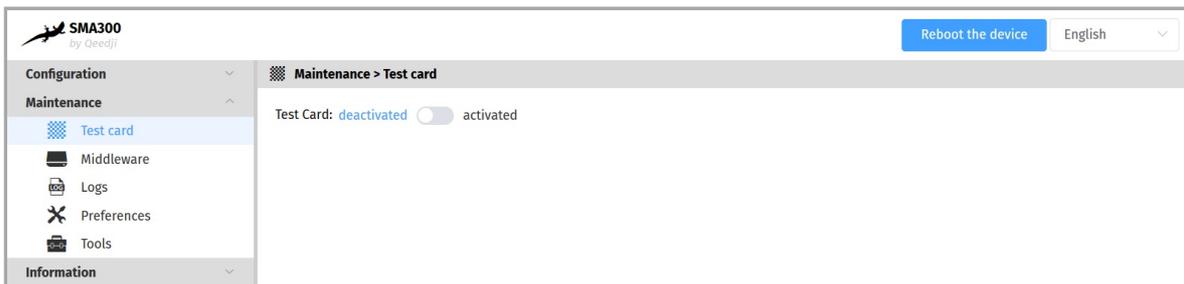

Activation of the test pattern through your monitor supporting CEC

If your monitor supports the CEC¹² on HDMI, you can enable or disable the test pattern by pressing a key combination on the monitor's remote control:


- Left Arrow, Right Arrow, Left Arrow, Right Arrow] in less than 10 seconds.
- ▮ Make sure that no menus or banners are displayed on the monitor.
- ▮ Before applying the keystroke combination, some monitors require you to deselect and then select the HDMI source of the display to which the device is connected to force a CECSetInput_Source

¹ For SAMSUNG monitors, CEC is usually activated by activating the Anynet function. ² for LG monitors, CEC is usually activated by using the Simplink key on the remote control.

Function	Linked User Preference
Support for test pattern activation by key combination	innes.player.test_pattern.key-event.*.authorized (default= true)

2.1.14 Maintenance > Middleware

From the Maintenance pane, select the **Middleware** menu to view the version of the middleware installed on your device.

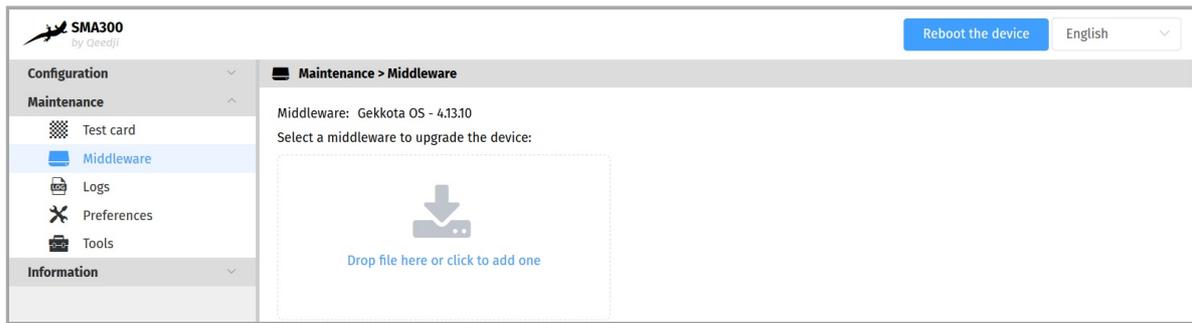


Corrective and evolutive maintenance software versions are regularly made available in the support tab of the official Qeedji website <http://www.qeedji.tech>. It is therefore advisable to regularly update your device. From this website, download the latest version available for your device model. Unzip the .zip archive and get the .frm file.

Drop your .frm file in the Drop file here box or click to add one, then click on the Send button to update the Gekkota OS version of your device. Wait a few minutes, the time to load and install the new version. Go back to the configuration web interface and check the new Gekkota OS version number of the device.

⚠ Do not electrically disconnect the device during the software update. For more information, refer to the chapter § LED behaviour.

2.1.15 Maintenance > Preferences

In the Maintenance pane, select the Preferences menu to view all the preferences.

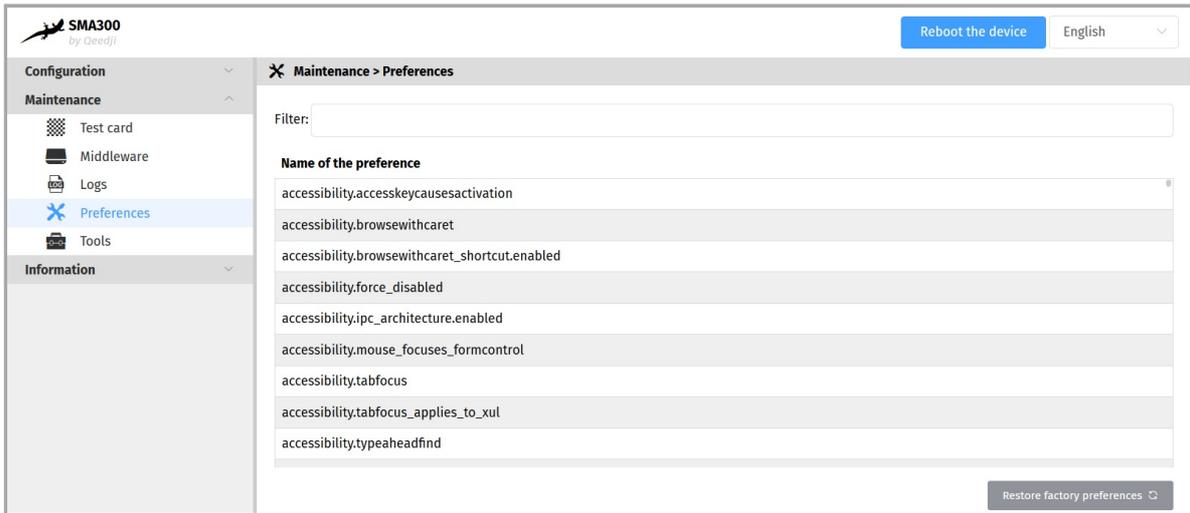

The filter allows you to list only those preferences whose name contains the string entered in the filter. All preferences have optimal default values.

 Before changing any value of a preference, please consult your Qeedji support.

Double click on a preference to change its value.

The Restore Factory Preferences button resets a subset of preferences allowing the device to reprogram its factory preferences.

Here are some user preferences that may be useful.

user preference	value	description
<code>innes.video.decoding-group.enabled</code>	<i>false</i> (default)	If a second video is trying to start while a first one is already running, the first video is stopped and the second video starts. A temporarily unavailable message content is displayed for the last stopped video media.
<code>innes.video.decoding-group.enabled</code>	<i>true</i>	In case a second video media tries to start while a first one is already running, the second video does not start. Temporarily unavailable message content is displayed for the second video media.
<code>media.mediasource.enable</code>	<i>false</i>	Disabling the DASH MSE.
<code>innes.hid.pointer-event.*.authorized</code>	<i>true</i>	Allows support for HDMI/USB touchscreens.
<code>innes.video.has.max-bitrate</code>	5	(Mbps) setting the maximum bitrate of a DASH Mpeg stream.
<code>media.cache_size</code>	16384 (default) to 65536	(in KB) Allows to support higher bitrate DASH Mpeg streams.
<code>innes.websserver.providers.http.enabled</code>	<i>true</i>	Allows to support access to the device in http://.
<code>innes.websserver.providers.https.enabled</code>	<i>true</i>	Allows to support access to the device in https://.

2.1.16 Maintenance > Logs

From the **Maintenance** pane, select the **Logs** menu to activate logs. The log levels are


- **DEBUG**: activation of level logs: **ERROR + WARN + DEBUG**
- **WARN**: activation of level logs: **ERROR + WARN**
- **ERROR**: activation of level logs: **ERROR**
- **OFF**: disabling logs

Logs are compartmentalized according to software functions such as

- **app** : App debug
- **widget** : HTML widget debugging
- **network** : debug of the network related layer
- Support may ask you to activate other logs in exceptional cases.

These logs can only be interpreted by software developers who are familiar with the software bricks that have been developed.

Activating the logs with a level other than **OFF** should only be done after a request from Qeedji support.

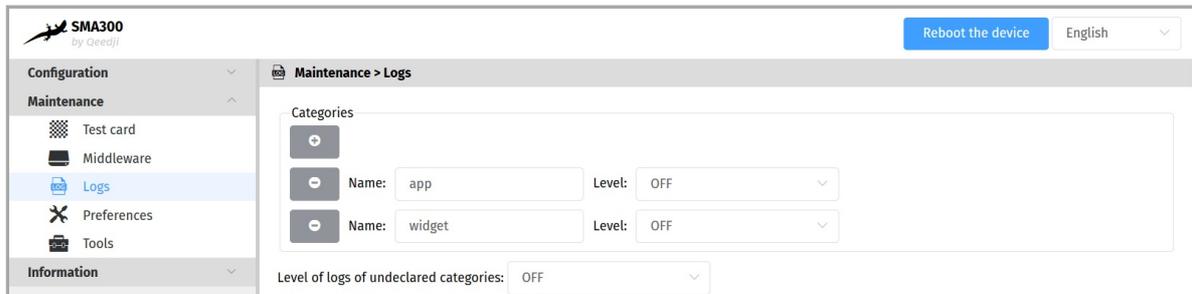

⚠ Enabling traces All trace levels of undeclared categories with a **DEBUG** or **WARN** level can significantly disrupt the operation of the device.

⚠ After a debug session with support, in nominal operation, all levels should be reset to **OFF**.

2.1.17 Maintenance > Tools

In the **Maintenance** pane, select the **Tools** menu to:

- **Correct** errors detected on the SD card data partition,
- **Format** the data partition of the SD card.

The **format** and **correct** buttons are only accessible if the Gekkota OS middleware has actually detected write or read errors on the partition.


A message indicates on the monitor that an error has occurred on the partition and that a reboot is necessary.

If the **Correct** button is accessible, clicking on the **Correct** button will repair the contents without rebooting an App. If the problem persists, and the **Format** button is available, clicking the **Format** button will format the contents. It is then necessary to republish an App.

▮ If the problem persists after formatting the SD card, contact your Qeedji support.

2.1.18 Information > Device

In the **Information** pane, select the menu **Device** to view system information about the device.

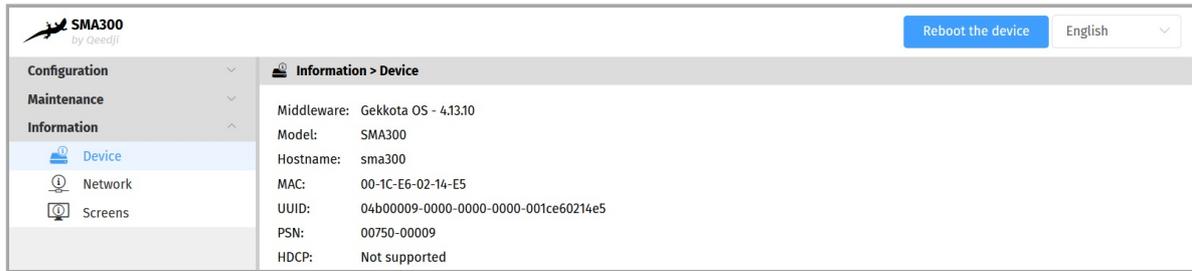

Information > Device	
Middleware:	Gekkota OS - 4.13.10
Model:	SMA300
Hostname:	sma300
MAC:	00-1C-E6-02-14-E5
UUID:	04b00009-0000-0000-0000-001ce60214e5
PSN:	00750-00009
HDCP:	Not supported

- **Middleware** : label and version of the embedded middleware,
- **Model** : model of the Qeedji device,
- **Hostname** : name of the device on the network,
- **MAC** : MAC address (value used in particular to generate the license key of the device),
- **UUID** : Universal Unique Identifier,
- **PSN** : Product Serial Number.

2.1.19 Information > Network

In the **Information** pane, select the **Network** menu to view a summary of the device's network configuration.

The screenshot displays the SMA300 web interface. The top left corner shows the SMA300 logo and the text "by (direct)". The top right corner features a "Reboot the device" button and a language dropdown menu set to "English". The left sidebar contains a navigation menu with the following items: Configuration, Maintenance, Information, Device, Network (highlighted), and Screens. The main content area is titled "Information > Network" and displays the following configuration details:

Delivery, status and installation servers:

Delivery server (G3):	http://custom-domain-url/	Heartbeat: 00:01:00
Status server:	http://custom-domain-url/.device-status/	Heartbeat: 00:01:00
Softwares and configurations installation server:	http://custom-domain-url/.setup/	Heartbeat: 00:01:00

NTP time server

NTP Server: fr.pool.ntp.org

LAN_1

Mac address: 00-1C-E6-02-14-E5
Ip v4 address: 192.168.160.2/24
Ip v6 address: fc00::21c:e6ff:fe02:14e5/64 [AUTO]
Default gateway: 192.168.160.6
State: connected
DNS Servers: 192.168.0.4, 8.8.8.8, 8.8.4.4

WLAN_1


Mac address: 00-19-88-46-7A-AE
Ip v4 address: 192.168.1.218/17
Ip v6 address:
Default gateway: 192.168.0.1
State: not connected
DNS Servers:

WWAN_1

Ip v4 address:
Ip v6 address:
Default gateway:
State: not connected
DNS Servers:

2.1.20 Information > Screens

From the Information pane, select the Screens menu to view information about the connected display in HDMI.

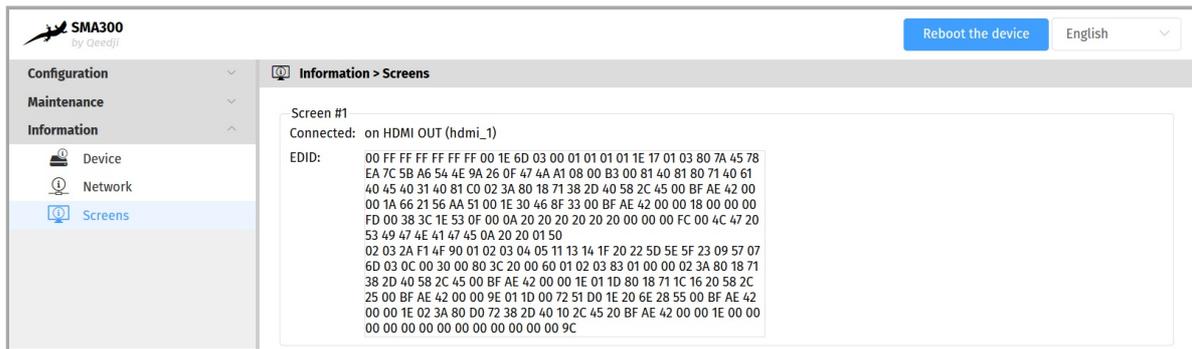

SMA300
by Qeeco

Reboot the device English

Configuration
Maintenance
Information

Device
Network
Screens

Information > Screens

Screen #1
Connected: on HDMI OUT (hdmi_1)

EDID: 00 FF FF FF FF FF FF 00 1E 6D 03 00 01 01 01 01 1E 17 01 03 80 7A 45 78
EA 7C 5B A6 54 4E 9A 26 0F 67 4A A1 08 00 B3 00 81 40 81 80 71 40 61
40 45 40 31 40 81 C0 02 3A 80 18 71 38 2D 40 58 2C 45 00 BF AE 42 00
00 1A 66 21 56 AA 51 00 1E 3D 46 8F 33 00 BF AE 42 00 00 18 00 00 00
FD 00 38 3C 1E 53 0F 00 0A 20 20 20 20 20 20 00 00 FC 00 4C 47 20
53 49 47 4E 41 47 45 0A 20 20 01 50
02 03 2A F1 4F 90 01 02 03 04 05 11 13 14 1F 20 22 5D 5E 5F 23 09 57 07
6D 03 0C 00 30 00 80 3C 20 00 60 01 02 03 83 01 00 00 02 3A 80 18 71
38 2D 40 58 2C 45 00 BF AE 42 00 00 1E 01 1D 80 18 71 1C 16 20 58 2C
25 00 BF AE 42 00 00 9E 01 1D 00 72 51 D0 1E 20 6E 28 55 00 BF AE 42
00 00 1E 02 3A 80 D0 72 38 2D 40 10 2C 45 20 BF AE 42 00 00 1E 00 00
00 00 00 00 00 00 00 00 00 00 9C

2.2 Configuration by script

The sma300 can auto-configure when it can load a configuration script. The configuration-by-script can be either hosted on remote WebDAV server, or broadcasted by your DHCP server (code 66) or injected with a USB stick. For further information, read the [configuration-by-script](#) application note on the Qeedji Web site.

In case the script is containing an error, the error is reported in the file `http://<device-ip-addr>/status/status.xml`

2.3 Appendix

Device status (status.xml)

The SMA300 device is updating regularly its device status stored in its `/.status` WebDAV directory:

```
http://<device-ip-addr>/.status/
```

This file can be periodically sent to a remote WebDAV server for monitoring purpose.

Status.xml example:

```
<device-status xmlns="ns.innes.device-status">
<device>
<id-type>MAC</id-type>
<mac>00-1c-e6-02-20-e2</mac>
<hostname>smh300</hostname>
<uuid>05c00002-0000-0000-0000-001ce60220e2</uuid>
<modelName><gekkota_os-model></modelName>
<modelName>4.13.11</modelName>
<serialNumber>00920-00002</serialNumber>
<middleware>gekkota-4</middleware>
<field1/>
<field2/>
<field3/>
<field4/>
<field5/>
<ip-addresses>
<ip-address>
<if-type>LAN</if-type>
<origin>dhcp</origin>
<value>192.168.1.119/17</value>
</ip-address>
<ip-address>
<if-type>LAN</if-type>
<origin>auto</origin>
<value>fc00::21c:e6ff:fe02:20e2/64</value>
</ip-address>
</ip-addresses>
<addons/>
</device>
<status>
<date>2020-03-31T17:40:16.055055+02:00</date>
<launcher>
<power-manager level="MAX"/>
<manifest-metadata xmlns:pzpm="ns.innes.gekkota.manifest">
<pzpm:publish-size>0</pzpm:publish-size>
<pzpm:publish-generator>gekkota_ui</pzpm:publish-generator>
<pzpm:publish-date>2020-03-30T06:45:26.759Z</pzpm:publish-date>
</manifest-metadata>
<state>NO_CONTENT</state>
</launcher>
<storage>
<total unit="byte">1912532992</total>
<used unit="byte">22161408</used>
</storage>
<display-outputs/>
<setup>
<configuration>
<metadatas/>
<version>2019-06-21T13:25:25Z</version>
</configuration>
</setup>
</status>
</device-status>
```

3.1 Technical specifications

Model	Manufacturer		
SMA300	Qeedji		
Processors			
CPU	Freescale iMX6		
GPU	Vivante		
Peripherals			
2x USB 2.0 Host (Low/Full/High Speed)			
1x Jack 3.5 configurable in GPIO or Infrared			
Storage	Information		
Internal Flash Memory for OS			
SD card	Qualified SD cards: SANDISK / SDSDAA-032G / 32 GB, SANDISK / SDSDB-032G-B35 / 32 GB, SANDISK / SDSDAA-008G / 8 GB		
Middleware			
Gekkota OS 4			
Audio outputs			
Jack 3.5 R+L stereo analog			
Embedded with HDMI output			
Video output			
1x HDMI 1.4			
Display resolutions for video output			
640x480 60Hz, 800x600 60Hz VESA, 1024x768 60Hz VESA, 1024x768 60Hz XGA, 1024x576 60Hz VESA, 1024x576 50Hz VESA, 1024x600 60Hz DENSITRON 84-0188-001T, 1280x720 60Hz CEA-861, 1280x720 50Hz CEA-861, 1280x720 60Hz VESA, 1280x720 50Hz VESA, 1280x720 60Hz SMPTE (720p), 1280x720 50Hz SMPTE (720p), 1280x720 60Hz CEA, 1280x720 50Hz CEA, 1280x720 60Hz SONY, 1280x720 60Hz CGV CPLine AV-HD, 1280x720 60Hz SAMSUNG, 1280x768 60Hz VESA, 1280x768 50Hz VESA, 1280x800 60Hz VESA, 1360x768 50Hz VESA, 1360x768 60Hz VESA, 1376x768 60Hz VESA, 1376x768 50Hz VESA, 1376x768 60Hz PC, 1920x1080 60Hz CEA-861, 1920x1080 50Hz CEA-861, 1920x1080 60Hz VESA, 1920x1080 50Hz VESA, 1920x1080 60Hz SMPTE (1080p), 1920x1080 50Hz SMPTE (1080p), 1920x1080 60Hz CEA, 1920x1080 50Hz CEA, 1920x540 60Hz VESA, 1920x300 60Hz VESA, 128x96 60Hz, 112x96 60Hz, 96x96 60Hz,			
Network			
1x Ethernet 10/100 BaseT PoE			
Options	Information		
GPRS/EDGE/HSDPA Modem	Mini-SIM card (25 mm x 15 mm)		
WIFI WIFI 802.11 b/g (WIFI 3)	⚠ when the device PSN is different from 01090-XXXXX. Do use the cipher protocol TKIP (meaning the WLAN parameters: <i>pairwise=TKIP, group=TKIP, key=psk</i>) when using WPA-PSK keys, or the cipher protocol CCMP (meaning the WLAN parameters: <i>pairwise=CCMP, group=CCMP, key=psk</i>) for WPA2-PSK keys		
WIFI 802.11a/b/g/n (WIFI 4)	⚠ when the device PSN is 01090-XXXXX. Do use the cipher protocol TKIP (meaning the WLAN parameters: <i>pairwise=TKIP, group=TKIP, key=psk</i>) when using WPA-PSK keys, or the cipher protocol CCMP (meaning the WLAN parameters: <i>pairwise=CCMP, group=CCMP, key=psk</i>) for WPA2-PSK keys		

Power supply	
12V DC (600mA)	
PoE power (Power Over Ethernet)	
Operating temperature	Storage temperature
+0°C to +35°C	-20°C to +60°C
Operating humidity	Storage humidity
< 80%	< 85%
Weight	Dimensions (WxHxD)
0,450 Kg	144 x 89 x 29 mm
Warranty	
3 years	

3.2 Conformities

In conformity with the following European directives:

- LVD 2014/35/EU
- EMC 2014/30/EU

4.1 Contacts

For further information, please do not hesitate to contact us:

- by phone at **+33 (0)2 23 20 01 62** or
- by e-mail:
 - **Technical support:** *support@qeedji.tech*
 - **Sales department:** *sales@qeedji.tech*

Refer to the Qeedji Website for FAQ, application notes, and software downloads:

<https://www.qeedji.tech/>

Qeedji
INNES SA
5A rue Pierre Joseph Colin
35700 RENNES

Tel: +33 (0)2 23 20 01 62
Fax: +33 (0)2 23 20 22 59

Qeedji
INNES SA
Verbindungsbüro Deutschland
Lebacher Str. 4
66113 Saarbrücken

Tel : 09386-979 39-14
Fax: 09386-979 39-15
Mob: 0175 853 67 81