

Memory Module Specifications

KSM29ES8/16HA

16GB 1Rx8 2G x 72-Bit PC4-2933

CL21 288-Pin DIMM

DESCRIPTION

Kingston's KSM29ES8/16HA is a 2G x 72-bit (16GB) DDR4-2933 CL21 SDRAM (Synchronous DRAM), 1Rx8, ECC, memory module, based on nine 2G x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-2933 timing of 21-21-21 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- Power Supply: VDD = 1.2V Typical
- VDDQ = 1.2V Typical
- VPP = 2.5V Typical
- VDDSPD = 2.2V to 3.6V
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- Data transfer rates: PC4-2933, PC4-2666, PC4-2400, PC4-2133, PC4-1866, PC4-1600
- Low-power auto self refresh (LPASR)
- Data bus inversion (DBI) for data bus
- On-die VREFDQ generation and calibration
- Single-rank
- On-board I₂S serial presence-detect (SPD) EEPROM
- Temperature sensor with integrated SPD
- 16 internal banks; 4 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- Fly-by topology
- Terminated control command and address bus
- PCB: Height 1.23" (31.25mm)
- RoHS Compliant and Halogen-Free

SPECIFICATIONS

CL(IDD)	21 cycles
Row Cycle Time (tRCmin)	45.75ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	32ns(min.)
Maximum Operating Power	*
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C

*See IDD Specifications (page 2)

Module Assembly

DRAM: HYNIX (A-DIE)

Continued >>


IDD Specifications

IDD		unit
Symbol	2933	
IDD0	414	mA
IDD0A	414	mA
IDD1	480	mA
IDD1A	511	mA
IDD2N	333	mA
IDD2NA	333	mA
IDD2NT	380	mA
IDD2NL	229	mA
IDD2NG	327	mA
IDD2ND	319	mA
IDD2NP	343	mA
IDD2P	222	mA
IDD2Q	304	mA
IDD3N	498	mA
IDD3NA	498	mA
IDD3P	399	mA
IDD4R	1279	mA
IDD4RA	1285	mA
IDD4RB	1290	mA
IDD4W	1084	mA
IDD4WA	1128	mA
IDD4WB	1024	mA
IDD4WC	1077	mA
IDD4WP	1336	mA
IDD5B	3544	mA
IDD5F2	2491	mA
IDD5F4	2088	mA
IDD6N	296	mA
IDD6E	445	mA
IDD6R	168	mA
IDD6A	445	mA
IDD7	1273	mA
IDD8	126	mA

IPP		unit
Symbol	2933	
IPPO	19	mA
IPP1	19	mA
IPP2N	12	mA
IPP2P	12	mA
IPP3N	18	mA
IPP3P	18	mA
IPP4R	18	mA
IPP4W	18	mA
IPP5B	592	mA
IPP5F2	391	mA
IPP5F4	323	mA
IPP6N	38	mA
IPP6E	65	mA
IPP6R	20	mA
IPP6A	57	mA
IPP7	75	mA
IPP8	12	mA

continued

MODULE DIMENSIONS

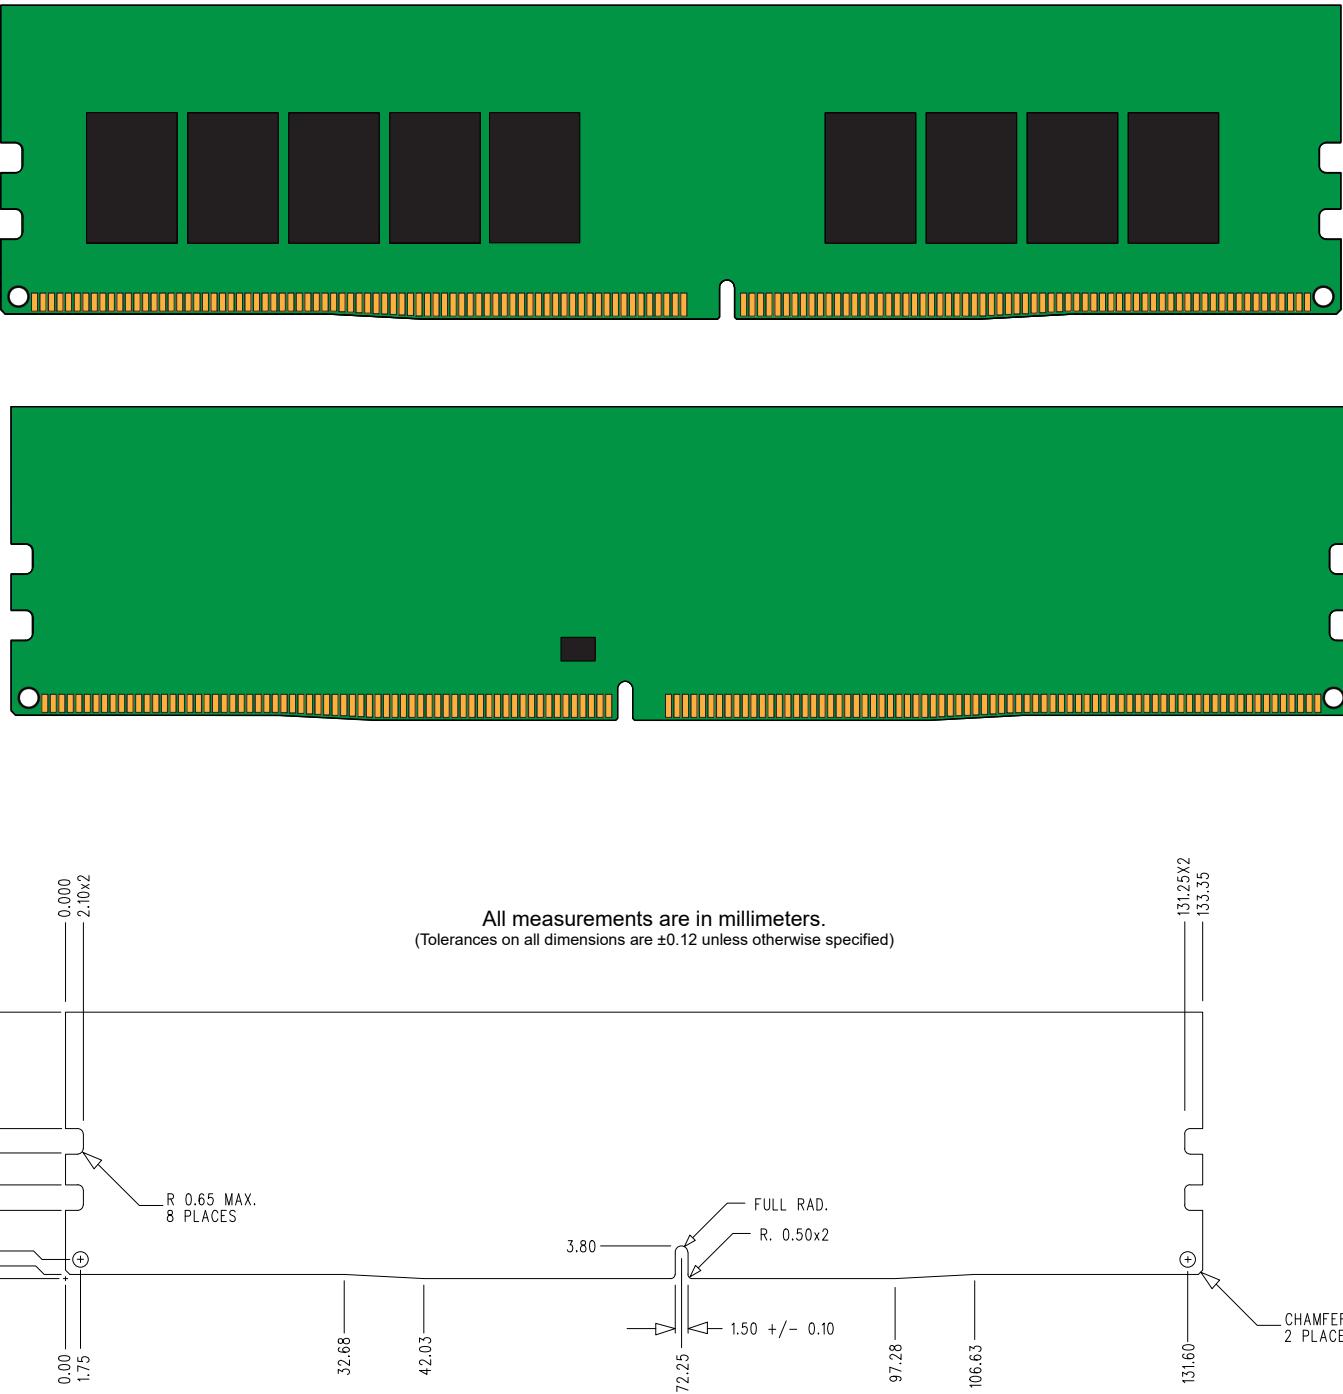

The product images shown are for illustration purposes only and may not be an exact representation of the product.
Kingston reserves the right to change any information at anytime without notice.