


AWFLC

Air displacement diffuser

The product is powder coated.
 Standard color white (RAL9003).
 The product specifies the maximum air volumes when air speed distributor shall not exceed 0,3 m/s.

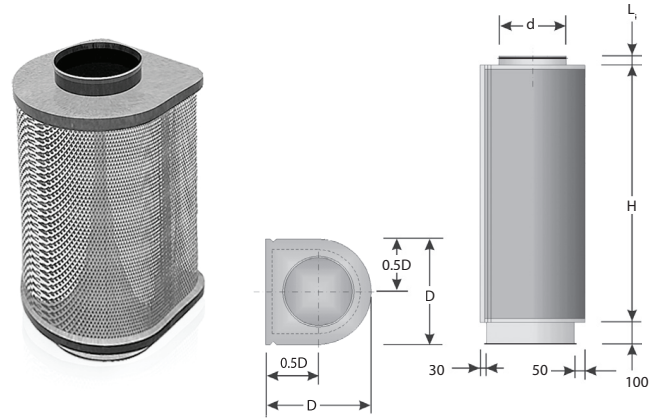

		H = 300 mm			H = 600 mm			H = 900 mm		
d, mm	D, mm	Air volume, m ³ /h	Code	Weight, kg	Air volume, m ³ /h	Code	Weight, kg	Air volume, m ³ /h	Code	Weight, kg
100	200	74	1021292	1,8	160	732321002	2,4	170	1021295	3,0
125	235	91	1021293	2,2	195	1021294	2,9	265	732321006	3,6
160	280				240	732321007	3,6	335	732321008	4,4
200	335				295	732321010	4,4	452	732321011	5,4
250	400							552	732321013	6,6
315	490							689	732321016	8,4
		H = 1200 mm			H = 1500 mm			H = 2000 mm		
d, mm	D, mm	Air volume, m ³ /h	Code	Weight, kg	Air volume, m ³ /h	Code	Weight, kg	Air volume, m ³ /h	Code	Weight, kg
160	280	434	1021296	5,3						
200	335	610	732321012	6,4						
250	400	744	732321014	7,8	937	732317214	9,0			
315	490	930	732321017	9,9	1170	732321018	11,3			
400	600	1157	732321019	12,4	1456	732321020	14,2	1954	732321021	17,2
500	735	1435	732321022	15,7	1806	732321023	17,9	2424	732321024	21,6

ORDER EXAMPLE: air displacement diffusers AWFLC-100-200-600.