

> PRINT > COPY > SCAN > FAX

ECOSYS M6630cidn (4-in-1) ECOSYS M6635cidn (4-in-1)

COLOR MULTIFUNCTION PRODUCT FOR A4 FORMAT

VIBRANT COLOR OUTPUT



- Speedy A4 copy/print speed up to 35/35 cpm Mono/Color* with 1,200 x 1,200dpi printing
- Fast scanning up to 62/46 ipm Mono/Color.
- Support A6 duplex scan from Document Processor.
- Fit for high print volume with paper capacity up to 1,850 sheets**.
- User-friendly 7-inch large color touch screen panel.
- Standard 1GB RAM to meet heavy-duty tasks without additional memory.
- Support Google Cloud Print, Apple AirPrint and Mopria certified.
- Standard 100 sheets capacity with high productive One-path duplex scanning Document Feeder*.

* For ECOSYS M6635cidn only ** Main unit + Multi-Purpose Tray + Optional PF-5100 x 3




Born to be Extraordinary

KYOCERA Document Solutions is Extraordinary for

- Broad Range of Multifunction Devices and Printers
- Optimized Total Cost of Ownership (TCO)
- Reliable with Long Life Drum and Parts
- New and Advanced Technology

KYOCERA Document Solutions strives to be a company that contributes to the society and demonstrates a "Customer First" principle by providing customers with maximum value to increase their satisfaction. By adhering to the mission of producing document management devices that take balance between "Economy" and "Ecology", KYOCERA Document Solutions succeeds to develop document management devices with advanced technologies which help customers to optimize office productivity and efficiency at a low total cost of ownership and, at the same time, improving environmental performance.

Robust Features

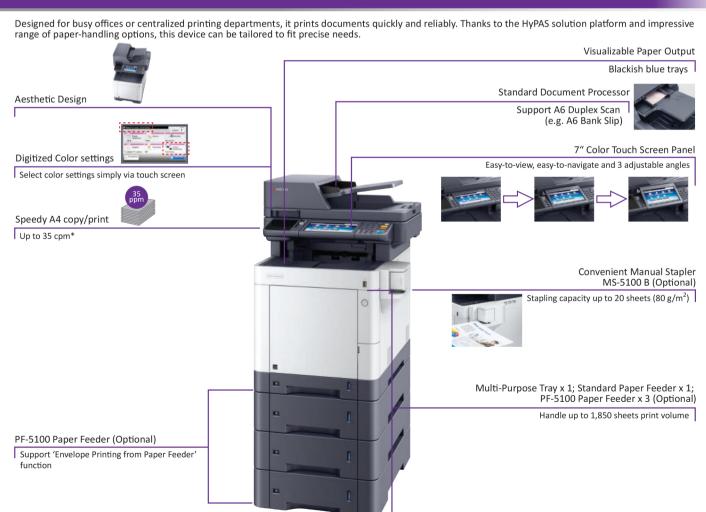

Amazing Quality

COPY/PRINT

- Convenient Multi-Purpose Tray First Mode: Allow printing via Multi-Purpose Tray whenever a paper is loaded there.
- Direct print from USB memory.
- Superior image quality 1,200 x 1,200 dpi print resolution.



SCAN

Support mixed sizes A4/Letter and Legal original in Copy/Scan. Skip Blank Page Function: Automatically skip blank pages in copy and scan.



- Fast scanning up to 62/46* ipm in A4 Mono/Color.
- Store scanned data easily by 'Scan to FTP', 'Scan to SMB', 'Scan to Email' and "Scan to USB"



FAX

- A destination and other transmission settings can be registered as a favor to prevent sending to the wrong recipient.
- Capable of sending and receiving fax via PC with network fax function.
 Fax broadcast up to 100 different destinations.

High Standard of Security

· Authentication management among departments via IC Card.



• Standard built-in Kensington Security Slot for burglar-proof of the device.

· Save cost by using less paper. Print: Allow 25-in-1 Copy: Allow 4-in-1

USB



· 2-sided copy/print as standard



• Equip with special features, e.g. 'Job Finish Notice' and 'Prevent Bleed-Through' Functions, etc.



• Banner Send: Scan a banner/3 or 4 panels folding with ease (One-sided only)





*For ECOSYS M6635cidn only

- Sophisticated network security (SSL, IPsec) as a standard to prevent improper access
- Private Print enables secure print jobs with preset password request at the device.



Protecting the Earth

- Low energy consumption
- Usage of white LED illumination for lower light emissions and power consumption. • Free of Hazardous material
- Fulfilled the requirements of RoHS (Restriction of Hazardous Substances) & usage of Lead-Free Parts.
- Reduce wastage by Long Life Consumables and Drums.
- Reduce noise by Quiet Mode.

Powerful Customization

By combining the innovative Business Applications, these devices can manage documents in an effective approach.

- **HyPAS**[°] Enhances specific document imaging needs.
 - **KYOCERA MyPanel** Remote control designated KYOCERA printing devices by smartphone or tablet.
 - AirPrint Print documents, photographs, images, etc. directly from iOS devices/Mac.
- KYOCERA Mobile Print Conveniently print files, web pages and images using smartphone or tablet.
- KYOCERA Cloud Connect (Optional) Print and scan directly to the cloud services easily.
- **KYOCERA Fleet Services (Optional)** Maintain entire fleet from the cloud.
- **KYOCERA Net Manager (Optional)** Control sensitive documents and reduce printing costs.
- **KYOCERA Net Device Manager** Optimize, track and manage network devices from local and remote locations.



- Support WiFi Direct:
- o Require IB-36 Wireless LAN (Optional) o Makes print via AirPrint/Google Cloud Print/Mopria/KYOCERA Mobile Print/KYOCERA MyPanel much easier.

Needed CCOSYS MGG3Cdcia CCOSYS MGG3Cdcia Main Function COSYS MGG3Cdcia COSYS MGG3Cdcia Orus COSYS MGG3Cdcia COSYS MGG3Cdcia Orus COSYS MGG3Cdcia COSYS MGG3Cdcia Orus Seed (al UDers/Code UDERs/
Nahn Rucken Copy Prod. Scan Se Prof. Scan Se Semiconscience Law CPU Max Carter AD Dual Care 1.2014 Scan Ins Special (All Momuno Law Sin Sin Special (All Momuno Law Scan Ins Special (All Momuno Law) Biol Sin Special (All Momuno Law) Scan Ins Special (All Momuno Law) Biol Sin Special (All Momuno Law) Memory Diamate Time Scan Sin Special (All Momuno Law) Memory Sam Inst Special (All Momuno Law) Scan Sin Special (All Momuno Law) Memory Sam Inst Special (All Momuno Law) Scan Sin Special (All Momuno Law) Memory Sam Inst Special (All Momuno Law) Scan Sin Special (All Momuno Law) Memory Cas Stan Sin Momuno Law) Scan Sin Special (All Momuno Law) Paper Size (All Momuno Law) Cas Stan Sin Momuno Law) Scan Sin Special (All Momuno Law) Cas Stan Sin Momuno Law) Cas Stan Sin Momuno Law) Scan Sin Momuno Law) Scan Sin Momuno Law) Cas Stan Sin Momuno Law) Scan Sin Momuno Law) Scan Sin Momuno Law) Scan Sin Momuno Law) Cas Stan Momuno Law) Scan Sin Momuno Law) Scan Sin Momuno Law) Scan Sin Momuno Law) Cas Stan Momuno Law)
Write general C44 (Mora-Case) General Case (Mora-Case) Prot Speed C44 (Mora-Case) General Case (Mora-Case) S935 ppm. Standing Speed (Mora-Case) General Case (Mora-Case) S935 ppm. Standing Speed (Mora-Case) General Case (Mora-Case) S935 ppm. Mora (Mora-Case) S936 ppm. S936 ppm. Mora (Mora (Mo
FU AMA CateA Dual Core 1.261; Standing Key
Print Second 2404 Mov_Cot 2000 32/35 ppm Stamming Second 2405 MoveCot 24
scame gene (Al 300 mg (Al 3
<table-container> blong/com blong/com Big/r Qanty Market Set Set Set Set Set Set Set Set Set S</table-container>
Memory V Image: Project State S
Warm Up Time Solander Stander Stander Pager Capacity Solander Stander Stander Pager Capacity Cassette Stander Stander Pager Size Cassette Stander Stander Pager Size Option Stander Stander Pager Size Cassette Stander Stander Cassette Cassette Stander Stander Option Gassette Stander Stander Diplet Printig Cassette Stander Stander Diplet Printig Cassette Stander Stander Cassette Stander Stander Stander Diplet Printig Cassette Stander Stander Stander Cassette Stander Stander Stander Stander Stander Diplet Printig Stander Stander<
Apper Capsory Maamum Sandard Maamum C203 Peters (Cassette) = 10.0 Peters (M/T) (Maamum Paper Size Paper Weght Cassette Ontion Cassette Ontion Min. Adit - Max. Ad (Logal) Paper Weght Cassette Ontion Gitta (Gassette) Option Ontion (Gassette) Ontion (Gassette) Ontion (Gassette) Option Cassette Ontion (Gassette) Ontion (Gassette) Option (Finding) Option (Gassette) Ontion (Gassette) Option (Gassette) Option (Finding) Cassette Option (Gassette) Option (Gassette) Option (Finding) Standard (Max. 75 sheets NACD Type) Standard (Max. 25 sheets NACD Type) Standard (Max. 75 sheets NACD Type) Descenter Horocacco (Gassette) Option (Gassette) Option (Gassette) Option (Gassette) Option (Max Lot (Ma
Profe Case of the
casette (assette (m. AB - Max, A4 (aga)) Paper Size Option (M. AB - Max, A4 (aga)) AMF (assette (B) 1.3 g (m ¹) Paper Weight Option (B) 2.3 g (m ¹) MPT (B) 2.3 g (m ¹) Duplex Finding (B) 2.3 g (m ¹) Output Capacity (B) 2.3 g (m ¹) Control Netal (B) 2.3 g (m ¹) Con
perform open
Cover lopion (MPT) Cover (MPT) Cover (MPT) Cover (MPT) Outputs Printing Control Zease VM Page Vale XM Page Vale VM Page Vale VM Outputs Printing Control Zease VM Page Vale XM Page Vale VM Page Vale VM Outputs Printing Control Zease VM Standard (Max 75 sheet SROP Type) Standard (Max 75 sheet SROP Type) Standard (Max 75 sheet SROP Type) Document Processor Control Zease VM Standard (Max 75 sheet SROP Type) Standard (Max 75 sheet SROP Type) Standard (Max 75 sheet SROP Type) Prover Control Zease VM Mode Standard VM Mode Standard VM Mode Standard (Max 75 sheet SROP Type) Standard (Max 75 sheet SROP Type) Prover Constroped VM Mode Standard VM Mode Standard VM Mode Standard (Max 75 sheet SROP Type) Standard (Max 75 sheet SROP Type) Prover Constroped Tease VM Mode Standard VM Mode This unit is manufactured according to 150 SQO1 quality standard and 150 34001 environmental standard. RoHs compatibility VCOP Standard VM Mode Standard (Max 75 sheet Standard VM Standard VM Mode Copy Stard Freeolution First Copy Time (Momo Color) This unit is manufactured according to 500 SQO1 quality standard and 150 34001 environmental standard. RoHs compatibility VCOP Stard Freeolution First Stroped Tease Vale Standard VA Stard Vale Standard VA Copy Stard Standard VA Stard Copy Standard Vale Stard
Paper Weight MPT Option 0 0.202 p/m ³ Output Capacity Voltant Capacity Control Parel Paper size: ASR - AKLegsb PAZE - AKLEGSB PAZE
MPT (0, 230 g)r ^m Dights Printing Paper size: RSA AVLigaj: Size
inpute Paper Lize: ASR. AdV_tapit Paper wight: 60 - 163 g/m ² Output Capacity Max 20 sheets face: dow Control Panel 7 inch Color Touch LCD Panel Opcoment Processor Standard (Max. 75 sheets RAP Type) Standard (Max. 100 sheets Cone_path duples scanning Type) Otmostor (V & D x HI) (Mail Unit) 475mm x 55mm x 51mm x 51mm 480mm x 57mm m x 510 Smm Opcoment Processor Control Paper 547M (733 W) Agoma x 57mm Otmostor (V & D x HI) (Mail Unit) Agoma x 57mm x 510 Smm Agoma x 57mm 51mm Opcoment Processor Control Paper x 51 Smm Agoma x 57mm 51mm Opcoment Processor Control Paper x 51 Smm Agoma x 57mm 51mm Opcoment Processor Control Paper x 51 Smm Agoma x 57mm 51mm Stand by Mode Sand by Mode 52ml (Ago M) 52ml (Ago M) 52ml (Ago M) Stand by Mode This unit is manufactured according to 150 0001 quality standard and Ref K Coox 500 cpi First Copy Time (Mont Color) 7.5 sc / 5.5 sc /
Output Zapach/ Control Panel Internation Rate Standard (Max. 75 sheets RADF Type) Standard (Max. 75 sheets RADF Type) Document Processor Standard (Max. 75 sheets RADF Type) Standard (Max. 70 sheets RADF Type) Meight (Main Unit) (Argmman SSBam on SEGmm Argman SSBam on SSBa
Control Panel 7 Inch Color Touch LCD Panel Document Processor Standard (Max. 75 sheets RADF Type) Standard (Max. 100 sheets 0ne path duplex scaning Type) Dimension (W x D x H) (Main Unit) 475mm x 558mm x 616mm 480mm x 577mm x 613.5mm Weight (Main Unit) Approx. 35.4 kg Approx. 36.5 kg Operation (W x D x H) (Main Unit) Approx. 35.4 kg Approx. 36.5 kg Operation (W x D x H) (Main Unit) Approx. 35.4 kg Approx. 36.4 kg Standard Max Standard Max Standard Max. 30.4 kg Approx. 36.4 kg Standard Made 70W Standard Made Standard Made Obj 2269 // 2000 (Color) This unit is mainfactured according to IS0 9001 quality standard and IS0 14001 environmental standard. Roles compatibility Operations (Standard) Copy First Mode This unit is mainfactured according to IS0 9001 quality standard and IS0 14001 environmental standard. Roles compatibility Operations (Standard) Copy First Mode This unit is mainfactured according to IS0 9001 quality standard and IS0 14001 environmental standard. Roles compatibility New Stard Sta
Document Procesor Standard (Max. 75 sheets RADF Type) Standard (Max. 100 sheets One path duples scanning Type) Dimension (W.X. bit) (Main Luin) 475mm K 558mm K 616mm 480mm X 57mm K 1515mm Over (Consumption) Copy/Print Mode 521W/496W 480mm X 57mm K 1515mm Standard (Max. 790m K 200m
Interestion (W x 0 x H) (Min Unit) 475mm x 518mm x 616mm Vegit (Main Unit) Opy/Print Mode Stank-by Mode Copy/Print Mode Copy/Pr
Weight (Main Unit) Approx. 35.4 kg Approx. 35.5 kg. converted on amplition (Standard Configuration) Copy/Print Mode 5.21W/496W 5.47W Standard Configuration) Energy Saver 0.68W 6.84W configuration) Copy/Print Mode 49.5dB(A) 3.040(A) Standard Copy Size / Resolution This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard. RoHs compatibility Copy Size / Resolution This unit is manufactured according to ISO 9001 (standard) Copy Size / 8.5 sec Zoony Size / Resolution This unit is manufactured according to ISO 9001 (standard) 7.5 sec / 8.5 sec Zoony Size / Resolution This unit is manufactured according to ISO 9001 (standard) 7.5 sec / 8.5 sec Zoony Size / Resolution Manual 2.5 sec / 9.0 sec 7.5 sec / 8.5 sec Zoon Ratio Manual 2.5 sec / 9.0 sec 7.5 sec / 8.5 sec Size / Siz
prover (Snamuption) (Standary) (Standary) Mode S121//395W S121//395W Consumption (Standary) (Standary) Mode 70W 84W Conjegration) (Standary) (Standary) Mode 0.6W 84W Conjegration) (Standary) Mode 52d8(A) 52d8(A) Standary Mode 30d8(A) 52d8(A) Copy Star / Resolution This unit is manifactured according to IS0 9001 quality standard and ISD 14001 environmental standard. Rols compatibility Copy Star / Resolution This unit is manifactured according to IS0 9001 quality standard and ISD 14001 environmental standard. Rols compatibility Copy Star / Resolution Max A4 (legal) - Min. A68 / 600 x 600 dpl Copy Time (Mort/Color) 7.5 sec / 3.0 sec 7.5 sec / 3.5 sec / 3.5 sec Com Station Manual 255 - 400% (K1 per Step) Multiple Copy 1 - 99 Multiple Copy Friet Functions (Standard) Resolution Fold Col x 600 dpl (s600 dpl (s
Consumption (analysis) Stand-by Mode (hergy Star) DW BAW INSE (150777) Copy Star) Stand-by Mode 30dB(A) Stand-by Mode 30dB(A) 30dB(A) Stand-by Mode 30dB(A) 30dB(A) Copy Star (Resolution This unit is manufacured according to ISO 9001 quality standard and ISO 14001 environmental standard. RoHs compatibility Copy Star (Resolution) This unit is manufacured according to ISO 9001 quality standard and ISO 14001 environmental standard. RoHs compatibility Copy Star (Resolution) This unit is manufacured according to ISO 9001 quality standard and ISO 14001 environmental standard. RoHs compatibility Copy Star (Resolution) Manual 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Zoon Ratio Manual 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Multiple Copy Pre defined 7.5 sec / 7.5 sec 7.5 sec / 8.5 sec First Print Out Time 6.0 sec / 7.5 sec 7.5 sec / 7.5 sec 7.5 sec / 7.5 sec Supported Windows Server 2008, Windows Server 2008, Windows Server 2008, Windows 10: Linux 6.0 sec / 7.5 sec Supported Windows Server 2008, Windows Server 2012, Windows Server 2012, Windows 20: Linux 6.0 sec / 7.5 sec
Citandard Configuration (Standard) Data Decision (Standard) Decision (Decision (Standard) Decision (Decision (Standard) Copy Star (Resolution This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard. Rolts compatibility (Copy Star (Resolution) This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard. Rolts compatibility (Copy Star (Resolution) Copy Star (Resolution) This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard. Rolts compatibility (Copy Star (Resolution) Copy Star (Resolution) This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard. Rolts compatibility (Resolution) Copy Star (Resolution) Manual Copy Functions (Standard) Resolution Frist Copy Time (Locy Time (Standard)) Resolution Resolution Frist Functions (Standard) Resolution Pol. PRESCRIBE, PCL (Pic LAV, PLS, PND 13 (Postscript 2) compatibile), PLS, PS PD Fore (Print VE 1.7 Supported Protorol Con Sec / 7.5 sec
Noise (1507779) Copy/Print Mode 52dB(A) 509296) Stand-by Mode 30dB(A) Copy Size / Resolution This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard. RoHs compatibility Copy Size / Resolution Copy Size / Resolution Copy Size / Resolution Ensit Copy Time (Mono/Color) 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Zoom Ratio Annual 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Zoom Ratio Pre-defined 7.5 sec / 8.0 sec 7.5 sec / 8.5 sec Multiple Copy 9.0 sec 7.5 sec / 8.0 sec 7.5 sec / 8.5 sec Multiple Copy 0.0 sec / 7.5 sec / 8.0 sec 7.5 sec / 8.5 sec Print Functions (Standard) Standard) Standard) Standard PDL PRESCRIBE, PCIc (PCL XL, PCL5, NEPD3 (Postscript 3 compatible), NP, SPD Finet Ver. 1.7 First Print Vunct Sec / 7.5 sec Supported Protocol S0.9 sec / 7.5 sec S0.9 sec / 7.5 sec Supported Protocol S0.9 sec / 7.5 sec S0.9 sec / 7.5 sec Supported Protocol S0.9 sec / 7.5 sec S0.9 sec
ISO2296) Stand-by Mode 30dE(A) Copy Size / Resolution This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard. RoHs compatibility Copy Size / Resolution Manual Copy Functions (Standard) Copy Size / Resolution Manual 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Zoom Ratio Manual 25% - 400% (1% per Step) Pre-defined Pre-defined 7.5 sec / 8.5 sec 5.5 sec / 9.0 sec 7.5 sec / 8.5 sec Multiple Copy 1 - 999 9.0 sec 7.5 sec / 8.5 sec Point Functions (Standard) 6.0 sec / 7.5 sec 6.0 sec / 7.5 sec Resolution 6.0 sec / 7.5 sec 6.0 sec / 7.5 sec Supported Protocol TCP/IP, NettEUU, FIP, Port 9100, PR, IPP, IPP Over SSL/TIS, WIDOWS 5erver 2012, Windows Server 2012, Windows S
Copy Size / Resolution This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard. RoHs compatibility Copy Size / Resolution Max. Ad (Legal) - Min. A6R / 600 × 600 dpi First Copy Time (Mono/Color) 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Zoom Ratio Marual 25% - 400% (J% per Step) Predefined 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Multiple Copy 1.999 1.999 Resolution 600 × 600 dpi; 9500 Equivalent x 600 dpi; 1.200 x 1.200 dpi PDL PRESCRIBE, PCLS (PCL-XH, PCL S), XPDL3 (Postscript 3 compatible), XPS, PDP Direct Print Ver. 1.7 First Print Out Time 6.5 sec / 7.5 sec 6.0 sec / 7.5 sec Supported Protocol TOF/IP, NetBEUI, FTP, Pnt 9100, LPR, IPP, IPP over SSL/TSL, SWS Print, Apple Bonjour Operating System Supported Windows Server 2008, Windows Server 2012, Windows Server 2012, R2; Windows 7, Windows 10; Linux Interface USS 2.0 High Speedx1; Ethernet 10BA/SE-T1/200BA/SE-T, USB Host Interface (USB Host)/2 USB Memory Printing Standard Mobile Printing Standard Mobile Printing Color, Sec, Sec ND-Sec, ND-S
Copy Size / Resolution Copy Functions (Standard) Copy Size / Resolution Max. A4 (Lega) - Min. A6R / 600 x 600 dpi First Copy Time (Mono/Colr) 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Zoom Ratio Manual 25% - 400% (1% per Step) Pre-defined 7.5 sec / 8.5 sec Multiple Copy 7.5 sec / 8.5 sec Multiple Copy 7.5 sec / 8.5 sec Pre-defined 7.5 sec / 9.0 sec Print Functions (Standard) 7.5 sec / 8.5 sec Resolution 600 x 600 dpi; 9500 Equivalent x 600 dpi; 1.200 x 1,200 dpi PDL PRESCRIBE / CPLC (PCL XU, PCL SC), KPDL (Bestscript 3 compatible), KPS, PDF Direct Print Ver. 1.7 First Pnint Out Time 6.5 sec / 7.5 sec Supported Protocol TCH/IP, NetBEUL, FTP, Port 9100, LPR, IPP Power SL/TLS, WSD Print, Apple Bonjour Operating System Supported Windows Server 2012, Windows Server 2012, Windows 2012, Unindows 10: Linux Interface USB 2.0 High Speedx1; Ethernet 108ASE-T/1008ASE-T; USB Host Interface (USB Host)x2 USB Memory Printing Standard USB Memory Printing Format Standard Koble Print, Mopria, KYOCERA Mobile Print, Google Cloud Print Standard S
Copy Size / Resolution Max. A4 (Legal) - Min. A6R / 500 x 600 dpi First Copy Time (Mono/Color) 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Zoom Ratio Manual 25% - 400% (1% per step) Multiple Copy 1.999 1.999 Multiple Copy Print Enuctions (Standard) Print Enuctions (Standard) Resolution 600 x 600 dpi; 9600 Equivalent x 600 dpi; 1,200 x 1,200 dpi 600 x 600 dpi; 9600 Equivalent x 600 dpi; 1,200 x 1,200 dpi PDL PRESCRIBE, PCL5 (PCL-XL, PCL SC), KPDL 30 (PSEscript 3 compatible), XPS, PDF Direct Print Ver. 1.7 First Print Out Time 65 sec / 7.5 sec 6.0 sec / 7.5 sec 50.0 sec / 7.5 sec Supported Protocol TCP/IP, NetBEUL, FTP, Port 9100, LPR, IPP, IPP over SSL/TLS, WSD Print, Apple Bonjour Operating System Supported Windows Server 2008, Windows Server 2012, Windows Server 2012 R2, Windows 7, Windows 10; Linux Interface USB Alemory Printing Standard USB Memory Printing Format TIFF, IPEG, NDF, XPS Eermal Print Morial, XPCCERA Mobile Print, Google Cloud Print Mobile Printing AliPrint, Mopria, KYCCERA Mobile Print, Google Cloud Print Standard USB Memory Printing Format TIFF, IPEG, XPS, OpenXPS, PDF (MMR/I/EG compression/HB), Focrypted PDF, PDF/A-1,
First Copy Time (Mono/Color) 7.5 sec / 9.0 sec 7.5 sec / 8.5 sec Zoom Ratio Mraual 25% - 400% (1% per Step) Multiple Copy 1 - 999 Resolution GOO x 600 dpi ; 2000 dpi ; 1200 x 1, 200 dpi PPL PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Postscript 3 compatible), XPS, PDF Direct Print Ver. 1.7 First Print Out Time 6.0 sec / 7.5 sec Supported Protocol TCP/IP, NetBEUJ, FTP, Port 9100, LPR, IPP, IPP over SSL/TLS, WSD Print, Apple Bonjour Operating System Supported Windows Server 2008, RJ, Windows Server 2012, RJ; Windows 7, Windows 10; Linux Interface USB 2.0 High Speedx1; Ethernet 10BASE-TJ/100BASE-TJ USB Host Interface (USB Host)x2 USB Memory Printing USB 2.0 High Speedx1; Ethernet 10BASE-TJ/100BASE-TJ USB Host Interface (USB Host)x2 USB Memory Printing Standard Mobile Print, Moral MCCERA Mobile Print, Mooria MCCERA Mobile Print, Google Cloud Print Color Selection ACS; Full Color; Grayscale; Black & White Resolution FUF, JPEG, XPS, OpenXPS, PDF (MMR//JPEG compression/PHE, Incorpted PDF, EDF, ZPS 2.00x400dpi, 200dpi, 20
Manual Coom Ratio Manual Pre-defined 25% - 400% (1% per Step) Multiple Copy 7R5E Multiple Copy Print Functions (Standard) Resolution 600 x 600 dpi; 9600 Equivalent x 600 dpi; 1,200 x 1,200 dpi PPL PRESCRIBE, PCLG (PCL-XL, PCL Sc), KPDL3 (Postscript 3 compatible), XPS, PDF Direct Print Ver. 1.7 First Print Out Time 6.5 sec / 7.5 sec Supported Protocol CTCP/IP, NetBUL, PTP, Por P300, UP, IP, Pi, PP over SSL/TLS, VSD Print, Apple Bonjour Operating System Supported Windows Server 2008 R2, Windows Server 2012, Windows Server 2012, RickWas Servere 2012, RickWas Server 2012, RickWas Server 2012, RickWas Serve
Zoom Ratio Pre-defined TRE Multiple Copy 1 - 999 Print Functions (Standard) Resolution 600 x 600 dpi; 9600 Equivalent x 600 dpi; 1, 200 x 1, 200 x 1, 200 dpi PDL PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Postscript 3 compatible), XPS, PDF Direct Print Ver. 1.7 First Print Out Time 6.0 sec / 7.5 sec Supported Protocol TCP/IP, NetBEUL, FTP, Port 9100, LPR, IPP, IPP over SSL/TLS, WSD Print, Apple Bonjour Operating System Supported Windows Server 2008, Windows Server 2008, R2, Windows Server 2012, R2; Windows 7, Windows 10; Linux Interface USB 2.0 High Speedx1; Ethernet 10BASE-T/100BASE-T, USB Host Interface (USB Host)x2 USB Memory Printing Standard USB Memory Printing Format TIFF, IPEC, RP, SrS e-mail Printing Standard USB Memory Printing Format Standard Color Selection ACS; Full Color; Graycale; Black & White Resolution Scan Functions (Standard) Color Selection ACS; Full Color; Graycale; Black & White Resolution Scan to SMB; Scan to E-mail ; Scan to DF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option), Searchable PDF (option), Searchable PDF (option), Searchable PDF, PDF/A-2, VIS Office file (option), Searchable PDF (option),
Multiple Copy 1 - 999 Resolution 600 x 600 dpi; 9600 Equivalent x 600 dpi; 1,200 x 1,200 dpi PDL PRESCRIBE, PCL6 (PCL-XL, PCL5), KPDL3 (Postscrift) 3 compatible), XPS, PDF Direct Print Ver. 1.7 First Print Out Time 6.0 sec / 7.5 sec Supported Protocol TCP/IP, NetBEUN, FTP, Port 9100, LPR, IPP, IPP over SSL/TLS, MSD Print, Apple Bonjour Operating System Supported Windows Server 2008, Windows Server 2012, Windows 7, Windows 10; Linux Interface USB 2.0 High Speedx1; Ethernet 10BASE-TX; UDBASE-TX; USB Hots Interface (USB Host)x2 USB Memory Printing Standard USB Memory Printing Standard Color Selection AirPrint, Mopria, KYOCERA Mobile Print, Google Cloud Print Resolution FACS; Full Color, Greyscale; Black & White Resolution FACS; Full Color, Greyscale; Black & White Resolution FOR print, Mopria, KYOCERA Mobile Print, Google Cloud Print Mobile Printing Standard Mobile Printing Standard Infer, IPEG, NPS, OpenXPS, PDF (MMR/JPEG compression PDF), Encrypted PDF, PDF/A-2, MS Office file (option), Searchable PDF (op Resolution FACS; Full Color, Greyscale; Black & White Resolution FTF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression PDF), Encrypted PDF, PDF/A-2, MS Office file (
Print Functions (Standard) Resolution 600 x 600 dpi; 9600 Equivalent x 600 dpi; 1,200 x 1,200 dpi PDL PRESCRIBE, PCI (PCL-XL, PCL Sc), KPDL3 (Postscript 3 compatible), XPS, PDF Direct Print Ver. 1.7 First Print Out Time 6.0 sec / 7.5 sec 6.0 sec / 7.5 sec Supported Protocol TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP over SSL/TLS, WSD Print, Apple Bonjour Operating System Supported Windows Server 2008 R2, Windows Server 2012, R2; Windows 7, Windows 10; Linux Interface USB 2.0 High Speedx1; Ethernet 10BASE-T/100BASE-TY J00BASE-TY USB Host Interface (USB Host)x2 USB Memory Printing Standard USB Memory Printing Standard Octors Selection AirPrint, Mopria, KYOCERA Mobile Print, Google Cloud Print Color Selection AirPrint, MP/IEG, COPT, Ser Composition, Searchable PDF, Iory FD-42, NS Office file (option), Searchable PDF (optimat) Image Type Mode TiFF, IPEG, XPS, OpenXPS, PDF (MMR/I/PEG compression/High, Compression PDF), Encryted PDF, PDF/A-1, PDF/A-2, NO FIC-3, RC Image Type Mode Text, Photo, Text + Photo, Light Text/Fine Line Transmission Type Scan Functions (Standard) Original Size Max. A4 (Legal) - Min. A6 Coding Method Max. A4 (Legal) - Min. A6 Memory
Resolution 600 x 600 dpi; 9600 Equivalent x 600 dpi; 1,200 x 1,200 dpl PDL PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Postcript 3 compatible), XPS, PDF Direct Print Ver. 1.7 First Print Out Time 6.0 sec / 7.5 sec 6.0 sec / 7.5 sec Supported Protocol TCP/IP, NetBELU, FTP, Port 9100, LPR, IPP, IPP over SSL/TLS, WSD Print, Apple Bonjour Operating System Supported Windows Server 2008, Windows Server 2008, R2, Windows Server 2012, Windows Server 2012, R2; Windows 7, Windows 10; Linux Interface USB ADM Modes Server 2008, R2, Windows Server 2012, Windows Server 2012, R2; Windows 7, Windows 10; Linux USB Memory Printing Standard USB Memory Printing Format Standard Mobile Printing Standard Color Selection Scan Functions (Standard) Color Selection Color Selection Scan Functions (Standard) File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (op Image Type Mode Text, Photo, Text + Photo, Tight Text, Fine Line Transmission Type Scan to SMB; Scan to E-mail ; Scan to TFP or FIP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage Color Selections Address Storage Color Selection File Format Scan to SMB; Scan to E
PDL PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Postscript 3 compatible), XPS, PDF Direct Print Ver. 1.7 First Print Out Time 6.5 sec / 7.5 sec 6.0 sec / 7.5 sec Supported Protocol TCCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP over SSL/TLS, WSD Print, Apple Bonjour Operating System Supported Windows Server 2008, Windows Server 2012, Windows Server 2012, R2; Windows 7, Windows 10; Linux Interface USB 2.0 High Speedx1; Ethernet 10BASE-TV/100BASE-TV, 100BASE-TV, 100BAS
First Print Out Time 6.5 sec / 7.5 sec 6.0 sec / 7.5 sec Supported Protocol TCP/IP, NetBEUJ, FTP, Port 9100, LPR, IPP, IPP over SSL/TLS, WSD Print, Apple Bonjour Operating System Supported Windows Server 2008, Windows Server 2012, Windows Server 2012, R2; Windows 7, Windows 10; Linux Interface USB 2.0 High Speedx1; Ethernet 10BASE-T/100BASE-T; USB Host Interface (USB Host)x2 USB Memory Printing Standard USB Memory Printing Format TIFF, JPEG, PDF, XPS e-mail Printing Standard Color Selection Standard Color Selection Color Selection Resolution 600dpi, 400dpi, 300dpi, 200dpi, 200x400dpi, 200x100dpi File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) Image Type Mode Text, Photo, Text + Photo, Light Text/File Line Transmission Type Scan to SMB; Scan to E-TMail; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), 50 groups (Group address list) Original Size Max. A4 [Legai] - Min. A6 Coding Method MAx. A4 [Legai] - Min. A6 Coding Method MAR, MR, MH, JBIG Transmission Speed 33.6 kbps
Supported Protocol TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP over SSL/TLS, WSD Print, Apple Bonjour Operating System Supported Windows Server 2008, Windows Server 2012, Windows Server 2012, R2; Windows 7, Windows 10; Linux Interface USB 2.0 High Speedx1; Ethernet 10BASE-TX/1000BASE-T; USB Host Interface (USB Host)x2 USB Memory Printing Standard USB Memory Printing Format Standard Mobile Printing Standard Color Selection Standard Resolution 600dpi, 400dpi, 200x400dpi, 200x400dpi File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (op Image Type Mode Framsmission Type Scan to SMB; Scan to FTP or FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), S0 group address list) Original Size Max. A4 (Legal - Min. A6 Coding Method MAx. A4 (Legal - Min. A6 Coding Method MAx. A4 (Legal - Min. A6 Coding Method MAx. A4 (Legal - Min. A6
Operating System Supported Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows 7, Windows 10; Linux Interface USB 2.0 High Speedx1; Ethernet 10BASE-T/100BASE-T/1
Operating System SupportedLinuxInterfaceUSB 2.0 High Speedx1; Ethernet 10BASE-T/100BASE-TX/100BASE-TX, USB Host Interface (USB Host)x2USB Memory PrintingStandardUSB Memory Printing FormatComparison (USB Address)e-mail PrintingStandardMobile PrintingAirPrint, Mopria, KYOCERA Mobile Print, Google Cloud PrintColor SelectionColor SelectionResolution600dpi, 200dpi, 200x400dpi, 200x100dpiFile FormatTIFF, JPEG, PDF, XPSImage Type ModeTIFF, JPEG, NPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (opImage Type ModeText, Photo, Text + Photo, Light Text/Fine LineTransmission TypeScan to SMB; Scan to E-mail ; Scan to FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIAAddress Storage200 addresses (Common address list), 50 groups (Group address list)Original SizeMax. A4 (Legal) - Min. A6Coding MethodMMR, MR, MH, JBIGTransmission Speed3.3.6 kbpsMemory6MB
InterfaceUSB 2.0 High Speedx1; Ethernet 10BASE-TX/100BASE-TX /100BASE-TX /100
USB Memory Printing Format TIFF, JPEG, PDF, XPS e-mail Printing Standard Mobile Printing AirPrint, Mopria, KYOCERA Mobile Print, Google Cloud Print Color Selection Scan Functions (Standard) Color Selection ACS; Full Color; Grayscale; Black & White Resolution 600dpi, 400dpi, 200x400dpi, 200x100dpi File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Encrypted PDF, PDF/A-2, MS Office file (option), Searchable PDF (option
e-mail Printing Standard Mobile Printing AirPrint, Mopria, KYOCERA Mobile Print, Google Cloud Print Scan Functions (Standard) Scan Functions (Standard) Color Selection ACS; Full Color; Grayscale; Black & White Resolution 600dpi, 400dpi, 300dpi, 200x400dpi File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (optimate Type Mode Image Type Mode Text, Photo, Text + Photo, Light Text/Fine Line Transmission Type Scan to SMB; Scan to E-mail ; Scan to FTP or FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), 50 groups (Group address list) Original Size Max. A4 (Legal) - Min. A6 Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps Memory 6MB
Mobile Printing AirPrint, Mopria, KYOCERA Mobile Print, Google Cloud Print Scan Functions (Standard) Color Selection ACS; Full Color; Grayscale; Black & White Resolution 600dpi, 400dpi, 300dpi, 200x400dpi, 200x100dpi File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) Image Type Mode Text, Photo, Text + Photo, Light Text/Fine Line Transmission Type Scan to SMB; Scan to E-mail ; Scan to FTP or FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), 50 groups (Group address list) Original Size Max. A4 (Legal) - Min. A6 Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps
Scan Functions (Standard) Color Selection ACS; Full Color; Grayscale; Black & White Resolution 600dpi, 400dpi, 300dpi, 200x400dpi, 200x100dpi File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) Image Type Mode Text, Photo, Text + Photo, Light Text/Fine Line Transmission Type Scan to SMB; Scan to E-mail ; Scan to FTP or PTP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), 50 groups (Group address list) Original Size Max. A4 (Legal) - Min. A6 Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps
Color Selection ACS; Full Color; Grayscale; Black & White Resolution 600dpi, 400dpi, 300dpi, 200x400dpi, 200x100dpi File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) Image Type Mode Text, Photo, Text + Photo, Light Text/Fine Line Transmission Type Scan to SMB; Scan to E-mail ; Scan to FTP or FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), 50 groups (Group address list) Original Size Max. A4 (Legal) - Min. A6 Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps
Resolution 600dpi, 400dpi, 300dpi, 200x400dpi, 200x100dpi File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (op Image Type Mode Image Type Mode Text, Photo, Text + Photo, Light Text/Fine Line Transmission Type Scan to SMB; Scan to E-mail ; Scan to FTP or FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), 50 groups (Group address list) Original Size Fax Functions Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps Memory 6MB
File Format TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (op Image Type Mode Text, Photo, Text + Photo, Light Text/Fine Line Transmission Type Scan to SMB; Scan to E-mail ; Scan to TFP or FTP over SSL; Scan to USB; TVAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), S0 groups (Group address list) Original Size Max. A4 (Legal) - Min. A6 Coding Method MMR, MR, MH, JBIG Transmission Speed 3.6 kbps Memory 6MB
Image Type Mode Text, Photo, Text + Photo, Light Text/Fine Line Transmission Type Scan to SMB; Scan to E-mail ; Scan to FTP or FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), S0 groups (Group address list) Original Size Fax Functions Coding Method MMR, MR, MH, JBIG Transmission Speed 3.6 kbps Memory 6MB
Transmission Type Scan to SMB; Scan to E-mail ; Scan to FTP or FTP over SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA Address Storage 200 addresses (Common address list), 50 groups (Group address list) Original Size Max. A4 (Legal) - Min. A6 Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps Memory 6MB
Address Storage 200 addresses (Common address list), 50 groups (Group address list) Fax Functions Original Size Max. A4 (Legal) - Min. A6 Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps Memory 6MB
Fax Functions Original Size Max. A4 (Legal) - Min. A6 Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps Memory 6MB
Original Size Max. A4 (Legal) - Min. A6 Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps Memory 6MB
Coding Method MMR, MR, MH, JBIG Transmission Speed 33.6 kbps Memory 6MB
Transmission Speed 33.6 kbps Memory 6MB
Memory 6MB
One Touch Dial 100 numbers
Network FAX Yes
Consumables & Options
TK-5275K · Black (8 000 nages) TK-5285K · Black (13 000 nages)
Ioner Kit (nane Kit in accordance with ICO (Inane Kit in accordance with ICO (
(Page Yield in accordance with ISO/ TK-5275M : Magenta (6,000 pages) TK-5285M : Magenta (11,000 pages) IEC 19798) TK-5275M : Valence (10,000 pages) TK-5285M : Valence (10,000 pages)
Intersection Intersection<
Capacity of Start up Toner Black 6,000 pages Black 6,000 pages Black 6,000 pages
Cyan/Magenta/Yellow 2,500 pages Cyan/Magenta/Yellow 5,000 pages
Maintenance Kit MK-5144 (200,000 pages); DP:MK-3140 (200,000 pages) MK-5159 (200,000 pages); DP:MK-5200 (200,000 pages) Paper Feeder PE-5100: 500 sheets (Max v2) PE-5100: 500 sheets (Max v2)
Paper Feeder PF-5100: 500 sheets (Max. x3)
Paper Feeder PF-5100: 500 sheets (Max. x3) Data Security Data Security Kit(E)
Paper Feeder PF-5100: 500 sheets (Max. x3) Data Security Data Security Kit(E) Card Authentication Card Authentication Kit(B)
Paper Feeder PF-5100: 500 sheets (Max. x3) Data Security Data Security Kit(E) Card Authentication Card Authentication Kit(B) Gigabit Ethernet Board IB-50
Paper Feeder PF-5100: 500 sheets (Max. x3) Data Security Data Security Kit(E) Card Authentication Card Authentication Kit(B) Gigabit Ethernet Board IB-50 Wireless LAN Interface IB-36 (802.11 b/g/n/Wireless LAN/WiFi Direct)
Paper Feeder PF-5100: 500 sheets (Max. x3) Data Security Data Security Kit(E) Card Authentication Card Authentication Kit(B) Gigabit Ethernet Board IB-50 Wireless LAN Interface IB-36 (802.11 b/g/n/Wireless LAN/WiFi Direct)
Paper Feeder PF-5100: 500 sheets (Max. x3) Data Security Data Security Kit(E) Card Authentication Card Authentication Kit(B) Gigabit Ethernet Board IB-50 Wireless LAN Interface IB-36 (802.11 b/g/n/Wireless LAN/WiFi Direct) Storage Device HD-6: SSD 32GB; HD-7: SSD 128GB
Paper Feeder PF-5100: 500 sheets (Max. x3) Data Security Data Security Kit(E) Card Authentication Card Authentication Kit(B) Gigabit Ethernet Board IB-50 Wireless LAN Interface IB-36 (802.11 b/g/n/Wireless LAN/WiFi Direct) Storage Device HD-6: SSD 32G8; HD-7: SSD 128GB Embedded OCR Scan Extension Kit(A)

KYOCERa

Document Solutions

KYOCERA Document Solutions Asia Limited

13/F, Mita Centre, 552-566 Castle Peak Road, Tsuen Wan, N.T., Hong Kong Tel : +852-2496-5678 Fax: +852-2610-2063 www.kyoceradocumentsolutions.asia

*KYOCERA does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged. @All rights reserved. Brochure/KDAS/201810/Mebius_Color MFP



KYOCERA Business Partner