

Simplicity™ Universal Combination Edge-Lit Series

Extruded aluminum edge-lit combo

EXIT SIGNS



Construction

- Extruded aluminum housing and trim plate
- Brushed aluminum finish
- Trim plate includes two fully tool-free adjustable, 2.5W LED heads, 400 Lumens each
- Acrylic panel featuring 6 inch silk-screened EXIT legend with field selectable chevrons
- Single face red or green on clear, double face red or green on mirror

Mounting

- Wall and ceiling surface and recessed mount
- Universal mounting on wall or ceiling, for surface or recessed applications
- Adjustable bar hanger included for recessed applications

Electronics

- High temperature long life Nickel Metal Hydride battery provides 90 minutes of emergency operation
- 120/277VAC 60Hz
- Optional: Improved-Diagnostics

Approvals

- UL 924 listed
- Damp location 41°F to 104°F (5°C to 40°C)

Warranty (subject to proper installation and maintenance)


Unit has a three-year limited warranty

Detailed warranty terms located online at: www.lightalarms.com




Photometric performance

	Spacing center-to-center (feet)
Series	7.5 feet mounting height
C6UEN*6	30'

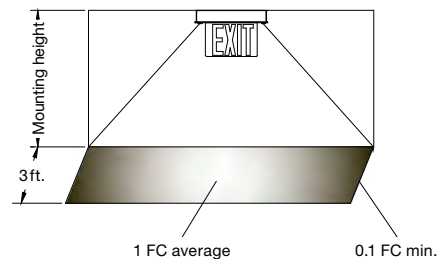


Dimensions (dimensions are approximate and subject to change):


Surface ceiling mount

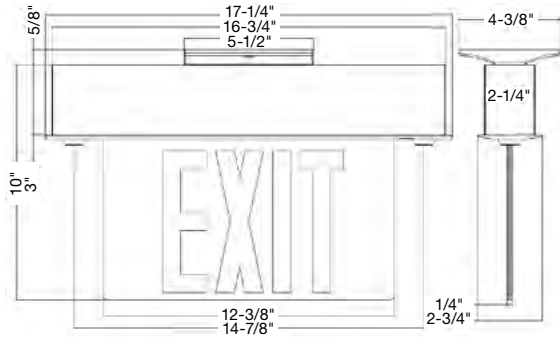


Surface recessed wall mount

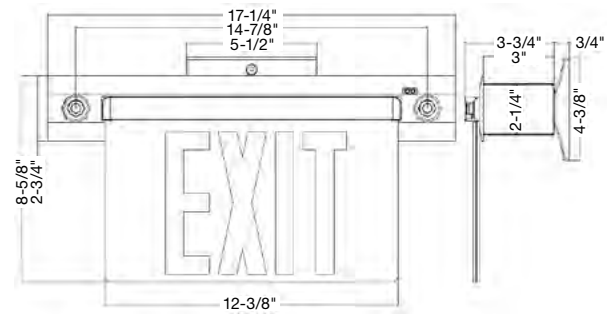

Recessed ceiling mount

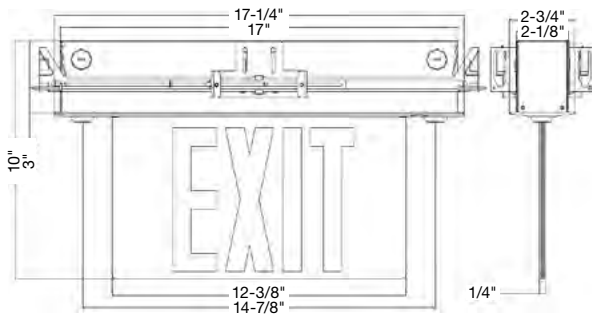

Recessed wall mount

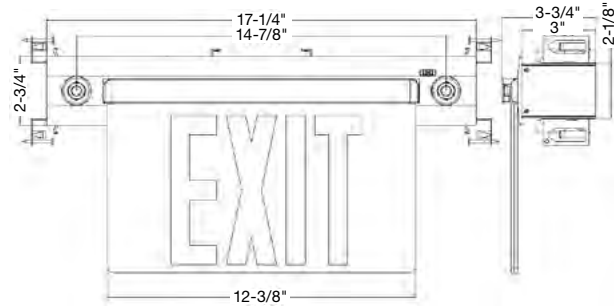

Power consumption chart

Series	AC input	Voltage	Battery
C6UENRM-2HO	120/277VAC, 60Hz	3.6V	NiHM 1800mAH
C6UENGM-2HO			NiHM 1800mAH
C6UENRM-2HO-ID			NiHM 2500mAH
C6UENGM-2HO-ID			NiHM 2500mAH

Ordering format

Model	Legend	Series	Legend color	Heads	Options
C = Combo	6 = 6" EXIT single and double face with universal chevrons and mounting for surface or recessed	UEN = Self-powered	RM = Red GM = Green	2HO = Two high output LED heads	Blank = Standard ID = Improved-Diagnostics

Example: C6UENRM-2HO-ID