



**HAVELLS**

## VAPORTITE FIXTURES



### Warranty

1 year limited warranty

### Listings

UL/cUL Listing- Suitable for damp locations.  
NFS certified for splash zone locations.  
IP65 Rated - Dust and water tight rated.



### Specifications:

#### Product

Features a fully enclosed body designed for the toughest environments. Specifically designed for weatherproof, dust proof, high impact and contaminate environments. Low profile available in 2', 4' & 8' lengths.

#### Lamps

T5 or T8 Fluorescent, LED Tubes & LED Modules available.

#### Body

The gasketed luminaire is constructed of a fiberglass body and acrylic diffuser, with a continuous poured gasket.

#### Lens

Vapor proof lenses provide light source protection against weather, moisture, chemicals and other elements.

Hi-Impact acrylic lens are standard on 2', 4' & 8' lengths.

#### Reflector

Basic & wide reflectors available for different light distribution.

#### Retaining Latches

Clear polycarbonate latches with tamper resistant capabilities are standard on all units. Stainless steel latches also available.

#### Installation

Durable stainless steel mounting hardware. Housing does not need to be drilled, lowering costs and installation time. Optional stainless steel bail for chain/cable hung installations.

#### Primary Applications

Parking Garages, Kitchens, Gas Stations, Schools, Public Areas, Subways & Industrial Facilities.


Contact your Havells USA Account Representative at 800-922-6693 for pricing, ordering and technical support. [www.havells-usa.com](http://www.havells-usa.com)

Project: \_\_\_\_\_

Order Code: \_\_\_\_\_

Prepared by: \_\_\_\_\_ Date: \_\_\_\_\_

### Vaportite Fixture

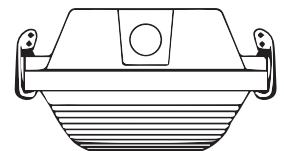

# VAPORTITE FIXTURES

## Ordering Information:

VP4	-	2	32	U	-	EB8	-	B
<b>Series</b>		<b># of Lamps</b>	<b>Wattage</b>	<b>Voltage</b>		<b>Ballast/Driver</b>		<b>Options</b>
VP2 - 2' Unit		2	17 - 17W T8	U- Universal		EB5 T5 Electronic		<b>SS</b> - Stainless steel latches
VP4 - 4' Unit		3	18 - 18W T8 LED			EB8 T8 Electronic		<b>B</b> - Bail for fixture suspension
VP8 - 8' Unit		4	24 - 24W T5 HO			LED		<b>OS</b> - Occupancy Sensor
		6	32 - 32W T8					<b>C</b> - Cord
			54 - 54W T5 HO					<b>QS</b> - Quick Ship Program
			59 - 59W T8					<b>2Ballast</b> - Contains 2 Ballasts


2' VAPORTITE				4' VAPORTITE				8' VAPORTITE			
Ordering Code	Product Name	Input Current (amps)		Ordering Code	Product Name	Input Current (amps)		Ordering Code	Product Name	Input Current (amps)	
		120V	277V			120V	277V			120V	277V
5053405	VP2-217U-EB8	0.28	0.12	5053407	VP4-218U-LED w/LED TUBES	0.32	0.14	5053414	VP8-232U-EB8	0.54	0.23
5053406	VP2-224U-EB5	0.97	0.43	5055340	VP4-232U-EB8	0.54	0.23	5053415	VP8-232U-EB8-SS	0.54	0.23
				5055372	VP4-232U-EB8-QS	0.54	0.23	5053416	VP8-254U-EB5	0.97	0.43
				5053408	VP4-232U-EB8-SS	0.54	0.23	5053417	VP8-354U-EB5-SS	1.48	0.78
				5055350	VP4-254U-EB5	0.97	0.43	5053418	VP8-418-LED w/LED TUBES	0.64	0.28
				5055374	VP4-254U-EB5-QS	0.97	0.43	5053419	VP8-432U-EB8	1.26	0.49
				5053409	VP4-254U-EB5-SS	0.97	0.43	5053420	VP8-432U-EB8-SS	1.26	0.49
				5055341	VP4-332U-EB8	0.91	0.39	5053403	VP8-454U-EB5	2.00	0.86
				5055373	VP4-332U-EB8-QS	0.91	0.39	5053421	VP8-454U-EB5-SS	2.00	0.86
				5053410	VP4-332U-EB8-SS	0.91	0.39	5053422	VP8-618-LED w/LED TUBES	0.96	0.43
				5055352	VP4-354U-EB5	1.48	0.78	5053423	VP8-632U-EB8	1.80	0.72
				5055375	VP4-354U-EB5-QS	1.48	0.78	5053424	VP8-632U-EB8-SS	1.80	0.72
				5053411	VP4-354U-EB5-SS	1.48	0.78	5053425	VP8-654U-EB5	2.97	1.29
				5053412	VP2x4-454U-EB5	2.00	0.86	5053426	VP8-654U-EB5-SS	2.97	1.29
				5053413	VP2x4-654U-EB5	2.97	1.29				
				5055376	VP4-with LED Modules	tbd	tbd				

## IP Rating

Protection Against Solid Objects		Protection Against Liquids	
First No.	Definition	Second No.	Definition
6	Totally protected against dust (dust tight)	5	Protected against low pressure jets if water from all directions – limited ingress permitted

## Product Mounting & Latches

Stainless Steel Mounting Clips: For Fixture Mounting

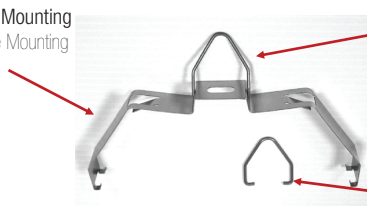

Shown with bail attached

Bails (B)  
Optional bail provides convenient means of suspending the fixture



Latching Options: Clear Polycarbonate (standard) or Stainless Steel (optional).

Distributed by:

**HAVELLS, INC.**

125-B Villanova Drive, Atlanta, GA 30336 Ph: 1.800.922.6693

E: info.us@havells-USA.com | www.havells-USA.com

© 2015 HAVELLS All rights reserved. All sizes and specifications are subject to change without notice. Ed: 01.21.15

